

50 Hz



e-NSC Series

HORIZONTAL CENTRIFUGAL ELECTRIC PUMPS
EQUIPPED WITH **IE3** MOTORS

ErP 2009/125/EC

Cod. 191002951 Rev. G Ed.07/2017

 **LOWARA**
a xylem brand

Xylect™


Xylect™ is a pump selection software with an extensive online database of product information across the entire range of pumps and related products, with multiple search options and helpful project management facilities. The system holds up-to-date product information on thousands of products and accessories.

Xylect™ is available:

On the website – www.xylect.com



On DVD – Loop 4U

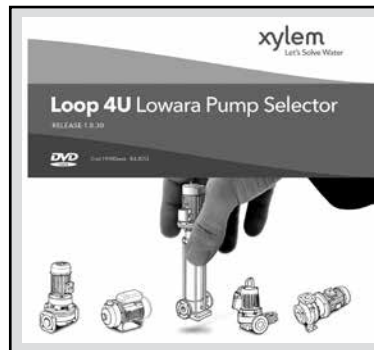

On Mobile Apps



For more information, please, see page 205-206.

Ecodesign Directive (ErP)

Over last decade the European Commission with the 'Energy Efficiency Plan' pushed the European Parliament and the Council to adopt specific measures to the purpose of reducing energy consumption and further negative environmental impacts.

Through the **Directives 2005/32/EC**, energy-using products (EuP), and 2009/125/EC, energy-related products (ErP) a framework for **ecodesign** requirements was established.

The Commission Regulations (EC) No 640/2009 and (EU) No 4/2014 have implemented two directives with regard to ecodesign requirements for **three-phase 50 Hz electric motors** placed on the market and put into service inside EU zone as self-alone units or integrated in other products.

This regulation states that motors must have **efficiency level IE3** (or IE2 + Variable Speed Drive) from **1 January 2015 for 7,5 to 375 kW** rated powers and from **1 January 2017 for 0,75 to 375 kW** ones.

The Commission Regulation (EU) No 547/2012 has implemented two directives with regard to ecodesign requirements for some types of **clean water pumps** placed on the market and put into service inside EU zone as self-alone units or integrated in other products.

This regulation states that water pumps shall have **index MEI 0.4** as minimum from **1 January 2015**. That index comes from a dedicated formula which considers hydraulic efficiency values at 'best efficiency point' (BEP), 75 % of the flow at BEP (Part load – PL) and 110 % of the flow at BEP (Over load – OL).


The e-NSC series, for the models in the scope of the regulations above, is ErP compliant, having an index MEI equal or higher than 0,4 and IE3 motor efficiency.

CONTENTS


| | |
|---|------------|
| General Introduction | 5 |
| Applications | 6 |
| Identification code | 8 |
| Rating plate | 9 |
| List of Models at 50 Hz, 2 poles | 10 |
| List of Models at 50 Hz, 4 poles | 12 |
| Pump cross-section and main components | 14 |
| Mechanical seals | 22 |
| Motors (ErP 2009/125/EC) | 26 |
| Pumps (ErP 2009/125/EC) | 38 |
| Minimum efficiency index (MEI) | 39 |
| Hydraulic performance range at 50 Hz, 2 poles | 40 |
| Table of hydraulic performances at 50 Hz, 2 poles | 41 |
| Hydraulic performance range at 50 Hz, 4 poles | 44 |
| Table of hydraulic performances at 50 Hz, 4 poles | 45 |
| Operating characteristics at 50 Hz, 2 poles | 50 |
| Operating characteristics at 50 Hz, 4 poles | 79 |
| Dimensions and weights | 127 |
| Forces and moments at pump flanges | 174 |
| NSC with variable frequency drive | 175 |
| NSC..H (e-NSC with HYDROVAR) | 177 |
| Accessories | 183 |
| Report and declarations | 197 |
| Technical appendix | 199 |

e-NSC SERIES

HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 2 POLES

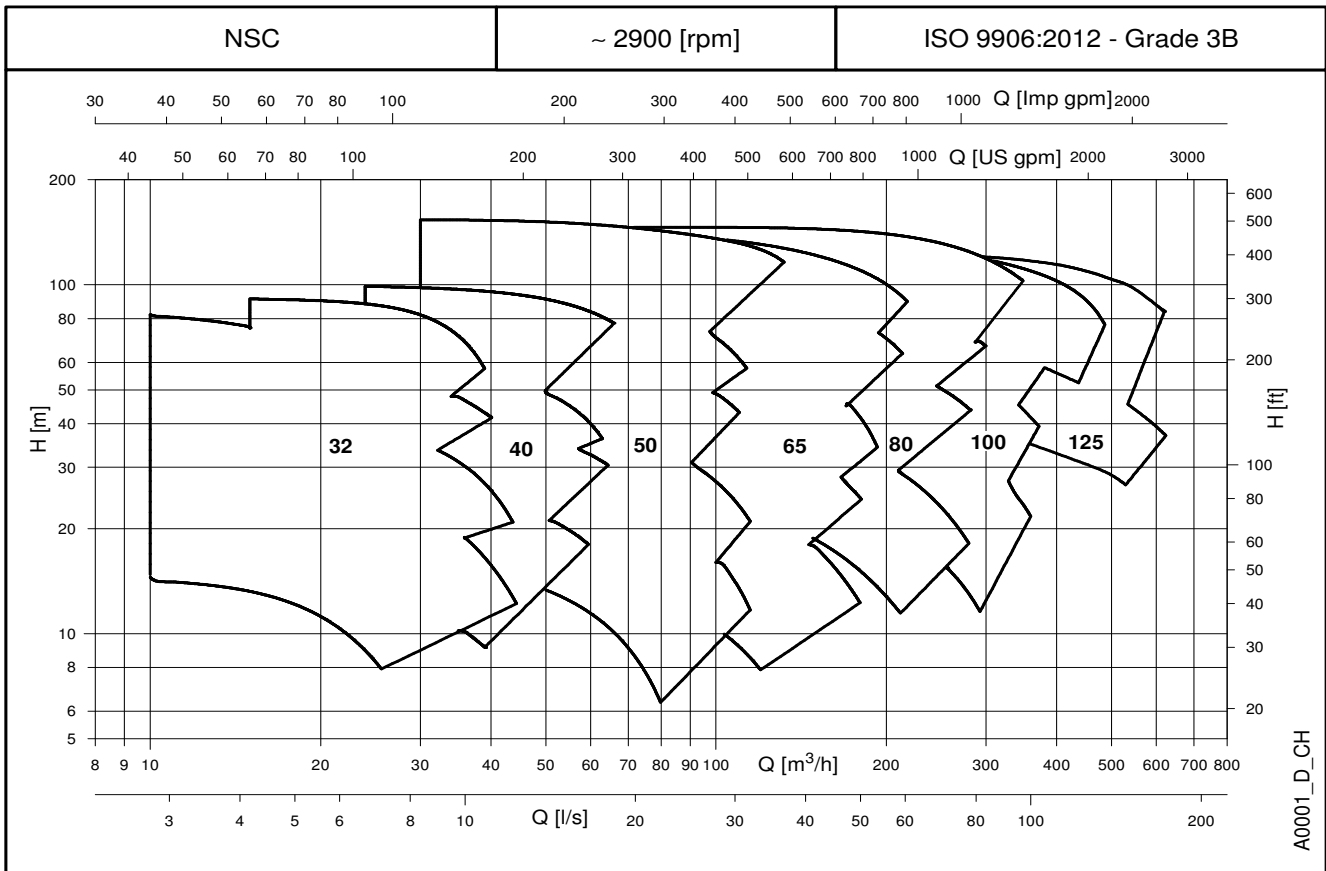

HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 4 POLES

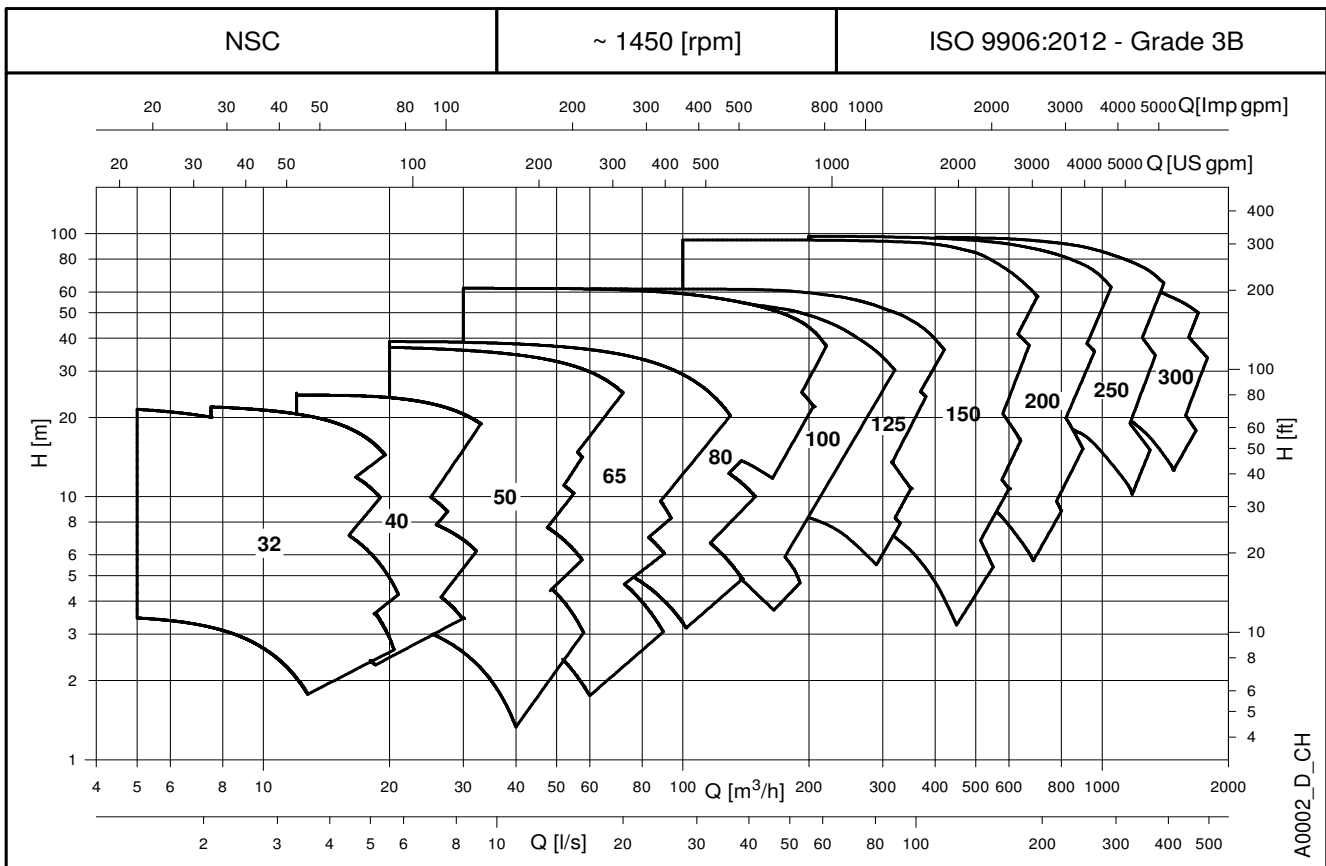

e-NSC SERIES GENERAL INTRODUCTION

The new **e-NSC** series is the result of the close collaboration between our customers and us; the new range has been redesigned and improved to meet the Commercial Building Services (CBS) requirements, in terms of performances and energy saving.

In addition the new **e-NSC** series can be customized to meet the needs of the Industry segment, keeping the quality in the production and the continuous reliability and robustness in the operation.

Pump design

The new **e-NSC** series is a centrifugal end-suction electro-pump with single-stage (except the two-stage NSC2 models), axial flanged suction port, radial flanged discharge and horizontal shaft. The **e-NSC** pumps have cast iron casing and impeller as standard but are also available in a wide range of materials, from bronze to duplex stainless steel, to allow for various pumping needs.

The pumps are equipped with interchangeable mechanical seals, IE3 efficiency motors, and are designed with a back pull-out configuration (impeller, adapter, and motor can be extracted without disconnecting the pump body from the piping system).

The **e-NSC** series pumps are available in the following constructions:

Extended shaft

Close-coupled by means of an adaptor bracket with an impeller keyed directly to the special motor shaft extension.



Frame mounted

Flexible-coupled with bracket, support, flexing coupling (special version with spacer on demand), aligning and anchoring base.



Stub shaft

Rigid-coupled with a bracket, an adaptor and a rigid coupling keyed to the standard motor shaft extension.



Bare shaft pump

Version without driver suitable to be coupled with a standard electric motor.



Hydraulic specifications

- Maximum delivery: up to **640** m³/h for 2 poles range.
up to **1900** m³/h for 4 poles range.
- Maximum head: up to **154** m for 2 poles range.
up to **100** m for 4 poles range.
- Hydraulic performance compliant with ISO 9906:2012 (Grade 3B).
- Fluid temperature range:
 - standard version (with mechanical seal BQ1EGG-WA and EPDM gasket) **-25 to +120 °C**.
 - versions on request (depending on mechanical seal and gasket) **-20*** or **-25 to +120** or **+140 °C**.
- Maximum operating pressure:
 - standard version with mechanical seal BQ1EGG-WA and cast iron casing: **16 bar @ 90 °C** and **10 bar @ 120 °C**
 - version with other mechanical seal and casing of cast iron: **16 bar @ 120 °C** and **14,9 bar @ 140 °C**
 - cast ductile iron: **16 bar @ 120 °C** and **15,6 bar @ 140 °C**
 - stainless steel: **16 bar @ 50 °C** and **14,8 bar @ 140 °C**
 - duplex: **16 bar @ 140 °C**
 - NSC2 models with mechanical seal BQ1EGG-WA and cast iron casing: **12 bar @ 110 °C** and **10 bar @ 120 °C**
 - see pages 22 to 25 for more information.

* Fluoro-elastomer: FPM (old ISO), FKM (ASTM & new ISO).

- Connection dimensions according to EN 733 for models 32-125/200, 40-125/250, 50-125/250, 65-125/315, 80-160/315, 100-200/400, 125-250/400, 150-315/400

Motor specifications

- Squirrel cage in short circuit enclosed construction with external ventilation (TEFC).
- 2-pole and 4-pole ranges.
- **IP55** protection degree as motor (EN 60034-5), IPX5 as electro-pump (EN 60529).
- Performances according to EN 60034-1.
- **IE3** efficiency level (three-phase 0,75 to 375 kW).
- **155 (F)** insulation class.
- Standard voltage:
 - 1 x 220-240 V 50 Hz for power up to 2,2 kW
 - 3 x 220-240/380-415 V 50 Hz for power up to 3 kW
 - 3 x 380-415/660-690 V 50 Hz for power above 3 kW
- Maximum ambient temperature: 40 °C.

Note

- Anti-clockwise rotation when facing pump's suction port.
- Pump does not include counter-flanges.

List of the Directives

- Machinery Directive MD 2006/42/EC
- Electromagnetic Compatibility Directive EMCD 2004/108/EC
- Ecodesign requirements for energy-related products ErP 2009/125/EC, Regulation (EC) No 640/2009, Regulation (EU) No 4/2014, Regulation (EU) No 547/2012

and the main technical norms

- EN 809, EN 60204-1 (safety)
- EN 1092-2 (cast and ductile iron flanges)
- EN 1092-1 (stainless steel and duplex flanges)
- EN 61000-6-1, EN 61000-6-3
- EN 60034-30:2009, EN 60034-30-1:2014 (electric motors)

e-NSC SERIES for COMMERCIAL BUILDING SERVICES (CBS) APPLICATIONS & BENEFITS

Applications

The **e-NSC** series is suitable for many different applications demanding reliable and efficient products that require constant or variable duty points in cost saving operation.

The e-NSC Series can be used for the following CBS applications:

- **HVAC**
 - Liquid transfer in heating systems.
 - Liquid transfer in air-conditioning systems.
 - Liquid transfer in ventilation systems.
- **Water Supply**
 - Pressure boosting in commercial buildings.
 - Irrigation systems.
 - Water transfer for green houses.
- **Fire Fighting**



Benefits

The e-NSC Series permit to achieve the following benefits.

- **Performances:** the e-NSC pumps are ErP 2015 compliant, equipped with IE3 motors and with the right hydraulic coverage for CBS applications. The standard full cast iron version with PN16 *, 140 °C * maximum fluid temperature and EPDM elastomer is exactly what the CBS Market needs.
- **Reliability:** the high quality in production, the robust construction and operation, the easily interchangeable mechanical seals, and wear rings guarantee a continuous operation without faults and a shorter down time for maintenance.
- **Versatility:** beside the standard offer, the e-NSC series is available in many different material configurations for casing, impeller, and elastomers as well as different construction methods to address a wide range of applications.
- **Total cost ownership:** the best hydraulic and electric efficiency, the HYDROVAR-equipped versions, the easy and quick maintenance, permit to reduce the operation and maintenance cost and to save energy when the pump is working.
- **Potable water use:** All pumps are certified for drinking water use (ACS and D.M.174/04).
- **Pre-post sales support:** we are continuously working close to our customers to help them in selecting the right pump for the specific application. An improved user-friendly selection software improved with many selection tools is available on the website, on DVD or on Apps for mobile phones. Experienced engineers are fully dedicated to big projects for Municipality.

Features

- Discharge ports DN32 to DN300 *.
- Wide performance range up to 154 m head and 1900 m³/h flow.
- Nominal pressure of 16 bar *.
- Wide range of temperatures for pumped liquids: -25°C to +140°C *.
- Wide range of materials for many different kinds of pumped liquid.
- Wide range of voltages.
- High performance IE3 motors.
- Variable speed by optional HYDROVAR drive.

* NSC2 models: PN12, 120 °C, suction 2", discharge 1¼".

e-NSC SERIES for INDUSTRY APPLICATIONS & BENEFITS

Applications

The e-NSC series and the different available configurations and standard options have been designed to cover a wide range of applications in the Industry segment. The e-NSC series can be installed in machines where compactness and high performances are a must or within industrial processes where the user looks for a robust and reliable design for the handling of many different liquids.

The e-NSC series can be used for the following Industry applications:

- **Process**
 - Process cooling
 - Process heating
 - Heat recovery
- **Water Supply**
 - Water boosting
 - Water treatment
 - Washing and cleaning

Benefits

The e-NSC Series permit to achieve the following benefits:

- **Efficiency:** new designed high efficiency hydraulics, IE3 motors, and the option with variable speed by the HYDROVAR drive sets the basis for very low operation costs.
- **Reliability:** various mechanical seal materials and options are available to meet the exact needs of your specific application. The e-NSC is also designed for easy maintenance and all service points are easily reachable to reduce downtime.
- **Know How:** the perfect configuration for an application can be made with the selection tool or with the support of our industrial experienced employees.
- **A global platform:** the e-NSC series are assembled in different factories across the world to make the e-NSC always "closer" to our customer. Beyond our commitment to reduce the carbon footprint of e-NSC, this global platform secures the availability of the same design with the same quality processes everywhere.




Features

- Discharge ports DN32 to DN300 *.
- Wide performance range up to 154 m head and 1900 m³/h flow.
- Nominal pressure of 16 bar *.
- Wide range of temperatures for pumped liquids: -25°C to +140°C *.
- Wide range of materials for many different kinds of pumped liquid.
- Wide range of voltages.
- High performance IE3 motors.
- Variable speed by optional HYDROVAR drive.

* NSC2 models: PN12, 120 °C, suction 2", discharge 1 1/4".

e-NSC SERIES IDENTIFICATION CODE

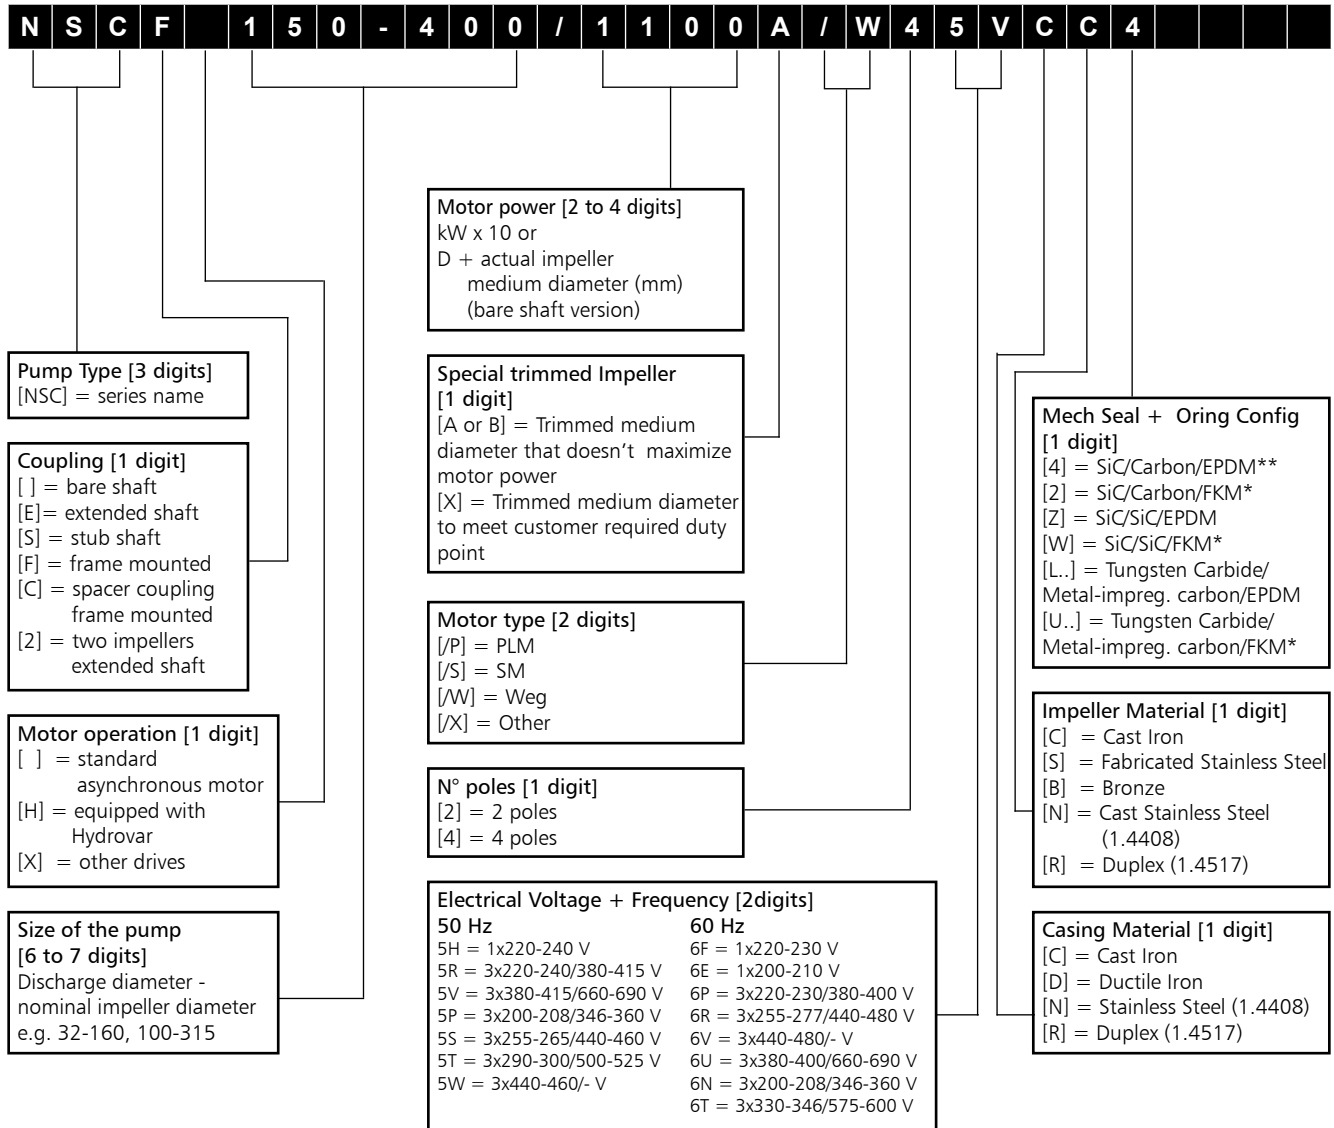

* = FPM (old ISO), FKM (ASTM & new ISO)

** [4] = SiC/Metal-impreg. carbon/EPDM for RR version

EXAMPLES

NSCS 100-250/900/W25RCC4

End-suction, electric pump with stub shaft coupling, DN 100 nominal discharge port, 250 mm nominal impeller diameter, 90 kW rated motor power, WEG IE3 model, 2-pole, 50 Hz 220-240/380-415 V, cast iron casing, cast iron impeller, Silicon carbide/Carbon/EPDM mechanical seal.

NSCF 150-400/1100A/W45VCC4


End-suction, electric pump with frame mounted coupling, DN 150 nominal discharge port, 400 mm nominal impeller diameter, 110 kW rated motor power, trimmed impeller, WEG IE3 model, 4-pole, 50 Hz 380-415/660-690 V, cast iron casing, cast iron impeller, Silicon carbide/Carbon/EPDM mechanical seal.

NSC 150-400/D423CCZ

End-suction, bare shaft pump, DN 150 nominal discharge port, 400 mm nominal impeller diameter, 423 mm actual impeller medium diameter, cast iron casing, cast iron impeller, Silicon carbide/ Silicon carbide/EPDM mechanical seal.


**e-NSC SERIES
RATING PLATE**

ELECTRIC PUMP

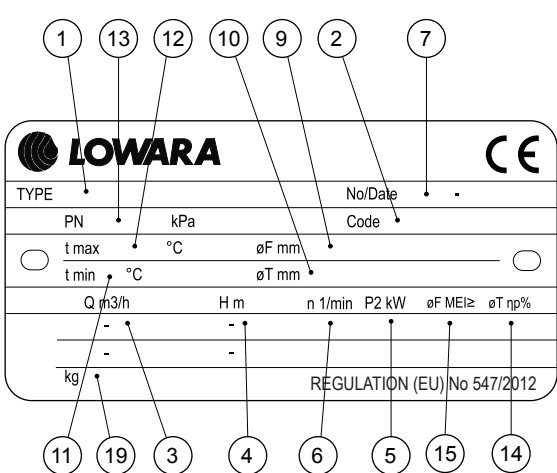

| | | | |
|---------------------|-----------------------------|---------|-------------------|
| LOWARA | | CE | |
| TYPE | No/Date | | |
| PN | kPa | Code | |
| t max °C | °C | øF mm | |
| t min °C | °C | øT mm | |
| Q m ³ /h | H m | n 1/min | P ₂ kW |
| | | | øF MEI ≥ |
| | | | øT ηp % |
| kg | REGULATION (EU) No 547/2012 | | |

PUMP ONLY (NSC)

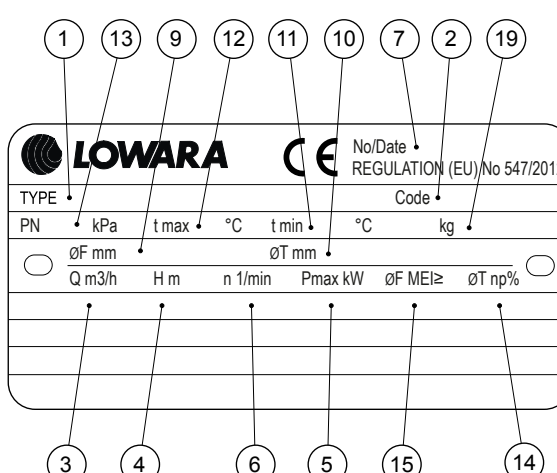

| | | | | | | |
|---------------------|-------|----------|---------------------|----------|-----------------------------|--|
| LOWARA | | CE | | No/Date | REGULATION (EU) No 547/2012 | |
| TYPE | Code | | | | | |
| PN | kPa | t max °C | t min °C | kg | | |
| øF mm | øT mm | | | | | |
| Q m ³ /h | H m | n 1/min | P _{max} kW | øF MEI ≥ | øT ηp % | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

LEGEND

- 1 - Electric pump unit type
- 2 - Electric pump unit code
- 3 - Flow range
- 4 - Head range
- 5 - Nominal or maximum pump power
- 6 - Speed
- 7 - Serial number, or
order number + order position number
- 9 - Full impeller diameter (only filled in for trimmed
impellers)
- 10 - Trimmed impeller diameter (only filled in for
trimmed impellers)
- 11 - Minimum operating liquid temperature
- 12 - Maximum operating liquid temperature
- 13 - Maximum operating pressure
- 14 - Hydraulic efficiency in best efficiency point (50 Hz)
- 15 - Minimum efficiency index MEI, as per Regulation
(EU) No 547/2012 (50 Hz)
- 19 - Weight

LEGEND

- 1 - Pump type
- 2 - Pump code
- 3 - Flow range
- 4 - Head range
- 5 - Maximum absorbed pump power
- 6 - Speed
- 7 - Serial number, or
order number + order position number
- 9 - Full impeller diameter (only filled in for trimmed
impellers)
- 10 - Trimmed impeller diameter (only filled in for
trimmed impellers)
- 11 - Minimum operating liquid temperature
- 12 - Maximum operating liquid temperature
- 13 - Maximum operating pressure
- 14 - Hydraulic efficiency in best efficiency point (50 Hz)
- 15 - Minimum efficiency index MEI, as per Regulation
(EU) No 547/2012 (50 Hz)
- 19 - Weight

Note for electric pump unit: refer to motor data plate for electrical data.

e-NSC SERIES

LIST OF MODELS AT 50 Hz, 2 POLES

| SIZE NSC..2 | kW | VERSION | | | | |
|----------------|------|---------|------|------|------|------|
| | | NSC2 | NSCE | NSCS | NSCF | NSCC |
| 32-125/11(*) | 1,1 | - | • | • | • | • |
| 32-125/15(*) | 1,5 | - | • | • | • | • |
| 32-125/22(*) | 2,2 | - | • | • | • | • |
| 32-125/30 | 3 | - | • | • | • | • |
| 32-160/22(*) | 2,2 | - | • | • | • | • |
| 32-160/30 | 3 | - | • | • | • | • |
| 32-160/40 | 4 | - | • | • | • | • |
| 32-160/55 | 5,5 | - | • | • | • | • |
| 32-200/30 | 3 | - | • | • | • | • |
| 32-200/40 | 4 | - | • | • | • | • |
| 32-200/55 | 5,5 | - | • | • | • | • |
| 32-200/75 | 7,5 | - | • | • | • | • |
| 32-250/55 | 5,5 | • | - | - | - | - |
| 32-250/75 | 7,5 | • | - | - | - | - |
| 32-250/75 | 7,5 | - | • | • | • | • |
| 32-250/92 | 9,2 | - | • | - | - | - |
| 32-250/110A | 11 | - | - | • | • | • |
| 32-250/110 | 11 | - | • | • | • | • |
| 32-250/150 | 15 | - | • | • | • | • |
| 40-125/15(*) | 1,5 | - | • | • | • | • |
| 40-125/22(*) | 2,2 | - | • | • | • | • |
| 40-125/30 | 3 | - | • | • | • | • |
| 40-125/40 | 4 | - | • | • | • | • |
| 40-160/30 | 3 | - | • | • | • | • |
| 40-160/40 | 4 | - | • | • | • | • |
| 40-160/55 | 5,5 | - | • | • | • | • |
| 40-160/75 | 7,5 | - | • | • | • | • |
| 40-200/55 | 5,5 | - | • | • | • | • |
| 40-200/75 | 7,5 | - | • | • | • | • |
| 40-200/92 | 9,2 | - | • | - | - | - |
| 40-200/110A | 11 | - | - | • | • | • |
| 40-200/110 | 11 | - | • | • | • | • |
| 40-250/92 | 9,2 | - | • | - | - | - |
| 40-250/110A | 11 | - | - | • | • | • |
| 40-250/110 | 11 | - | • | • | • | • |
| 40-250/150 | 15 | - | • | • | • | • |
| 40-250/185 | 18,5 | - | • | • | • | • |
| 40-250/220 | 22 | - | • | • | • | • |
| 50-125/30 | 3 | - | • | • | • | • |
| 50-125/40 | 4 | - | • | • | • | • |
| 50-125/55 | 5,5 | - | • | • | • | • |
| 50-125/75 | 7,5 | - | • | • | • | • |
| 50-160/55 | 5,5 | - | • | • | • | • |
| 50-160/75 | 7,5 | - | • | • | • | • |
| 50-160/92 | 9,2 | - | • | - | - | - |
| 50-160/110A | 11 | - | - | • | • | • |
| 50-160/110 | 11 | - | • | • | • | • |
| 50-200/92 | 9,2 | - | • | - | - | - |
| 50-200/110A | 11 | - | - | • | • | • |
| 50-200/110 | 11 | - | • | • | • | • |
| 50-200/150 | 15 | - | • | • | • | • |
| 50-200/185 | 18,5 | - | • | • | • | • |

• = Available

Nsc1_models-2p50-en_c_sc

| SIZE NSC..2 | kW | VERSION | | | |
|----------------|------|---------|------|------|------|
| | | NSCE | NSCS | NSCF | NSCC |
| 50-250/150 | 15 | • | • | • | • |
| 50-250/185 | 18,5 | • | • | • | • |
| 50-250/220 | 22 | • | • | • | • |
| 50-250/300 | 30 | - | • | • | • |
| 50-315/370 | 37 | - | • | • | • |
| 50-315/450 | 45 | - | • | • | • |
| 50-315/550 | 55 | - | • | • | • |
| 50-315/750 | 75 | - | • | • | • |
| 65-125/40 | 4 | • | • | • | • |
| 65-125/55 | 5,5 | • | • | • | • |
| 65-125/75 | 7,5 | • | • | • | • |
| 65-125/92 | 9,2 | • | - | - | - |
| 65-125/110A | 11 | - | • | • | • |
| 65-125/110 | 11 | • | • | • | • |
| 65-160/75 | 7,5 | • | • | • | • |
| 65-160/92 | 9,2 | • | - | - | - |
| 65-160/110A | 11 | - | • | • | • |
| 65-160/110 | 11 | • | • | • | • |
| 65-160/150 | 15 | • | • | • | • |
| 65-160/185 | 18,5 | • | • | • | • |
| 65-200/110 | 11 | • | • | • | • |
| 65-200/150 | 15 | • | • | • | • |
| 65-200/185 | 18,5 | • | • | • | • |
| 65-200/220 | 22 | • | • | • | • |
| 65-200/300 | 30 | - | • | • | • |
| 65-250/220 | 22 | - | • | • | • |
| 65-250/300 | 30 | - | • | • | • |
| 65-250/370 | 37 | - | • | • | • |
| 65-250/450 | 45 | - | • | • | • |
| 65-250/550 | 55 | - | • | • | • |
| 65-315/550 | 55 | - | • | • | • |
| 65-315/750 | 75 | - | • | • | • |
| 65-315/900 | 90 | - | • | • | • |
| 80-160/110 | 11 | • | • | • | • |
| 80-160/150 | 15 | • | • | • | • |
| 80-160/185 | 18,5 | • | • | • | • |
| 80-160/220 | 22 | • | • | • | • |
| 80-200/220 | 22 | - | • | • | • |
| 80-200/300 | 30 | - | • | • | • |
| 80-200/370 | 37 | - | • | • | • |
| 80-200/450 | 45 | - | • | • | • |
| 80-250/370 | 37 | - | • | • | • |
| 80-250/450 | 45 | - | • | • | • |
| 80-250/550 | 55 | - | • | • | • |
| 80-250/750 | 75 | - | • | • | • |
| 80-316/900 | 90 | - | - | • | • |
| 80-316/1100 | 110 | - | - | • | • |
| 80-316/1320 | 132 | - | - | • | • |
| 80-316/1600 | 160 | - | - | • | • |

(*) Models available also in single-phase version.

NSC2 : Two impellers Extended shaft.

NSCE : Extended shaft.

NSCS : Stub shaft.

NSCF : Frame mounted.

NSCC : Frame mounted with spacer coupling.

e-NSC SERIES
LIST OF MODELS AT 50 Hz, 2 POLES

| SIZE NSC | kW | VERSION | | | |
|--------------|------|---------|------|------|------|
| | | NSCE | NSCS | NSCF | NSCC |
| 100-160/150 | 15 | - | • | • | • |
| 100-160/185 | 18,5 | - | • | • | • |
| 100-160/220 | 22 | - | • | • | • |
| 100-160/300 | 30 | - | • | • | • |
| 100-200/300 | 30 | - | • | • | • |
| 100-200/370 | 37 | - | • | • | • |
| 100-200/450 | 45 | - | • | • | • |
| 100-200/550 | 55 | - | • | • | • |
| 100-250/450 | 45 | - | - | • | • |
| 100-250/550 | 55 | - | - | • | • |
| 100-250/750 | 75 | - | • | • | • |
| 100-250/900 | 90 | - | • | • | • |
| 100-316/1100 | 110 | - | - | • | • |
| 100-316/1320 | 132 | - | - | • | • |
| 100-316/1600 | 160 | - | - | • | • |
| 125-200/450 | 45 | - | • | • | • |
| 125-200/550 | 55 | - | • | • | • |
| 125-200/750 | 75 | - | • | • | • |
| 125-200/900 | 90 | - | • | • | • |
| 125-315/1100 | 110 | - | - | • | • |
| 125-315/1320 | 132 | - | - | • | • |
| 125-315/1600 | 160 | - | - | • | • |
| 125-315/2000 | 200 | - | - | • | • |

• = Available

Nsc2_models-2p50-en_b_sc

e-NSC SERIES LIST OF MODELS AT 50 Hz, 4 POLES

| SIZE NSC..4 | kW | VERSION | | | | |
|----------------|------|---------|------|------|------|------|
| | | NSC2 | NSCE | NSCS | NSCF | NSCC |
| 32-125/02B | 0.25 | - | • | - | • | • |
| 32-125/02A | 0.25 | - | • | - | • | • |
| 32-125/02 | 0.25 | - | • | - | • | • |
| 32-125/03 | 0.37 | - | • | - | • | • |
| 32-160/02 | 0.25 | - | • | - | • | • |
| 32-160/03 | 0.37 | - | • | - | • | • |
| 32-160/05A | 0.55 | - | • | • | • | • |
| 32-160/05 | 0.55 | - | • | • | • | • |
| 32-200/05A | 0.55 | - | • | • | • | • |
| 32-200/05 | 0.55 | - | • | • | • | • |
| 32-200/07 | 0.75 | - | • | • | • | • |
| 32-200/11 | 1.1 | - | • | • | • | • |
| 32-250/11A | 1,1 | • | - | - | - | - |
| 32-250/11 | 1,1 | • | - | - | - | - |
| 32-250/11A | 1.1 | - | - | • | • | • |
| 32-250/15B | 1.5 | - | • | - | - | - |
| 32-250/11 | 1.1 | - | - | • | • | • |
| 32-250/15A | 1.5 | - | • | - | - | - |
| 32-250/15 | 1.5 | - | • | • | • | • |
| 32-250/22 | 2.2 | - | • | • | • | • |
| 40-125/02A | 0.25 | - | • | - | • | • |
| 40-125/02 | 0.25 | - | • | - | • | • |
| 40-125/03 | 0.37 | - | • | - | • | • |
| 40-125/05 | 0.55 | - | • | • | • | • |
| 40-160/03 | 0.37 | - | • | - | • | • |
| 40-160/05 | 0.55 | - | • | • | • | • |
| 40-160/07 | 0.75 | - | • | • | • | • |
| 40-160/11 | 1.1 | - | • | • | • | • |
| 40-200/07 | 0.75 | - | • | • | • | • |
| 40-200/11 | 1.1 | - | • | • | • | • |
| 40-200/15A | 1.5 | - | • | • | • | • |
| 40-200/15 | 1.5 | - | • | • | • | • |
| 40-250/11 | 1.1 | - | - | • | • | • |
| 40-250/15A | 1.5 | - | • | - | - | - |
| 40-250/15 | 1.5 | - | • | • | • | • |
| 40-250/22A | 2.2 | - | • | • | • | • |
| 40-250/22 | 2.2 | - | • | • | • | • |
| 40-250/30 | 3 | - | • | • | • | • |
| 50-125/03 | 0.37 | - | • | - | • | • |
| 50-125/05 | 0.55 | - | • | • | • | • |
| 50-125/07 | 0.75 | - | • | • | • | • |
| 50-125/11 | 1.1 | - | • | • | • | • |
| 50-160/07 | 0.75 | - | • | • | • | • |
| 50-160/11A | 1.1 | - | • | • | • | • |
| 50-160/11 | 1.1 | - | • | • | • | • |
| 50-160/15 | 1.5 | - | • | • | • | • |
| 50-200/11 | 1.1 | - | - | • | • | • |
| 50-200/15A | 1.5 | - | • | - | - | - |
| 50-200/15 | 1.5 | - | • | • | • | • |
| 50-200/22A | 2.2 | - | • | • | • | • |
| 50-200/22 | 2.2 | - | • | • | • | • |
| 50-250/22A | 2.2 | - | • | • | • | • |
| 50-250/22 | 2.2 | - | • | • | • | • |
| 50-250/30 | 3 | - | • | • | • | • |
| 50-250/40 | 4 | - | • | • | • | • |

• = Available

Nsc1_models-4p50-en_d_sc

| SIZE NSC..4 | kW | VERSION | | | |
|----------------|------|---------|------|------|------|
| | | NSCE | NSCS | NSCF | NSCC |
| 50-315/40 | 4 | - | • | • | • |
| 50-315/55 | 5.5 | - | • | • | • |
| 50-315/75 | 7.5 | - | • | • | • |
| 50-315/110 | 11 | - | • | • | • |
| 65-125/05 | 0.55 | • | • | • | • |
| 65-125/07 | 0.75 | • | • | • | • |
| 65-125/11 | 1.1 | • | • | • | • |
| 65-125/15 | 1.5 | • | • | • | • |
| 65-160/11A | 1.1 | - | • | • | • |
| 65-160/15B | 1.5 | • | - | - | - |
| 65-160/11 | 1.1 | - | • | • | • |
| 65-160/15A | 1.5 | • | - | - | - |
| 65-160/15 | 1.5 | • | • | • | • |
| 65-160/22A | 2.2 | • | • | • | • |
| 65-160/22 | 2.2 | • | • | • | • |
| 65-200/15 | 1.5 | • | • | • | • |
| 65-200/22A | 2.2 | • | • | • | • |
| 65-200/22 | 2.2 | • | • | • | • |
| 65-200/30 | 3 | • | • | • | • |
| 65-200/40 | 4 | • | • | • | • |
| 65-250/30 | 3 | - | • | • | • |
| 65-250/40 | 4 | - | • | • | • |
| 65-250/55A | 5.5 | - | • | • | • |
| 65-250/55 | 5.5 | - | • | • | • |
| 65-250/75 | 7.5 | - | • | • | • |
| 65-315/55 | 5.5 | - | • | • | • |
| 65-315/75 | 7.5 | - | • | • | • |
| 65-315/110 | 11 | - | • | • | • |
| 65-315/150 | 15 | - | • | • | • |
| 80-160/15 | 1.5 | • | • | • | • |
| 80-160/22A | 2.2 | • | • | • | • |
| 80-160/22 | 2.2 | • | • | • | • |
| 80-160/30 | 3 | • | • | • | • |
| 80-200/30 | 3 | - | • | • | • |
| 80-200/40 | 4 | - | • | • | • |
| 80-200/55A | 5.5 | - | • | • | • |
| 80-200/55 | 5.5 | - | • | • | • |
| 80-250/55A | 5.5 | - | • | • | • |
| 80-250/55 | 5.5 | - | • | • | • |
| 80-250/75 | 7.5 | - | • | • | • |
| 80-250/110 | 11 | - | • | • | • |
| 80-315/110A | 11 | - | • | • | • |
| 80-315/110 | 11 | - | • | • | • |
| 80-315/150 | 15 | - | • | • | • |
| 80-315/185 | 18.5 | - | • | • | • |
| 80-315/220 | 22 | - | • | • | • |
| 80-400/185 | 18.5 | - | • | • | • |
| 80-400/220 | 22 | - | • | • | • |
| 80-400/300 | 30 | - | • | • | • |
| 80-400/370 | 37 | - | • | • | • |

e-NSC SERIES
LIST OF MODELS AT 50 Hz, 4 POLES

| SIZE NSC..4 | kW | VERSION | | | |
|----------------|------|---------|------|------|------|
| | | NSCE | NSCS | NSCF | NSCC |
| 100-160/22A | 2,2 | - | • | • | • |
| 100-160/22 | 2,2 | - | • | • | • |
| 100-160/30 | 3 | - | • | • | • |
| 100-160/40 | 4 | - | • | • | • |
| 100-200/40 | 4 | - | • | • | • |
| 100-200/55 | 5,5 | - | • | • | • |
| 100-200/75 | 7,5 | - | • | • | • |
| 100-250/55 | 5,5 | - | - | • | • |
| 100-250/75 | 7,5 | - | • | • | • |
| 100-250/110 | 11 | - | • | • | • |
| 100-315/110 | 11 | - | • | • | • |
| 100-315/150 | 15 | - | • | • | • |
| 100-315/185 | 18,5 | - | • | • | • |
| 100-315/220 | 22 | - | • | • | • |
| 100-315/300 | 30 | - | • | • | • |
| 100-400/300 | 30 | - | • | • | • |
| 100-400/370 | 37 | - | • | • | • |
| 100-400/450 | 45 | - | • | • | • |
| 125-200/55 | 5,5 | - | • | • | • |
| 125-200/75 | 7,5 | - | • | • | • |
| 125-200/110 | 11 | - | • | • | • |
| 125-250/75 | 7,5 | - | - | • | • |
| 125-250/110 | 11 | - | • | • | • |
| 125-250/150 | 15 | - | • | • | • |
| 125-315/185 | 18,5 | - | • | • | • |
| 125-315/220 | 22 | - | • | • | • |
| 125-315/300 | 30 | - | • | • | • |
| 125-315/370 | 37 | - | • | • | • |
| 125-400/370 | 37 | - | • | • | • |
| 125-400/450 | 45 | - | • | • | • |
| 125-400/550 | 55 | - | • | • | • |
| 125-400/750 | 75 | - | • | • | • |
| 150-200/110A | 11 | - | • | • | • |
| 150-200/110 | 11 | - | • | • | • |
| 150-200/150A | 15 | - | • | • | • |
| 150-200/150 | 15 | - | • | • | • |
| 150-250/150 | 15 | - | • | • | • |
| 150-250/185 | 18,5 | - | • | • | • |
| 150-250/220 | 22 | - | • | • | • |
| 150-250/300 | 30 | - | • | • | • |
| 150-315/300 | 30 | - | • | • | • |
| 150-315/370 | 37 | - | • | • | • |
| 150-315/450 | 45 | - | • | • | • |
| 150-400/450 | 45 | - | • | • | • |
| 150-400/550 | 55 | - | • | • | • |
| 150-400/750 | 75 | - | • | • | • |
| 150-400/900 | 90 | - | • | • | • |
| 150-400/1100 | 110 | - | - | • | • |
| 150-500/900 | 90 | - | - | • | • |
| 150-500/1100 | 110 | - | - | • | • |
| 150-500/1320 | 132 | - | - | • | • |
| 150-500/1600 | 160 | - | - | • | • |
| 150-500/2000 | 200 | - | - | • | • |

| SIZE NSC..4 | kW | VERSION | | | |
|----------------|------|---------|------|------|------|
| | | NSCE | NSCS | NSCF | NSCC |
| 200-250/185 | 18,5 | - | • | • | • |
| 200-250/220 | 22 | - | • | • | • |
| 200-250/300A | 30 | - | • | • | • |
| 200-250/300 | 30 | - | • | • | • |
| 200-315/300 | 30 | - | - | • | • |
| 200-315/370 | 37 | - | • | • | • |
| 200-315/450 | 45 | - | • | • | • |
| 200-315/550 | 55 | - | • | • | • |
| 200-315/750 | 75 | - | • | • | • |
| 200-400/750A | 75 | - | - | • | • |
| 200-400/750 | 75 | - | - | • | • |
| 200-400/900 | 90 | - | - | • | • |
| 200-400/1100 | 110 | - | - | • | • |
| 200-400/1320 | 132 | - | - | • | • |
| 200-500/1320 | 132 | - | - | • | • |
| 200-500/1600 | 160 | - | - | • | • |
| 200-500/2000 | 200 | - | - | • | • |
| 200-500/2500 | 250 | - | - | • | • |
| 200-500/3150 | 315 | - | - | • | • |
| 250-315/370 | 37 | - | • | • | • |
| 250-315/450 | 45 | - | • | • | • |
| 250-315/550 | 55 | - | • | • | • |
| 250-315/750 | 75 | - | • | • | • |
| 250-400/750 | 75 | - | - | • | • |
| 250-400/900 | 90 | - | - | • | • |
| 250-400/1100 | 110 | - | - | • | • |
| 250-400/1320 | 132 | - | - | • | • |
| 250-400/1600 | 160 | - | - | • | • |
| 250-400/2000 | 200 | - | - | • | • |
| 250-500/1600 | 160 | - | - | • | • |
| 250-500/2000 | 200 | - | - | • | • |
| 250-500/2500 | 250 | - | - | • | • |
| 250-500/3150 | 315 | - | - | • | • |
| 250-500/3550 | 355 | - | - | • | • |
| 300-350/750A | 75 | - | - | • | • |
| 300-350/750 | 75 | - | - | • | • |
| 300-350/900 | 90 | - | - | • | • |
| 300-350/1100 | 110 | - | - | • | • |
| 300-400/1100 | 110 | - | - | • | • |
| 300-400/1320 | 132 | - | - | • | • |
| 300-400/1600 | 160 | - | - | • | • |
| 300-400/2000 | 200 | - | - | • | • |
| 300-400/2500 | 250 | - | - | • | • |
| 300-450/1600 | 160 | - | - | • | • |
| 300-450/2000 | 200 | - | - | • | • |
| 300-450/2500 | 250 | - | - | • | • |
| 300-450/3150 | 315 | - | - | • | • |

• = Available

Nsc2_models-4p50-en_a_sc

SERIE e-NSC AVAILABLE MATERIALS

Various material configurations are available to fit the needs of different pumped mediums and applications requirements. Below are the specifics regarding the material configurations and their availability for the different pump sizes. The material identification codes are the same used in the pump description (see page 8)

MATERIAL CONFIGURATION

| COMPONENTS | CS | CC/DC | CB/DB | CN/DN | NN | RN | RR |
|------------------------------|-----------------|------------------------|--------|-----------------|-----------------|--------|--------|
| Volute casing | Cast iron | Cast iron/Ductile iron | | | Stainless steel | Duplex | Duplex |
| Impeller | Stainless steel | Cast iron | Bronze | Stainless steel | Stainless steel | | Duplex |
| Casing cover | Cast iron | Cast iron/Ductile iron | | | Stainless steel | Duplex | Duplex |
| Stub shaft | Stainless steel | | | | Duplex | | |
| Wear ring | Stainless steel | | | | Duplex | | |
| Impeller lock nut and washer | Stainless steel | | | | | | Duplex |
| Impeller key | Stainless steel | | | | | | Duplex |
| Fill and drain plugs | Stainless steel | | | | | Duplex | |
| Motor adapter | Cast iron | | | | | | |

Stub shaft and wear rings in Duplex are available as an option for all pump sizes.
For further informations, see the pages 15-21.

Nsc_configs-en_a_tm

AVAILABLE MATERIALS FOR CASING AND IMPELLER PER PUMP SIZE


| DISCHARGE SIZE | IMPELLER SIZE | | | | | | |
|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| | 125 | 160 | 200 | 250 | 315 | 400 | 500 |
| 32 | CS | CS | CS | CS | | | |
| 40 | CS | CS | CS | CS | | | |
| 50 | CS | CS | CS | CS | CC-CB-CN NN-RR | | |
| 65 | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | | |
| 80 | | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | |
| 100 | | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | |
| 125 | | | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | |
| 150 | | | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | CC-CB-CN NN-RR | DC-DB-DN RN-RR |
| 200 | | | | DC-DB-DN RN-RR | DC-DB-DN RN-RR | DC-DB-DN RN-RR | DC-DB-DN RN-RR |
| 250 | | | | | DC-DB-DN RN-RR | DC-DB-DN RN-RR | DC-DB-DN RN-RR |
| 300 | | | | | DC-DB-DN RN-RR | DC-DB-DN RN-RR | DC-DB-DN RN-RR |

NOTE. Sizes 80-316 and 100-316 are available only in CC configuration (specially created for fire-fighting applications).

Nsc_models-en_a_tm

NSCE SERIES

ELECTRIC PUMP CROSS-SECTION AND MAIN COMPONENTS

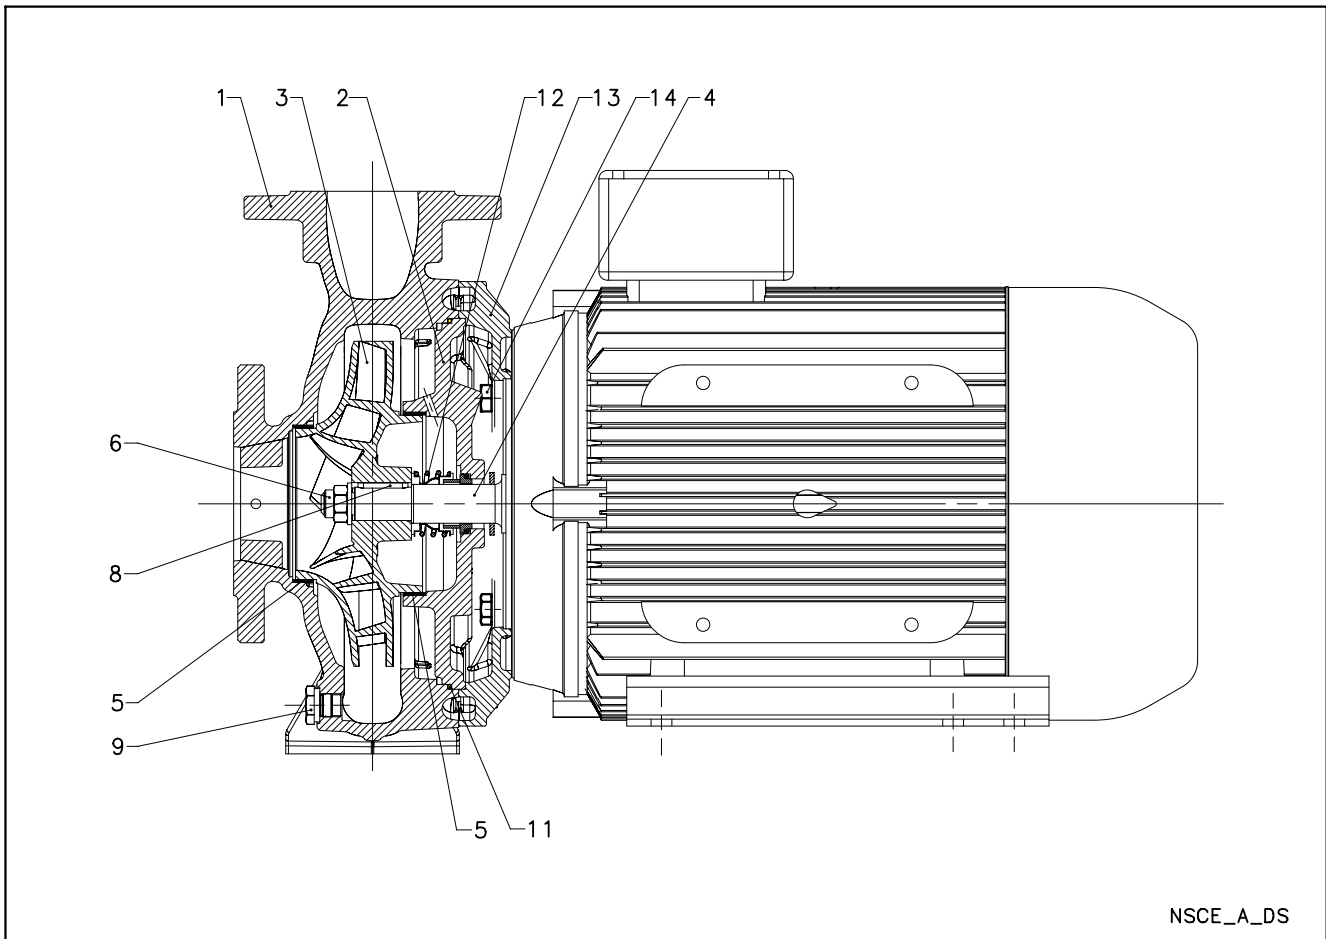

NSCE_A_DS


| REF. N. | PART | MATERIAL | REFERENCE STANDARDS | |
|---------|--|--|--|------------------|
| | | | EUROPE | USA |
| 1 | Volute casing | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| 2 | Casing cover | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| 3 | Impeller (32, 40, 50) | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| | | Cast iron | EN 1561 - GJL-200 (JL1030) | ASTM Class 30 |
| | Impeller (65, 80) | Bronze | EN 1982 - CuSn10-C (CC480K) | UNS C90700 |
| | | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | ASTM A743 CF8M |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | ASTM A743 CD4MCu |
| 4 | Shaft extension | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| 5 | Wear ring | Stainless steel | EN 10088-X5CrNi18-10 (1.4301) | AISI 304 |
| 6 | Impeller lock nut and washer | Stainless steel | EN 10088-1-X5CrNiMo17-12-2 (1.4401) | AISI 316 |
| 8 | Impeller key | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| 9 | Fill and drain plugs | Stainless steel | EN 10088-3-X8CrNiS18-9 (1.4305) | AISI 303 |
| 11 | O-Ring | EPDM (standard version) | | |
| 12 | Mechanical seal | Carbon / Silicon carbide / EPDM (standard version) | | |
| 13 | Motor adapter * | Aluminium | EN 1706-AC-AISI11Cu2 (Fe) (AC46100) | - |
| | Motor adapter | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| 14 | Volute casing fastening bolts and screws | Galvanized steel | | |

* 2/4 pole: 32/40/50-125, 32/40-160

Nsce-en_b_tm

NSC2 SERIES

ELECTRIC PUMP CROSS-SECTION AND MAIN COMPONENTS

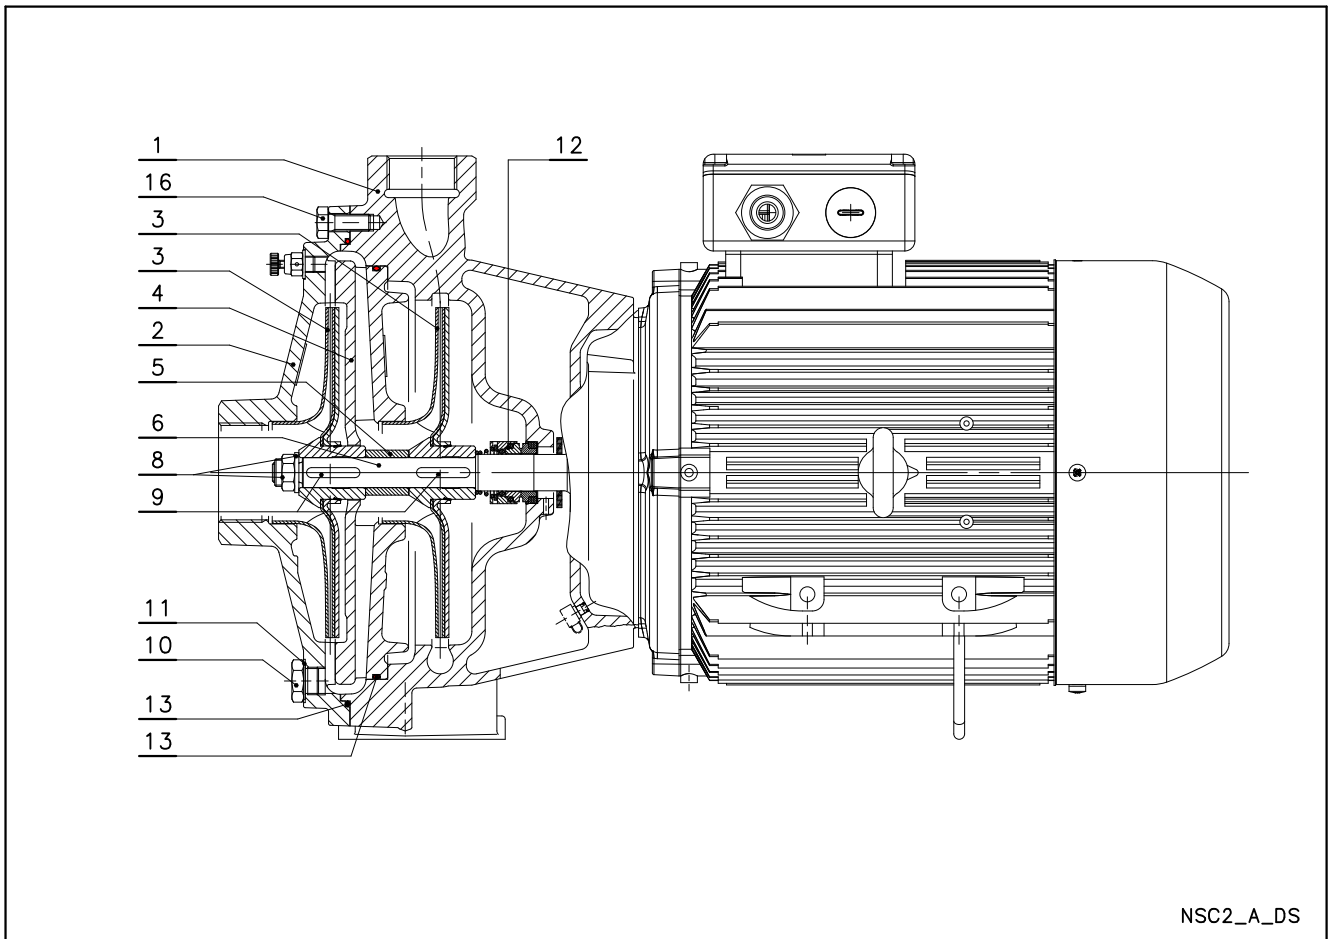


NSC2_A_DS

| REF. N. | PART | MATERIAL | REFERENCE STANDARDS | |
|---------|--------------------------------------|--|-------------------------------------|---------------|
| | | | EUROPE | USA |
| 1 | Pump body | Cast iron | EN 1561-GJL-200 (JL1030) | ASTM Class 25 |
| 2 | Suction flange | Cast iron | EN 1561-GJL-200 (JL1030) | ASTM Class 25 |
| 3 | Impeller | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| 4 | Diffuser | Cast iron | EN 1561-GJL-200 (JL1030) | ASTM Class 25 |
| 5 | Impeller spacer | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| 6 | Shaft extension | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| 8 | Impeller lock nut and washer | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| 9 | Tab | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| 10 | Fill and drain plugs | Stainless steel | EN 10088-3-X8CrNiS18-9 (1.4305) | AISI 303 |
| 11 | Fill and drain plugs seals | EPDM (standard version) | | |
| 12 | Mechanical seal | Carbon / Silicon carbide / EPDM (standard version) | | |
| 13 | O-Ring | EPDM (standard version) | | |
| 16 | Pump body fastening bolts and screws | Galvanized steel | | |

Nsc2-en_b_tm

NSCS SERIES

ELECTRIC PUMP CROSS-SECTION AND MAIN COMPONENTS

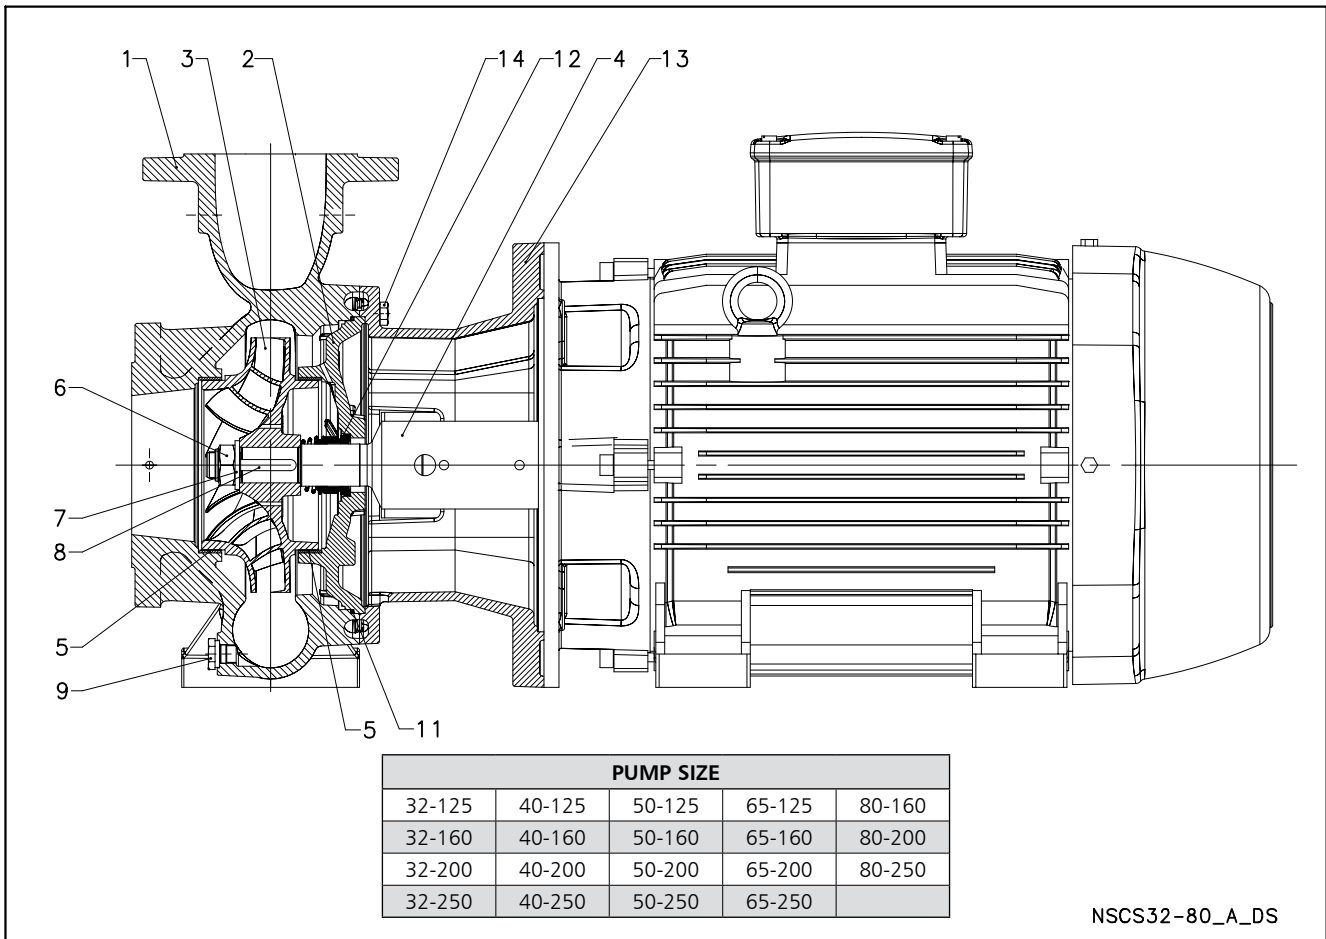


| REF. N. | PART | MATERIAL | REFERENCE STANDARDS | |
|---------|--|---|--|------------------|
| | | | EUROPE | USA |
| 1 | Volute casing | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| | Volute casing (65, 80) | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | ASTM A743 CF8M |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | ASTM A743 CD4MCu |
| 2 | Casing cover | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| | Casing cover (65, 80) | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | ASTM A743 CF8M |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | ASTM A743 CD4MCu |
| 3 | Impeller (32, 40, 50) | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| | | Cast iron | EN 1561 - GJL-200 (JL1030) | ASTM Class 30 |
| | Impeller (65, 80) | Bronze | EN 1982 - CuSn10-C (CC480K) | UNS C90700 |
| | | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | ASTM A743 CF8M |
| 4 | Stub shaft | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| | Stub shaft (65-250, 80-200, 80-250) | Stainless steel | EN 10088-1-X17CrNi16-2 (1.4057) | AISI 431 |
| | Stub shaft (65, 80) | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 5 | Wear ring | Stainless steel | EN 10088-X5CrNi18-10 (1.4301) | AISI 304 |
| | Wear ring (65, 80) | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 6 | Impeller lock nut and washer | Stainless steel | EN 10088-1-X5CrNiMo17-12-2 (1.4401) | AISI 316 |
| | Impeller lock nut and washer (65, 80) | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 8 | Impeller key | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| | Impeller key (65, 80) | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 9 | Fill and drain plugs | Stainless steel | EN 10088-3-X8CrNiS18-9 (1.4305) | AISI 303 |
| | Fill and drain plugs (65, 80) | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 11 | O-Ring | EPDM (versione standard) | | |
| 12 | Mechanical seal | Carbon / Silicon carbide / EPDM (standard version) | | |
| 13 | Mechanical seal (65, 80) | Antimony impregnated carbon / Silicon carbide / EPDM (duplex version) | | |
| 13 | Adapter * | Aluminium | EN 1706-AC-AISI11Cu2 (Fe) (AC46100) | - |
| | Adapter | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| | Motor adapter | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| 14 | Volute casing fastening bolts and screws | Galvanized steel | | |
| | Volute casing fastening bolts and screws | Stainless steel | A4 (~ 1.4401) | |

* 2/4 pole: 32/40/50-125, 32/40-160

NSCS SERIES

ELECTRIC PUMP CROSS-SECTION AND MAIN COMPONENTS

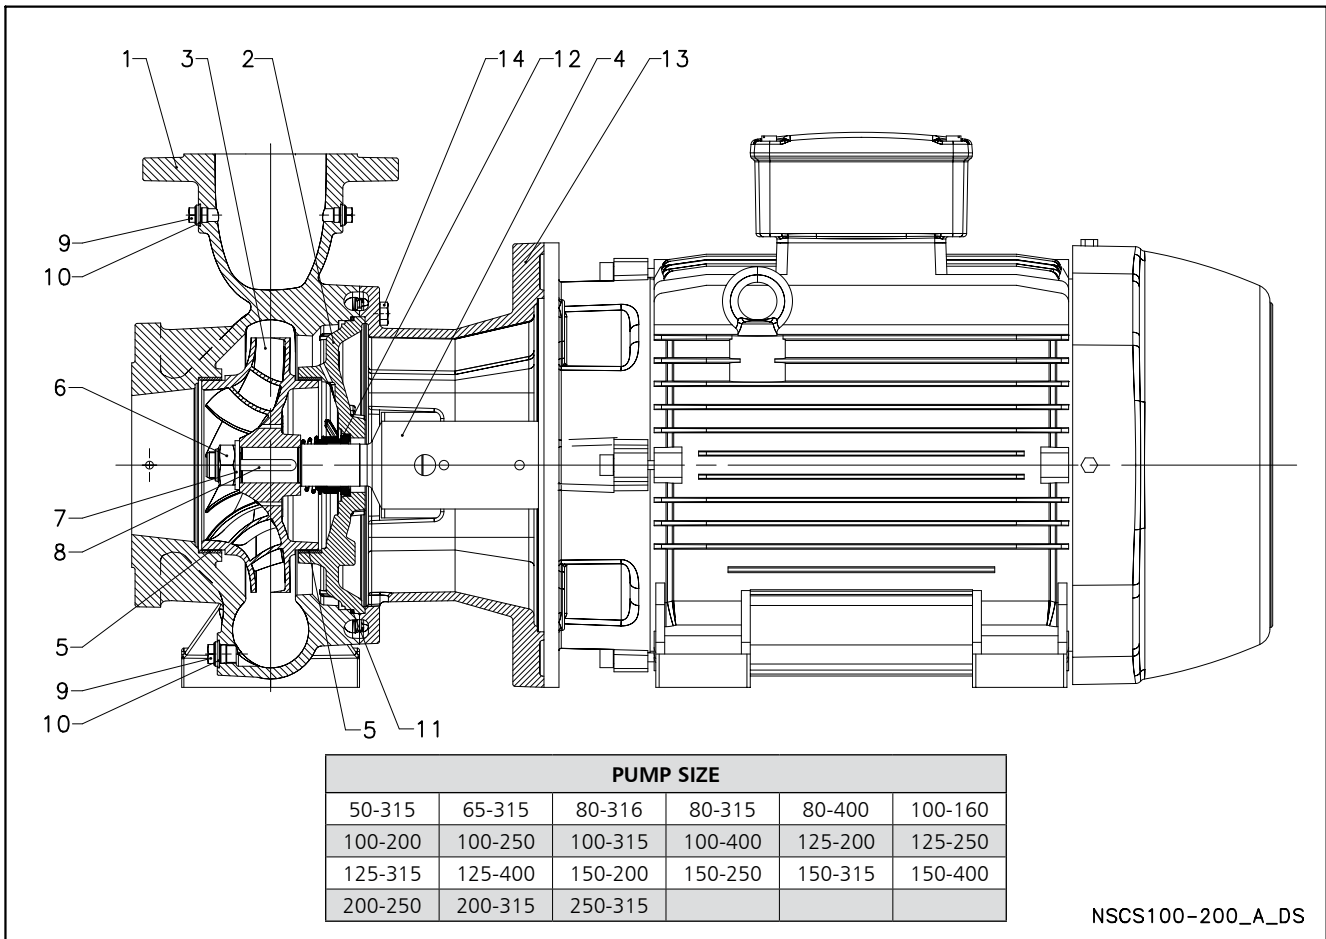


| PUMP SIZE | | | | | |
|-----------|---------|---------|---------|---------|---------|
| 50-315 | 65-315 | 80-316 | 80-315 | 80-400 | 100-160 |
| 100-200 | 100-250 | 100-315 | 100-400 | 125-200 | 125-250 |
| 125-315 | 125-400 | 150-200 | 150-250 | 150-315 | 150-400 |
| 200-250 | 200-315 | 250-315 | | | |

NSCS100-200_A_DS

| REF. N. | PART | MATERIAL | REFERENCE STANDARDS | |
|---------|---|---|--|-----|
| | | | EUROPE | USA |
| 1 | Volute casing | Cast iron | EN 1561 - GJL-250 (JL1040) | |
| | | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | |
| | Volute casing (200-250, 200-315, 250-315) | Cast ductile iron | EN 1563 - EN-GJS400-15 (EN-JS1030) | |
| 2 | Casing cover | Cast iron | EN 1561 - GJL-250 (JL1040) | |
| | | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | |
| | | Cast ductile iron | EN 1563 - EN-GJS400-15 (EN-JS1030) | |
| | Casing cover (200-250, 200-315, 250-315) | Cast ductile iron | EN 1563 - EN-GJS400-15 (EN-JS1030) | |
| 3 | Impeller | Cast iron | EN 1561 - GJL-200 (JL1030) | |
| | | Bronzo | EN 1982 - CuSn10-C (CC480K) | |
| | | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | |
| 4 | Stub shaft | Stainless steel | EN 10088-1-X17CrNi16-2 (1.4057) | |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | |
| 5 | Wear ring | Stainless steel | EN 10088-X5CrNi18-10 (1.4301) | |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | |
| 6 | Impeller nut | Stainless steel | A4 (~ 1.4401) | |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | |
| 7 | Impeller washer | Stainless steel | A4 (~ 1.4401) | |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | |
| 8 | Impeller key | Stainless steel | EN 10088 - X6CrNiMo17-12-2 (1.4571) | |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | |
| 9 | Plug | Stainless steel | EN 10088 - X6CrNiMo17-12-2 (1.4571) | |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | |
| 10 | Gasket | Asbestos-free synthetic fiber AFM 34 | | |
| 11 | O-Ring | EPDM (versione standard) | | |
| 12 | Mechanical seal | Carbon / Silicon carbide / EPDM (standard version) | | |
| | | Antimony impregnated carbon / Silicon carbide / EPDM (duplex version) | | |
| 13 | Motor adapter | Cast iron | EN 1561 - GJL-250 (JL1040) | |
| 14 | Volute - casing fastening screws | Carbon steel | | |
| | | Stainless steel | A4 | |

NSC, NSCF, NSCC SERIES

ELECTRIC PUMP CROSS-SECTION AND MAIN COMPONENTS

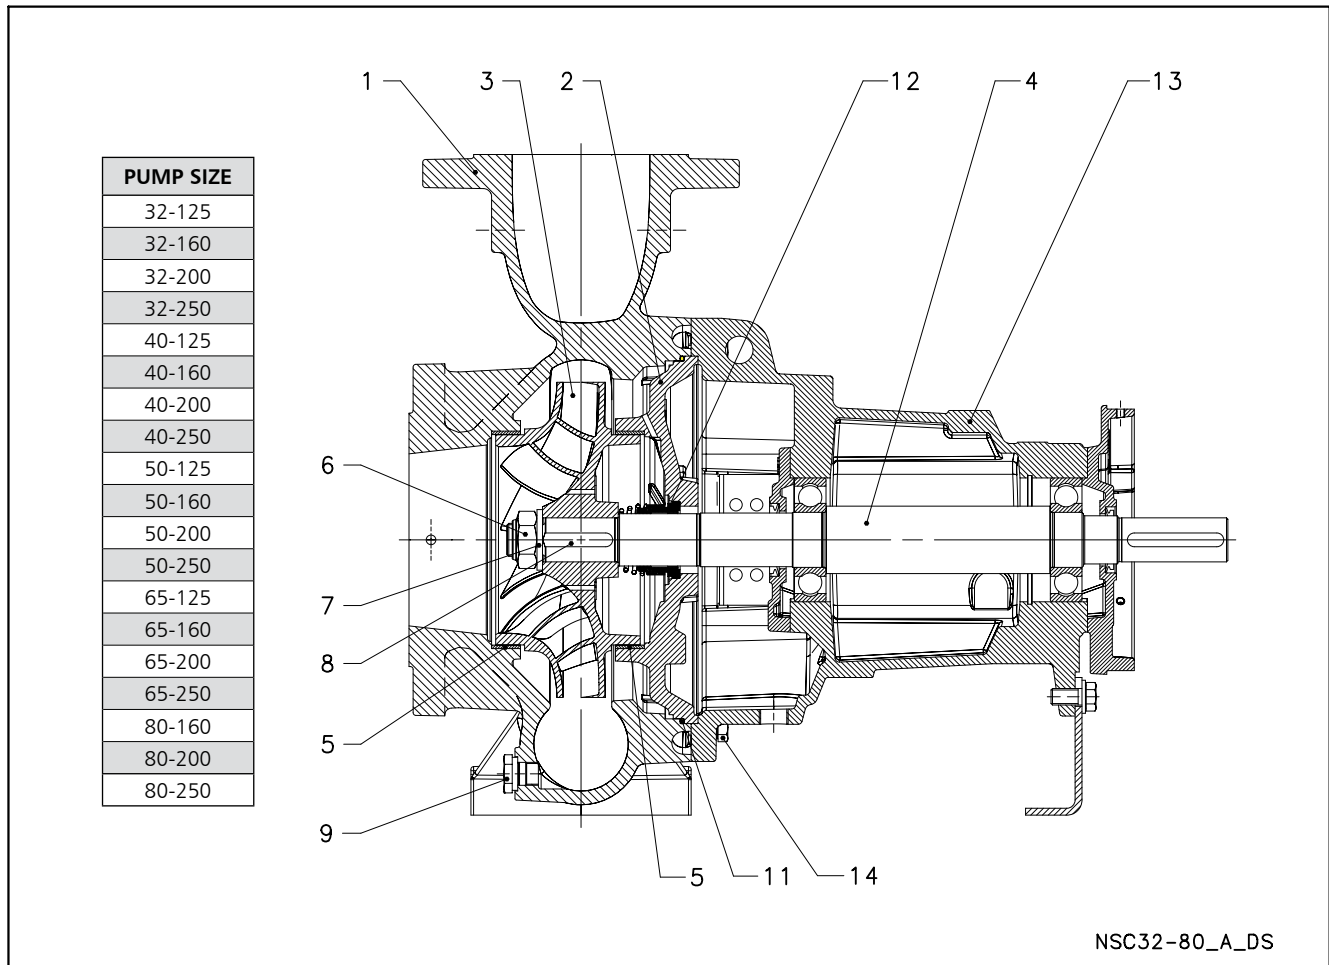


| REF. N. | PART | MATERIAL | REFERENCE STANDARDS | |
|---------|--|---|--|------------------|
| | | | EUROPE | USA |
| 1 | Volute casing | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| | Volute casing (65, 80) | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | ASTM A743 CF8M |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | ASTM A743 CD4MCu |
| 2 | Casing cover | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| | Casing cover (65, 80) | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | ASTM A743 CF8M |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | ASTM A743 CD4MCu |
| 3 | Impeller (32, 40, 50) | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| | | Cast iron | EN 1561 - GJL-200 (JL1030) | ASTM Class 30 |
| | Impeller (65, 80) | Bronze | EN 1982 - CuSn10-C (CC480K) | UNS C90700 |
| | | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | ASTM A743 CF8M |
| 4 | Shaft | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| | Shaft (65-250, 80-200, 80-250) | Stainless steel | EN 10088-1-X17CrNi16-2 (1.4057) | AISI 431 |
| | Shaft (65, 80) | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 5 | Wear ring | Stainless steel | EN 10088-X5CrNi18-10 (1.4301) | AISI 304 |
| | Wear ring (65, 80) | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 6 | Impeller lock nut and washer | Stainless steel | EN 10088-1-X5CrNiMo17-12-2 (1.4401) | AISI 316 |
| | Impeller lock nut and washer (65, 80) | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 8 | Impeller key | Stainless steel | EN 10088-1-X2CrNiMo17-12-2 (1.4404) | AISI 316L |
| | Impeller key (65, 80) | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 9 | Fill and drain plugs | Stainless steel | EN 10088-3-X8CrNiS18-9 (1.4305) | AISI 303 |
| | Fill and drain plugs (65, 80) | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 11 | O-Ring | EPDM (versione standard) | | |
| 12 | Mechanical seal | Carbon / Silicon carbide / EPDM (standard version) | | |
| 13 | Mechanical seal (65, 80) | Antimony impregnated carbon / Silicon carbide / EPDM (duplex version) | | |
| 13 | Adapter * | Aluminium | EN 1706-AC-AISI11Cu2 (Fe) (AC46100) | - |
| | Adapter | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| | Motor adapter | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| 14 | Volute casing fastening bolts and screws | Galvanized steel | | |
| | Volute casing fastening bolts and screws | Stainless steel | A4 (~ 1.4401) | |

* 2/4 pole: 32/40/50-125, 32/40-160

NSC, NSCF, NSCC SERIES

ELECTRIC PUMP CROSS-SECTION AND MAIN COMPONENTS

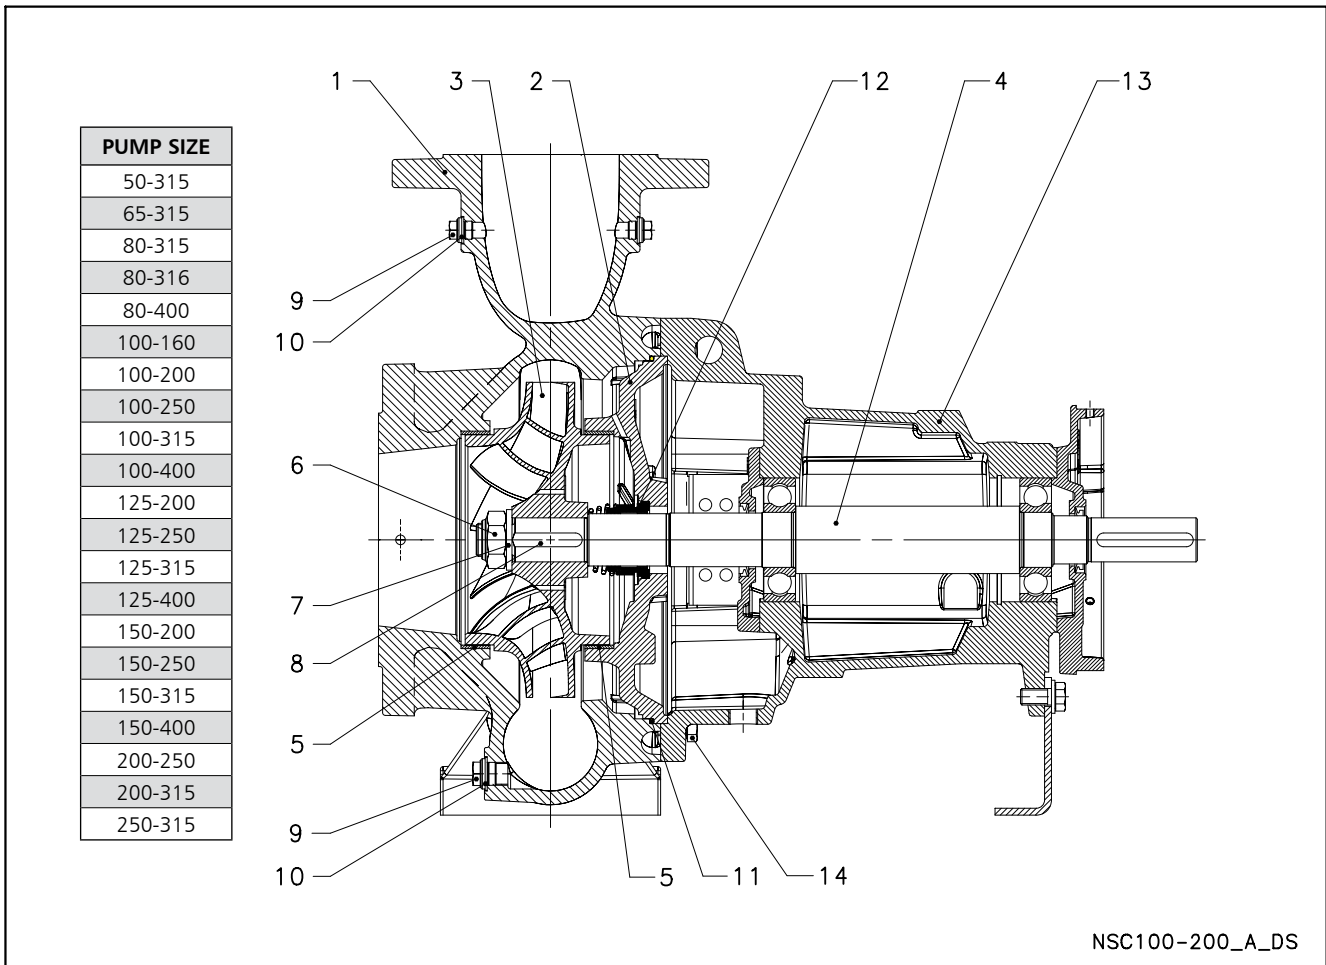


NSC100-200_A_DS

| REF. N. | PART | MATERIAL | REFERENCE STANDARDS | |
|---------|---|---|--|--------------------|
| | | | EUROPE | USA |
| 1 | Volute casing | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| | | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | ASTM A743 CF8M |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | ASTM A743 CD4MCu |
| | Volute casing (200-250, 200-315, 250-315) | Cast ductile iron | EN 1563 - EN-GJS400-15 (EN-JS1030) | ASTM A536 40-60-18 |
| 2 | Casing cover | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| | | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | ASTM A743 CF8M |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | ASTM A743 CD4MCu |
| | | Cast ductile iron | EN 1563 - EN-GJS400-15 (EN-JS1030) | ASTM A536 40-60-18 |
| 3 | Impeller | Cast iron | EN 1561 - GJL-200 (JL1030) | ASTM Class 30 |
| | | Bronze | EN 1982 - CuSn10-C (CC480K) | UNS C90700 |
| | | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | ASTM A743 CF8M |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | ASTM A743 CD4MCu |
| 4 | Shaft | Stainless steel | EN 10088-1-X17CrNi16-2 (1.4057) | AISI 431 |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 5 | Wear ring | Stainless steel | EN 10088-X5CrNi18-10 (1.4301) | AISI 304 |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 6 | Impeller nut | Stainless steel | A4 (~ 1.4401) | |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 7 | Impeller washer | Stainless steel | A4 (~ 1.4401) | |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 8 | Impeller key | Stainless steel | EN 10088 - X6CrNiMo17-12-2 (1.4571) | AISI 316Ti |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 9 | Plug | Stainless steel | EN 10088 - X6CrNiMo17-12-2 (1.4571) | AISI 316Ti |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 10 | Gasket | Asbestos-free synthetic fiber AFM 34 | | |
| 11 | O-Ring | EPDM (standard version) | | |
| 12 | Mechanical seal | Carbon / Silicon carbide / EPDM (standard version) | | |
| | | Antimony impregnated carbon / Silicon carbide / EPDM (duplex version) | | |
| 13 | Bearing bracket | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| 14 | Volute - casing fastening screws | Carbon steel | | |
| | | Stainless steel | A4 (~ 1.4401) | |

NSC, NSCF, NSCC SERIES


ELECTRIC PUMP CROSS-SECTION AND MAIN COMPONENTS

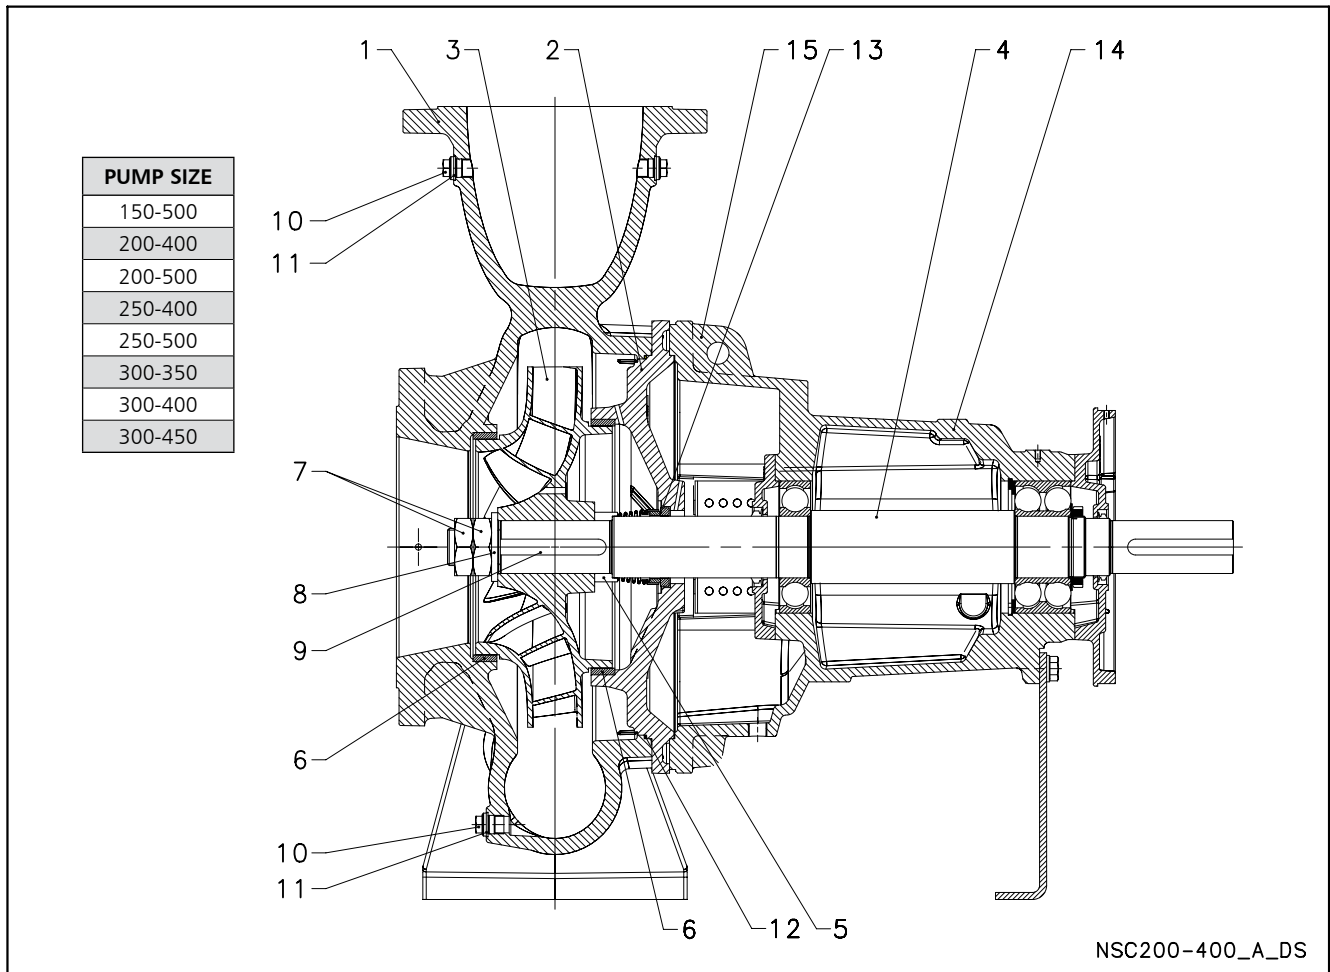

| REF. N. | PART | MATERIAL | REFERENCE STANDARDS | |
|---------|----------------------------------|--|--|--------------------|
| | | | EUROPE | USA |
| 1 | Volute casing | Cast ductile iron | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | ASTM A743 CD4MCu |
| | | Duplex | EN 1563 - EN-GJS400-15 (EN-JS1030) | ASTM A536 40-60-18 |
| 2 | Casing cover | Cast ductile iron | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | ASTM A743 CD4MCu |
| | | Duplex | EN 1563 - EN-GJS400-15 (EN-JS1030) | ASTM A536 40-60-18 |
| 3 | Impeller | Cast iron | EN 1561 - GJL-200 (JL1030) | ASTM Class 30 |
| | | Bronze | EN 1982 - CuSn10-C (CC480K) | UNS C90700 |
| | | Stainless steel | EN 10088-1-GX5CrNiMo-19-11-2 (1.4408) | ASTM A743 CF8M |
| | | Duplex | EN 10213-4-GX2CrNiCuN25-6-3-3 (1.4517) | ASTM A743 CD4MCu |
| 4 | Shaft | Stainless steel | EN 10088-1-X17CrNi16-2 (1.4057) | AISI 431 |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 5 | Spacer ring | Stainless steel | EN 10088-1-X17CrNi16-2 (1.4057) | AISI 431 |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 6 | Wear ring | Stainless steel | EN 10088-X5CrNi18-10 (1.4301) | AISI 304 |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 7 | Impeller nut | Stainless steel | A4 (~ 1.4401) | |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 8 | Impeller washer | Stainless steel | A4 (~ 1.4401) | |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 9 | Impeller key | Stainless steel | EN 10088 - X6CrNiMo17-12-2 (1.4571) | AISI 316Ti |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 10 | Plug | Stainless steel | EN 10088 - X6CrNiMo17-12-2 (1.4571) | AISI 316Ti |
| | | Duplex | EN 10088-3-X2CrNiMoN22-5-3 (1.4462) | ASTM A182 F51 |
| 11 | Gasket | Asbestos-free synthetic fiber AFM 34 | | |
| 12 | O-Ring | EPDM (standard version) | | |
| 13 | Mechanical seal | Carbon / Silicon carbide / EPDM (standard version) | | |
| | | Carbon / Silicon carbide / EPDM (standard version) | | |
| 14 | Bearing bracket | Cast iron | EN 1561 - GJL-250 (JL1040) | ASTM Class 35 |
| 15 | Volute - casing fastening screws | Cast iron | | |
| | | Stainless steel | A4 (~ 1.4401) | |

e-NSC SERIES MECHANICAL SEALS

Elastomer bellow seal with mounting dimensions according to EN 12756 and ISO 3069

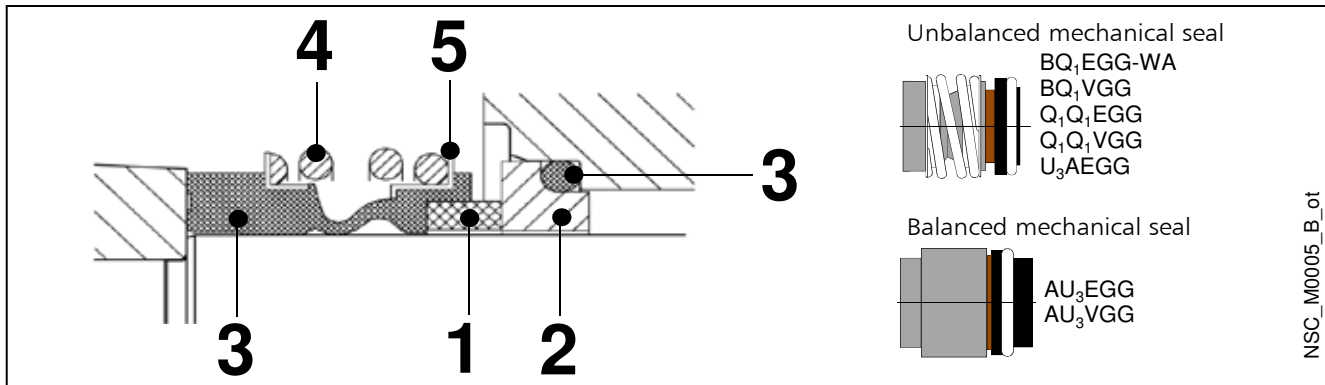

| POSITION 1 - 2 | POSITION 3 | POSITION 4 - 5 |
|---|----------------------|---------------------|
| B : Resin impregnated carbon | E : EPDM | G : AISI 316 |
| A : Antimony impregnated carbon | V : FKM (FPM) | |
| Q₁ : Silicon carbide | | |
| U₃ : Tungsten carbide | | |

Ine-Int_ten-mec-en_a_tm



| TYPE | POSITION | | | | | PRESSURE (bar) | RANGE TEMPERATURE (°C) |
|---------------------------------------|---------------------------|---------------------|-----------------|--------------|--------------------------|-------------------|------------------------------|
| | 1 ROTATING ASSEMBLY | 2 FIXED ASSEMBLY | 3 ELASTOMERS | 4 SPRINGS | 5 OTHER COMPONENTS | | |
| STANDARD MECHANICAL SEAL | | | | | | | |
| B Q ₁ E G G - WA | B | Q ₁ | E | G | G | 16/10 | -25 ... +90/+120 |
| OTHER TYPES OF MECHANICAL SEAL | | | | | | | |
| B Q ₁ V G G | B | Q ₁ | V | G | G | 16 | -20 ... +120 ^{*)} |
| Q ₁ Q ₁ E G G | Q ₁ | Q ₁ | E | G | G | 16 | -25 ... +120 |
| Q ₁ Q ₁ V G G | Q ₁ | Q ₁ | V | G | G | 16 | -20 ... +120 ^{*)} |
| U ₃ A E G G (Ø≤38) | U ₃ | A | E | G | G | 16 | -25 ... +140 |
| A U ₃ E G G (Ø>38) | A | U ₃ | E | G | G | 16 | -25 ... +140 |
| U ₃ A V G G (Ø≤38) | U ₃ | A | V | G | G | 16 | -20 ... +140 ^{*)} |
| A U ₃ V G G (Ø>38) | A | U ₃ | V | G | G | 16 | -20 ... +140 ^{*)} |

^{*)} for hot water: max. +80 °C

nsc_tipi-ten-mec-en_b_tc

e-NSC SERIES



PRESSURE/TEMPERATURE APPLICATION LIMITS FOR COMPLETE PUMP

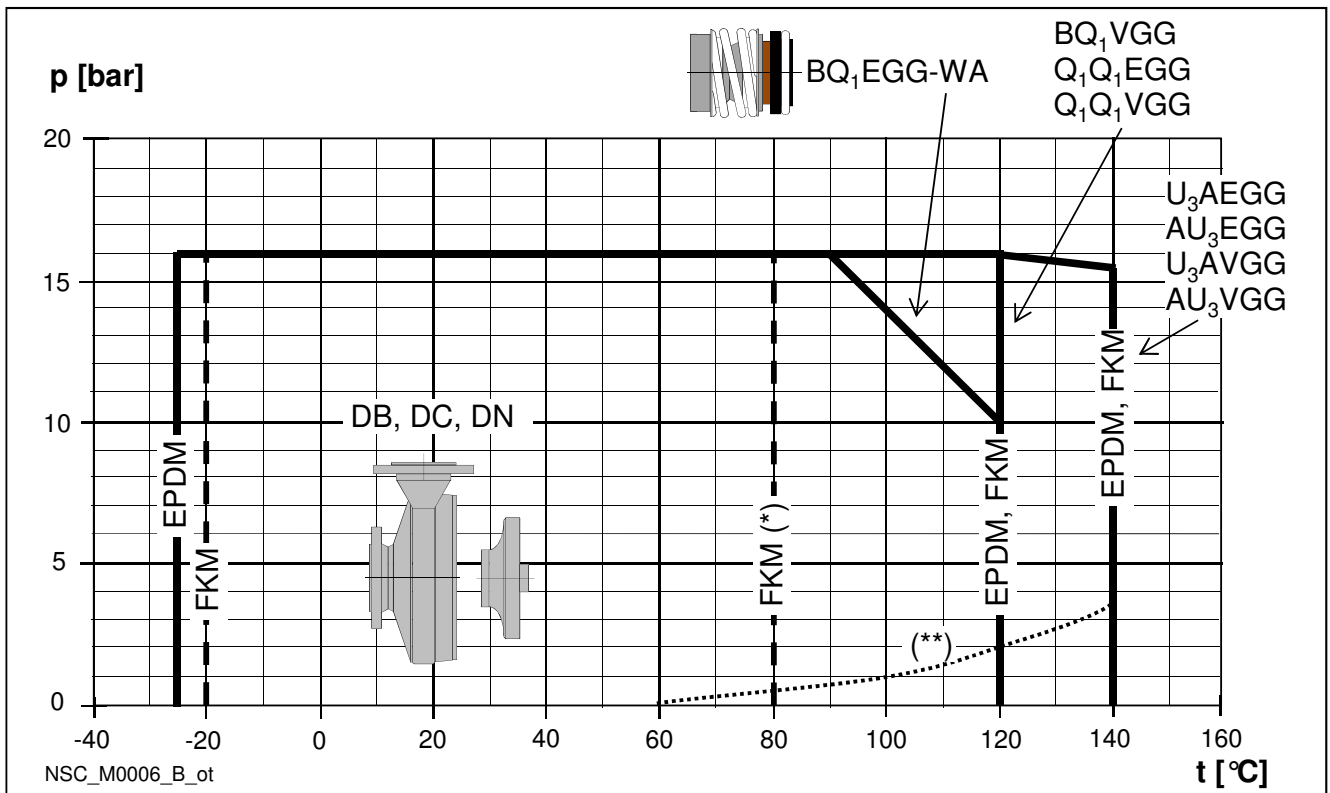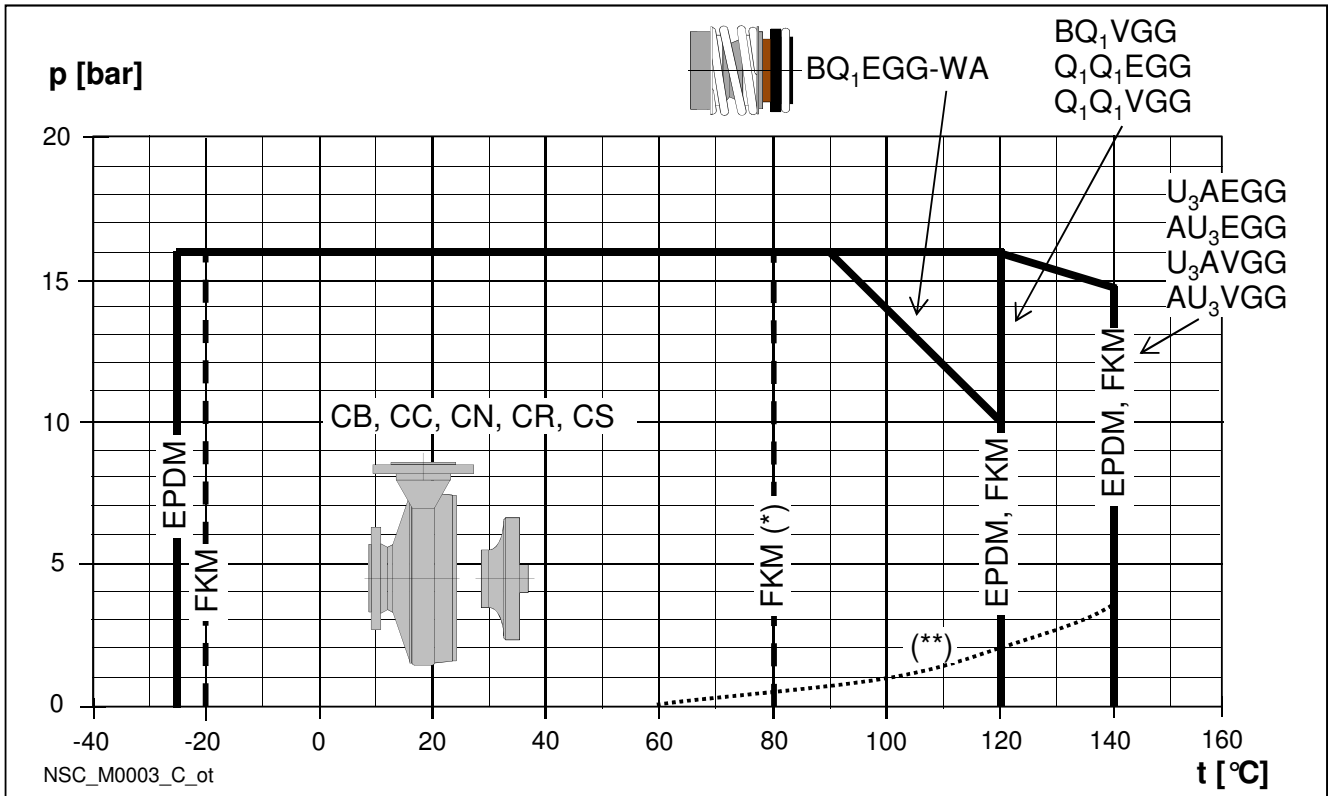

(*) hot water (**) minimum pressure required at mechanical seal (hot water; could be different in case of other liquids).

e-NSC SERIES

PRESSURE/TEMPERATURE APPLICATION LIMITS FOR COMPLETE PUMP

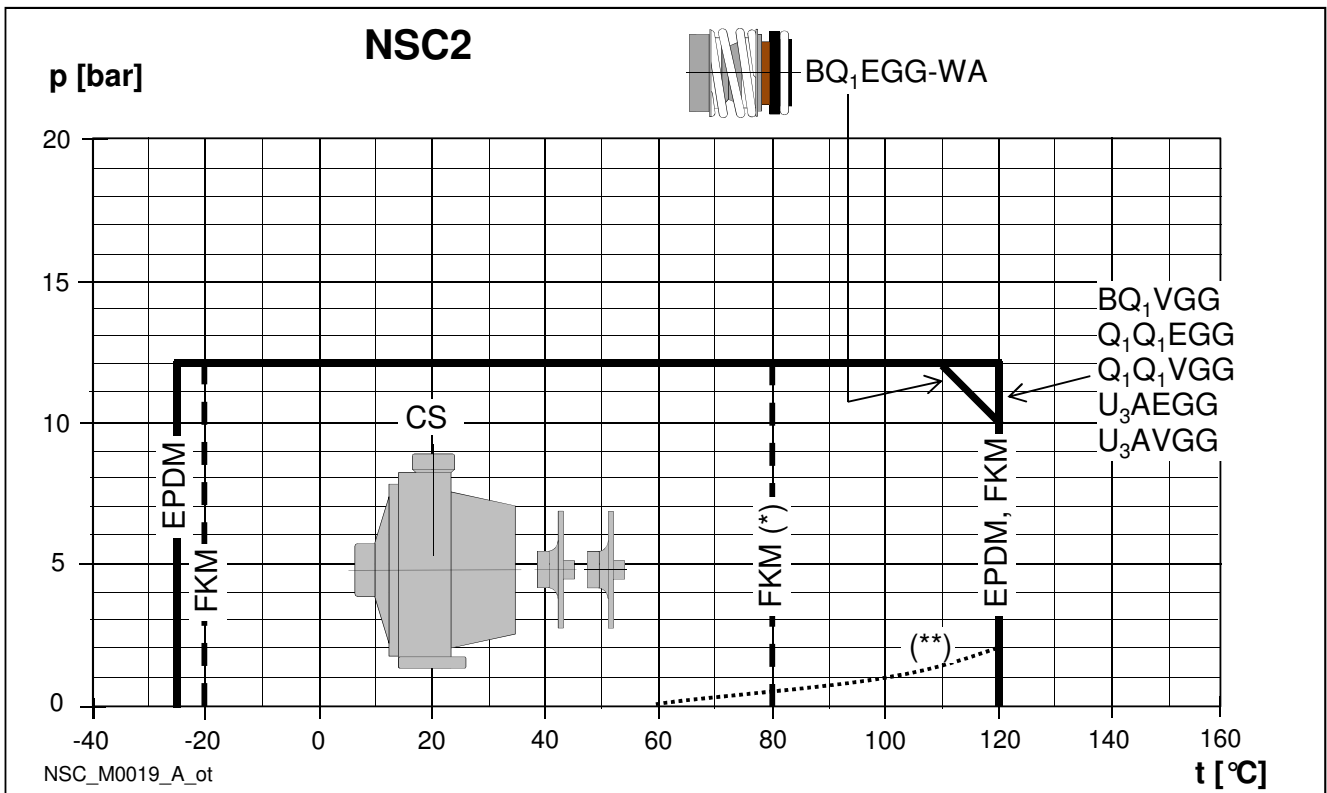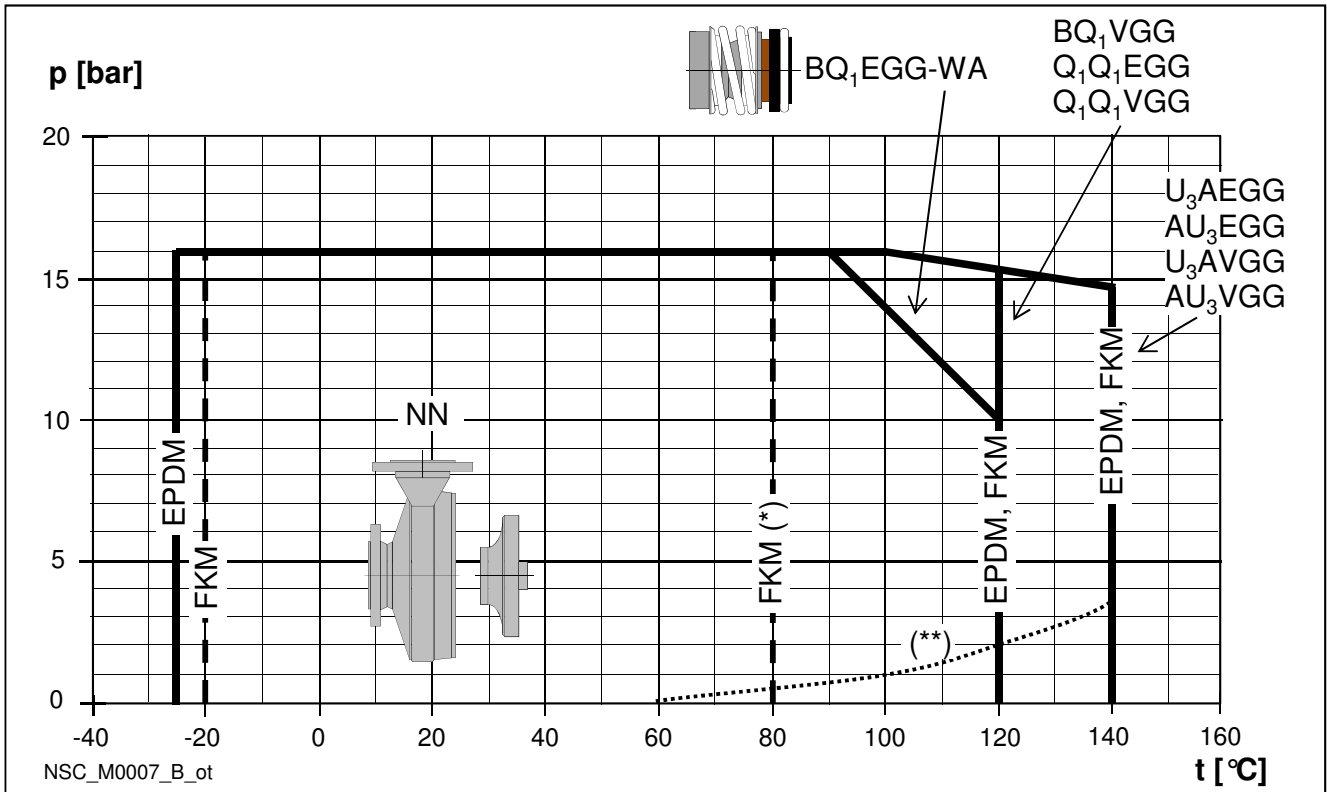


(*) hot water (**) minimum pressure required at mechanical seal (hot water; could be different in case of other liquids).

e-NSC SERIES

MECHANICAL SEALS FOR DUPLEX VERSION

Balanced metal bellows seal with mounting dimensions according to EN 12756 and ISO 3069

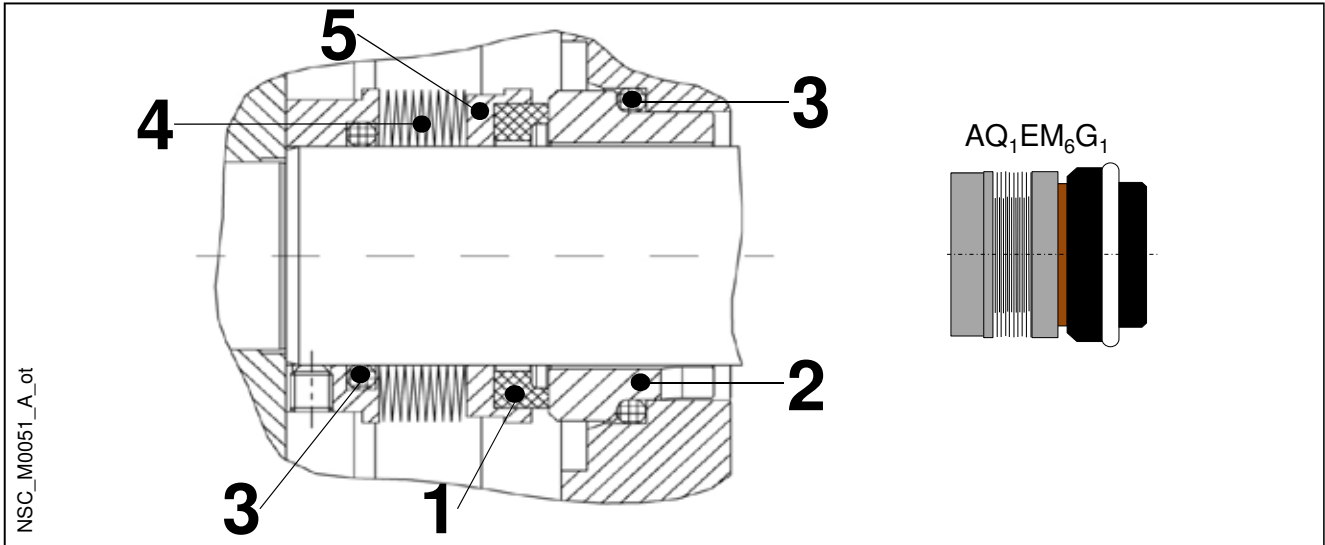


| POSITION 1 - 2 | POSITION 3 | POSITION 4 - 5 |
|--|-----------------|--------------------------|
| A : Antimony impregnated carbon | E : EPDM | M6 : Inconel® 718 |
| Q1 : Silicon carbide | | G1 : Duplex |

nsc_ten-mec_duplex-en_a_tm

| TYPE | POSITION | | | | | PRESSURE (bar) | RANGE TEMPERATURE (°C) |
|--|---------------------------|---------------------|-----------------|----------------|--------------------------|-------------------|------------------------------|
| | 1 ROTATING ASSEMBLY | 2 FIXED ASSEMBLY | 3 ELASTOMERS | 4 SPRINGS | 5 OTHER COMPONENTS | | |
| STANDARD MECHANICAL SEAL | | | | | | | |
| A Q ₁ E M ₆ G ₁ | A | Q ₁ | E | M ₆ | G ₁ | 16 | -25 ... +120 |

nsc_tipi-ten-mec-duplex-en_a_tc

PRESSURE/TEMPERATURE APPLICATION LIMITS FOR COMPLETE PUMP

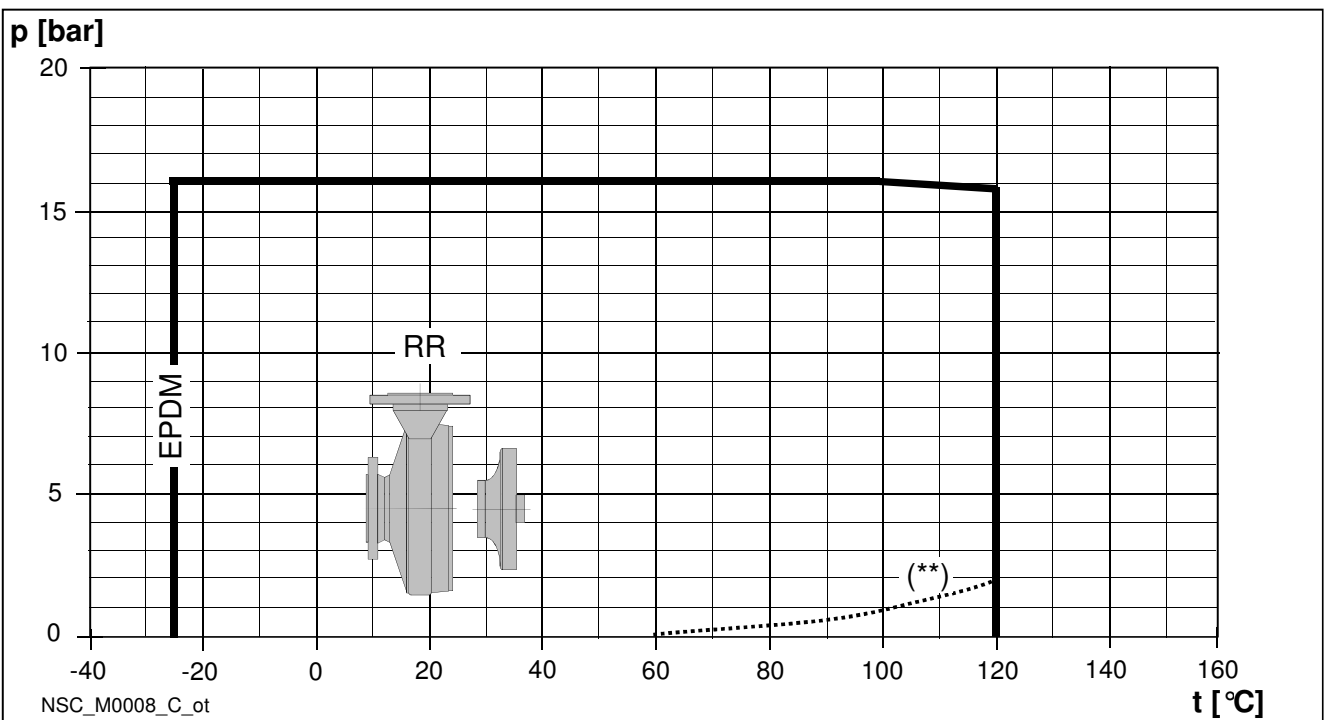

(**) minimum pressure required at mechanical seal (hot water; could be different in case of other liquids).

e-NSC SERIES MOTORS

With the "Energy using Products" (EuP 2005/32/EC) and "Energy related Products" (ErP 2009/125/EC) directives, the European Commission has established requirements for promoting the use of products with low power consumption.

The various products considered include **three-phase 50 Hz surface motors with power outputs ranging from 0,75 to 375 kW**, also when integrated with other products, with characteristics as defined by the specific **Regulations (EC) No 640/2009** and **(EU) No 4/2014** implementing the requirements of the EuP and ErP Directives which also establish the following deadlines:

| from | kW | minimum level of efficiency (IE) |
|------------------------------|------------|--|
| 1 st January 2017 | 0,75 ÷ 375 | IE3 |
| | | IE2 fitted with variable speed drive ¹⁾ |

¹⁾ IE 2 motor can be supplied without frequency converter as the obligation to have that device is related to when motor works and not when is placed on the market.

- Short-circuit squirrel-cage motor, enclosed construction with external ventilation (TEFC).
- Rated power from 1,1 to 200 kW for 2-pole range and from 0,25 to 355 kW for 4-pole range.
- **IP55** protection degree.
- Insulation class **155 (F)**.
- **Standard** three-phase surface motors $\geq 0,75$ kW supplied as **IE3**.
- IE efficiency level according to EN 60034-30:2009 and EN 60034-30-1:2014 ($\geq 0,75$ kW).
- Electrical performances according to EN 60034-1.
- Metric cable gland according to EN 50262.
- **Standard voltage**
Single-phase version:
220-240 V 50 Hz
Built-in automatic reset overload protection.
Three-phase version:
220-240/380-415 V 50 Hz for power up to 3 kW.
380-415/660-690 V 50 Hz for power above 3 kW.
Overload protection to be provided by the user.
- **PTC included** as standard only for WEG motors (one per phase, 155°C).
- Maximum ambient temperature: 40 °C.

NSCE SERIES SINGLE-PHASE MOTORS AT 50 Hz, 2 POLES

| P _N kW | MOTOR TYPE | IEC SIZE* | Construction Design | INPUT CURRENT I _n (A) 220-240 V | CAPACITOR | | DATA FOR 230 V 50 Hz VOLTAGE | | | | | | |
|----------------------|-----------------|-----------|---------------------|--|-----------|-----|------------------------------|---------------------------------|------|------|----------------------|--------------------------------|--------------------------------|
| | | | | | μF | V | min ⁻¹ | I _s / I _n | η % | cosφ | T _n Nm | T _s /T _n | T _m /T _n |
| 1,1 | SM90RB14S2/1115 | 90R | B14 | 6,88-6,65 | 30 | 450 | 2800 | 3,89 | 74,7 | 0,96 | 3,75 | 0,46 | 1,72 |
| 1,5 | SM90RB14S2/1155 | 90R | B14 | 9,21-8,58 | 40 | 450 | 2810 | 4,00 | 76,1 | 0,98 | 5,15 | 0,39 | 1,74 |
| 2,2 | PLM90B14S2/1225 | 90 | B14 | 12,5-11,6 | 70 | 450 | 2825 | 4,47 | 82,4 | 0,97 | 7,43 | 0,53 | 1,87 |

* R = Reduced size of motor casing as compared to shaft extension and flange.

Nsce-motm-2p50-en_a_te

NSCE, NSC2 SERIES THREE-PHASE MOTORS AT 50 Hz, 2 POLES

| P _N kW | Efficiency η_N % | | | | | | | | | | | | | | | IE | Year of manufacture | | | |
|----------------------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|------|------------------------|----------------|-----|-----|
| | Δ 220 V Y 380 V | | | Δ 230 V Y 400 V | | | Δ 240 V Y 415 V | | | Δ 380 V Y 660 V | | | Δ 400 V Y 690 V | | | | | Δ 415 V | | |
| | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | | | 4/4 | 3/4 | 2/4 |
| 1,1 | 84,0 | 84,7 | 83,4 | 84,4 | 84,5 | 82,5 | 84,3 | 84,0 | 81,4 | 84,0 | 84,0 | 81,4 | 84,0 | 84,0 | 81,4 | 84,0 | 84,0 | 81,4 | | |
| 1,5 | 85,6 | 86,5 | 85,8 | 85,9 | 86,4 | 84,9 | 86,0 | 86,0 | 84,0 | 85,6 | 86,0 | 84,0 | 85,6 | 86,0 | 84,0 | 85,6 | 86,0 | 84,0 | | |
| 2,2 | 86,5 | 87,4 | 86,8 | 86,4 | 86,9 | 85,7 | 86,6 | 86,7 | 85,0 | 86,4 | 86,7 | 85,0 | 86,4 | 86,7 | 85,0 | 86,4 | 86,7 | 85,0 | | |
| 3 | 87,2 | 88,5 | 88,3 | 87,5 | 88,2 | 87,5 | 87,5 | 87,8 | 86,4 | 87,2 | 87,8 | 86,4 | 87,2 | 87,8 | 86,4 | 87,2 | 87,8 | 86,4 | | |
| 4 | 89,1 | 90,1 | 89,2 | 89,1 | 90,1 | 89,2 | 89,1 | 90,1 | 89,2 | 89,1 | 90,3 | 90,4 | 89,6 | 90,4 | 89,9 | 89,6 | 90,1 | 89,2 | | |
| 5,5 | 89,5 | 89,6 | 88,0 | 89,5 | 89,6 | 88,0 | 89,5 | 89,6 | 88,0 | 89,5 | 90,3 | 89,9 | 89,7 | 90,0 | 89,0 | 89,6 | 89,6 | 88,0 | | |
| 7,5 | 90,6 | 90,5 | 89,0 | 90,6 | 90,5 | 89,0 | 90,6 | 90,5 | 89,0 | 90,6 | 91,0 | 90,2 | 90,8 | 90,8 | 89,6 | 90,7 | 90,5 | 89,0 | | |
| 9,2 | 90,8 | 91,0 | 89,7 | 90,8 | 91,0 | 89,7 | 90,8 | 91,0 | 89,7 | 90,8 | 91,4 | 90,8 | 91,1 | 91,3 | 90,3 | 91,1 | 91,0 | 89,7 | | |
| 11 | 91,3 | 92,0 | 91,1 | 91,3 | 92,0 | 91,1 | 91,3 | 92,0 | 91,1 | 91,3 | 92,2 | 92,2 | 91,6 | 92,2 | 91,7 | 91,7 | 92,0 | 91,1 | | |
| 15 | 92,5 | 92,4 | 91,2 | 92,5 | 92,4 | 91,2 | 92,5 | 92,4 | 91,2 | 92,7 | 93,3 | 92,9 | 93,1 | 93,3 | 92,7 | 92,5 | 92,4 | 91,2 | | |
| 18,5 | 92,6 | 93,1 | 92,4 | 92,6 | 93,1 | 92,4 | 92,6 | 93,1 | 92,4 | 92,6 | 93,2 | 93,0 | 92,9 | 93,3 | 92,8 | 92,9 | 93,1 | 92,4 | | |
| 22 | 93,0 | 92,7 | 91,3 | 93,0 | 92,7 | 91,3 | 93,0 | 92,7 | 91,3 | 93,0 | 93,2 | 92,4 | 93,1 | 93,0 | 91,9 | 93,0 | 92,7 | 91,3 | | |

| P _N kW | Manufacturer | | IEC SIZE* | Construction Design | N. of Poles | f _N Hz | Data for 400 V / 50 Hz Voltage | | | | | | | | | | | | | | | | |
|----------------------|--|--|-----------|------------------------|----------------|----------------------|--------------------------------|---------------------------------|----------------------|--------------------------------|--------------------------------|------|---------|------|------|---------|------|------|------|------|------|------|------|
| | Xylem Service Italia Srl Reg. No. 07520560967 Montecchio Maggiore Vicenza - Italia | | | | | | cos ϕ | I _s / I _N | T _N Nm | T _s /T _N | T _m /T _N | | | | | | | | | | | | |
| | Model | | | | | | | | | | | | | | | | | | | | | | |
| 1,1 | SM90RB14S2/311 PE | | 90R | SPECIAL | 2 | 50 | 0,79 | 8,31 | 3,63 | 3,95 | 3,95 | | | | | | | | | | | | |
| 1,5 | SM90RB14S2/315 PE | | 90R | | | | 0,80 | 8,80 | 4,96 | 4,31 | 4,10 | | | | | | | | | | | | |
| 2,2 | PLM90B14S2/322 E3 | | 90 | | | | 0,80 | 8,77 | 7,28 | 3,72 | 3,70 | | | | | | | | | | | | |
| 3 | PLM90B14S2/330 E3 | | 90 | | | | 0,79 | 7,81 | 9,93 | 4,26 | 3,94 | | | | | | | | | | | | |
| 4 | PLM112RB14S2/340 E3 | | 112R | | | | 0,85 | 9,13 | 13,2 | 3,82 | 4,32 | | | | | | | | | | | | |
| 5,5 | PLM1122FHE/355 E3 | | 112 | | | | SPECIAL | 2 | 50 | 0,85 | 10,5 | 18,1 | 4,74 | 5,11 | | | | | | | | | |
| | PLM112B14S2/355 E3 | | 112 | | | | | | | | | | | | | | | | | | | | |
| 7,5 | PLM1322FHE/375 E3 | | 132 | | | | | | | SPECIAL | 2 | 50 | 0,85 | 10,2 | 24,4 | 3,43 | 4,76 | | | | | | |
| | PLM132B14S2/375 E3 | | 132 | | | | | | | | | | | | | | | | | | | | |
| | PLM132B14S3/375 E3 | | 132 | | | | | | | | | | | | | | | | | | | | |
| 9,2 | PLM132B14S2/392 E3 | | 132 | | | | | | | | | | SPECIAL | 2 | 50 | 0,85 | 10,1 | 30,0 | 3,73 | 4,81 | | | |
| | PLM132B14S3/392 E3 | | 132 | | | | | | | | | | | | | | | | | | | | |
| 11 | PLM132B14S2/3110 E3 | | 132 | SPECIAL | 2 | 50 | | | | | | | | | | 0,86 | 9,89 | 35,9 | 3,46 | 4,59 | | | |
| | PLM132B14S3/3110 E3 | | 132 | | | | | | | | | | | | | | | | | | | | |
| 15 | PLM160B34S3/3150 E3 | | 160 | | | | | | | | | | | | | SPECIAL | 2 | 50 | 0,88 | 9,51 | 48,6 | 2,73 | 4,32 |
| 18,5 | PLM160B34S3/3185 E3 | | 160 | | | | | | | | | | | | | | | | 0,88 | 9,81 | 59,9 | 2,81 | 4,53 |
| 22 | PLM160B34S3/3220 E3 | | 160 | | | | | | | | | | | | | | | | 0,85 | 10,9 | 71,1 | 3,26 | 5,12 |

| P _N kW | Voltage U _N V | | | | | | | | | | n _N min ⁻¹ | Observe the regulations and codes locally in force regarding sorted waste disposal. | Operating conditions ** | | | | |
|----------------------|-----------------------------|-------|-------|-------|-------|-------|----------|-------|-------|-------|-------------------------------------|--|------------------------------------|-------------------------|------|-------|--------------------|
| | Δ | | | Y | | | Δ | | | Y | | | Altitude Above Sea Level (m) | T. amb min/max °C | ATEX | | |
| | 220 V | 230 V | 240 V | 380 V | 400 V | 415 V | 380 V | 400 V | 415 V | 660 V | | | | | | 690 V | I _N (A) |
| 1,1 | 4,19 | 4,14 | 4,16 | 2,42 | 2,39 | 2,40 | 2,41 | 2,38 | 2,38 | 1,39 | 1,37 | 2870 ÷ 2900 | ≤ 1000 | -15 / 40 | No | | |
| 1,5 | 5,56 | 5,49 | 5,51 | 3,21 | 3,17 | 3,18 | 3,21 | 3,18 | 3,19 | 1,85 | 1,84 | 2870 ÷ 2895 | | | | | |
| 2,2 | 7,97 | 7,90 | 7,98 | 4,6 | 4,56 | 4,61 | 4,57 | 4,54 | 4,57 | 2,64 | 2,62 | 2880 ÷ 2900 | | | | | |
| 3 | 11,0 | 11,0 | 11,2 | 6,35 | 6,33 | 6,44 | 6,29 | 6,27 | 6,34 | 3,63 | 3,62 | 2865 ÷ 2895 | | | | | |
| 4 | 13,6 | 13,4 | 13,4 | 7,87 | 7,75 | 7,74 | 7,80 | 7,62 | 7,61 | 4,50 | 4,40 | 2885 ÷ 2910 | | | | | |
| 5,5 | 18,1 | 17,9 | 18,1 | 10,4 | 10,4 | 10,4 | 10,6 | 10,5 | 10,7 | 6,10 | 6,05 | 2880 ÷ 2910 | | | | | |
| 7,5 | 24,8 | 24,4 | 24,3 | 14,3 | 14,1 | 14,0 | 14,4 | 14,1 | 14,2 | 8,32 | 8,16 | 2920 ÷ 2935 | | | | | |
| 9,2 | 30,6 | 30,1 | 30,2 | 17,6 | 17,4 | 17,5 | 17,5 | 17,2 | 17,3 | 10,1 | 9,93 | 2920 ÷ 2935 | | | | | |
| 11 | 35,7 | 35,0 | 34,9 | 20,6 | 20,2 | 20,2 | 20,6 | 20,2 | 20,2 | 11,9 | 11,7 | 2910 ÷ 2930 | | | | | |
| 15 | 47,6 | 46,1 | 45,2 | 27,5 | 26,6 | 26,1 | 27,5 | 26,6 | 26,1 | 15,9 | 15,3 | 2940 ÷ 2950 | | | | | |
| 18,5 | 58,3 | 56,7 | 55,6 | 33,7 | 32,7 | 32,1 | 34,0 | 33,0 | 32,7 | 19,6 | 19,0 | 2940 ÷ 2950 | | | | | |
| 22 | 72,9 | 73,1 | 73,7 | 42,1 | 42,2 | 42,6 | 40,9 | 40,4 | 40,6 | 23,6 | 23,3 | 2950 ÷ 2960 | | | | | |

* R = Reduced size of motor casing as compared to shaft extension and flange.

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

NSCS SERIES THREE-PHASE MOTORS AT 50 Hz, 2 POLES (up to 22 kW)

| P _N kW | Efficiency η_N % | | | | | | | | | | | | | | | | | | IE | Year of manufacture |
|----------------------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|----------------|------|------|----|------------------------|
| | Δ 220 V Y 380 V | | | Δ 230 V Y 400 V | | | Δ 240 V Y 415 V | | | Δ 380 V Y 660 V | | | Δ 400 V Y 690 V | | | Δ 415 V | | | | |
| | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | | |
| 1,1 | 84,0 | 84,7 | 83,4 | 84,4 | 84,5 | 82,5 | 84,3 | 84,0 | 81,4 | 84,0 | 84,0 | 81,4 | 84,0 | 84,0 | 81,4 | 84,0 | 84,0 | 81,4 | 3 | From 11/2014 |
| 1,5 | 85,6 | 86,5 | 85,8 | 85,9 | 86,4 | 84,9 | 86,0 | 86,0 | 84,0 | 85,6 | 86,0 | 84,0 | 85,6 | 86,0 | 84,0 | 85,6 | 86,0 | 84,0 | | |
| 2,2 | 86,5 | 87,4 | 86,8 | 86,4 | 86,9 | 85,7 | 86,6 | 86,7 | 85,0 | 86,4 | 86,7 | 85,0 | 86,4 | 86,7 | 85,0 | 86,4 | 86,7 | 85,0 | | |
| 3 | 87,2 | 88,5 | 88,3 | 87,5 | 88,2 | 87,5 | 87,5 | 87,8 | 86,4 | 87,2 | 87,8 | 86,4 | 87,2 | 87,8 | 86,4 | 87,2 | 87,8 | 86,4 | | |
| 4 | 89,1 | 90,1 | 89,2 | 89,1 | 90,1 | 89,2 | 89,1 | 90,1 | 89,2 | 89,1 | 90,3 | 90,4 | 89,6 | 90,4 | 89,9 | 89,6 | 90,1 | 89,2 | | |
| 5,5 | 89,5 | 89,6 | 88,0 | 89,5 | 89,6 | 88,0 | 89,5 | 89,6 | 88,0 | 89,5 | 90,3 | 89,9 | 89,7 | 90,0 | 89,0 | 89,6 | 89,6 | 88,0 | | |
| 7,5 | 90,6 | 90,5 | 89,0 | 90,6 | 90,5 | 89,0 | 90,6 | 90,5 | 89,0 | 90,6 | 91,0 | 90,2 | 90,8 | 90,8 | 89,6 | 90,7 | 90,5 | 89,0 | | |
| 11 | 91,8 | 92,3 | 91,5 | 91,8 | 92,3 | 91,5 | 91,8 | 92,3 | 91,5 | 91,8 | 92,3 | 91,9 | 92,2 | 92,5 | 91,8 | 92,3 | 92,4 | 91,5 | | |
| 15 | 92,5 | 92,4 | 91,2 | 92,5 | 92,4 | 91,2 | 92,5 | 92,4 | 91,2 | 92,7 | 93,3 | 92,9 | 93,1 | 93,3 | 92,7 | 92,5 | 92,4 | 91,2 | | |
| 18,5 | 92,6 | 93,1 | 92,4 | 92,6 | 93,1 | 92,4 | 92,6 | 93,1 | 92,4 | 92,6 | 93,2 | 93,0 | 92,9 | 93,3 | 92,8 | 92,9 | 93,1 | 92,4 | | |
| 22 | 93,0 | 92,7 | 91,3 | 93,0 | 92,7 | 91,3 | 93,0 | 92,7 | 91,3 | 93,0 | 93,2 | 92,4 | 93,1 | 93,0 | 91,9 | 93,0 | 92,7 | 91,3 | | |

| P _N kW | Manufacturer | | IEC SIZE* | Construction Design | N. of Poles | f _N Hz | Data for 400 V / 50 Hz Voltage | | | | |
|----------------------|--|--|-----------|---------------------|-------------|----------------------|--------------------------------|---------------------------------|----------------------|--------------------------------|--------------------------------|
| | Xylem Service Italia Srl Reg. No. 07520560967 Montecchio Maggiore Vicenza - Italia | | | | | | cos ϕ | I _s / I _N | T _N Nm | T _s /T _N | T _m /T _N |
| | Model | | | | | | | | | | |
| 1,1 | SM80B5/311 PE | | 80 | B5 | 2 | 50 | 0,79 | 8,31 | 3,63 | 3,95 | 3,95 |
| 1,5 | SM90RB5/315 PE | | 90R | | | | 0,80 | 8,80 | 4,96 | 4,31 | 4,10 |
| 2,2 | PLM90B5/322 E3 | | 90 | | | | 0,80 | 8,77 | 7,28 | 3,72 | 3,70 |
| 3 | PLM100RB5/330 E3 | | 100R | | | | 0,79 | 7,81 | 9,93 | 4,26 | 3,94 |
| 4 | PLM112RB5/340 E3 | | 112R | | | | 0,85 | 9,13 | 13,2 | 3,82 | 4,32 |
| 5,5 | PLM132RB5/355 E3 | | 132R | | | | 0,85 | 10,5 | 18,1 | 4,74 | 5,11 |
| 7,5 | PLM132B5/375 E3 | | 132 | | | | 0,85 | 10,2 | 24,4 | 3,43 | 4,76 |
| 11 | PLM160B35/3110 E3 | | 160 | | | | 0,88 | 8,59 | 35,6 | 2,36 | 4,14 |
| 15 | PLM160B35/3150 E3 | | 160 | | | | 0,88 | 9,51 | 48,6 | 2,73 | 4,32 |
| 18,5 | PLM160B35/3185 E3 | | 160 | | | | 0,88 | 9,81 | 59,9 | 2,81 | 4,53 |
| 22 | PLM180RB35/3220 E3 | | 180R | | | | 0,85 | 10,9 | 71,1 | 3,26 | 5,12 |

| P _N kW | Voltage U _N V | | | | | | | | | | n _N min ⁻¹ | Observe the regulations and codes locally in force regarding sorted waste disposal. | Operating conditions ** | | | |
|----------------------|-----------------------------|-------|-------|-------|-------|-------|----------|-------|-------|-------|-------------------------------------|--|------------------------------------|-------------------------|------|-------|
| | Δ | | | Y | | | Δ | | | Y | | | Altitude Above Sea Level (m) | T. amb min/max °C | ATEX | |
| | 220 V | 230 V | 240 V | 380 V | 400 V | 415 V | 380 V | 400 V | 415 V | 660 V | | | | | | 690 V |
| | I _N (A) | | | | | | | | | | | | | | | |
| 1,1 | 4,19 | 4,14 | 4,16 | 2,42 | 2,39 | 2,40 | 2,41 | 2,38 | 2,38 | 1,39 | 1,37 | 2870 ÷ 2900 | ≤ 1000 | -15 / 40 | No | |
| 1,5 | 5,56 | 5,49 | 5,51 | 3,21 | 3,17 | 3,18 | 3,21 | 3,18 | 3,19 | 1,85 | 1,84 | 2870 ÷ 2895 | | | | |
| 2,2 | 7,97 | 7,90 | 7,98 | 4,6 | 4,56 | 4,61 | 4,57 | 4,54 | 4,57 | 2,64 | 2,62 | 2880 ÷ 2900 | | | | |
| 3 | 11,0 | 11,0 | 11,2 | 6,35 | 6,33 | 6,44 | 6,29 | 6,27 | 6,34 | 3,63 | 3,62 | 2865 ÷ 2895 | | | | |
| 4 | 13,6 | 13,4 | 13,4 | 7,87 | 7,75 | 7,74 | 7,80 | 7,62 | 7,61 | 4,50 | 4,40 | 2885 ÷ 2910 | | | | |
| 5,5 | 18,1 | 17,9 | 18,1 | 10,4 | 10,4 | 10,4 | 10,6 | 10,5 | 10,7 | 6,10 | 6,05 | 2880 ÷ 2910 | | | | |
| 7,5 | 24,8 | 24,4 | 24,3 | 14,3 | 14,1 | 14,0 | 14,4 | 14,1 | 14,2 | 8,32 | 8,16 | 2920 ÷ 2935 | | | | |
| 11 | 35,0 | 33,9 | 33,0 | 20,2 | 19,6 | 19,1 | 20,4 | 19,6 | 19,2 | 11,8 | 13,3 | 2935 ÷ 2950 | | | | |
| 15 | 47,6 | 46,1 | 45,2 | 27,5 | 26,6 | 26,1 | 27,5 | 26,6 | 26,1 | 15,9 | 15,3 | 2940 ÷ 2950 | | | | |
| 18,5 | 58,3 | 56,7 | 55,6 | 33,7 | 32,7 | 32,1 | 34,0 | 33,0 | 32,7 | 19,6 | 19,0 | 2940 ÷ 2950 | | | | |
| 22 | 72,9 | 73,1 | 73,7 | 42,1 | 42,2 | 42,6 | 40,9 | 40,4 | 40,6 | 23,6 | 23,3 | 2950 ÷ 2960 | | | | |

* R = Reduced size of motor casing as compared to shaft extension and flange.

Nscs-IE3-mott-2p50-en_a_te

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

NSCS SERIES
THREE-PHASE MOTORS AT 50 Hz, 2 POLES (from 30 to 90 kW)

| P _N kW | Efficiency η_N % | | | | | | | | | IE | Year of manufacture |
|----------------------|---------------------------|------|------|---------------------------|------|------|----------------|------|------|----|------------------------|
| | Δ 380 V Y 660 V | | | Δ 400 V Y 690 V | | | Δ 415 V | | | | |
| | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | | |
| 30 | 94,0 | 94,0 | 93,1 | 94,1 | 94,0 | 92,8 | 94,2 | 93,9 | 92,6 | 3 | from 11/2014 |
| 37 | 94,4 | 94,0 | 93,5 | 94,6 | 94,0 | 93,3 | 94,7 | 93,9 | 93,1 | | |
| 45 | 94,8 | 94,9 | 94,6 | 95,1 | 95,1 | 94,6 | 95,3 | 95,2 | 94,5 | | |
| 55 | 95,1 | 95,0 | 94,9 | 95,4 | 95,3 | 94,9 | 95,5 | 95,3 | 94,8 | | |
| 75 | 95,4 | 95,2 | 94,6 | 95,6 | 95,3 | 94,5 | 95,7 | 95,3 | 94,4 | | |
| 90 | 95,6 | 95,5 | 94,9 | 95,8 | 95,6 | 94,8 | 95,9 | 95,6 | 94,7 | | |

| P _N kW | Manufacturer | | IEC SIZE | Construction Design | N. of Poles | f _N Hz | Data for 400 V / 50 Hz Voltage | | | | |
|----------------------|--|--|----------|------------------------|----------------|----------------------|--------------------------------|---------------------------------|----------------------|--------------------------------|--------------------------------|
| | WEG Equipamentos Eletricos S.A. Reg. No. 07.175.725/0010-50 Jaragua do Sul - SC (Brazil) | | | | | | cos ϕ | I _s / I _N | T _N Nm | T _s /T _N | T _m /T _n |
| | Model | | | | | | | | | | |
| 30 | W22 200L B35 30KW E3 | | 200 | B35 | 2 | 50 | 0,86 | 7,30 | 96,60 | 2,60 | 2,90 |
| 37 | W22 200L B35 37KW E3 | | 200 | | | | 0,86 | 7,30 | 119,20 | 2,60 | 2,90 |
| 45 | W22 225S/M B35 45KW E3 | | 225 | | | | 0,88 | 8,00 | 144,70 | 2,70 | 3,20 |
| 55 | W22 250S/M B35 55KW E3 | | 250 | | | | 0,89 | 7,90 | 177,10 | 2,80 | 2,90 |
| 75 | W22 280S/M B35 75KW E3 | | 280 | | | | 0,90 | 7,60 | 240,3 | 2,30 | 2,90 |
| 90 | W22 280S/M B35 90KW E3 | | 280 | | | | 0,90 | 7,40 | 288,4 | 2,20 | 2,80 |

| P _N kW | Voltage U _N V | | | | | n _N min ⁻¹ | Operating conditions ** | | | |
|----------------------|-----------------------------|--------|--------|-------|-------|-------------------------------------|-------------------------|------------------------------------|-------------------------|------|
| | Δ | | | Y | | | See note: | Altitude Above Sea Level (m) | T. amb min/max °C | ATEX |
| | 380 V | 400 V | 415 V | 660 V | 690 V | | | | | |
| | I _N (A) | | | | | | | | | |
| 30 | 55,10 | 53,50 | 52,70 | 31,70 | 31,00 | 2960 ÷ 2970 | ≤ 1000 | -15 / 40 | No | |
| 37 | 67,70 | 65,60 | 64,70 | 39,00 | 38,00 | 2960 ÷ 2970 | | | | |
| 45 | 80,10 | 77,60 | 74,60 | 46,10 | 45,00 | 2965 ÷ 2970 | | | | |
| 55 | 97,60 | 93,50 | 91,00 | 56,20 | 54,20 | 2960 ÷ 2965 | | | | |
| 75 | 131,00 | 126,00 | 121,00 | 75,40 | 73,00 | 2975 ÷ 2980 | | | | |
| 90 | 159,00 | 151,00 | 145,00 | 91,50 | 87,50 | 2975 ÷ 2980 | | | | |

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

Nscs-mott90-2p50-en_b_te

Note: Observe the regulations and codes locally in force regarding sorted waste disposal.

NSCF, NSCC SERIES

THREE-PHASE MOTORS AT 50 Hz, 2 POLES (up to 18,5 kW)

| P _N kW | Efficiency η_N % | | | | | | | | | | | | | | | | | | IE | Year of manufacture |
|----------------------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|----------------|------|------|----|------------------------|
| | Δ 220 V Y 380 V | | | Δ 230 V Y 400 V | | | Δ 240 V Y 415 V | | | Δ 380 V Y 660 V | | | Δ 400 V Y 690 V | | | Δ 415 V | | | | |
| | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | | |
| 1,1 | 84,0 | 84,7 | 83,4 | 84,4 | 84,5 | 82,5 | 84,3 | 84,0 | 81,4 | 84,0 | 84,0 | 81,4 | 84,0 | 84,0 | 81,4 | 84,0 | 84,0 | 81,4 | 3 | from 11/2014 |
| 1,5 | 84,6 | 85,8 | 85,4 | 85,5 | 86,3 | 85,2 | 85,9 | 86,2 | 84,8 | 84,6 | 85,8 | 84,8 | 84,6 | 85,8 | 84,8 | 84,6 | 85,8 | 84,8 | | |
| 2,2 | 86,5 | 87,4 | 86,8 | 86,4 | 86,9 | 85,7 | 86,6 | 86,7 | 85,0 | 86,4 | 86,7 | 85,0 | 86,4 | 86,7 | 85,0 | 86,4 | 86,7 | 85,0 | | |
| 3 | 88,7 | 89,5 | 89,1 | 89,1 | 89,5 | 88,4 | 89,1 | 89,1 | 87,7 | 88,7 | 89,1 | 87,7 | 88,7 | 89,1 | 87,7 | 88,7 | 89,1 | 87,7 | | |
| 4 | 88,6 | 89,0 | 87,6 | 88,6 | 89,0 | 87,6 | 88,6 | 89,0 | 87,6 | 88,7 | 89,6 | 89,1 | 88,6 | 89,2 | 88,3 | 88,9 | 89,0 | 87,6 | | |
| 5,5 | 90,1 | 89,8 | 88,0 | 90,1 | 89,8 | 88,0 | 90,1 | 89,8 | 88,0 | 90,2 | 90,5 | 89,5 | 90,3 | 90,2 | 88,8 | 90,1 | 89,8 | 88,0 | | |
| 7,5 | 90,6 | 90,5 | 89,0 | 90,6 | 90,5 | 89,0 | 90,6 | 90,5 | 89,0 | 90,6 | 91,0 | 90,2 | 90,8 | 90,8 | 89,6 | 90,7 | 90,5 | 89,0 | | |
| 11 | 91,8 | 92,3 | 91,5 | 91,8 | 92,3 | 91,5 | 91,8 | 92,3 | 91,5 | 91,8 | 92,3 | 91,9 | 92,2 | 92,5 | 91,8 | 92,3 | 92,4 | 91,5 | | |
| 15 | 92,5 | 92,4 | 91,2 | 92,5 | 92,4 | 91,2 | 92,5 | 92,4 | 91,2 | 92,7 | 93,3 | 92,9 | 93,1 | 93,3 | 92,7 | 92,5 | 92,4 | 91,2 | | |
| 18,5 | 92,6 | 93,1 | 92,4 | 92,6 | 93,1 | 92,4 | 92,6 | 93,1 | 92,4 | 92,6 | 93,2 | 93,0 | 92,9 | 93,3 | 92,8 | 92,9 | 93,1 | 92,4 | | |

| P _N kW | Manufacturer | | IEC SIZE* | Construction Design | N. of Poles | f _N Hz | Data for 400 V / 50 Hz Voltage | | | | |
|----------------------|--|--|-----------|------------------------|----------------|----------------------|--------------------------------|---------------------------------|----------------------|--------------------------------|--------------------------------|
| | Xylem Service Italia Srl Reg. No. 07520560967 Montecchio Maggiore Vicenza - Italia | | | | | | cos ϕ | I _s / I _N | T _N Nm | T _s /T _N | T _m /T _N |
| | Model | | | | | | | | | | |
| 1,1 | SM80B3/311 PE | | 80 | B3 | 2 | 50 | 0,79 | 8,31 | 3,63 | 3,95 | 3,95 |
| 1,5 | PLM90B3/315 E3 | | 90 | | | | 0,86 | 8,04 | 4,96 | 3,34 | 3,27 |
| 2,2 | PLM90B3/322 E3 | | 90 | | | | 0,80 | 8,77 | 7,28 | 3,72 | 3,70 |
| 3 | PLM100B3/330 E3 | | 100 | | | | 0,84 | 9,65 | 9,84 | 3,59 | 4,26 |
| 4 | PLM112B3/340 E3 | | 112 | | | | 0,86 | 9,41 | 13,2 | 3,95 | 4,46 |
| 5,5 | PLM132B3/355 E3 | | 132 | | | | 0,83 | 10,0 | 17,9 | 3,33 | 4,65 |
| 7,5 | PLM132B3/375 E3 | | 132 | | | | 0,85 | 10,2 | 24,4 | 3,43 | 4,76 |
| 11 | PLM160B3/3110 E3 | | 160 | | | | 0,88 | 8,59 | 35,6 | 2,36 | 4,14 |
| 15 | PLM160B3/3150 E3 | | 160 | | | | 0,88 | 9,51 | 48,6 | 2,73 | 4,32 |
| 18,5 | PLM160B3/3185 E3 | | 160 | | | | 0,88 | 9,81 | 59,9 | 2,81 | 4,53 |

| P _N kW | Tensione U _N V | | | | | | | | | | | n_N min ⁻¹ | Observe the regulations and codes locally in force regarding sorted waste disposal. | Operating conditions ** | | |
|----------------------|------------------------------|-------|-------|-------|-------|-------|----------|-------|-------|-------|-------|----------------------------|--|------------------------------------|-------------------------|------|
| | Δ | | | Y | | | Δ | | | Y | | | | Altitude Above Sea Level (m) | T. amb min/max °C | ATEX |
| | 220 V | 230 V | 240 V | 380 V | 400 V | 415 V | 380 V | 400 V | 415 V | 660 V | 690 V | | | | | |
| 1,1 | 4,19 | 4,14 | 4,16 | 2,42 | 2,39 | 2,4 | 2,41 | 2,38 | 2,38 | 1,39 | 1,37 | 2870 ÷ 2900 | ≤ 1000 | -15 / 40 | No | |
| 1,5 | 5,35 | 5,11 | 5,04 | 3,09 | 2,95 | 2,91 | 3,09 | 2,96 | 2,91 | 1,78 | 1,71 | 2865 ÷ 2890 | | | | |
| 2,2 | 7,97 | 7,90 | 7,98 | 4,6 | 4,56 | 4,61 | 4,57 | 4,54 | 4,57 | 2,64 | 2,62 | 2880 ÷ 2900 | | | | |
| 3 | 10,2 | 10,0 | 10,1 | 5,91 | 5,79 | 5,82 | 5,94 | 5,83 | 5,87 | 3,43 | 3,37 | 2895 ÷ 2920 | | | | |
| 4 | 13,3 | 13,1 | 13,1 | 7,69 | 7,56 | 7,55 | 7,70 | 7,56 | 7,57 | 4,45 | 4,36 | 2885 ÷ 2905 | | | | |
| 5,5 | 18,9 | 18,8 | 18,9 | 10,9 | 10,9 | 10,9 | 10,7 | 10,6 | 10,7 | 6,2 | 6,14 | 2925 ÷ 2940 | | | | |
| 7,5 | 24,8 | 24,4 | 24,3 | 14,3 | 14,4 | 14,0 | 14,4 | 14,1 | 14,2 | 8,32 | 8,16 | 2920 ÷ 2935 | | | | |
| 11 | 35,0 | 33,9 | 33,0 | 20,2 | 19,6 | 19,1 | 20,4 | 19,6 | 19,2 | 11,8 | 11,3 | 2935 ÷ 2950 | | | | |
| 15 | 47,6 | 46,1 | 45,2 | 27,5 | 26,6 | 26,1 | 27,5 | 26,6 | 26,1 | 15,9 | 15,3 | 2940 ÷ 2950 | | | | |
| 18,5 | 58,3 | 56,7 | 55,6 | 33,7 | 32,7 | 32,1 | 34 | 33,0 | 32,7 | 19,6 | 19,0 | 2940 ÷ 2950 | | | | |

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

Nscf-IE3-mott18-2p50-en_a_te

NSCF, NSCC SERIES

THREE-PHASE MOTORS AT 50 Hz, 2 POLES (from 22 to 200 kW)

| P _N kW | Efficiency η_N % | | | | | | | | | IE | Year of manufacture |
|----------------------|---------------------------|------|------|---------------------------|------|------|----------------|------|------|----|------------------------|
| | Δ 380 V Y 660 V | | | Δ 400 V Y 690 V | | | Δ 415 V | | | | |
| | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | | |
| 22 | 93,4 | 93,2 | 92,7 | 93,7 | 93,3 | 92,5 | 93,8 | 93,3 | 92,3 | 3 | from 11/2014 |
| 30 | 94,0 | 94,0 | 93,1 | 94,1 | 94,0 | 92,8 | 94,2 | 93,9 | 92,6 | | |
| 37 | 94,4 | 94,0 | 93,5 | 94,6 | 94,0 | 93,3 | 94,7 | 93,9 | 93,1 | | |
| 45 | 94,8 | 94,9 | 94,6 | 95,1 | 95,1 | 94,6 | 95,3 | 95,2 | 94,5 | | |
| 55 | 95,1 | 95,0 | 94,9 | 95,4 | 95,3 | 94,9 | 95,5 | 95,3 | 94,8 | | |
| 75 | 95,4 | 95,2 | 94,6 | 95,6 | 95,3 | 94,5 | 95,7 | 95,3 | 94,4 | | |
| 90 | 95,6 | 95,5 | 94,9 | 95,8 | 95,6 | 94,8 | 95,9 | 95,6 | 94,7 | | |
| 110 | 96,0 | 95,7 | 94,8 | 96,1 | 95,7 | 94,7 | 96,1 | 95,7 | 94,6 | | |
| 132 | 96,1 | 95,8 | 95,3 | 96,3 | 95,9 | 95,2 | 96,4 | 95,9 | 95,1 | | |
| 160 | 96,4 | 96,1 | 95,7 | 96,6 | 96,2 | 95,6 | 96,7 | 96,2 | 95,5 | | |
| 200 | 96,5 | 96,4 | 96,0 | 96,7 | 96,5 | 96,0 | 96,8 | 96,5 | 95,9 | | |

| P _N kW | Manufacturer | | IEC SIZE | Construction Design | N. of Poles | f _N Hz | Data for 400 V / 50 Hz Voltage | | | | |
|----------------------|--|--|----------|---------------------|-------------|----------------------|--------------------------------|---------------------------------|----------------------|--------------------------------|--------------------------------|
| | WEG Equipamentos Eletricos S.A. Reg. No. 07.175.725/0010-50 Jaragua do Sul - SC (Brazil) | | | | | | cos ϕ | I _s / I _N | T _N Nm | T _s /T _N | T _m /T _N |
| | Model | | | | | | | | | | |
| 22 | W22 180M B3 22KW E3 | | 180 | B3 | 2 | 50 | 0,87 | 8,00 | 71,10 | 2,50 | 3,30 |
| 30 | W22 200L B3 30KW E3 | | 200 | | | | 0,86 | 7,30 | 96,60 | 2,60 | 2,90 |
| 37 | W22 200L B3 37KW E3 | | 200 | | | | 0,86 | 7,30 | 119,20 | 2,60 | 2,90 |
| 45 | W22 225S/M B3 45KW E3 | | 225 | | | | 0,88 | 8,00 | 144,70 | 2,70 | 3,20 |
| 55 | W22 250S/M B3 55KW E3 | | 250 | | | | 0,89 | 7,90 | 177,1 | 2,80 | 2,90 |
| 75 | W22 280S/M B3 75KW E3 | | 280 | | | | 0,90 | 7,60 | 240,3 | 2,30 | 2,90 |
| 90 | W22 280S/M-B3 90kW E3 | | 280 | | | | 0,90 | 7,40 | 288,4 | 2,20 | 2,80 |
| 110 | W22 315S/M-B3 110kW E3 | | 315 | | | | 0,89 | 7,60 | 352,5 | 2,50 | 3,00 |
| 132 | W22 315S/M-B3 132kW E3 | | 315 | | | | 0,90 | 7,50 | 423,0 | 2,10 | 2,80 |
| 160 | W22 315S/M-B3 160kW E3 | | 315 | | | | 0,91 | 7,90 | 512,7 | 2,30 | 2,80 |
| 200 | W22 315L-B3 200kW E3 | | 315 | | | | 0,90 | 8,20 | 640,9 | 2,60 | 2,80 |

| P _N kW | Voltage U _N V | | | | | n _N min ⁻¹ | Operating conditions ** | | |
|----------------------|-----------------------------|-------|-------|-------|-------|-------------------------------------|------------------------------------|-------------------------|------|
| | Δ | | | Y | | | Altitude Above Sea Level (m) | T. amb min/max °C | ATEX |
| | 380 V | 400 V | 415 V | 660 V | 690 V | | | | |
| | I _N (A) | | | | | | | | |
| 22 | 40,70 | 39,00 | 37,90 | 23,40 | 22,60 | 2950 ÷ 2960 | See note: ≤ 1000 | -15 /+ 40 | No |
| 30 | 55,10 | 53,50 | 52,70 | 31,70 | 31,00 | 2960 ÷ 2970 | | | |
| 37 | 67,70 | 65,60 | 64,70 | 39,00 | 38,00 | 2960 ÷ 2970 | | | |
| 45 | 80,10 | 77,60 | 74,60 | 46,10 | 45,00 | 2965 ÷ 2970 | | | |
| 55 | 97,60 | 93,50 | 91,00 | 56,20 | 54,20 | 2960 ÷ 2965 | | | |
| 75 | 131,0 | 126,0 | 121,0 | 75,40 | 73,00 | 2975 ÷ 2980 | | | |
| 90 | 159,0 | 151,0 | 145,0 | 91,50 | 87,50 | 2975 ÷ 2980 | | | |
| 110 | 193,0 | 186,0 | 181,0 | 111,0 | 108,0 | 2975 ÷ 2980 | | | |
| 132 | 232,0 | 220,0 | 212,0 | 134,0 | 128,0 | 2975 ÷ 2980 | | | |
| 160 | 274,0 | 263,0 | 253,0 | 158,0 | 152,0 | 2975 ÷ 2980 | | | |
| 200 | 346,0 | 332,0 | 319,0 | 199,0 | 192,0 | 2975 ÷ 2980 | | | |

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

Nscf-mott200-2p50-en_b_te

Note: Observe the regulations and codes locally in force regarding sorted waste disposal.

NSCE, NSC2 SERIES THREE-PHASE MOTORS AT 50 Hz, 4 POLES

| P _N kW | Efficiency η_N | | | | | | | | | | | | | | | | | | Year of manufacture | | |
|----------------------|---------------------|------|------|--------------------|------|------|--------------------|------|------|--------------------|------|------|--------------------|------|------|---------|------|------|------------------------|----|-------|
| | % | | | | | | | | | | | | | | | | | | | | |
| | Δ 220 V Y 380 V | | | Δ 230 V Y 400 V | | | Δ 240 V Y 415 V | | | Δ 380 V Y 660 V | | | Δ 400 V Y 690 V | | | Δ 415 V | | | | IE | |
| | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | | | |
| 0,25 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 06/11 |
| 0,37 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 0,55 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 0,75 | 83,0 | 84,3 | 83,5 | 83,4 | 84,1 | 82,6 | 83,8 | 84,0 | 81,9 | 83,0 | 84,3 | 83,5 | 83,4 | 84,1 | 82,6 | 83,8 | 84,0 | 81,9 | | | 01/17 |
| 1,1 | 84,9 | 85,7 | 84,7 | 85,3 | 85,5 | 83,8 | 85,3 | 85,0 | 82,7 | 84,9 | 85,0 | 82,7 | 84,9 | 85,0 | 82,7 | 84,9 | 85,0 | 82,7 | | | |
| 1,5 | 86,6 | 87,0 | 85,7 | 86,7 | 86,9 | 84,5 | 86,4 | 85,9 | 83,3 | 86,4 | 85,9 | 83,3 | 86,4 | 85,9 | 83,3 | 86,4 | 85,9 | 83,3 | | | |
| 2,2 | 87,6 | 88,6 | 88,3 | 88,2 | 88,8 | 87,9 | 88,5 | 88,7 | 87,4 | 87,6 | 88,6 | 87,4 | 87,6 | 88,6 | 87,4 | 87,6 | 88,6 | 87,4 | | | |
| 3 | 88,5 | 89,2 | 88,5 | 88,6 | 88,9 | 87,6 | 88,6 | 88,6 | 86,8 | 88,5 | 88,6 | 86,8 | 88,5 | 88,6 | 86,8 | 88,5 | 88,6 | 86,8 | | | |
| 4 | 88,6 | 89,1 | 87,9 | 88,6 | 89,1 | 87,9 | 88,6 | 89,1 | 87,9 | 88,6 | 89,2 | 88,9 | 88,6 | 89,2 | 88,4 | 88,8 | 89,1 | 87,9 | | | |

| P _N kW | Manufacturer | | IEC SIZE* | Construction Design | N. of Poles | f _N Hz | Data for 400 V / 50 Hz Voltage | | | | |
|----------------------|--|--|-----------|------------------------|----------------|----------------------|--------------------------------|---------------------------------|----------------------|--------------------------------|--------------------------------|
| | Xylem Service Italia Srl Reg. No. 07520560967 Montecchio Maggiore Vicenza - Italia | | | | | | cosφ | I _s / I _N | T _N Nm | T _s /T _N | T _m /T _N |
| | Model | | | | | | | | | | |
| 0,25 | SM471B5/302 | | 71 | B5 | 4 | 50 | 0,59 | 3,58 | 1,71 | 3,16 | 2,63 |
| 0,37 | SM471B5/304 | | 71 | | | | 0,60 | 3,39 | 2,57 | 3,40 | 2,47 |
| 0,55 | SM490RB14S2/305 | | 90R | | | | 0,67 | 3,95 | 3,77 | 2,45 | 2,38 |
| 0,75 | LLM490RB14S2/307 | | 90R | SPECIAL | 4 | 50 | 0,80 | 6,38 | 5,00 | 2,73 | 3,13 |
| 1,1 | PLM4902FHE/311 E3 | | 90 | | | | 0,71 | 6,22 | 7,28 | 2,75 | 3,44 |
| | PLM490B5S2/311 E3 | | 90 | | | | 0,68 | 6,92 | 9,89 | 3,29 | 4,01 |
| 1,5 | PLM490B5S2/315 E3 | | 90 | | | | 0,78 | 7,47 | 14,5 | 2,38 | 3,69 |
| 2,2 | PLM4100B5S3/322 E3 | | 100 | | | | 0,74 | 7,75 | 19,7 | 2,48 | 4,21 |
| 3 | PLM4100B5S3/330 E3 | | 100 | | | | 0,79 | 8,32 | 26,3 | 3,19 | 4,02 |
| 4 | PLM4112B5S3/340 E3 | | 112 | | | | | | | | |

| P _N kW | Voltage U _N V | | | | | | | | | | | n _N min ⁻¹ | Operating conditions ** | | | |
|----------------------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------------------------------|--|------------------------------------|-------------------------|------|
| | Δ | | | Y | | | Δ | | | Y | | | Observe the regulations and codes locally in force regarding sorted waste disposal. | Altitude Above Sea Level (m) | T. amb min/max °C | ATEX |
| | 220 V | 230 V | 240 V | 380 V | 400 V | 415 V | 380 V | 400 V | 415 V | 660 V | 690 V | | | | | |
| 0,25 | 1,68 | 1,71 | 1,77 | 0,97 | 0,99 | 1,02 | - | - | - | - | - | 1375 ÷ 1400 | ≤ 1000 | -15 / 40 | No | |
| 0,37 | 2,46 | 2,53 | 2,62 | 1,42 | 1,46 | 1,51 | - | - | - | - | - | 1355 ÷ 1380 | | | | |
| 0,55 | 2,98 | 3,03 | 3,1 | 1,72 | 1,75 | 1,79 | - | - | - | - | - | 1380 ÷ 1400 | | | | |
| 0,75 | 2,90 | 2,85 | 2,85 | 1,70 | 1,65 | 1,65 | 1,70 | 1,65 | 1,65 | 0,98 | 0,95 | 1420 ÷ 1435 | | | | |
| 1,1 | 4,61 | 4,59 | 4,62 | 2,66 | 2,65 | 2,67 | 2,64 | 2,63 | 2,65 | 1,53 | 1,52 | 1435 ÷ 1445 | | | | |
| 1,5 | 6,34 | 6,41 | 6,41 | 3,66 | 3,70 | 3,70 | 3,65 | 3,68 | 3,69 | 2,11 | 2,13 | 1440 ÷ 1450 | | | | |
| 2,2 | 8,19 | 8,04 | 7,97 | 4,73 | 4,64 | 4,60 | 4,70 | 4,62 | 4,56 | 2,71 | 2,67 | 1445 ÷ 1455 | | | | |
| 3 | 11,5 | 11,5 | 11,5 | 6,66 | 6,62 | 6,67 | 6,63 | 6,59 | 6,63 | 3,83 | 3,81 | 1450 ÷ 1460 | | | | |
| 4 | 14,8 | 14,6 | 14,5 | 8,52 | 8,40 | 8,36 | 8,40 | 8,23 | 8,19 | 4,85 | 4,75 | 1445 ÷ 1455 | | | | |

* R = Reduced size of motor casing as compared to shaft extension and flange.

Nsce-IE3-mott-4p50-en_b_te

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

NSCS SERIES THREE-PHASE MOTORS AT 50 Hz, 4 POLES

| P _N kW | Efficiency η_N | | | | | | | | | | | | | | | | | | Year of manufacture | |
|----------------------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|----------------|------|------|------------------------|-------|
| | % | | | | | | | | | | | | | | | | | | | |
| | Δ 220 V Y 380 V | | | Δ 230 V Y 400 V | | | Δ 240 V Y 415 V | | | Δ 380 V Y 660 V | | | Δ 400 V Y 690 V | | | Δ 415 V | | | | IE |
| 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | | | |
| 0,55 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 2011 |
| 0,75 | 83 | 84,3 | 83,5 | 83,4 | 84,1 | 82,6 | 83,8 | 84 | 81,9 | 83 | 84,3 | 83,5 | 83,4 | 84,1 | 82,6 | 83,8 | 84 | 81,9 | 3 | 01/17 |
| 1,1 | 84,9 | 85,7 | 84,7 | 85,3 | 85,5 | 83,8 | 85,3 | 85 | 82,7 | 84,9 | 85 | 82,7 | 84,9 | 85 | 82,7 | 84,9 | 85 | 82,7 | | |
| 1,5 | 86,6 | 87 | 85,7 | 86,7 | 86,9 | 84,5 | 86,4 | 85,9 | 83,3 | 86,4 | 85,9 | 83,3 | 86,4 | 85,9 | 83,3 | 86,4 | 85,9 | 83,3 | | |
| 2,2 | 87,6 | 88,6 | 88,3 | 88,2 | 88,8 | 87,9 | 88,5 | 88,7 | 87,4 | 87,6 | 88,6 | 87,4 | 87,6 | 88,6 | 87,4 | 87,6 | 88,6 | 87,4 | | |
| 3 | 88,5 | 89,2 | 88,5 | 88,6 | 88,9 | 87,6 | 88,6 | 88,6 | 86,8 | 88,5 | 88,6 | 86,8 | 88,5 | 88,6 | 86,8 | 88,5 | 88,6 | 86,8 | | |
| 4 | 88,6 | 89,1 | 87,9 | 88,6 | 89,1 | 87,9 | 88,6 | 89,1 | 87,9 | 88,6 | 89,2 | 88,9 | 88,6 | 89,2 | 88,4 | 88,8 | 89,1 | 87,9 | | |
| 5,5 | 90,4 | 90,9 | 89,7 | 90,4 | 90,9 | 89,7 | 90,4 | 90,9 | 89,7 | 90,4 | 91,0 | 90,5 | 90,9 | 91,1 | 90,2 | 90,9 | 90,9 | 89,7 | | |
| 7,5 | 90,4 | 91,2 | 90,4 | 90,4 | 91,2 | 90,4 | 90,4 | 91,2 | 90,4 | 90,4 | 91,2 | 91,1 | 90,7 | 91,3 | 90,8 | 90,9 | 91,2 | 90,4 | | |
| 11 | 91,5 | 92,2 | 91,4 | 91,5 | 92,2 | 91,4 | 91,5 | 92,2 | 91,4 | 91,5 | 92,4 | 92,4 | 91,9 | 92,5 | 92,0 | 91,9 | 92,2 | 91,4 | | |
| 15 | 92,2 | 92,2 | 90,8 | 92,2 | 92,2 | 90,8 | 92,2 | 92,2 | 90,8 | 92,5 | 93,0 | 92,7 | 92,5 | 92,7 | 91,8 | 92,2 | 92,2 | 90,8 | | |

| P _N kW | Manufacturer | | IEC SIZE | Construction Design | N. of Poles | f _N Hz | Data for 400 V / 50 Hz Voltage | | | | |
|----------------------|--|--|----------|------------------------|----------------|----------------------|--------------------------------|---------------------------------|----------------------|--------------------------------|--------------------------------|
| | Xylem Service Italia Srl Reg. No. 07520560967 Montecchio Maggiore Vicenza - Italia | | | | | | cos ϕ | I _s / I _N | T _N Nm | T _s /T _N | T _m /T _N |
| | Model | | | | | | | | | | |
| 0,55 | SM480B5/305 | | 80 | B5 | 4 | 50 | 0,67 | 3,95 | 3,77 | 2,45 | 2,38 |
| 0,75 | LLM480B5/307 | | 80 | | | | 0,80 | 6,38 | 5,00 | 2,73 | 3,31 |
| 1,1 | PLM490B5/311 E3 | | 90 | | | | 0,71 | 6,22 | 7,28 | 2,75 | 3,44 |
| 1,5 | PLM490B5/315 E3 | | 90 | | | | 0,68 | 6,92 | 9,89 | 3,29 | 4,01 |
| 2,2 | PLM4100B5/322 E3 | | 100 | | | | 0,78 | 7,47 | 14,5 | 2,38 | 3,69 |
| 3 | PLM4100B5/330 E3 | | 100 | | | | 0,74 | 7,75 | 19,7 | 2,48 | 4,21 |
| 4 | PLM4112B5/340 E3 | | 112 | | | | 0,79 | 8,32 | 26,3 | 3,19 | 4,02 |
| 5,5 | PLM4132B5/355 E3 | | 132 | | | | 0,76 | 7,64 | 35,9 | 2,85 | 3,65 |
| 7,5 | PLM4132B5/375 E3 | | 132 | | | | 0,79 | 7,70 | 49,1 | 2,69 | 3,57 |
| 11 | PLM4160B35/3110 E3 | | 160 | | | | 0,81 | 7,19 | 71,5 | 2,45 | 3,26 |
| 15 | PLM4160B35/3150 E3 | | 160 | 0,77 | 8,23 | 97,2 | 2,97 | 3,99 | | | |

| P _N kW | Voltage U _N V | | | | | | | | | | η_N min ⁻¹ | Operating conditions ** | | | | |
|----------------------|-----------------------------|-------|-------|-------|-------|-------|----------|-------|-------|-------|-------------------------------|-------------------------|------------------------------------|-------------------------|------|--|
| | Δ | | | Y | | | Δ | | | Y | | | Altitude Above Sea Level (m) | T. amb min/max °C | ATEX | |
| | 220 V | 230 V | 240 V | 380 V | 400 V | 415 V | 380 V | 400 V | 415 V | 660 V | | 690 V | | | | |
| 0,55 | 2,98 | 3,03 | 3,10 | 1,72 | 1,75 | 1,79 | - | - | - | - | - | 1380 ÷ 1400 | ≤ 1000 | -15 / 40 | No | |
| 0,75 | 2,90 | 2,85 | 2,85 | 1,70 | 1,65 | 1,65 | 1,70 | 1,65 | 1,65 | 0,98 | 0,95 | 1420 ÷ 1435 | | | | |
| 1,1 | 4,61 | 4,59 | 4,62 | 2,66 | 2,65 | 2,67 | 2,64 | 2,63 | 2,65 | 1,53 | 1,52 | 1435 ÷ 1445 | | | | |
| 1,5 | 6,34 | 6,41 | 6,41 | 3,66 | 3,7 | 3,7 | 3,65 | 3,68 | 3,69 | 2,11 | 2,13 | 1440 ÷ 1450 | | | | |
| 2,2 | 8,19 | 8,04 | 7,97 | 4,73 | 4,64 | 4,6 | 4,70 | 4,62 | 4,56 | 2,71 | 2,67 | 1445 ÷ 1455 | | | | |
| 3 | 11,5 | 11,5 | 11,5 | 6,66 | 6,62 | 6,67 | 6,63 | 6,59 | 6,63 | 3,83 | 3,81 | 1450 ÷ 1460 | | | | |
| 4 | 14,8 | 14,6 | 14,5 | 8,52 | 8,40 | 8,36 | 8,40 | 8,23 | 8,19 | 4,85 | 4,75 | 1445 ÷ 1455 | | | | |
| 5,5 | 20,0 | 19,7 | 19,4 | 11,6 | 11,4 | 11,2 | 11,7 | 11,5 | 11,4 | 6,75 | 6,62 | 1455 ÷ 1465 | | | | |
| 7,5 | 26,6 | 26,1 | 25,8 | 15,4 | 15,1 | 14,9 | 15,5 | 15,2 | 15,1 | 8,95 | 8,75 | 1450 ÷ 1460 | | | | |
| 11 | 38,3 | 37,3 | 37,5 | 22,1 | 21,8 | 21,7 | 21,9 | 21,4 | 21,3 | 12,6 | 12,3 | 1465 ÷ 1470 | | | | |
| 15 | 51,8 | 52 | 52,7 | 29,9 | 30,0 | 30,4 | 30,5 | 30,7 | 31,4 | 17,6 | 17,7 | 1465 ÷ 1475 | | | | |

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

Nscs-IE3-mott15-4p50-en_b_te

NSCS SERIES

THREE-PHASE MOTORS AT 50 Hz, 4 POLES (from 18,5 to 90 kW)

| P _N kW | Efficiency η_N % | | | | | | | | | IE | Year of manufacture |
|----------------------|---------------------------|------|------|---------------------------|------|------|----------------|------|------|----|------------------------|
| | Δ 380 V Y 660 V | | | Δ 400 V Y 690 V | | | Δ 415 V | | | | |
| | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | | |
| 18,5 | 93,1 | 92,9 | 92,5 | 93,3 | 92,9 | 92,2 | 93,4 | 92,8 | 91,8 | 3 | from 11/2014 |
| 22 | 93,4 | 93,1 | 92,8 | 93,6 | 93,0 | 92,4 | 93,6 | 92,8 | 91,9 | | |
| 30 | 94,1 | 94,1 | 93,5 | 94,2 | 94,0 | 93,0 | 94,2 | 93,9 | 92,5 | | |
| 37 | 94,3 | 94,5 | 94,1 | 94,6 | 94,6 | 94,0 | 94,7 | 94,6 | 93,8 | | |
| 45 | 94,7 | 94,7 | 94,3 | 94,8 | 94,8 | 94,2 | 94,8 | 94,8 | 94,0 | | |
| 55 | 95,1 | 94,9 | 94,7 | 95,3 | 95,0 | 94,6 | 95,4 | 94,9 | 94,4 | | |
| 75 | 95,4 | 95,2 | 94,8 | 95,6 | 95,2 | 94,7 | 95,7 | 95,2 | 94,6 | | |
| 90 | 95,6 | 95,4 | 95,1 | 95,8 | 95,5 | 95,0 | 95,9 | 95,5 | 94,9 | | |

| P _N kW | Manufacturer | | IEC SIZE | Construction Design | N. of Poles | f _N Hz | Data for 400 V / 50 Hz Voltage | | | | |
|----------------------|--|--|----------|------------------------|----------------|----------------------|--------------------------------|---------------------------------|----------------------|--------------------------------|--------------------------------|
| | WEG Equipamentos Eletricos S.A. Reg. No. 07.175.725/0010-50 Jaragua do Sul - SC (Brazil) | | | | | | cos ϕ | I _s / I _N | T _N Nm | T _s /T _N | T _m /T _N |
| | Model | | | | | | | | | | |
| 18,5 | W22 180M4-B35 18.5kW E3 | | 180 | B35 | 4 | 50 | 0,82 | 7,30 | 120,20 | 2,70 | 3,00 |
| 22 | W22 180L4-B35 22kW E3 | | 180 | | | | 0,83 | 7,30 | 142,90 | 2,80 | 3,30 |
| 30 | W22 200L4-B35 30kW E3 | | 200 | | | | 0,82 | 7,30 | 193,60 | 2,50 | 3,00 |
| 37 | W22 225S/M4-B35 37kW E3 | | 225 | | | | 0,86 | 7,80 | 238,70 | 2,70 | 3,00 |
| 45 | W22 225S/M4-B35 45kW E3 | | 225 | | | | 0,85 | 7,90 | 290,40 | 2,80 | 3,20 |
| 55 | W22 250S/M4-B35 55kW E3 | | 250 | | | | 0,86 | 7,90 | 354,90 | 2,80 | 3,30 |
| 75 | W22 280S/M4-B35 75kW E3 | | 280 | | | | 0,87 | 7,60 | 482,30 | 2,30 | 2,80 |
| 90 | W22 280S/M4-B35 90kW E3 | | 280 | | | | 0,86 | 7,40 | 578,80 | 2,30 | 2,80 |

| P _N kW | Voltage U _N V | | | | | n _N min ⁻¹ | Operating conditions ** | | |
|----------------------|-----------------------------|-------|-------|-------|-------|-------------------------------------|------------------------------------|-------------------------|------|
| | Δ | | | Y | | | Altitude Above Sea Level (m) | T. amb min/max °C | ATEX |
| | 380 V | 400 V | 415 V | 660 V | 690 V | | | | |
| 18,5 | 35,90 | 34,90 | 34,40 | 20,70 | 20,20 | 1470 | See note. ≤ 1000 | -15 / +40 | No |
| 22 | 42,10 | 40,90 | 40,40 | 24,20 | 23,70 | 1470 | | | |
| 30 | 57,70 | 56,10 | 55,40 | 33,20 | 32,50 | 1480 | | | |
| 37 | 68,50 | 65,60 | 63,90 | 39,40 | 38,00 | 1480 | | | |
| 45 | 83,90 | 79,40 | 78,60 | 48,30 | 46,00 | 1480 | | | |
| 55 | 100,0 | 96,90 | 94,40 | 57,60 | 56,20 | 1480 | | | |
| 75 | 136,0 | 130,0 | 127,0 | 78,30 | 75,40 | 1485 | | | |
| 90 | 164,0 | 158,0 | 154,0 | 94,40 | 91,60 | 1485 | | | |

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

Nscs-mott90-4p50-en_a_te

Note: Observe the regulations and codes locally in force regarding sorted waste disposal.

NSCF, NSCC SERIES

THREE-PHASE MOTORS AT 50 Hz, 4 POLES (from 0,25 to 15 kW)

| P _N kW | Efficiency η_N % | | | | | | | | | | | | | | | | | | Year of manufacture | | | |
|----------------------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|---------------------------|------|------|----------------|------|------|------------------------|----|-------|---------------------|
| | Δ 220 V Y 380 V | | | Δ 230 V Y 400 V | | | Δ 240 V Y 415 V | | | Δ 380 V Y 660 V | | | Δ 400 V Y 690 V | | | Δ 415 V | | | | IE | | |
| | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | | | | |
| 0,25 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 06/11 | |
| 0,37 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | 01/17 3 11/14 |
| 0,55 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | |
| 0,75 | 83,0 | 84,3 | 83,5 | 83,4 | 84,1 | 82,6 | 83,8 | 84,0 | 81,9 | 83,0 | 84,3 | 83,5 | 83,4 | 84,1 | 82,6 | 83,8 | 84,0 | 81,9 | | | | |
| 1,1 | 84,9 | 85,7 | 84,7 | 85,3 | 85,5 | 83,8 | 85,3 | 85,0 | 82,7 | 84,9 | 85,0 | 82,7 | 84,9 | 85,0 | 82,7 | 84,9 | 85,0 | 82,7 | | | | |
| 1,5 | 86,6 | 87,0 | 85,7 | 86,7 | 86,9 | 84,5 | 86,4 | 85,9 | 83,3 | 86,4 | 85,9 | 83,3 | 86,4 | 85,9 | 83,3 | 86,4 | 85,9 | 83,3 | | | | |
| 2,2 | 87,6 | 88,6 | 88,3 | 88,2 | 88,8 | 87,9 | 88,5 | 88,7 | 87,4 | 87,6 | 88,6 | 87,4 | 87,6 | 88,6 | 87,4 | 87,6 | 88,6 | 87,4 | | | | |
| 3 | 88,5 | 89,2 | 88,5 | 88,6 | 88,9 | 87,6 | 88,6 | 88,6 | 86,8 | 88,5 | 88,6 | 86,8 | 88,5 | 88,6 | 86,8 | 88,5 | 88,6 | 86,8 | | | | |
| 4 | 88,6 | 89,1 | 87,9 | 88,6 | 89,1 | 87,9 | 88,6 | 89,1 | 87,9 | 88,6 | 89,2 | 88,9 | 88,6 | 89,2 | 88,9 | 88,6 | 88,8 | 89,1 | 87,9 | | | |
| 5,5 | 90,4 | 90,9 | 89,7 | 90,4 | 90,9 | 89,7 | 90,4 | 90,9 | 89,7 | 90,4 | 91,0 | 90,5 | 90,9 | 91,1 | 90,2 | 90,9 | 90,9 | 89,7 | | | | |
| 7,5 | 90,4 | 91,2 | 90,4 | 90,4 | 91,2 | 90,4 | 90,4 | 91,2 | 90,4 | 90,4 | 91,2 | 91,1 | 90,7 | 91,3 | 90,8 | 90,9 | 91,2 | 90,4 | | | | |
| 11 | 91,5 | 92,2 | 91,4 | 91,5 | 92,2 | 91,4 | 91,5 | 92,2 | 91,4 | 91,5 | 92,4 | 92,4 | 91,9 | 92,5 | 92,0 | 91,9 | 92,2 | 91,4 | | | | |
| 15 | 92,2 | 92,2 | 90,8 | 92,2 | 92,2 | 90,8 | 92,2 | 92,2 | 90,8 | 92,5 | 93,0 | 92,7 | 92,5 | 92,7 | 91,8 | 92,2 | 92,2 | 90,8 | | | | |

| P _N kW | Manufacturer | | IEC SIZE | Construction Design | N. of Poles | f _N Hz | Data for 400 V / 50 Hz Voltage | | | | |
|----------------------|--|--|----------|------------------------|----------------|----------------------|--------------------------------|---------------------------------|----------------------|--------------------------------|--------------------------------|
| | Xylem Service Italia Srl Reg. No. 07520560967 Montecchio Maggiore Vicenza - Italia | | | | | | cos ϕ | I _s / I _N | T _N Nm | T _s /T _N | T _m /T _N |
| | Model | | | | | | | | | | |
| 0,25 | SM471B3/302 | | 71 | B3 | 4 | 50 | 0,59 | 3,58 | 1,71 | 3,16 | 2,63 |
| 0,37 | SM471B3/304 | | 71 | | | | 0,60 | 3,39 | 2,57 | 3,40 | 2,47 |
| 0,55 | SM480B3/305 | | 80 | | | | 0,67 | 3,95 | 3,77 | 2,45 | 2,38 |
| 0,75 | LLM480B3/307 | | 80 | | | | 0,80 | 6,38 | 5,00 | 2,73 | 3,31 |
| 1,1 | PLM490B3/311 E3 | | 90 | | | | 0,71 | 6,22 | 7,28 | 2,75 | 3,44 |
| 1,5 | PLM490B3/315 E3 | | 90 | | | | 0,68 | 6,92 | 9,89 | 3,29 | 4,01 |
| 2,2 | PLM4100B3/322 E3 | | 100 | | | | 0,78 | 7,47 | 14,5 | 2,38 | 3,69 |
| 3 | PLM4100B3/330 E3 | | 100 | | | | 0,74 | 7,75 | 19,7 | 2,48 | 4,21 |
| 4 | PLM4112B3/340 E3 | | 112 | | | | 0,79 | 8,32 | 26,3 | 3,19 | 4,02 |
| 5,5 | PLM4132B3/355 E3 | | 132 | | | | 0,76 | 7,64 | 35,9 | 2,85 | 3,65 |
| 7,5 | PLM4132B3/375 E3 | | 132 | | | | 0,79 | 7,70 | 49,1 | 2,69 | 3,57 |
| 11 | PLM4160B3/3110 E3 | | 160 | | | | 0,81 | 7,19 | 71,5 | 2,45 | 3,26 |
| 15 | PLM4160B3/3150 E3 | | 160 | | | | 0,77 | 8,23 | 97,2 | 2,97 | 3,99 |

| P _N kW | Voltage U _N V | | | | | | | | | | | n _N min ⁻¹ | Observe the regulations and codes locally in force regarding sorted waste disposal. | Operating conditions ** | | |
|----------------------|-----------------------------|-------|-------|-------|-------|-------|----------|-------|-------|-------|-------|-------------------------------------|--|------------------------------------|-------------------------|------|
| | Δ | | | Y | | | Δ | | | Y | | | | Altitude Above Sea Level (m) | T. amb min/max °C | ATEX |
| | 220 V | 230 V | 240 V | 380 V | 400 V | 415 V | 380 V | 400 V | 415 V | 660 V | 690 V | | | | | |
| 0,25 | 1,68 | 1,71 | 1,77 | 0,97 | 0,99 | 1,02 | - | - | - | - | - | 1375 ÷ 1400 | ≤ 1000 | -15 / 40 | No | |
| 0,37 | 2,46 | 2,53 | 2,62 | 1,42 | 1,46 | 1,51 | - | - | - | - | - | 1355 ÷ 1380 | | | | |
| 0,55 | 2,98 | 3,03 | 3,1 | 1,72 | 1,75 | 1,79 | - | - | - | - | - | 1380 ÷ 1400 | | | | |
| 0,75 | 2,90 | 2,85 | 2,85 | 1,70 | 1,65 | 1,65 | 1,70 | 1,65 | 1,65 | 0,98 | 0,95 | 1420 ÷ 1435 | | | | |
| 1,1 | 4,61 | 4,59 | 4,62 | 2,66 | 2,65 | 2,67 | 2,64 | 2,63 | 2,65 | 1,53 | 1,52 | 1435 ÷ 1445 | | | | |
| 1,5 | 6,34 | 6,41 | 6,41 | 3,66 | 3,70 | 3,70 | 3,65 | 3,68 | 3,69 | 2,11 | 2,13 | 1440 ÷ 1450 | | | | |
| 2,2 | 8,19 | 8,04 | 7,97 | 4,73 | 4,64 | 4,60 | 4,70 | 4,62 | 4,56 | 2,71 | 2,67 | 1445 ÷ 1455 | | | | |
| 3 | 11,5 | 11,5 | 11,5 | 6,66 | 6,62 | 6,67 | 6,63 | 6,59 | 6,63 | 3,83 | 3,81 | 1450 ÷ 1460 | | | | |
| 4 | 14,8 | 14,6 | 14,5 | 8,52 | 8,40 | 8,36 | 8,40 | 8,23 | 8,19 | 4,85 | 4,75 | 1445 ÷ 1455 | | | | |
| 5,5 | 20,0 | 19,7 | 19,4 | 11,6 | 11,4 | 11,2 | 11,7 | 11,5 | 11,4 | 6,75 | 6,62 | 1455 ÷ 1465 | | | | |
| 7,5 | 26,6 | 26,1 | 25,8 | 15,4 | 15,1 | 14,9 | 15,5 | 15,2 | 15,1 | 8,95 | 8,75 | 1450 ÷ 1460 | | | | |
| 11 | 38,3 | 37,3 | 37,5 | 22,1 | 21,8 | 21,7 | 21,9 | 21,4 | 21,3 | 12,6 | 12,3 | 1465 ÷ 1470 | | | | |
| 15 | 51,8 | 52 | 52,7 | 29,9 | 30,0 | 30,4 | 30,5 | 30,7 | 31,4 | 17,6 | 17,7 | 1465 ÷ 1475 | | | | |

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

Nscf-IE3-mott15-4p50-en_b_te

NSCF, NSCC SERIES

THREE-PHASE MOTORS AT 50 Hz, 4 POLES (from 18,5 to 315 kW)

| P _N kW | Efficiency η_N % | | | | | | | | | IE | Year of manufacture |
|----------------------|---------------------------|------|------|---------------------------|------|------|----------------|------|------|----|------------------------|
| | Δ 380 V Y 660 V | | | Δ 400 V Y 690 V | | | Δ 415 V | | | | |
| | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | 4/4 | 3/4 | 2/4 | | |
| 18,5 | 93,1 | 92,9 | 92,5 | 93,3 | 92,9 | 92,2 | 93,4 | 92,8 | 91,8 | 3 | from 11/2014 |
| 22 | 93,4 | 93,1 | 92,8 | 93,6 | 93,0 | 92,4 | 93,6 | 92,8 | 91,9 | | |
| 30 | 94,1 | 94,1 | 93,5 | 94,2 | 94,0 | 93,0 | 94,2 | 93,9 | 92,5 | | |
| 37 | 94,3 | 94,5 | 94,1 | 94,6 | 94,6 | 94,0 | 94,7 | 94,6 | 93,8 | | |
| 45 | 94,7 | 94,7 | 94,3 | 94,8 | 94,8 | 94,2 | 94,8 | 94,8 | 94,0 | | |
| 55 | 95,1 | 94,9 | 94,7 | 95,3 | 95,0 | 94,6 | 95,4 | 94,9 | 94,4 | | |
| 75 | 95,4 | 95,2 | 94,8 | 95,6 | 95,2 | 94,7 | 95,7 | 95,2 | 94,6 | | |
| 90 | 95,6 | 95,4 | 95,1 | 95,8 | 95,5 | 95,0 | 95,9 | 95,5 | 94,9 | | |
| 110 | 96,2 | 95,9 | 95,5 | 96,3 | 95,9 | 95,4 | 96,3 | 95,8 | 95,2 | | |
| 132 | 96,3 | 96,0 | 95,6 | 96,4 | 96,0 | 95,5 | 96,4 | 95,9 | 95,3 | | |
| 160 | 96,3 | 96,2 | 95,8 | 96,5 | 96,2 | 95,7 | 96,6 | 96,2 | 95,5 | | |
| 200 | 96,5 | 96,5 | 96,2 | 96,7 | 96,5 | 96,1 | 96,7 | 96,5 | 95,9 | | |
| 250 | 96,8 | 96,6 | 96,4 | 96,9 | 96,6 | 96,2 | 96,9 | 96,5 | 96,0 | | |
| 315 | 96,8 | 96,7 | 96,5 | 96,9 | 96,7 | 96,4 | 97,0 | 96,7 | 96,3 | | |
| 355 | 96,8 | 96,8 | 96,6 | 96,9 | 96,8 | 96,5 | 97,0 | 96,8 | 96,4 | | |

| P _N kW | Manufacturer | | IEC SIZE | Construction Design | N. of Poles | f _N Hz | Data for 400 V / 50 Hz Voltage | | | | |
|----------------------|--|--|----------|------------------------|----------------|----------------------|--------------------------------|---------------------------------|----------------------|--------------------------------|--------------------------------|
| | WEG Equipamentos Eletricos S.A. Reg. No. 07.175.725/0010-50 Jaragua do Sul - SC (Brazil) | | | | | | cos ϕ | I _s / I _N | T _N Nm | T _s /T _N | T _m /T _N |
| | Model | | | | | | | | | | |
| 18,5 | W22 180M4-B3 18.5kW E3 | | 180 | B3 | 4 | 50 | 0,82 | 7,30 | 120,20 | 2,70 | 3,00 |
| 22 | W22 180L4-B3 22kW E3 | | 180 | | | | 0,83 | 7,30 | 142,90 | 2,80 | 3,30 |
| 30 | W22 200L4-B3 30kW E3 | | 200 | | | | 0,82 | 7,30 | 193,60 | 2,50 | 3,00 |
| 37 | W22 225S/M4-B3 37kW E3 | | 225 | | | | 0,86 | 7,80 | 238,70 | 2,70 | 3,00 |
| 45 | W22 225S/M4-B3 45kW E3 | | 225 | | | | 0,85 | 7,90 | 290,40 | 2,80 | 3,20 |
| 55 | W22 250S/M4-B3 55kW E3 | | 250 | | | | 0,86 | 7,90 | 354,90 | 2,80 | 3,30 |
| 75 | W22 280S/M4-B3 75kW E3 | | 280 | | | | 0,87 | 7,60 | 482,30 | 2,30 | 2,80 |
| 90 | W22 280S/M4-B3 90kW E3 | | 280 | | | | 0,86 | 7,40 | 578,80 | 2,30 | 2,80 |
| 110 | W22 315S/M4-B3 110kW E3 | | 315 | | | | 0,86 | 7,50 | 705,00 | 2,60 | 2,70 |
| 132 | W22 315S/M4-B3 132kW E3 | | 315 | | | | 0,86 | 7,60 | 846,00 | 2,90 | 3,00 |
| 160 | W22 315S/M4-B3 160kW E3 | | 315 | | | | 0,87 | 7,60 | 1025,0 | 2,60 | 2,60 |
| 200 | W22 315L4-B3 200kW E3 | | 315 | | | | 0,87 | 7,60 | 1282,0 | 2,50 | 2,50 |
| 250 | W22 315L4-B3 250kW E3 | | 315 | | | | 0,86 | 8,00 | 1602,0 | 2,70 | 2,60 |
| 315 | W22 355M/L4-B3 315kW E3 | | 355 | | | | 0,86 | 7,30 | 2019,0 | 2,30 | 2,40 |
| 355 | W22 355M/L4-B3 355kW E3 | | 355 | | | | 0,86 | 7,20 | 2275,0 | 2,40 | 2,50 |

| P _N kW | Voltage U _N V | | | | | n _N min ⁻¹ | Operating conditions ** | | | |
|----------------------|-----------------------------|-------|-------|-------|-------|-------------------------------------|------------------------------------|-------------------------|-----------|----|
| | Δ | | | Y | | | Altitude Above Sea Level (m) | T. amb min/max °C | ATEX | |
| | 380 V | 400 V | 415 V | 660 V | 690 V | | | | | |
| | I _N (A) | | | | | | | | | |
| 18,5 | 35,90 | 34,90 | 34,40 | 20,70 | 20,20 | 1470 | See note | ≤ 1000 | -20 / +40 | No |
| 22 | 42,10 | 40,90 | 40,40 | 24,20 | 23,70 | 1470 | | | | |
| 30 | 57,70 | 56,10 | 55,40 | 33,20 | 32,50 | 1480 | | | | |
| 37 | 68,50 | 65,60 | 63,90 | 39,40 | 38,00 | 1480 | | | | |
| 45 | 83,90 | 79,40 | 78,60 | 48,30 | 46,00 | 1480 | | | | |
| 55 | 100,0 | 96,90 | 94,40 | 57,60 | 56,20 | 1480 | | | | |
| 75 | 136,0 | 130,0 | 127,0 | 78,30 | 75,40 | 1485 | | | | |
| 90 | 164,0 | 158,0 | 154,0 | 94,40 | 91,60 | 1485 | | | | |
| 110 | 200,0 | 192,0 | 187,0 | 115,0 | 111,0 | 1490 | | | | |
| 132 | 239,0 | 230,0 | 224,0 | 138,0 | 133,0 | 1490 | | | | |
| 160 | 287,0 | 275,0 | 268,0 | 165,0 | 159,0 | 1490 | | | | |
| 200 | 358,0 | 343,0 | 335,0 | 206,0 | 199,0 | 1490 | | | | |
| 250 | 451,0 | 433,0 | 422,0 | 260,0 | 251,0 | 1490 | | | | |
| 315 | 575,0 | 552,0 | 538,0 | 331,0 | 320,0 | 1490 | | | | |
| 355 | 640,0 | 615,0 | 599,0 | 368,0 | 357,0 | 1490 | | | | |

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

Nscf-mott355-4p50-en_c_te

Note: Observe the regulations and codes locally in force regarding sorted waste disposal.

e-NSC SERIES

AVAILABLE VOLTAGES FOR SM AND PLM MOTORS

| P _N kW | SINGLE-PHASE | | | | | | | | THREE-PHASE | | | | | | | | | | | | | | | | | | | |
|----------------------|--------------|---------|-------------|-------------|---------|-------------|-------------|-------------|-------------------|-------------------|-------------------|-----------------|-----------------------------|-------------------------|---------------------|---------------------|---------------------|---------------|---------------|---------------------|-----------------------------|---------------------|-------------------|---------------------|---------------------|---------------------|-----------|---|
| | 50 Hz | | | | 60 Hz | | | | 50/60 Hz | | 50 Hz | | | | | | 60 Hz | | | | | | | | | | | |
| | 1 x 220-240 | 1 x 100 | 1 x 110-120 | 1 x 220-230 | 1 x 100 | 1 x 110-115 | 1 x 120-127 | 1 x 200-210 | 3 x 230/400 50 Hz | 3 x 265/460 60 Hz | 3 x 400/690 50 Hz | 3 x 460/- 60 Hz | 3 x 220-230-240/380-400-415 | 3 x 380-400-415/660-690 | 3 x 200-208/346-360 | 3 x 255-265/440-460 | 3 x 290-300/500-525 | 3 x 440-460/- | 3 x 500-525/- | 3 x 220-230/380-400 | 3 x 255-265-277/440-460-480 | 3 x 380-400/660-690 | 3 x 440-460-480/- | 3 x 110-115/190-200 | 3 x 200-208/346-360 | 3 x 330-346/575-600 | 3 x 575/- | |
| 0,37 | s | o | o | s | - | o | - | o | s | o | o | o | o | o | o | o | o | o | o | s | o | o | o | o | o | o | o | o |
| 0,55 | s | o | o | s | o | o | o | o | s | o | o | o | o | o | o | o | o | o | o | s | o | o | o | o | o | o | o | o |
| 0,75 | s | o | o | s | o | o | o | o | s | o | o | o | o | o | o | o | o | o | o | s | o | o | o | o | o | o | o | o |
| 1,1 | s | - | o | s | - | o | - | o | s | - | o | - | o | o | o | o | o | o | o | s | o | o | o | o | o | o | o | o |
| 1,5 | s | - | - | s | - | o | - | o | s | - | o | - | o | o | o | o | o | o | o | s | o | o | o | o | o | o | o | o |
| 2,2 | s | - | - | s | - | - | - | - | s | - | - | - | - | o | o | o | o | o | o | s | o | o | o | o | o | o | o | o |
| 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5,5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7,5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 18,5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

s = Standard voltage o = Voltage upon request - = Not available

nsc-volt-low-a-en_a_te

For higher power motors special voltages available on request.

MOTOR NOISE

The tables below show the mean sound pressure levels (Lp) measured at 1 meter's distance in a free field according to the A curve (ISO 1680 standard). The noise values are measured with idling 50 Hz motor with a tolerance of 3 dB (A).

MOTORS 2 POLES 50 Hz

| POWER kW | MOTOR TYPE IEC SIZE | NOISE LpA dB |
|-------------|------------------------|--------------------|
| 1,1 | 80 | <70 |
| | 90R | <70 |
| 1,5 | 90R | <70 |
| | 90 | <70 |
| 2,2 | 90 | <70 |
| 3 | 90 | <70 |
| | 100R | <70 |
| | 100 | <70 |
| 4 | 112R | <70 |
| | 112 | <70 |
| 5,5 | 112 | <70 |
| | 132R | <70 |
| | 132 | 71 |
| 7,5 | 132 | 71 |
| 9,2 | 132 | 73 |
| 11 | 132 | 73 |
| | 160 | 71 |
| 15 | 160 | 71 |
| 18,5 | 160 | 73 |
| | 160 | 70 |
| 22 | 180R | 70 |
| | 180 | 67 |
| 30 | 200 | 69 |
| 37 | 200 | 69 |
| 45 | 225 | 74 |
| 55 | 250 | 74 |
| 75 | 280 | 77 |
| 90 | 280 | 77 |
| 110 | 315 | 77 |
| 132 | 315 | 77 |
| 160 | 315 | 77 |
| 200 | 315 | 80 |

MOTORS 4 POLES 50 Hz

| POWER kW | MOTOR TYPE IEC SIZE | NOISE LpA dB |
|-------------|------------------------|--------------------|
| 0,25 | 71 | <70 |
| 0,37 | 71 | <70 |
| 0,55 | 80 | <70 |
| | 90R | <70 |
| 0,75 | 80 | <70 |
| | 90R | <70 |
| 1,1 | 90 | <70 |
| 1,5 | 90 | <70 |
| 2,2 | 100 | <70 |
| 3 | 100 | <70 |
| 4 | 112 | <70 |
| 5,5 | 132 | <70 |
| 7,5 | 132 | <70 |
| 11 | 160 | <70 |
| 15 | 160 | <70 |
| 18,5 | 180 | <70 |
| 22 | 180 | <70 |
| 30 | 200 | <70 |
| 37 | 225 | <70 |
| 45 | 225 | <70 |
| 55 | 250 | <70 |
| 75 | 280 | <70 |
| 90 | 280 | <70 |
| 110 | 315 | 71 |
| 132 | 315 | 71 |
| 160 | 315 | 71 |
| 200 | 315 | 73 |
| 250 | 315 | 73 |
| 315 | 355 | 74 |
| 355 | 355 | 74 |

*R=Reduced size of motor as compared to shaft extension and flange.

e-NSC SERIES PUMPS

With the “Energy using Products” (EuP 2005/32/EC) and “Energy related Products” (ErP 2009/125/EC) directives, the European Commission has established requirements for promoting the use of products with low power consumption.

The **Commission Regulation (EU) No 547/2012** has implemented two directives with regard to ecodesign requirements for **some types of clean water pumps** placed on the market and put into service inside EU zone as self-alone units or integrated in other products.

For end-suction close-coupled pumps (ESCC for the Regulation) and end-suction own-bearing pumps (ESOB for the Regulation) the efficiency assessment refers to:

- just the pump and not the pump and motor assembly (electric or combustion);
- pumps with just one impeller;
- pumps with a nominal pressure PN not higher than 16 bar (1600 kPa);
- pumps with a minimum nominal flow not less than 6 m³/h;
- pumps with a maximum nominal power at the shaft not higher than 150 kW;
- pumps designed to operate at a speed of 2900 min⁻¹ (for electric pumps this means 50 Hz 2-pole electric motors) and with a head not greater than 140 metres;
- pumps designed to operate at a speed of 1450 min⁻¹ (for electric pumps this means 50 Hz 4-pole electric motors) and with a head not greater than 90 metres;
- use with clean water at a temperature ranging from -10°C to 120°C (the test is performed with cold water at a temperature not higher than 40°C).

According to the definitions established in the Regulation NSCE and NSCS versions correspond to the “end-suction close-coupled pump” while NSC, NSCF and NSCC versions correspond to the “end-suction own bearing pump”. This regulation states that water pumps shall have a minimum index MEI coming from a dedicated formula which considers hydraulic efficiency values at ‘best efficiency point’ (BEP), 75 % of the flow at BEP (Part load – PL) and 110 % of the flow at BEP (Over load – OL).

The Regulation also establishes the following deadlines.

| from | minimum efficiency index (MEI) |
|------------------------------|--------------------------------|
| 1 st January 2013 | MEI ≥ 0,1 |
| 1 st January 2015 | MEI ≥ 0,4 |


NSC2 models are out of the scope of the Regulation.

Regulation (EU) n. 547/2012 – Annex II – point 2 (Product information requirements)

- 1) Minimum efficiency index: see MEI values in specific tables on following page.
- 2) “The benchmark for most efficient water pumps is MEI ≥ 0,70”.
- 3) Year of manufacture: 2014.
- 4) Manufacturer: Xylem Service Italia Srl - Reg. No 07520560967 - Montecchio Maggiore, Vicenza, Italy.
- 5) Product type: see the PUMP TYPE column in the tables in the *Hydraulic performance* section.
- 6) Hydraulic pump efficiency with trimmed impeller: see η_p and $\varnothing T$ columns in the tables in the *Hydraulic performance* section.
- 7) Pump performance curves, including the performance curve: see the *Operating Characteristics* graphs in the following pages.
- 8) “The efficiency of a pump with a trimmed impeller is usually lower than that of a pump with the full impeller diameter. The trimming of the impeller will adapt the pump to a fixed duty point, leading to reduced energy consumption. The minimum efficiency index (MEI) is based on the full impeller diameter”.
- 9) “The operation of this water pump with variable duty points may be more efficient and economic when controlled, for example, by the use of a variable speed drive that matches the pump duty to the system”.
- 10) Information relevant for disassembly, recycling or disposal at end-of-life: observe the current laws and by-laws governing sorted waste disposal. Consult the product operating manual.
- 11) “Designed for use below – 10 °C only”: note not applicable to these products.
- 12) “Designed for use above 120 °C only”: note not applicable to these products.
- 13) Specific instructions for pumps as per points 11 and 12: not applicable to these products.
- 14) “Information on benchmark efficiency is available at”: www.europump.org (Ecodesign section).
- 15) The benchmark efficiency graphs with MEI = 0.7 and MEI = 0.4 are available at www.europump.org, Ecodesign, Efficiency charts (refer to “ESCC 1450 rpm”, “ESCC 2900 rpm”, “ESOB 1450 rpm”, “ESOB 2900 rpm”).

e-NSC SERIES

HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 2 POLES

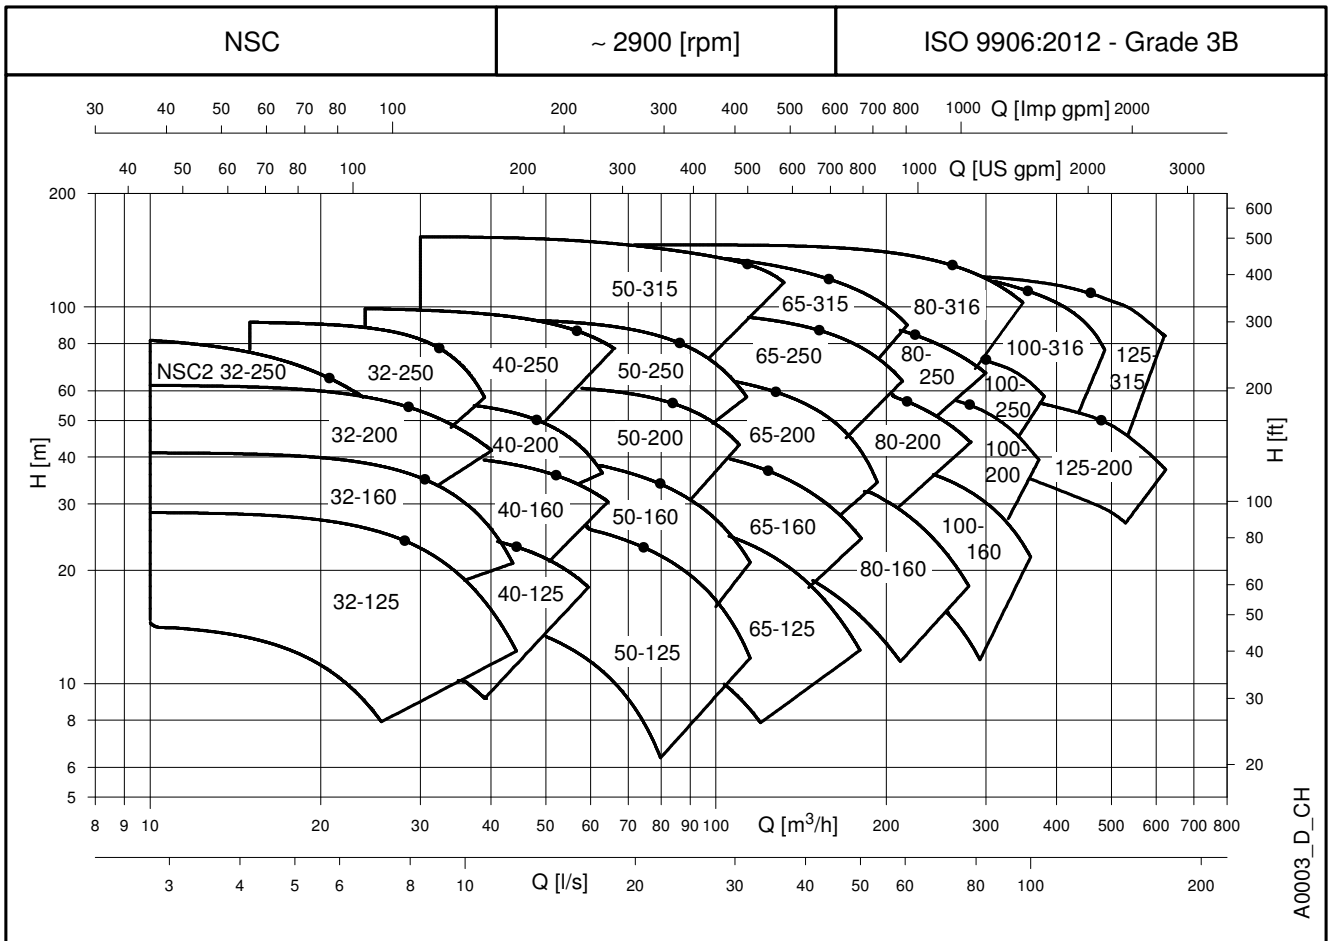

e-NSC 32, 40, 50 SERIES
HYDRAULIC PERFORMANCE TABLE AT 50 Hz, 2 POLES

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|-------------|----------------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|
| | | STD (1) | B (2) | ● (3) | ηP % (3) | Vs 0 m³/h 0 | 1,8 6 | 2,6 9 | 3,5 13 | 4,4 16 | 5,3 19 | 6,1 22 | 7,0 25 | 7,9 28 | 8,8 32 | 9,6 35 | 10,5 38 | 11,4 41 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 32-125/11* | 1,1 | 113 | - | ○ | 60,7 | 14,2 | 14,4 | 14,2 | 13,7 | 12,9 | 11,8 | 10,2 | 8,2 | | | | | |
| 32-125/15* | 1,5 | 123 | - | ○ | 65,9 | 17,9 | | 18,0 | 17,5 | 16,7 | 15,7 | 14,3 | 12,6 | 10,5 | | | | |
| 32-125/22* | 2,2 | 133 | - | ○ | 70,2 | 22,7 | | 23,0 | 22,8 | 22,3 | 21,7 | 20,7 | 19,5 | 17,9 | 16,0 | 13,6 | | |
| 32-125/30 | 3 | 145 | - | ● | 70,4 | 27,7 | | | 28,4 | 28,1 | 27,5 | 26,6 | 25,5 | 24,0 | 22,3 | 20,2 | 17,8 | 15,1 |
| 32-160/22* | 2,2 | 137 | - | ○ | 62,5 | 24,2 | | 23,9 | 23,6 | 23,0 | 22,1 | 20,7 | 18,7 | | | | | |
| 32-160/30 | 3 | 150 | - | ○ | 65,7 | 29,3 | | 29,5 | 29,2 | 28,7 | 27,9 | 26,6 | 25,0 | 22,9 | 20,2 | | | |
| 32-160/40 | 4 | 160,5 | - | ○ | 66,1 | 34,4 | | 35,0 | 34,9 | 34,6 | 34,0 | 32,9 | 31,4 | 29,5 | 27,0 | 24,0 | | |
| 32-160/55 | 5,5 | 171 | - | ● | 67,5 | 40,4 | | | 40,9 | 40,7 | 40,2 | 39,3 | 38,1 | 36,3 | 34,1 | 31,4 | 28,1 | |
| 32-200/30 | 3 | 158 | - | ○ | 57,2 | 33,1 | | 32,6 | 31,9 | 30,7 | 28,8 | 26,1 | | | | | | |
| 32-200/40 | 4 | 171 | - | ○ | 61,1 | 40,2 | | 39,8 | 39,4 | 38,6 | 37,3 | 35,4 | 32,6 | | | | | |
| 32-200/55 | 5,5 | 186 | - | ○ | 61,7 | 48,9 | | 48,4 | 48,0 | 47,2 | 46,1 | 44,4 | 42,0 | 38,8 | | | | |
| 32-200/75 | 7,5 | 205 | - | ● | 63,4 | 62,4 | | | 61,9 | 61,1 | 59,6 | 57,6 | 55,2 | 52,8 | 50,0 | | | |
| NSC2 32-250/55 | 5,5 | 174 | - | ○ | 49,9 | 70,3 | | 64,7 | 61,3 | 56,5 | 50,6 | 44,0 | | | | | | |
| NSC2 32-250/75 | 7,5 | 190,5 | - | ● | 50,4 | 88,3 | | 82,0 | 79,1 | 74,6 | 68,6 | 61,6 | 54,2 | | | | | |
| 32-250/75 | 7,5 | 214 | - | ○ | 45,5 | 58,7 | | | 57,5 | 56,0 | 53,7 | 50,6 | 46,5 | 41,0 | | | | |
| 32-250/92 | 9,2 | 226,5 | - | ○ | 47,5 | 66,8 | | | 65,8 | 64,6 | 62,7 | 60,3 | 57,2 | 52,8 | | | | |
| 32-250/110A | 11 | 226,5 | - | ○ | 47,5 | 66,8 | | | 65,8 | 64,6 | 62,7 | 60,3 | 57,2 | 52,8 | | | | |
| 32-250/110 | 11 | 239 | - | ○ | 48,3 | 76,0 | | | 73,7 | 71,7 | 69,2 | 66,1 | 62,2 | 57,0 | | | | |
| 32-250/150 | 15 | 259 | - | ● | 50,5 | 92,5 | | | 91,0 | 90,4 | 89,3 | 87,4 | 84,3 | 79,5 | 72,3 | 62,2 | | |

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|-------------|----------------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|------------|------------|------------|------------|
| | | STD (1) | B (2) | ○ (3) | ηP % (3) | Vs 0 m³/h 0 | 2,7 10 | 4,1 15 | 5,5 20 | 6,9 25 | 8,4 30 | 9,8 35 | 11,2 40 | 12,6 45 | 14,1 51 | 15,5 56 | 16,9 61 | 18,3 66 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 40-125/15* | 1,5 | 105 | - | ○ | 69,3 | 14,5 | 14,7 | 14,5 | 13,9 | 13,1 | 11,9 | 10,5 | | | | | | |
| 40-125/22* | 2,2 | 118 | - | ○ | 73,1 | 19,4 | | 18,8 | 18,2 | 17,4 | 16,4 | 15,0 | 13,3 | 11,1 | | | | |
| 40-125/30 | 3 | 130 | - | ○ | 78,1 | 23,2 | | 22,9 | 22,6 | 22,0 | 21,2 | 20,0 | 18,6 | 16,9 | 15,0 | | | |
| 40-125/40 | 4 | 135 | - | ● | 81,1 | 26,7 | | | 26,5 | 26,2 | 25,7 | 25,0 | 24,0 | 22,8 | 21,3 | 19,5 | | |
| 40-160/30 | 3 | 127 | - | ○ | 69,2 | 21,8 | | 22,8 | 22,5 | 21,8 | 20,7 | 19,3 | 17,4 | | | | | |
| 40-160/40 | 4 | 139 | - | ○ | 71,6 | 26,4 | | 27,8 | 27,7 | 27,2 | 26,4 | 25,2 | 23,6 | 21,6 | | | | |
| 40-160/55 | 5,5 | 154 | - | ○ | 75,0 | 33,3 | | 34,7 | 34,7 | 34,4 | 33,8 | 32,8 | 31,5 | 29,9 | 28,0 | 25,7 | | |
| 40-160/75 | 7,5 | 165 | - | ● | 75,6 | 40,8 | | | 41,3 | 41,2 | 40,9 | 40,2 | 39,2 | 37,9 | 36,2 | 34,3 | 32,0 | |
| 40-200/55 | 5,5 | 165 | - | ○ | 62,4 | 36,2 | | 36,6 | 36,4 | 35,7 | 34,4 | 32,4 | 29,5 | | | | | |
| 40-200/75 | 7,5 | 179 | - | ○ | 64,0 | 44,2 | | 45,0 | 44,8 | 44,2 | 43,3 | 41,7 | 39,4 | 36,1 | 31,6 | | | |
| 40-200/92 | 9,2 | 189 | - | ○ | 67,3 | 49,8 | | | 50,9 | 50,5 | 50,0 | 49,0 | 47,6 | 45,2 | 41,6 | 36,3 | | |
| 40-200/110A | 11 | 189 | - | ○ | 67,3 | 49,8 | | | 50,9 | 50,5 | 50,0 | 49,0 | 47,6 | 45,2 | 41,6 | 36,3 | | |
| 40-200/110 | 11 | 199 | - | ● | 67,6 | 56,1 | | | 57,1 | 56,8 | 56,3 | 55,4 | 53,9 | 51,8 | 48,7 | 44,5 | 38,8 | |
| 40-250/92 | 9,2 | 199 | - | ○ | 58,8 | 54,9 | | | 54,8 | 54,1 | 52,7 | 50,5 | 47,2 | | | | | |
| 40-250/110A | 11 | 199 | - | ○ | 58,8 | 54,9 | | | 54,8 | 54,1 | 52,7 | 50,5 | 47,2 | | | | | |
| 40-250/110 | 11 | 210 | - | ○ | 59,3 | 60,5 | | | 59,5 | 58,9 | 57,7 | 55,9 | 53,1 | 49,0 | | | | |
| 40-250/150 | 15 | 228 | - | ○ | 61,0 | 73,9 | | | 72,7 | 71,9 | 70,6 | 68,7 | 65,9 | 61,9 | | | | |
| 40-250/185 | 18,5 | 243 | - | ○ | 65,2 | 86,5 | | | 85,2 | 84,5 | 83,6 | 82,2 | 80,1 | 77,1 | 72,9 | | | |
| 40-250/220 | 22 | 257,5 | - | ● | 66,8 | 99,8 | | | 98,1 | 97,4 | 96,6 | 95,5 | 93,8 | 91,3 | 87,9 | 83,1 | 76,6 | |

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|-------------|----------------|-----------|-----------|------------|------------|------------|------------|------------|------------|-------------|-------------|-------------|-------------|
| | | STD (1) | B (2) | ○ (3) | ηP % (3) | Vs 0 m³/h 0 | 4,6 17 | 7,5 27 | 10,4 38 | 13,4 48 | 16,3 59 | 19,2 69 | 22,1 80 | 25,0 90 | 27,9 101 | 30,8 111 | 33,8 122 | 36,7 132 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 50-125/30 | 3 | 118 | - | ○ | 66,1 | 17,1 | | 16,2 | 15,2 | 13,7 | 11,7 | 9,3 | 6,5 | | | | | |
| 50-125/40 | 4 | 130 | - | ○ | 70,6 | 21,3 | | 20,4 | 19,5 | 18,1 | 16,3 | 14,0 | 11,2 | 8,2 | | | | |
| 50-125/55 | 5,5 | 144 | - | ○ | 73,2 | 26,9 | | 25,6 | 24,9 | 23,8 | 22,2 | 20,1 | 17,6 | 14,7 | 11,5 | | | |
| 50-125/75 | 7,5 | 148 | - | ● | 75,2 | 30,9 | | 29,2 | 28,4 | 27,3 | 25,9 | 24,1 | 21,9 | 19,3 | 16,2 | 12,8 | | |
| 50-160/55 | 5,5 | 144 | - | ○ | 71,9 | 27,1 | | 26,2 | 25,3 | 23,8 | 21,7 | 18,9 | 15,7 | | | | | |
| 50-160/75 | 7,5 | 159 | - | ○ | 72,2 | 33,8 | | 32,7 | 31,8 | 30,2 | 28,0 | 25,2 | 21,9 | 18,1 | | | | |
| 50-160/92 | 9,2 | 170 | - | ○ | 72,6 | 38,8 | | 38,0 | 37,3 | 36,0 | 34,1 | 31,6 | 28,5 | 24,9 | 20,7 | | | |
| 50-160/110A | 11 | 170 | - | ○ | 72,6 | 38,8 | | 38,0 | 37,3 | 36,0 | 34,1 | 31,6 | 28,5 | 24,9 | 20,7 | | | |
| 50-160/110 | 11 | 176 | - | ● | 74,9 | 43,5 | | 42,3 | 41,5 | 40,3 | 38,7 | 36,6 | 34,0 | 30,8 | 27,1 | 22,7 | | |
| 50-200/92 | 9,2 | 168 | - | ○ | 70,7 | 36,5 | | 37,5 | 37,5 | 36,8 | 35,1 | 32,4 | 28,5 | | | | | |
| 50-200/110A | 11 | 168 | - | ○ | 70,7 | 36,5 | | 37,5 | 37,5 | 36,8 | 35,1 | 32,4 | 28,5 | | | | | |
| 50-200/110 | 11 | 179 | - | ○ | 72,2 | 42,5 | | 43,5 | 43,5 | 42,6 | 40,6 | 37,3 | 32,9 | | | | | |
| 50-200/150 | 15 | 197 | - | ○ | 74,4 | 53,5 | | 54,3 | 54,3 | 53,6 | 51,9 | 49,0 | 44,9 | 39,8 | | | | |
| 50-200/185 | 18,5 | 209 | - | ● | 77,4 | 62,7 | | 63,0 | 63,0 | 62,6 | 61,4 | 59,5 | 56,6 | 52,7 | 48,0 | | | |
| 50-250/150 | 15 | 208 | - | ○ | 65,4 | 57,9 | | 57,7 | 57,2 | 55,6 | 52,8 | 48,3 | 42,1 | | | | | |
| 50-250/185 | 18,5 | 220 | - | ○ | 69,8 | 67,9 | | 66,9 | 66,4 | 65,0 | 62,5 | 58,5 | 52,9 | 45,4 | | | | |
| 50-250/220 | 22 | 232 | - | ○ | 70,3 | 75,1 | | 74,9 | 74,4 | 73,2 | 71,0 | 67,6 | 62,5 | 55,7 | 46,7 | | | |
| 50-250/300 | 30 | 256 | - | ● | 71,5 | 93,2 | | 93,5 | 93,3 | 92,5 | 90,8 | 87,9 | 83,6 | 77,7 | 70,1 | 60,6 | | |
| 50-315/370 | 37 | 264 | - | ○ | 61,2 | 101,7 | 100,8 | 100,2 | 98,3 | 95,3 | 92,0 | 88,9 | 86,1 | 82,2 | | | | |
| 50-315/450 | 45 | 278 | - | ○ | 62,1 | 112,7 | | 112,4 | 111,2 | 108,8 | 105,6 | 102,2 | 98,8 | 95,3 | 90,2 | | | |
| 50-315/550 | 55 | 298 | - | ○ | 63,2 | 131,0 | | 128,6 | 127,8 | 126,6 | 124,6 | 121,7 | 117,8 | 113,6 | 109,3 | 104,3 | | |
| 50-315/750 | 75 | 322 | - | ● | 64,2 | 154,0 | | 151,9 | 151,6 | 151,0 | 149,7 | 147,3 | 143,8 | 139,4 | 134,9 | 130,3 | 125,0 | 117,1 |

Hydraulic performances in compliance with ISO 9906:2012 - Grade 3B (ex ISO 9906:1999 - Annex A) Nsc-32-40-50_2p50-en_f.th
 (1) STD = Cast iron/Stainless steel - B = Bronze (2) ● = Full impeller diameter - ○ = Trimmed impeller diameter (3) Hydraulic efficiency of pump.
 *Available also in single-phase version.

e-NSC 65, 80 SERIES

HYDRAULIC PERFORMANCE TABLE AT 50 Hz, 2 POLES

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|
| | | STD (1) | B (2) | ○ (3) | η _p % | l/s | 6 | 11,8 | 17,1 | 22,4 | 27,8 | 33,1 | 38,4 | 43,7 | 49,0 | 54,4 | 59,7 | 65 |
| | | | | | | m ³ /h | 0 | 23 | 42 | 62 | 81 | 100 | 119 | 138 | 157 | 177 | 196 | 215 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 65-125/40 | 4 | 113 | 112 | ○ | 77,9 | 14,4 | | 14,5 | 13,7 | 12,2 | 10,3 | 8,0 | | | | | | |
| 65-125/55 | 5,5 | 127 | 125,5 | ○ | 79,7 | 19,5 | | 19,4 | 18,4 | 16,7 | 14,5 | 11,7 | | | | | | |
| 65-125/75 | 7,5 | 137 | 136 | ○ | 80,3 | 23,8 | | 23,9 | 23,2 | 21,7 | 19,6 | 16,8 | 13,7 | 10,5 | | | | |
| 65-125/92 | 9,2 | 146 | 143 | ○ | 81,4 | 28,3 | | 28,1 | 27,4 | 26,2 | 24,4 | 22,1 | 19,2 | 16,1 | | | | |
| 65-125/110A | 11 | 146 | 143 | ○ | 81,4 | 28,3 | | 28,1 | 26,7 | 24,4 | 21,0 | 16,8 | 12,2 | 16,1 | | | | |
| 65-125/110 | 11 | 148 | 146 | ● | 81,9 | 29,5 | | 29,1 | 28,3 | 27,2 | 25,6 | 23,6 | 21,0 | 18,0 | 14,5 | | | |
| 65-160/75 | 7,5 | 145 | 144 | ○ | 79,1 | 27,0 | | 26,5 | 25,3 | 23,2 | 20,2 | 16,6 | | | | | | |
| 65-160/92 | 9,2 | 151 | 152 | ○ | 80,9 | 29,8 | | 29,4 | 28,5 | 26,7 | 23,9 | 20,4 | 16,4 | | | | | |
| 65-160/110A | 11 | 151 | 152 | ○ | 80,9 | 29,8 | | 29,4 | 28,5 | 26,7 | 23,9 | 20,4 | 16,4 | | | | | |
| 65-160/110 | 11 | 159 | 160 | ○ | 81,4 | 33,3 | | 33,0 | 32,1 | 30,5 | 27,9 | 24,6 | 20,5 | | | | | |
| 65-160/150 | 15 | 175 | 176 | ○ | 82,4 | 41,3 | | 41,1 | 40,4 | 39,2 | 37,1 | 34,3 | 30,7 | 26,5 | | | | |
| 65-160/185 | 18,5 | 180 | 180 | ● | 83,4 | 44,7 | | 44,3 | 43,7 | 42,5 | 40,7 | 38,2 | 35,1 | 31,3 | 26,8 | | | |
| 65-200/110 | 11 | 165 | 162 | ○ | 73,0 | 36,4 | | 35,6 | 33,8 | 30,6 | 25,8 | 19,5 | | | | | | |
| 65-200/150 | 15 | 177 | 177 | ○ | 77,4 | 43,1 | | 42,8 | 41,6 | 39,1 | 35,2 | 29,7 | 22,8 | | | | | |
| 65-200/185 | 18,5 | 189 | 189 | ○ | 78,5 | 49,9 | | 49,4 | 48,3 | 46,1 | 42,7 | 37,8 | 31,4 | | | | | |
| 65-200/220 | 22 | 199 | 199 | ○ | 79,2 | 55,9 | | 55,6 | 54,6 | 52,7 | 49,6 | 45,0 | 38,9 | 31,0 | | | | |
| 65-200/300 | 30 | 220 | 218 | ● | 80,1 | 70,2 | | 69,6 | 68,7 | 67,3 | 65,0 | 61,7 | 57,2 | 51,1 | 43,1 | | | |
| 65-250/220 | 22 | 195 | 192 | ○ | 76,0 | 51,0 | | 53,7 | 52,4 | 50,0 | 46,7 | 42,3 | 36,6 | 29,1 | | | | |
| 65-250/300 | 30 | 215 | 213 | ○ | 76,8 | 63,7 | | 66,6 | 65,5 | 63,4 | 60,5 | 56,6 | 51,6 | 45,0 | 36,4 | | | |
| 65-250/370 | 37 | 229 | 226 | ○ | 79,1 | 73,3 | | 77,2 | 76,4 | 74,6 | 72,0 | 68,7 | 64,5 | 59,1 | 52,0 | 42,5 | | |
| 65-250/450 | 45 | 243 | 240 | ○ | 79,4 | 83,7 | | 87,8 | 87,1 | 85,5 | 83,3 | 80,6 | 77,0 | 72,4 | 66,3 | 57,9 | 46,3 | |
| 65-250/550 | 55 | 258 | 255 | ● | 80,3 | 98,5 | | 99,7 | 99,1 | 97,9 | 95,9 | 93,3 | 89,8 | 85,2 | 79,4 | 72,0 | 62,8 | 51,4 |
| 65-315/550 | 55 | 272 | 272 | ○ | 68,0 | 103,6 | 103,8 | 103,3 | 101,6 | 98,7 | 94,7 | 89,6 | 83,4 | 75,7 | 66,0 | | | |
| 65-315/750 | 75 | 298 | 298 | ○ | 68,9 | 126,1 | | 125,7 | 124,5 | 122,0 | 118,4 | 113,7 | 108,1 | 101,5 | 93,6 | 83,7 | | |
| 65-315/900 | 90 | 315 | 315 | ● | 69,2 | 142,4 | | 141,7 | 140,8 | 138,7 | 135,4 | 130,9 | 125,4 | 119,0 | 111,5 | 102,7 | 91,7 | |

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | STD (1) | B (2) | ○ (3) | η _p % | l/s | 11 | 18,4 | 26,2 | 34,1 | 41,9 | 49,8 | 57,7 | 65,5 | 73,4 | 81,2 | 89,1 | 97 |
| | | | | | | m ³ /h | 0 | 38 | 66 | 94 | 123 | 151 | 179 | 208 | 236 | 264 | 292 | 321 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 80-160/110 | 11 | 144 | 144 | ○ | 76,0 | 26,8 | | 25,7 | 23,8 | 21,4 | 18,5 | 15,3 | 12,0 | | | | | |
| 80-160/150 | 15 | 158 | 158 | ○ | 79,5 | 33,4 | | 32,4 | 31,1 | 29,0 | 26,3 | 22,9 | 19,1 | 15,1 | | | | |
| 80-160/185 | 18,5 | 168 | 168 | ○ | 80,3 | 38,0 | | 37,2 | 36,0 | 34,0 | 31,2 | 27,8 | 23,8 | 19,6 | | | | |
| 80-160/220 | 22 | 177 | 177 | ● | 80,8 | 42,3 | | 41,6 | 40,5 | 38,8 | 36,4 | 33,3 | 29,5 | 25,3 | 20,7 | | | |
| 80-200/220 | 22 | 181 | 177 | ○ | 79,7 | 43,5 | | 43,7 | 42,8 | 40,9 | 38,0 | 34,2 | 29,7 | | | | | |
| 80-200/300 | 30 | 195 | 192 | ○ | 81,8 | 52,1 | | 52,1 | 51,6 | 50,2 | 47,8 | 44,3 | 40,0 | 34,9 | | | | |
| 80-200/370 | 37 | 208 | 204 | ○ | 82,6 | 60,5 | | 60,2 | 59,5 | 58,0 | 55,8 | 52,7 | 48,7 | 43,8 | | | | |
| 80-200/450 | 45 | 219 | 216 | ● | 83,3 | 67,8 | | 67,7 | 67,1 | 66,0 | 64,1 | 61,3 | 57,7 | 53,1 | 47,6 | | | |
| 80-250/370 | 37 | 214 | 211 | ○ | 80,6 | 65,0 | | 65,8 | 64,4 | 62,0 | 58,8 | 54,6 | 49,5 | | | | | |
| 80-250/450 | 45 | 227 | 224 | ○ | 81,8 | 73,9 | | 75,1 | 74,3 | 72,4 | 69,4 | 65,2 | 60,1 | 54,2 | | | | |
| 80-250/550 | 55 | 241 | 238 | ○ | 82,3 | 83,5 | | 85,1 | 84,3 | 82,6 | 79,9 | 76,0 | 71,2 | 65,5 | 59,0 | | | |
| 80-250/750 | 75 | 259 | 256 | ● | 83,6 | 98,8 | | | 98,1 | 96,9 | 94,9 | 91,8 | 87,6 | 82,2 | 75,9 | 68,6 | | |
| 80-316/900 | 90 | 280 | 280 | ○ | 76,3 | 110,7 | 110,2 | 110,0 | 109,9 | 109,0 | 106,7 | 102,7 | 97,1 | 90,3 | 82,8 | 74,1 | | |
| 80-316/1100 | 110 | 298 | 298 | ○ | 76,7 | 125,2 | | 124,5 | 124,3 | 123,8 | 122,5 | 119,9 | 115,6 | 109,8 | 102,5 | 94,0 | 84,5 | |
| 80-316/1320 | 132 | 310 | 310 | ○ | 77,7 | 135,1 | | 134,7 | 134,6 | 134,1 | 132,9 | 130,8 | 127,4 | 122,7 | 116,5 | 108,7 | 99,5 | |
| 80-316/1600 | 160 | 321 | 321 | ● | 77,9 | 146,1 | | 145,4 | 145,3 | 144,9 | 143,8 | 141,8 | 138,6 | 134,2 | 128,5 | 121,3 | 112,7 | 102,7 |

Hydraulic performances in compliance with ISO 9906:2012 - Grade 3B (ex ISO 9906:1999 - Annex A)

Nsc-65-80_2p50-en_e_th

(1) STD = Cast iron/Stainless steel - B = Bronze (2) ● = Full impeller diameter - ○ = Trimmed impeller diameter (3) Hydraulic efficiency of pump.

e-NSC 100, 125 SERIES

HYDRAULIC PERFORMANCE TABLE AT 50 Hz, 2 POLES


| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|------------------|-------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|
| | | STD (1) | B (2) | ○ (3) | η _p % | l/s | 11 | 22,5 | 33,8 | 45,1 | 56,3 | 67,6 | 78,9 | 90,2 | 101,4 | 112,7 | 124 | 135 |
| | | | | | | m ³ /h | 0 | 40 | 81 | 122 | 162 | 203 | 243 | 284 | 325 | 365 | 406 | 446 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 100-160/150 | 15 | 144 | 144 | ○ | 76,7 | 24,7 | 24,8 | 24,6 | 23,8 | 22,3 | 19,9 | 16,6 | 12,6 | | | | | |
| 100-160/185 | 18,5 | 156 | 156 | ○ | 79,7 | 29,1 | | 28,7 | 28,2 | 26,9 | 24,6 | 21,3 | 17,1 | | | | | |
| 100-160/220 | 22 | 167 | 167 | ○ | 80,5 | 34,1 | | 33,4 | 32,8 | 31,5 | 29,3 | 26,0 | 21,7 | 16,7 | | | | |
| 100-160/300 | 30 | 187 | 187 | ● | 83,8 | 44,1 | | 42,7 | 41,9 | 40,6 | 38,7 | 35,9 | 32,1 | 27,1 | | | | |
| 100-200/300 | 30 | 188 | 188 | ○ | 79,7 | 46,5 | | 45,7 | 44,8 | 42,7 | 39,2 | 34,3 | 28,1 | 21,0 | | | | |
| 100-200/370 | 37 | 202 | 202 | ○ | 82,0 | 53,9 | | 53,4 | 52,8 | 51,2 | 48,2 | 43,8 | 38,0 | 31,0 | | | | |
| 100-200/450 | 45 | 213 | 213 | ○ | 83,4 | 60,4 | | 59,8 | 59,5 | 58,3 | 55,7 | 51,8 | 46,4 | 39,7 | 31,8 | | | |
| 100-200/550 | 55 | 227 | 227 | ● | 84,6 | 69,2 | | 68,9 | 68,2 | 66,9 | 64,7 | 61,3 | 56,6 | 50,6 | 43,0 | | | |
| 100-250/450 | 45 | 213 | 213 | ○ | 80,4 | 58,7 | | 58,3 | 58,0 | 56,9 | 54,4 | 50,3 | 44,8 | 38,5 | 31,5 | | | |
| 100-250/550 | 55 | 227 | 227 | ○ | 83,1 | 67,8 | | 67,7 | 67,4 | 66,2 | 64,0 | 60,5 | 55,7 | 49,6 | 42,4 | | | |
| 100-250/750 | 75 | 249 | 249 | ○ | 84,3 | 82,8 | | 82,7 | 82,5 | 81,8 | 80,0 | 76,9 | 72,4 | 66,7 | 60,2 | 52,9 | | |
| 100-250/900 | 90 | 259 | 259 | ● | 85,0 | 90,1 | | 90,1 | 89,8 | 88,8 | 87,0 | 84,0 | 79,8 | 74,4 | 67,6 | 59,6 | | |
| 100-316/1100 | 110 | 270 | 270 | ○ | 78,6 | 104,7 | | 104,3 | 103,5 | 101,9 | 99,3 | 95,6 | 90,5 | 83,7 | 74,6 | 62,4 | | |
| 100-316/1320 | 132 | 286 | 286 | ○ | 79,9 | 116,6 | | 116,2 | 115,7 | 114,2 | 111,8 | 108,5 | 104,2 | 98,6 | 91,4 | 81,5 | 67,3 | |
| 100-316/1600 | 160 | 302 | 302 | ● | 80,8 | 131,3 | | 130,9 | 130,8 | 129,9 | 128,0 | 124,8 | 120,4 | 115,0 | 108,8 | 101,5 | 91,8 | 77,0 |

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|------------------|-------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| | | STD (1) | B (2) | ○ (3) | η _p % | l/s | 24 | 37,6 | 51,6 | 65,6 | 79,6 | 93,6 | 107,7 | 121,7 | 135,7 | 149,7 | 163,8 | 178 |
| | | | | | | m ³ /h | 0 | 85 | 135 | 186 | 236 | 287 | 337 | 388 | 438 | 489 | 539 | 590 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 125-200/450 | 45 | 179 | 179 | ○ | 80,4 | 34,9 | 34,5 | 34,5 | 34,4 | 34,2 | 33,8 | 33,1 | 31,7 | 29,6 | 26,6 | 22,3 | | |
| 125-200/550 | 55 | 195 | 195 | ○ | 83,1 | 43,1 | | 43,0 | 43,0 | 42,7 | 42,1 | 40,9 | 39,0 | 36,2 | 32,6 | 28,4 | | |
| 125-200/750 | 75 | 215 | 215 | ○ | 84,4 | 55,1 | | 54,9 | 54,9 | 54,7 | 54,2 | 53,2 | 51,6 | 49,3 | 46,1 | 42,0 | 37,1 | |
| 125-200/900 | 90 | 225 | 225 | ● | 85,7 | 61,8 | | 61,6 | 61,5 | 61,2 | 60,7 | 59,8 | 58,3 | 56,1 | 53,0 | 49,1 | 44,5 | 39,3 |
| 125-315/1100 | 110 | 250 | 250 | ○ | 81,4 | 84,0 | | 83,8 | 83,2 | 81,6 | 78,7 | 74,3 | 68,2 | 60,4 | 51,0 | | | |
| 125-315/1320 | 132 | 265 | 265 | ○ | 81,1 | 96,8 | | 96,7 | 96,2 | 95,0 | 92,6 | 89,0 | 83,9 | 77,1 | 68,4 | | | |
| 125-315/1600 | 160 | 280 | 280 | ○ | 81,9 | 109,8 | | 109,8 | 109,5 | 108,6 | 106,9 | 104,0 | 99,7 | 93,8 | 86,1 | 76,4 | | |
| 125-315/2000 | 200 | 290 | 290 | ● | 82,9 | 118,9 | | 119,0 | 118,8 | 118,1 | 116,7 | 114,3 | 110,6 | 105,4 | 98,3 | 89,3 | 78,3 | |

Hydraulic performances in compliance with ISO 9906:2012 - Grade 3B (ex ISO 9906:1999 - Annex A)

Nsc-100-125_2p50-en_d_th

(1) STD = Cast iron/Stainless steel - B = Bronze (2) ● = Full impeller diameter - ○ = Trimmed impeller diameter (3) Hydraulic efficiency of pump.

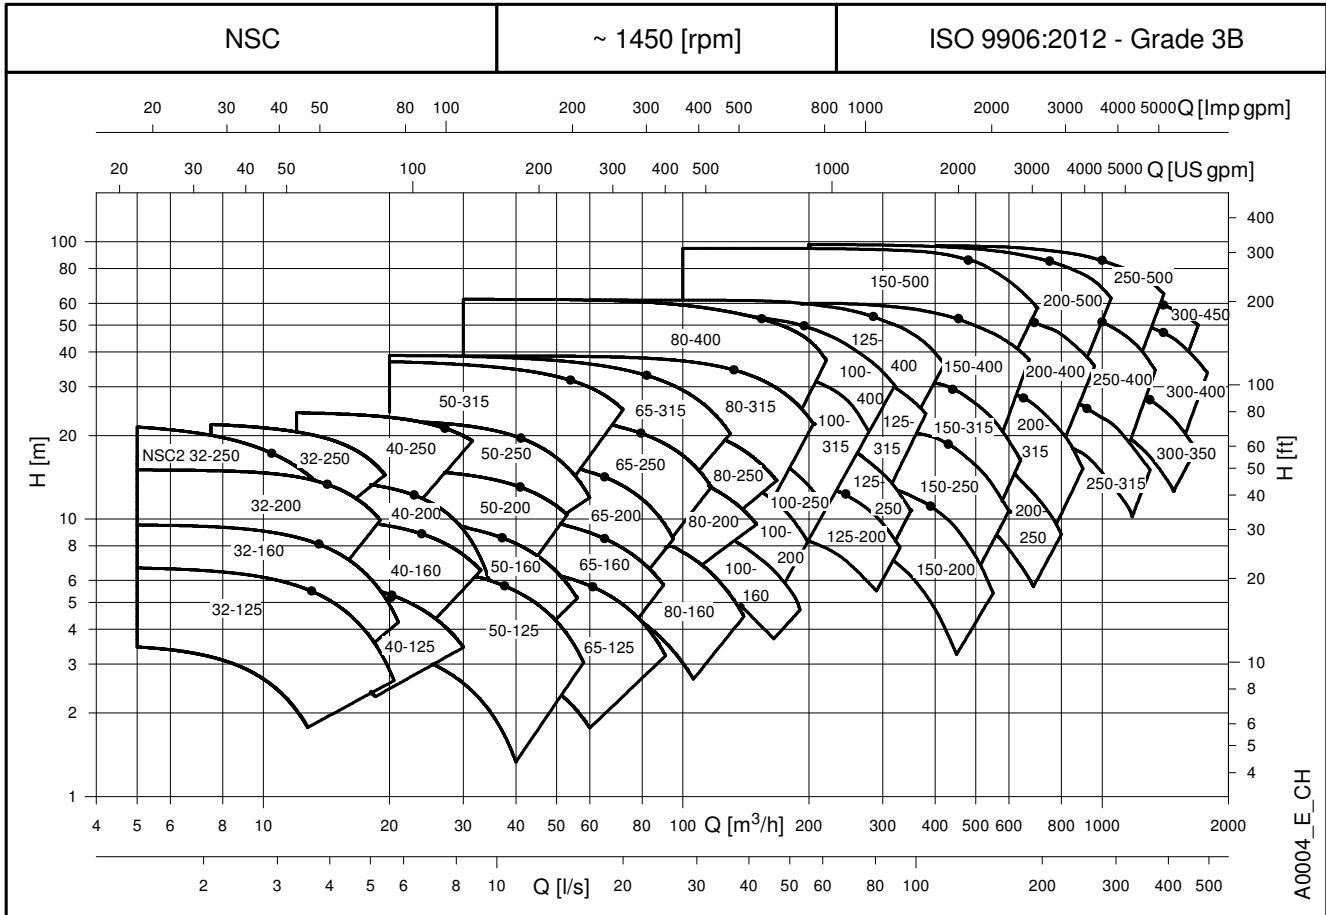e-NSC SERIES
HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 4 POLES


e-NSC 32, 40, 50 SERIES

HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 4 POLES

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | η _p % (3) | Q = DELIVERY | | | | | | | | | | | | | |
|---------------------------------------|-------------------|-----------------|----------|----------|-------------------------|---------------------|-----|------|------|------|------|------|------|------|------|------|------|-----|--|
| | | STD (1) | B (2) | ● (3) | | l/s 0 | 0,9 | 1,3 | 1,8 | 2,2 | 2,7 | 3,1 | 3,6 | 4,0 | 4,5 | 4,9 | 5,4 | 5,8 | |
| | | | | | | m ³ /h 0 | 3 | 5 | 6 | 8 | 10 | 11 | 13 | 14 | 16 | 18 | 19 | 21 | |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | | |
| 32-125/02B | 0,25 | 113 | - | ○ | 56,9 | 3,5 | 3,5 | 3,5 | 3,3 | 3,1 | 2,7 | 2,3 | | | | | | | |
| 32-125/02A | 0,25 | 123 | - | ○ | 61,1 | 4,3 | | 4,3 | 4,2 | 4,0 | 3,7 | 3,3 | 2,8 | 2,2 | | | | | |
| 32-125/02 | 0,25 | 133 | - | ○ | 63,4 | 5,3 | | 5,4 | 5,3 | 5,1 | 4,9 | 4,5 | 4,1 | 3,6 | 2,9 | | | | |
| 32-125/03 | 0,37 | 145 | - | ● | 64,5 | 6,7 | | | 6,6 | 6,4 | 6,2 | 5,9 | 5,5 | 5,1 | 4,5 | 3,8 | 3,1 | | |
| 32-160/02 | 0,25 | 137 | - | ○ | 58,5 | 5,5 | | 5,5 | 5,4 | 5,1 | 4,8 | 4,3 | 3,7 | 3,0 | | | | | |
| 32-160/03 | 0,37 | 150 | - | ○ | 62,1 | 7,0 | | 6,9 | 6,8 | 6,6 | 6,3 | 5,9 | 5,3 | 4,7 | 3,9 | | | | |
| 32-160/05A | 0,55 | 160,5 | - | ○ | 63,3 | 8,4 | | 8,4 | 8,4 | 8,2 | 8,0 | 7,6 | 7,1 | 6,5 | 5,8 | 5,0 | 4,0 | | |
| 32-160/05 | 0,55 | 171 | - | ● | 63,4 | 9,5 | | | 9,5 | 9,3 | 9,1 | 8,8 | 8,3 | 7,8 | 7,1 | 6,2 | 5,3 | 4,2 | |
| 32-200/05A | 0,55 | 158 | - | ○ | 54,3 | 7,9 | | 7,9 | 7,7 | 7,4 | 6,7 | 5,9 | 4,9 | | | | | | |
| 32-200/05 | 0,55 | 171 | - | ○ | 56,5 | 9,5 | | 9,4 | 9,3 | 9,0 | 8,5 | 7,7 | 6,8 | 5,7 | | | | | |
| 32-200/07 | 0,75 | 186 | - | ○ | 58,5 | 11,9 | | 11,9 | 11,8 | 11,6 | 11,3 | 10,8 | 10,0 | 9,1 | 7,9 | | | | |
| 32-200/11 | 1,1 | 205 | - | ● | 60,6 | 15,1 | | | 15,0 | 14,9 | 14,7 | 14,4 | 13,9 | 13,2 | 12,2 | 11,0 | | | |
| NSC2 32-250/11A | 1,10 | 177 | - | ○ | 47,3 | 18,7 | | 17,0 | 16,1 | 14,8 | 13,3 | 11,5 | 9,6 | | | | | | |
| NSC2 32-250/11 | 1,1 | 195 | - | ● | 50,0 | 23,3 | | 21,6 | 20,8 | 19,7 | 18,2 | 16,4 | 14,3 | 12,0 | | | | | |
| 32-250/11A | 1,1 | 214 | - | ○ | 44,4 | 14,5 | | | 14,1 | 13,7 | 13,1 | 12,2 | 11,1 | | | | | | |
| 32-250/15B | 1,5 | 214 | - | ○ | 44,4 | 14,5 | | | 14,1 | 13,7 | 13,1 | 12,2 | 11,1 | | | | | | |
| 32-250/11 | 1,1 | 226,5 | - | ○ | 45,7 | 16,3 | | | 15,9 | 15,5 | 15,0 | 14,2 | 13,2 | 11,9 | | | | | |
| 32-250/15A | 1,5 | 226,5 | - | ○ | 45,7 | 16,3 | | | 15,9 | 15,5 | 15,0 | 14,2 | 13,2 | 11,9 | | | | | |
| 32-250/15 | 1,5 | 239 | - | ○ | 46,1 | 18,7 | | | | 17,8 | 17,3 | 16,6 | 15,7 | 14,5 | 13,0 | | | | |
| 32-250/22 | 2,2 | 259 | - | ● | 46,7 | 22,6 | | | | 21,9 | 21,5 | 20,9 | 20,2 | 19,3 | 18,1 | 16,6 | 14,6 | | |

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | η _p % (3) | Q = DELIVERY | | | | | | | | | | | | | |
|---------------------------------------|-------------------|-----------------|----------|----------|-------------------------|---------------------|-----|------|------|------|------|------|------|------|------|------|------|-----|--|
| | | STD (1) | B (2) | ● (3) | | l/s 0 | 1,3 | 2,1 | 2,8 | 3,6 | 4,3 | 5,0 | 5,8 | 6,5 | 7,2 | 8,0 | 8,7 | 9,4 | |
| | | | | | | m ³ /h 0 | 5 | 7 | 10 | 13 | 15 | 18 | 21 | 23 | 26 | 29 | 31 | 34 | |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | | |
| 40-125/02A | 0,25 | 105 | - | ○ | 66,1 | 3,6 | 3,6 | 3,5 | 3,4 | 3,1 | 2,8 | 2,4 | | | | | | | |
| 40-125/02 | 0,25 | 118 | - | ○ | 70,5 | 4,6 | | 4,4 | 4,3 | 4,1 | 3,8 | 3,4 | 2,9 | | | | | | |
| 40-125/03 | 0,37 | 130 | - | ○ | 73,3 | 5,6 | | 5,5 | 5,4 | 5,3 | 5,0 | 4,7 | 4,3 | 3,8 | 3,2 | | | | |
| 40-125/05 | 0,55 | 135 | - | ● | 74,0 | 6,5 | | | 6,3 | 6,1 | 5,9 | 5,6 | 5,2 | 4,8 | 4,3 | 3,7 | | | |
| 40-160/03 | 0,37 | 127 | - | ○ | 66,6 | 5,2 | | 5,3 | 5,2 | 5,0 | 4,6 | 4,1 | 3,6 | | | | | | |
| 40-160/05 | 0,55 | 139 | - | ○ | 69,0 | 6,6 | | 6,6 | 6,6 | 6,4 | 6,2 | 5,8 | 5,3 | 4,7 | | | | | |
| 40-160/07 | 0,75 | 154 | - | ○ | 70,8 | 8,3 | | 8,4 | 8,4 | 8,4 | 8,2 | 7,9 | 7,6 | 7,1 | 6,4 | 5,7 | | | |
| 40-160/11 | 1,1 | 165 | - | ● | 71,1 | 10,1 | | | 10,1 | 10,0 | 9,9 | 9,6 | 9,3 | 8,9 | 8,4 | 7,8 | 7,0 | | |
| 40-200/07 | 0,75 | 165 | - | ○ | 59,5 | 9,0 | | 8,9 | 8,8 | 8,6 | 8,2 | 7,5 | 6,5 | 5,2 | | | | | |
| 40-200/11 | 1,1 | 179 | - | ○ | 60,6 | 10,9 | | 11,0 | 11,0 | 10,9 | 10,6 | 10,1 | 9,3 | 8,2 | 6,9 | | | | |
| 40-200/15A | 1,5 | 189 | - | ○ | 60,9 | 12,4 | | | 12,5 | 12,4 | 12,2 | 11,7 | 11,1 | 10,2 | 9,0 | 7,4 | | | |
| 40-200/15 | 1,5 | 199 | - | ● | 62,8 | 14,0 | | | 14,0 | 13,9 | 13,6 | 13,3 | 12,8 | 12,0 | 11,1 | 9,8 | 8,3 | 6,4 | |
| 40-250/11 | 1,1 | 199 | - | ○ | 57,9 | 13,5 | | | 13,3 | 12,9 | 12,4 | 11,6 | 10,6 | | | | | | |
| 40-250/15A | 1,5 | 199 | - | ○ | 57,9 | 13,5 | | | 13,3 | 12,9 | 12,4 | 11,6 | 10,6 | | | | | | |
| 40-250/15 | 1,5 | 210 | - | ○ | 58,8 | 15,1 | | | 14,9 | 14,7 | 14,3 | 13,6 | 12,7 | 11,6 | | | | | |
| 40-250/22A | 1,5 | 228 | - | ○ | 59,1 | 18,0 | | | 18,0 | 17,8 | 17,5 | 17,1 | 16,4 | 15,5 | 14,3 | | | | |
| 40-250/22 | 2,2 | 243 | - | ○ | 60,4 | 20,6 | | | | 20,5 | 20,3 | 19,9 | 19,4 | 18,6 | 17,6 | 16,4 | | | |
| 40-250/30 | 3 | 257,5 | - | ● | 63,9 | 24,4 | | | | 24,1 | 23,9 | 23,6 | 23,1 | 22,5 | 21,6 | 20,6 | 19,2 | | |

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | η _p % (3) | Q = DELIVERY | | | | | | | | | | | | | |
|---------------------------------------|-------------------|-----------------|----------|----------|-------------------------|---------------------|------|------|------|------|------|------|------|------|------|------|------|------|--|
| | | STD (1) | B (2) | ● (3) | | l/s 0 | 2,3 | 3,9 | 5,5 | 7,2 | 8,8 | 10,4 | 12,0 | 13,6 | 15,2 | 16,8 | 18,4 | 20,0 | |
| | | | | | | m ³ /h 0 | 8 | 14 | 20 | 26 | 32 | 37 | 43 | 49 | 55 | 60 | 66 | 72 | |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | | |
| 50-125/03 | 0,37 | 118 | - | ○ | 67,5 | 4,1 | | 3,7 | 3,4 | 3,0 | 2,4 | 1,7 | | | | | | | |
| 50-125/05 | 0,55 | 130 | - | ○ | 69,8 | 5,2 | | 4,8 | 4,5 | 4,1 | 3,5 | 2,8 | 2,0 | | | | | | |
| 50-125/07 | 0,75 | 144 | - | ○ | 71,0 | 6,7 | | 6,3 | 6,0 | 5,7 | 5,2 | 4,6 | 3,9 | 3,0 | | | | | |
| 50-125/11 | 1,1 | 148 | - | ● | 74,6 | 7,6 | | 7,2 | 7,0 | 6,7 | 6,3 | 5,8 | 5,2 | 4,4 | 3,6 | | | | |
| 50-160/07 | 0,75 | 144 | - | ○ | 69,9 | 6,8 | | 6,4 | 6,1 | 5,6 | 4,9 | 4,1 | | | | | | | |
| 50-160/11A | 1,1 | 159 | - | ○ | 70,4 | 8,4 | | 8,1 | 7,8 | 7,3 | 6,7 | 5,9 | 4,9 | | | | | | |
| 50-160/11 | 1,1 | 170 | - | ○ | 71,8 | 9,6 | | 9,3 | 9,0 | 8,6 | 8,0 | 7,3 | 6,4 | 5,4 | | | | | |
| 50-160/15 | 1,5 | 176 | - | ● | 72,3 | 10,8 | | 10,3 | 10,0 | 9,7 | 9,2 | 8,5 | 7,7 | 6,7 | 5,5 | | | | |
| 50-200/11 | 1,1 | 168 | - | ○ | 68,9 | 8,9 | | 9,1 | 9,0 | 8,7 | 8,0 | 6,9 | | | | | | | |
| 50-200/15A | 1,5 | 168 | - | ○ | 68,9 | 8,9 | | 9,1 | 9,0 | 8,7 | 8,0 | 6,9 | | | | | | | |
| 50-200/15 | 1,5 | 179 | - | ○ | 70,5 | 10,4 | | 10,6 | 10,6 | 10,3 | 9,7 | 8,7 | 7,4 | | | | | | |
| 50-200/22A | 2,2 | 197 | - | ○ | 72,0 | 13,1 | | 13,3 | 13,3 | 13,1 | 12,6 | 11,8 | 10,7 | 9,2 | | | | | |
| 50-200/22 | 2,2 | 209 | - | ● | 73,3 | 15,1 | | 15,1 | 15,1 | 14,8 | 14,4 | 13,7 | 12,7 | 11,4 | | | | | |
| 50-250/22A | 2,2 | 208 | - | ○ | 67,2 | 14,7 | | 14,6 | 14,3 | 13,6 | 12,6 | 11,1 | 9,0 | | | | | | |
| 50-250/22 | 2,2 | 220 | - | ○ | 68,3 | 16,6 | | 16,5 | 16,2 | 15,7 | 14,7 | 13,3 | 11,4 | | | | | | |
| 50-250/30 | 3 | 232 | - | ○ | 68,5 | 18,7 | | 18,6 | 18,3 | 17,8 | 16,9 | 15,7 | 13,9 | 11,6 | | | | | |
| 50-250/40 | 4 | 256 | - | ● | 68,6 | 22,8 | | | 22,6 | 22,2 | 21,6 | 20,5 | 19,0 | 17,1 | 14,6 | | | | |
| 50-315/40 | 4 | 265 | - | ○ | 60,0 | 22,6 | 22,5 | 22,2 | 21,7 | 21,0 | 20,2 | 19,2 | 17,9 | 16,1 | | | | | |
| 50-315/55 | 5,5 | 278 | - | ○ | 61,1 | 27,4 | | 27,0 | 26,6 | 25,9 | 25,1 | 24,1 | 23,0 | 21,7 | 19,8 | 17,0 | | | |
| 50-315/75 | 7,5 | 304 | - | ○ | 63,2 | 33,3 | | 33,1 | 32,8 | 32,2 | 31,4 | 30,4 | 29,4 | 28,3 | 27,0 | 25,2 | 22,5 | | |
| 50-315/110 | 11 | 322 | - | ● | 63,3 | 37,6 | | 37,3 | 37,0 | 36,5 | 35,9 | 35,1 | 34,1 | 32,9 | 31,5 | 29,7 | 27,5 | 24,8 | |

Hydraulic performances in compliance with ISO 9906:2012 - Grade 3B (ex ISO 9906:1999 - Annex A)

Nsc-32-40-50_4p50-en_d_th

(1) STD = Cast iron/Stainless steel - B = Bronze (2) ● = Full impeller diameter - ○ = Trimmed impeller diameter (3) Hydraulic efficiency of pump.

e-NSC 65, 80 SERIES

HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 4 POLES

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|------------------|-------------------|-----|------|------|------|------|------|------|------|------|------|------|------|
| | | STD (1) | B (2) | O (3) | η _p % | l/s | 3,3 | 6,3 | 9,3 | 12,2 | 15,2 | 18,2 | 21,2 | 24,2 | 27,2 | 30,1 | 33,1 | 36,1 |
| | | | | | | m ³ /h | 0 | 12 | 23 | 33 | 44 | 55 | 66 | 76 | 87 | 98 | 109 | 119 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 65-125/05 | 0,55 | 113 | 112 | ○ | 75,0 | 3,5 | | 3,4 | 3,1 | 2,7 | 2,1 | | | | | | | |
| 65-125/07 | 0,75 | 127 | 126 | ○ | 77,0 | 4,9 | | 4,7 | 4,4 | 3,9 | 3,2 | 2,4 | | | | | | |
| 65-125/11 | 1,1 | 137 | 136 | ○ | 78,3 | 5,8 | | 5,8 | 5,6 | 5,1 | 4,5 | 3,6 | 2,7 | | | | | |
| 65-125/15 | 1,5 | 148 | 146 | ● | 79,5 | 7,2 | | 7,1 | 6,9 | 6,5 | 6,0 | 5,4 | 4,6 | 3,6 | | | | |
| 65-160/11A | 1,1 | 145 | 144 | ○ | 77,1 | 6,4 | | 6,4 | 6,0 | 5,4 | 4,4 | 3,4 | | | | | | |
| 65-160/15B | 1,5 | 145 | 144 | ○ | 77,1 | 6,4 | | 6,4 | 6,0 | 5,4 | 4,4 | 3,4 | | | | | | |
| 65-160/11 | 1,1 | 151 | 152 | ○ | 78,0 | 7,2 | | 7,0 | 6,7 | 6,1 | 5,2 | 4,1 | | | | | | |
| 65-160/15A | 1,5 | 151 | 152 | ○ | 78,0 | 7,2 | | 7,0 | 6,7 | 6,1 | 5,2 | 4,1 | | | | | | |
| 65-160/15 | 1,5 | 159 | 160 | ○ | 79,6 | 8,2 | | 8,0 | 7,7 | 7,1 | 6,3 | 5,3 | | | | | | |
| 65-160/22A | 2,2 | 175 | 176 | ○ | 81,8 | 10,2 | | 10,1 | 9,9 | 9,4 | 8,8 | 7,9 | 6,8 | 5,6 | | | | |
| 65-160/22 | 2,2 | 180 | 180 | ● | 82,1 | 10,9 | | 10,8 | 10,5 | 10,0 | 9,3 | 8,4 | 7,4 | 6,1 | | | | |
| 65-200/15 | 1,5 | 165 | 162 | ○ | 73,1 | 8,9 | 8,9 | 8,7 | 8,2 | 7,2 | 5,7 | | | | | | | |
| 65-200/22A | 2,2 | 177 | 177 | ○ | 74,6 | 10,6 | | 10,5 | 10,0 | 9,2 | 7,8 | 6,0 | | | | | | |
| 65-200/22 | 2,2 | 189 | 189 | ○ | 76,9 | 12,1 | | 12,0 | 11,6 | 10,8 | 9,6 | 7,9 | 5,7 | | | | | |
| 65-200/30 | 3 | 199 | 199 | ○ | 78,0 | 13,6 | | 13,6 | 13,2 | 12,6 | 11,5 | 9,9 | 7,8 | | | | | |
| 65-200/40 | 4 | 220 | 218 | ● | 80,0 | 17,0 | | 16,9 | 16,7 | 16,1 | 15,3 | 14,1 | 12,5 | 10,3 | | | | |
| 65-250/30 | 3 | 195 | 192 | ○ | 73,9 | 12,6 | | 13,2 | 12,8 | 12,0 | 10,8 | 9,3 | 7,3 | | | | | |
| 65-250/40 | 4 | 215 | 213 | ○ | 74,3 | 15,7 | | 16,2 | 15,8 | 15,1 | 14,1 | 12,7 | 11,0 | 8,9 | | | | |
| 65-250/55A | 5,5 | 229 | 226 | ○ | 76,0 | 18,1 | | 19,0 | 18,7 | 18,1 | 17,3 | 16,1 | 14,6 | 12,8 | 10,5 | | | |
| 65-250/55 | 5,5 | 243 | 240 | ○ | 77,2 | 20,7 | | 21,3 | 21,2 | 20,7 | 20,0 | 18,9 | 17,5 | 15,8 | 13,7 | | | |
| 65-250/75 | 7,5 | 258 | 255 | ● | 77,6 | 24,3 | | 24,6 | 24,3 | 23,8 | 23,0 | 22,0 | 20,8 | 19,2 | 17,4 | 15,2 | | |
| 65-315/55 | 5,5 | 260 | 260 | ○ | 68,1 | 22,7 | | 22,4 | 21,7 | 20,8 | 19,6 | 18,0 | 15,7 | 12,7 | | | | |
| 65-315/75 | 7,5 | 285 | 285 | ○ | 70,4 | 27,6 | | 27,3 | 26,8 | 26,0 | 24,8 | 23,3 | 21,4 | 18,9 | 15,9 | | | |
| 65-315/110 | 11 | 315 | 315 | ○ | 71,4 | 34,7 | | 34,5 | 34,0 | 33,3 | 32,3 | 31,0 | 29,3 | 27,2 | 24,6 | 21,4 | 17,3 | |
| 65-315/150 | 15 | 334 | 334 | ● | 72,2 | 39,0 | | 38,9 | 38,5 | 37,8 | 36,8 | 35,5 | 33,9 | 32,0 | 29,7 | 27,0 | 23,8 | 20,3 |

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|------------------|-------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | STD (1) | B (2) | O (3) | η _p % | l/s | 5,6 | 10,7 | 15,7 | 20,8 | 25,8 | 30,9 | 35,9 | 40,9 | 46,0 | 51,0 | 56,1 | 61,1 |
| | | | | | | m ³ /h | 0 | 20 | 38 | 57 | 75 | 93 | 111 | 129 | 147 | 166 | 184 | 202 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 80-160/15 | 1,5 | 144 | 144 | ○ | 72,1 | 6,5 | | 6,2 | 5,5 | 4,5 | 3,5 | | | | | | | |
| 80-160/22A | 2,2 | 158 | 158 | ○ | 78,4 | 8,3 | | 7,9 | 7,3 | 6,5 | 5,4 | 4,2 | | | | | | |
| 80-160/22 | 2,2 | 168 | 168 | ○ | 79,0 | 9,3 | | 9,0 | 8,5 | 7,6 | 6,5 | 5,2 | 3,8 | | | | | |
| 80-160/30 | 3 | 177 | 177 | ● | 81,2 | 10,5 | | 10,2 | 9,8 | 9,0 | 8,0 | 6,7 | 5,3 | | | | | |
| 80-200/30 | 3 | 181 | 177 | ○ | 77,1 | 10,8 | | 10,6 | 10,1 | 9,3 | 8,2 | | | | | | | |
| 80-200/40 | 4 | 195 | 192 | ○ | 79,7 | 12,8 | | 12,7 | 12,4 | 11,6 | 10,4 | 8,9 | | | | | | |
| 80-200/55A | 5,5 | 208 | 204 | ○ | 82,0 | 15,0 | | 14,9 | 14,5 | 13,9 | 12,8 | 11,3 | | | | | | |
| 80-200/55 | 5,5 | 219 | 216 | ● | 82,5 | 16,9 | | 16,5 | 16,2 | 15,6 | 14,7 | 13,5 | 11,8 | | | | | |
| 80-250/55A | 5,5 | 214 | 211 | ○ | 80,0 | 16,4 | | 16,0 | 15,4 | 14,4 | 13,1 | 11,3 | 9,1 | 6,5 | | | | |
| 80-250/55 | 5,5 | 227 | 224 | ○ | 80,1 | 18,2 | | 18,2 | 17,6 | 16,6 | 15,3 | 13,5 | | | | | | |
| 80-250/75 | 7,5 | 241 | 238 | ○ | 80,8 | 21,0 | | 20,7 | 20,2 | 19,4 | 18,1 | 16,4 | 14,4 | | | | | |
| 80-250/110 | 11 | 259 | 256 | ● | 82,2 | 24,1 | | 23,9 | 23,7 | 23,2 | 22,2 | 20,8 | 19,0 | 16,7 | | | | |
| 80-315/110A | 11 | 262 | 262 | ○ | 75,8 | 23,1 | | 23,1 | 22,7 | 21,9 | 20,4 | 18,4 | 15,8 | 12,8 | 9,6 | | | |
| 80-315/110 | 11 | 280 | 280 | ○ | 76,0 | 26,6 | | 26,6 | 26,4 | 25,7 | 24,5 | 22,8 | 20,4 | 17,5 | | | | |
| 80-315/150 | 15 | 304 | 304 | ○ | 76,9 | 31,6 | | 31,7 | 31,6 | 31,2 | 30,3 | 28,9 | 26,8 | 24,3 | 21,2 | | | |
| 80-315/185 | 18,5 | 321 | 321 | ○ | 77,2 | 35,5 | | 35,6 | 35,5 | 35,2 | 34,4 | 33,2 | 31,4 | 29,1 | 26,2 | 22,7 | | |
| 80-315/220 | 22 | 334 | 334 | ● | 77,8 | 38,6 | | 38,7 | 38,6 | 38,3 | 37,6 | 36,4 | 34,8 | 32,7 | 30,0 | 26,7 | | |
| 80-400/185 | 18,5 | 338 | 338 | ○ | 69,9 | 39,1 | | 39,0 | 38,2 | 37,0 | 35,3 | 33,3 | 30,6 | 27,0 | 22,0 | 15,0 | 5,1 | |
| 80-400/220 | 22 | 356 | 356 | ○ | 71,3 | 43,8 | 44,0 | 43,8 | 43,2 | 42,0 | 40,4 | 38,4 | 36,1 | 33,1 | 29,1 | | | |
| 80-400/300 | 30 | 388 | 388 | ○ | 72,5 | 53,1 | | 52,8 | 52,6 | 51,7 | 50,2 | 48,3 | 46,1 | 43,7 | 40,8 | | | |
| 80-400/370 | 37 | 418 | 418 | ● | 73,8 | 62,6 | | 61,9 | 61,7 | 61,0 | 59,7 | 57,9 | 55,9 | 53,5 | 50,9 | 47,8 | | |

Hydraulic performances in compliance with ISO 9906:2012 - Grade 3B (ex ISO 9906:1999 - Annex A)

Nsc-65-80_4p50-en_d_th

(1) STD = Cast iron/Stainless steel - B = Bronze (2) ● = Full impeller diameter - ○ = Trimmed impeller diameter (3) Hydraulic efficiency of pump.

e-NSC 100-125-150 SERIES HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 4 POLES

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | | |
|---------------------------------------|-------------------|-----------------|-----|---|------|-------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | STD | B | ○ | ηp % | l/s | 0 | 5.6 | 12.6 | 19.7 | 26.8 | 33.8 | 40.9 | 48.0 | 55.1 | 62.1 | 69.2 | 76.3 | 83.3 |
| | | | | | | m ³ /h | 0 | 20 | 45 | 71 | 96 | 122 | 147 | 173 | 198 | 224 | 249 | 275 | 300 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | | |
| 100-160/22A | 2.2 | 144 | 144 | ○ | 75.9 | 5.9 | | 5.9 | 5.6 | 4.9 | 3.7 | | | | | | | | |
| 100-160/22 | 2.2 | 156 | 156 | ○ | 77.4 | 6.9 | | 6.9 | 6.6 | 6.0 | 4.8 | 3.5 | | | | | | | |
| 100-160/30 | 3 | 176 | 176 | ○ | 81.5 | 9.1 | | 9.0 | 8.8 | 8.1 | 7.0 | 5.6 | 4.0 | | | | | | |
| 100-160/40 | 4 | 190 | 190 | ● | 83.6 | 10.8 | | 10.6 | 10.4 | 9.8 | 8.9 | 7.6 | 6.0 | | | | | | |
| 100-200/40 | 4.0 | 197 | 197 | ○ | 82.6 | 12.2 | | 12.1 | 11.8 | 11.0 | 9.6 | 7.5 | 5.1 | | | | | | |
| 100-200/55 | 5.5 | 213 | 213 | ○ | 83.8 | 14.8 | | 14.6 | 14.5 | 13.8 | 12.6 | 10.7 | 8.4 | | | | | | |
| 100-200/75 | 7.5 | 227 | 227 | ● | 84.3 | 16.9 | | 16.7 | 16.5 | 15.9 | 14.8 | 13.1 | 11.0 | 8.4 | | | | | |
| 100-250/55 | 5.5 | 213 | 213 | ○ | 80.6 | 14.1 | | 14.1 | 13.8 | 13.1 | 11.9 | 10.1 | 8.0 | | | | | | |
| 100-250/75 | 7.5 | 237 | 237 | ○ | 83.1 | 17.8 | | 17.9 | 17.7 | 17.2 | 16.2 | 14.6 | 12.5 | 10.1 | | | | | |
| 100-250/110 | 11 | 259 | 259 | ● | 84.1 | 21.9 | | 21.9 | 21.7 | 21.1 | 20.0 | 18.4 | 16.3 | 13.8 | | | | | |
| 100-315/110 | 11 | 260 | 260 | ○ | 78.9 | 23.5 | 23.5 | 23.4 | 23.1 | 22.4 | 21.1 | 19.2 | 16.5 | 12.6 | | | | | |
| 100-315/150 | 15 | 284 | 284 | ○ | 79.5 | 28.0 | | 28.0 | 27.8 | 27.2 | 26.0 | 24.4 | 22.4 | 19.5 | | | | | |
| 100-315/185 | 18.5 | 298 | 298 | ○ | 79.9 | 31.1 | | 31.0 | 30.9 | 30.3 | 29.3 | 27.8 | 26.1 | 23.8 | 20.4 | | | | |
| 100-315/220 | 22 | 312 | 312 | ○ | 80.6 | 34.3 | | 34.2 | 34.1 | 33.7 | 32.8 | 31.4 | 29.6 | 27.6 | 25.0 | | | | |
| 100-315/300 | 30 | 334 | 334 | ● | 80.8 | 40.2 | | 40.1 | 40.1 | 39.7 | 38.8 | 37.6 | 36.0 | 34.0 | 31.5 | 28.2 | | | |
| 100-400/300 | 30 | 375 | 375 | ○ | 76.8 | 47.4 | | 46.5 | 45.8 | 44.9 | 43.7 | 42.1 | 40.0 | 37.4 | 34.3 | 30.6 | | | |
| 100-400/370 | 37 | 397 | 397 | ○ | 77.1 | 54.4 | | 53.3 | 52.5 | 51.6 | 50.4 | 48.9 | 47.1 | 44.8 | 42.0 | 38.6 | 34.7 | | |
| 100-400/450 | 45 | 420 | 420 | ● | 76.9 | 61.3 | | 60.0 | 59.4 | 58.6 | 57.3 | 55.7 | 53.8 | 51.6 | 49.0 | 45.8 | 42.0 | 37.3 | |

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | | |
|---------------------------------------|-------------------|-----------------|-----|---|------|-------------------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|
| | | STD | B | ○ | ηp % | l/s | 0 | 11.9 | 21.4 | 30.9 | 40.5 | 50.0 | 59.5 | 69.0 | 78.6 | 88.1 | 97.6 | 107.1 | 116.7 |
| | | | | | | m ³ /h | 0 | 43 | 77 | 111 | 146 | 180 | 214 | 249 | 283 | 317 | 351 | 386 | 420 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | | |
| 125-200/55 | 5.5 | 179 | 179 | ○ | 80.9 | 8.6 | | 8.4 | 8.4 | 8.3 | 8.0 | 7.2 | 6.0 | | | | | | |
| 125-200/75 | 7.5 | 204 | 204 | ○ | 83.5 | 11.9 | | 11.8 | 11.8 | 11.6 | 11.2 | 10.3 | 9.0 | 7.5 | | | | | |
| 125-200/110 | 11 | 225 | 225 | ● | 85.4 | 15.0 | | 14.9 | 14.9 | 14.8 | 14.4 | 13.7 | 12.6 | 11.1 | 9.3 | | | | |
| 125-250/75 | 7.5 | 210 | 210 | ○ | 84.5 | 13.6 | 13.5 | 13.4 | 13.3 | 12.9 | 12.1 | 10.6 | 8.6 | 6.3 | | | | | |
| 125-250/110 | 11 | 235 | 235 | ○ | 86.3 | 17.5 | | 17.4 | 17.4 | 17.2 | 16.6 | 15.3 | 13.5 | 11.3 | 9.2 | | | | |
| 125-250/150 | 15 | 259 | 259 | ● | 88.3 | 22.0 | | 21.7 | 21.7 | 21.5 | 21.0 | 20.0 | 18.5 | 16.5 | 14.1 | 11.6 | | | |
| 125-315/185 | 18.5 | 277 | 277 | ○ | 83.7 | 25.6 | | 25.7 | 25.6 | 25.3 | 24.4 | 22.8 | 20.1 | 16.4 | 11.9 | 7.3 | | | |
| 125-315/220 | 22 | 290 | 290 | ○ | 84.3 | 28.3 | | 28.6 | 28.5 | 28.2 | 27.5 | 26.1 | 23.8 | 20.7 | 16.6 | | | | |
| 125-315/300 | 30 | 315 | 315 | ○ | 85.4 | 34.8 | | 35.1 | 35.0 | 34.8 | 34.1 | 33.0 | 31.4 | 29.1 | 26.0 | 22.1 | | | |
| 125-315/370 | 37 | 334 | 334 | ● | 86.4 | 39.6 | | 39.8 | 39.9 | 39.7 | 39.2 | 38.2 | 36.8 | 34.8 | 32.1 | 28.7 | 24.6 | | |
| 125-400/370 | 37 | 353 | 353 | ○ | 78.0 | 43.4 | | 43.9 | 43.8 | 43.2 | 41.9 | 39.9 | 37.0 | 33.0 | 28.0 | | | | |
| 125-400/450 | 45 | 374 | 374 | ○ | 78.8 | 48.7 | | 49.4 | 49.6 | 49.3 | 48.3 | 46.4 | 43.7 | 40.0 | 35.4 | 30.0 | | | |
| 125-400/550 | 55 | 394 | 394 | ○ | 79.1 | 54.4 | | 55.6 | 55.8 | 55.5 | 54.6 | 53.0 | 50.7 | 47.6 | 43.6 | 38.7 | | | |
| 125-400/750 | 75 | 422 | 422 | ● | 79.9 | 63.4 | | 64.8 | 64.7 | 64.2 | 63.3 | 61.8 | 59.8 | 57.1 | 53.8 | 49.8 | 45.0 | 39.3 | |

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | | |
|---------------------------------------|-------------------|-----------------|-----|---|------|-------------------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|
| | | STD | B | ○ | ηp % | l/s | 0 | 16.7 | 33.8 | 51.0 | 68.2 | 85.4 | 102.5 | 119.7 | 136.9 | 154.0 | 171.2 | 188.4 | 205.6 |
| | | | | | | m ³ /h | 0 | 60 | 122 | 184 | 245 | 307 | 369 | 431 | 493 | 555 | 616 | 678 | 740 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | | |
| 150-200/110A | 11 | 200 | 200 | ○ | 78.8 | 11.8 | | 11.3 | 10.5 | 9.4 | 8.3 | 7.0 | 5.4 | | | | | | |
| 150-200/110 | 11 | 217 | 217 | ○ | 80.7 | 14.0 | | 13.4 | 12.5 | 11.4 | 10.1 | 8.7 | 7.0 | 4.9 | | | | | |
| 150-200/150A | 15 | 227 | 227 | ○ | 82.0 | 15.2 | | 14.5 | 13.8 | 12.9 | 11.7 | 10.2 | 8.4 | 6.4 | | | | | |
| 150-200/150 | 15 | 237 | 237 | ● | 83.9 | 16.3 | | 15.6 | 15.1 | 14.4 | 13.4 | 12.0 | 10.3 | 8.2 | | | | | |
| 150-250/150 | 15 | 238 | 238 | ○ | 80.3 | 17.2 | 17.0 | 16.7 | 16.1 | 15.1 | 13.7 | 11.6 | 9.1 | | | | | | |
| 150-250/185 | 18.5 | 253 | 253 | ○ | 82.7 | 19.8 | | 19.1 | 18.7 | 17.9 | 16.6 | 14.8 | 12.4 | 9.5 | | | | | |
| 150-250/220 | 22 | 265 | 265 | ○ | 84.6 | 22.1 | | 21.4 | 21.0 | 20.4 | 19.3 | 17.6 | 15.4 | 12.6 | | | | | |
| 150-250/300 | 30 | 282 | 282 | ● | 86.2 | 26.4 | | 25.3 | 24.7 | 23.9 | 22.9 | 21.5 | 19.6 | 17.3 | 14.4 | | | | |
| 150-315/300 | 30 | 291 | 291 | ○ | 84.2 | 27.7 | | 27.7 | 27.6 | 27.0 | 25.7 | 23.5 | 20.4 | 16.5 | | | | | |
| 150-315/370 | 37 | 310 | 310 | ○ | 85.1 | 31.9 | | 31.8 | 31.6 | 31.1 | 30.0 | 28.1 | 25.3 | 21.5 | 17.1 | | | | |
| 150-315/450 | 45 | 330 | 330 | ● | 86.3 | 36.6 | | 36.2 | 36.1 | 35.7 | 34.7 | 32.9 | 30.4 | 27.2 | 23.2 | | | | |
| 150-400/450 | 45 | 327 | 327 | ○ | 81.8 | 36.7 | | 36.9 | 36.6 | 35.6 | 34.0 | 31.7 | 28.6 | 24.6 | | | | | |
| 150-400/550 | 55 | 346 | 346 | ○ | 84.4 | 41.2 | | 41.6 | 41.5 | 40.9 | 39.5 | 37.5 | 34.6 | 30.9 | 26.3 | | | | |
| 150-400/750 | 75 | 377 | 377 | ○ | 84.9 | 50.3 | | 50.8 | 50.9 | 50.4 | 49.1 | 47.0 | 44.4 | 41.3 | 37.7 | 33.3 | | | |
| 150-400/900 | 90 | 398 | 398 | ○ | 85.3 | 56.5 | | 56.9 | 57.0 | 56.5 | 55.5 | 53.7 | 51.4 | 48.5 | 45.1 | 41.0 | | | |
| 150-400/1100 | 110 | 423 | 423 | ● | 85.5 | 63.9 | | 64.4 | 64.3 | 63.9 | 63.0 | 61.5 | 59.4 | 56.6 | 53.2 | 49.1 | 44.4 | | |
| 150-500/900 | 90 | 420 | 420 | ○ | 75.1 | 60.9 | | 61.6 | 61.8 | 61.1 | 59.0 | 55.2 | 49.6 | 42.6 | 34.5 | | | | |
| 150-500/1100 | 110 | 443 | 443 | ○ | 75.4 | 68.5 | | 68.9 | 69.3 | 69.0 | 67.5 | 64.4 | 59.5 | 52.7 | 44.6 | 36.1 | | | |
| 150-500/1320 | 132 | 467 | 467 | ○ | 76.5 | 76.9 | | 77.6 | 78.1 | 78.0 | 76.9 | 74.3 | 70.1 | 64.0 | 56.3 | 47.3 | | | |
| 150-500/1600 | 160 | 495 | 495 | ○ | 77.9 | 87.0 | | 87.9 | 88.4 | 88.5 | 87.8 | 86.0 | 82.7 | 77.6 | 70.7 | 62.1 | 52.6 | | |
| 150-500/2000 | 200 | 516 | 516 | ● | 78.6 | 95.1 | | 95.9 | 96.5 | 96.7 | 96.1 | 94.4 | 91.4 | 86.7 | 80.4 | 72.6 | 63.5 | 53.7 | |

Hydraulic performances in compliance with ISO 9906:2012 - Grade 3B (ex ISO 9906:1999 - Annex A)

Nsc-100-150_4p50-en_c_th

(1) STD = Cast iron/Stainless steel - B = Bronze (2) ● = Full impeller diameter - ○ = Trimmed impeller diameter (3) Hydraulic efficiency of pump.

e-NSC 200-250-300 SERIES

HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 4 POLES

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|-------------------------|-----------------------------|-------------|-------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|---------------|
| | | STD (1) | B (2) | ● (3) | η _p % (3) | Vs 0 m ³ /h 0 | 38,1 137 | 62,4 225 | 86,7 312 | 111,0 400 | 135,3 487 | 159,6 575 | 184,0 662 | 208,3 750 | 232,6 837 | 256,9 925 | 281,2 1012 | 305,6 1100 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 200-250/185 | 18,5 | 228 | 228 | ○ | 78,6 | 15,7 | 15,3 | 14,8 | 13,7 | 12,2 | 10,6 | 8,9 | 6,8 | | | | | |
| 200-250/220 | 22 | 245 | 245 | ○ | 81,6 | 18,5 | | 17,2 | 16,2 | 14,8 | 13,1 | 11,1 | 8,7 | | | | | |
| 200-250/300A | 30 | 260 | 260 | ○ | 83,9 | 21,2 | | 19,7 | 18,7 | 17,4 | 15,8 | 13,7 | 11,2 | 8,4 | | | | |
| 200-250/300 | 30 | 271 | 271 | ● | 85,0 | 23,1 | | 21,5 | 20,5 | 19,4 | 17,9 | 16,0 | 13,6 | 10,8 | | | | |
| 200-315/300 | 30 | 268 | 268 | ○ | 80,7 | 22,1 | 21,7 | 21,3 | 20,7 | 19,6 | 17,7 | 14,9 | 11,3 | | | | | |
| 200-315/450 | 37 | 287 | 287 | ○ | 82,9 | 25,3 | | 24,6 | 24,2 | 23,3 | 21,7 | 19,3 | 15,9 | 11,8 | | | | |
| 200-315/370 | 45 | 306 | 306 | ○ | 84,8 | 29,0 | | 28,3 | 28,1 | 27,4 | 26,1 | 23,9 | 20,8 | 16,8 | 12,3 | | | |
| 200-315/550 | 55 | 328 | 328 | ○ | 86,1 | 34,1 | | 33,2 | 32,8 | 32,1 | 30,9 | 28,8 | 26,0 | 22,2 | 17,8 | | | |
| 200-315/750 | 75 | 333 | 333 | ● | 86,3 | 35,1 | | 34,3 | 34,0 | 33,3 | 32,0 | 29,9 | 27,1 | 23,4 | 19,1 | | | |
| 200-400/750A | 75 | 328 | 328 | ○ | 83,4 | 37,2 | | 37,0 | 36,7 | 35,7 | 33,8 | 31,0 | 27,0 | 22,0 | | | | |
| 200-400/750 | 75 | 342 | 342 | ○ | 83,5 | 41,0 | | 40,6 | 40,3 | 39,4 | 37,7 | 35,0 | 31,3 | 26,5 | | | | |
| 200-400/900 | 90 | 362 | 362 | ○ | 84,2 | 46,5 | | 46,0 | 45,7 | 44,9 | 43,4 | 41,1 | 37,7 | 33,3 | 27,9 | | | |
| 200-400/1100 | 110 | 383 | 383 | ○ | 85,4 | 52,4 | | 52,2 | 51,9 | 51,2 | 50,0 | 48,0 | 45,1 | 41,2 | 36,2 | | | |
| 200-400/1320 | 132 | 409 | 409 | ● | 85,5 | 60,1 | | 59,8 | 59,6 | 59,0 | 57,9 | 56,1 | 53,5 | 50,0 | 45,4 | 39,6 | | |
| 200-500/1320 | 132 | 425 | 425 | ○ | 80,5 | 64,3 | | 64,4 | 63,7 | 62,5 | 60,2 | 56,4 | 50,8 | 43,3 | 34,2 | | | |
| 200-500/1600 | 160 | 450 | 450 | ○ | 81,2 | 72,8 | | 72,7 | 72,2 | 71,0 | 69,0 | 65,8 | 61,2 | 55,0 | 46,9 | | | |
| 200-500/2000 | 200 | 480 | 480 | ○ | 82,6 | 83,8 | | 83,6 | 83,1 | 82,1 | 80,3 | 77,7 | 74,0 | 69,1 | 62,5 | 53,8 | | |
| 200-500/2500 | 250 | 508 | 508 | ○ | 83,0 | 94,3 | | 93,8 | 93,3 | 92,3 | 90,7 | 88,3 | 85,1 | 81,0 | 75,8 | 69,2 | 60,7 | |
| 200-500/3150 | 315 | 523 | 523 | ● | 83,3 | 100,3 | | 99,6 | 99,1 | 98,1 | 96,4 | 94,1 | 91,0 | 87,2 | 82,5 | 76,6 | 69,1 | 59,6 |

| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|-------------------------|-----------------------------|-------------|-------------|--------------|--------------|--------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|
| | | STD (1) | B (2) | ○ (3) | η _p % (3) | Vs 0 m ³ /h 0 | 61,9 223 | 94,2 339 | 126,4 455 | 158,7 571 | 190,9 687 | 223,2 803 | 255,4 920 | 287,7 1036 | 319,9 1152 | 352,2 1268 | 384,4 1384 | 416,7 1500 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 250-315/370 | 37 | 255 | 255 | ○ | 81,1 | 19,4 | 19,2 | 18,5 | 17,7 | 16,7 | 15,3 | 13,3 | 10,4 | | | | | |
| 250-315/450 | 45 | 273 | 273 | ○ | 83,1 | 22,7 | | 21,8 | 21,0 | 20,1 | 18,9 | 16,9 | 13,8 | 10,0 | | | | |
| 250-315/550 | 55 | 290 | 290 | ○ | 84,5 | 26,1 | | 24,8 | 24,3 | 23,6 | 22,6 | 20,7 | 18,0 | 14,5 | | | | |
| 250-315/750 | 75 | 316 | 316 | ● | 85,7 | 31,5 | | 29,9 | 29,5 | 29,1 | 28,4 | 27,1 | 25,0 | 22,1 | 18,6 | | | |
| 250-400/750 | 75 | 325 | 325 | ○ | 82,0 | 35,4 | | 35,2 | 34,3 | 32,5 | 29,9 | 26,3 | 21,8 | 16,4 | | | | |
| 250-400/900 | 90 | 344 | 344 | ○ | 82,9 | 39,8 | | 39,8 | 39,2 | 37,9 | 35,6 | 32,3 | 27,9 | 22,5 | | | | |
| 250-400/1100 | 110 | 365 | 365 | ○ | 84,0 | 45,1 | | 45,0 | 44,8 | 43,8 | 42,0 | 39,1 | 35,1 | 30,0 | 23,9 | | | |
| 250-400/1320 | 132 | 386 | 386 | ○ | 85,1 | 50,8 | | 50,6 | 50,4 | 49,7 | 48,1 | 45,6 | 42,0 | 37,3 | 31,5 | | | |
| 250-400/1600 | 160 | 407 | 407 | ○ | 85,8 | 56,9 | | 56,4 | 56,2 | 55,6 | 54,2 | 52,0 | 48,9 | 44,7 | 39,4 | 33,0 | | |
| 250-400/2000 | 200 | 425 | 425 | ● | 86,5 | 62,7 | | 62,0 | 61,6 | 60,9 | 59,6 | 57,6 | 54,9 | 51,2 | 46,5 | 40,6 | | |
| 250-500/1600 | 160 | 420 | 420 | ○ | 82,3 | 61,1 | | 61,6 | 60,8 | 59,2 | 56,4 | 52,2 | 46,3 | 38,1 | | | | |
| 250-500/2000 | 200 | 448 | 448 | ○ | 84,5 | 70,3 | | 71,0 | 70,7 | 69,6 | 67,6 | 64,1 | 59,0 | 51,8 | 42,3 | | | |
| 250-500/2500 | 250 | 477 | 477 | ○ | 84,6 | 80,5 | | 81,0 | 80,6 | 79,7 | 78,2 | 75,6 | 71,8 | 66,3 | 58,8 | 48,9 | | |
| 250-500/3150 | 315 | 508 | 508 | ○ | 84,9 | 92,6 | | 93,3 | 92,7 | 91,6 | 90,0 | 87,6 | 84,5 | 80,3 | 74,8 | 67,8 | 58,9 | |
| 250-500/3550 | 355 | 523 | 523 | ● | 85,0 | 98,3 | | 99,0 | 98,4 | 97,3 | 95,7 | 93,6 | 90,6 | 86,8 | 81,9 | 75,7 | 68,0 | 58,5 |




| PUMP TYPE | P _N kW | Ø Impeller (mm) | | | | Q = DELIVERY | | | | | | | | | | | | |
|---------------------------------------|----------------------|-----------------|----------|----------|-------------------------|-----------------------------|-------------|--------------|--------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | | STD (1) | B (2) | ○ (3) | η _p % (3) | Vs 0 m ³ /h 0 | 92,8 334 | 132,3 476 | 171,9 619 | 211,4 761 | 251,0 903 | 290,5 1046 | 330,1 1188 | 369,6 1331 | 409,1 1473 | 448,7 1615 | 488,2 1758 | 527,8 1900 |
| H = TOTAL HEAD METRES COLUMN OF WATER | | | | | | | | | | | | | | | | | | |
| 300-350/750A | 75 | 285 | 285 | ○ | 79,0 | 24,4 | | 22,4 | 21,4 | 20,0 | 18,3 | 16,3 | 13,9 | 11,3 | 8,2 | | | |
| 300-350/750 | 75 | 315 | 315 | ○ | 82,2 | 30,5 | | 28,1 | 26,8 | 25,3 | 23,4 | 21,2 | 18,7 | 15,9 | 12,7 | 9,1 | | |
| 300-350/900 | 90 | 332 | 332 | ○ | 83,2 | 34,7 | | 32,0 | 30,7 | 29,1 | 27,3 | 25,2 | 22,7 | 19,9 | 16,8 | 13,3 | | |
| 300-350/1100 | 110 | 354 | 354 | ● | 85,8 | 39,7 | | 37,1 | 36,0 | 34,6 | 32,9 | 30,9 | 28,5 | 25,8 | 22,7 | 19,2 | 15,4 | |
| 300-400/1100 | 110 | 346 | 346 | ○ | 88,2 | 36,2 | | 36,3 | 35,9 | 34,9 | 33,2 | 30,8 | 27,6 | 23,7 | 19,1 | | | |
| 300-400/1320 | 132 | 367 | 367 | ○ | 87,5 | 41,9 | | 41,4 | 41,0 | 40,2 | 38,8 | 36,6 | 33,6 | 29,7 | 25,0 | 19,7 | | |
| 300-400/1600 | 160 | 390 | 390 | ○ | 86,0 | 48,0 | | 47,2 | 46,9 | 46,3 | 45,3 | 43,6 | 41,0 | 37,4 | 32,8 | 27,4 | 21,5 | |
| 300-400/2000 | 200 | 416 | 416 | ○ | 84,2 | 56,2 | | 55,0 | 54,7 | 54,2 | 53,2 | 51,7 | 49,5 | 46,5 | 42,6 | 37,8 | 32,1 | |
| 300-400/2500 | 250 | 425 | 425 | ● | 82,9 | 59,3 | | 57,9 | 57,5 | 56,9 | 56,0 | 54,5 | 52,5 | 49,7 | 46,1 | 41,6 | 36,0 | 29,4 |
| 300-450/1600 | 160 | 404 | 404 | ○ | 86,6 | 52,5 | 53,1 | 52,5 | 51,4 | 49,8 | 47,6 | 44,8 | 41,5 | 37,5 | 32,9 | | | |
| 300-450/2000 | 200 | 430 | 430 | ○ | 88,0 | 60,7 | | 60,2 | 59,4 | 58,1 | 56,3 | 53,8 | 50,7 | 46,9 | 42,3 | 36,9 | | |
| 300-450/2500 | 250 | 456 | 456 | ○ | 88,1 | 69,1 | | 69,0 | 68,0 | 66,7 | 65,0 | 62,9 | 60,3 | 57,0 | 53,1 | 48,1 | | |
| 300-450/3150 | 315 | 470 | 470 | ● | 89,0 | 74,9 | | 73,5 | 72,8 | 71,6 | 70,0 | 67,9 | 65,4 | 62,4 | 58,8 | 54,5 | 49,3 | |

Hydraulic performances in compliance with ISO 9906:2012 - Grade 3B (ex ISO 9906:1999 - Annex A)

Nsc-200-300_4p50-en_c_th

(1) STD = Cast iron/Stainless steel - B = Bronze (2) ● = Full impeller diameter - ○ = Trimmed impeller diameter (3) Hydraulic efficiency of pump.


e-NSC SERIES IDENTIFICATION OF GRAPH

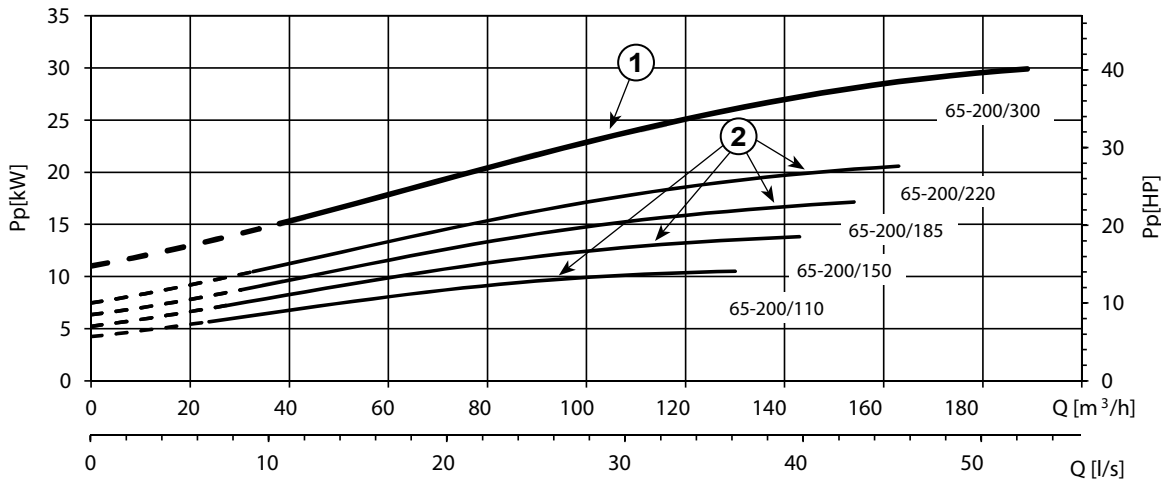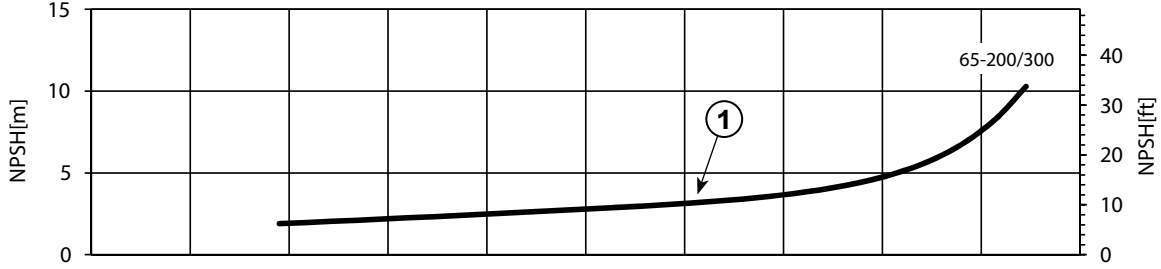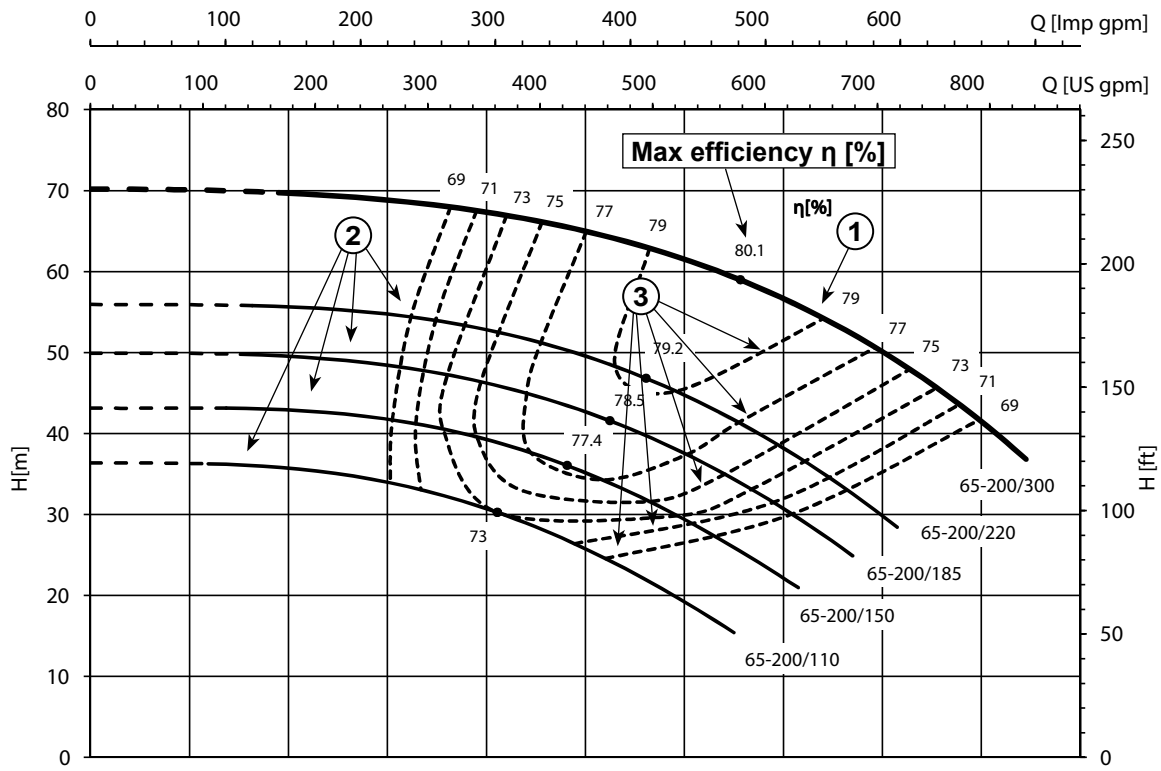

| REF | TYPE | DESCRIPTION |
|-----|------|---|
| ① | | Full Diameter impeller operating range |
| ② | | Trimmed diameter impeller operating range |
| ③ | | Isoefficiency curves |

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

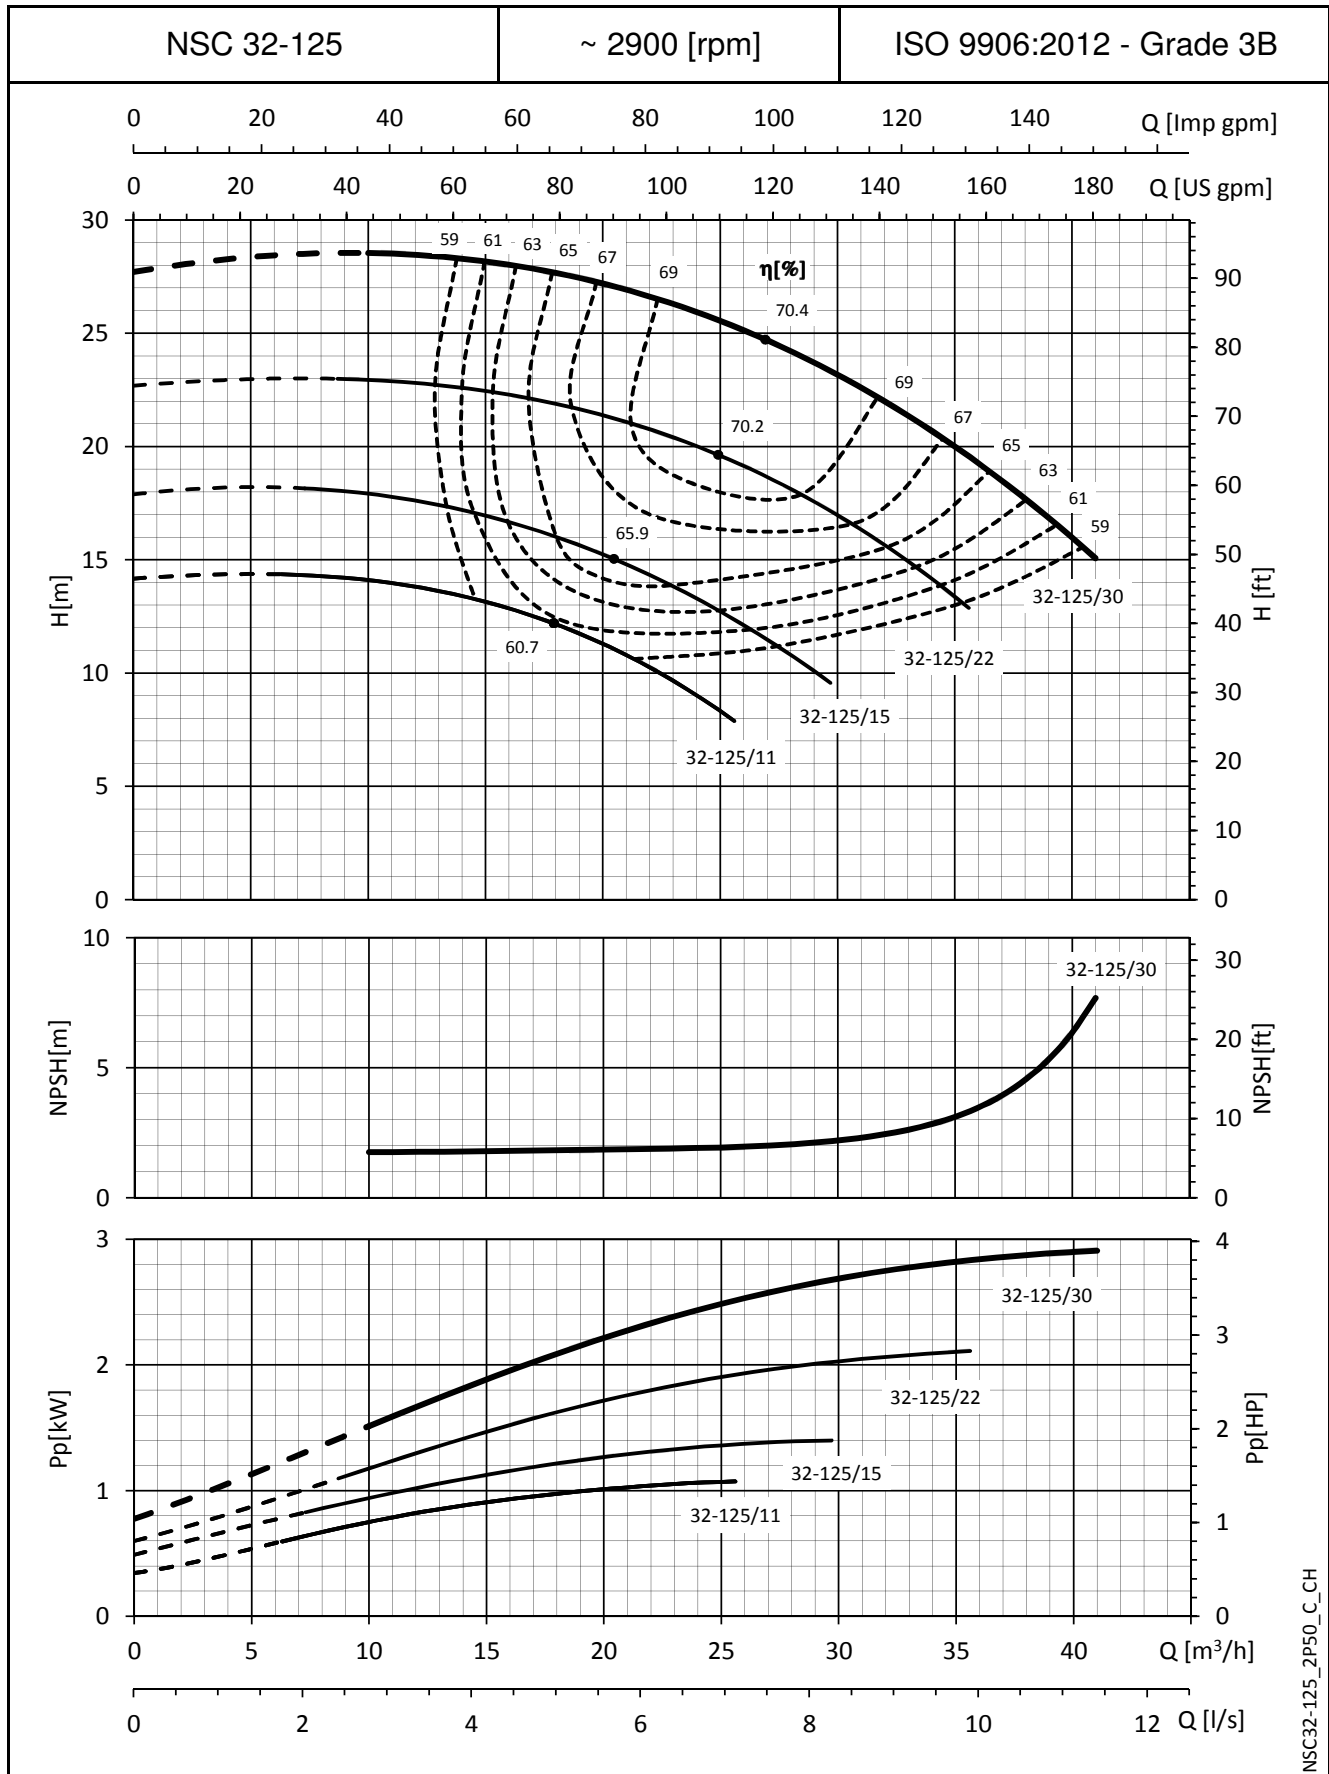


NSC32-125_2P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

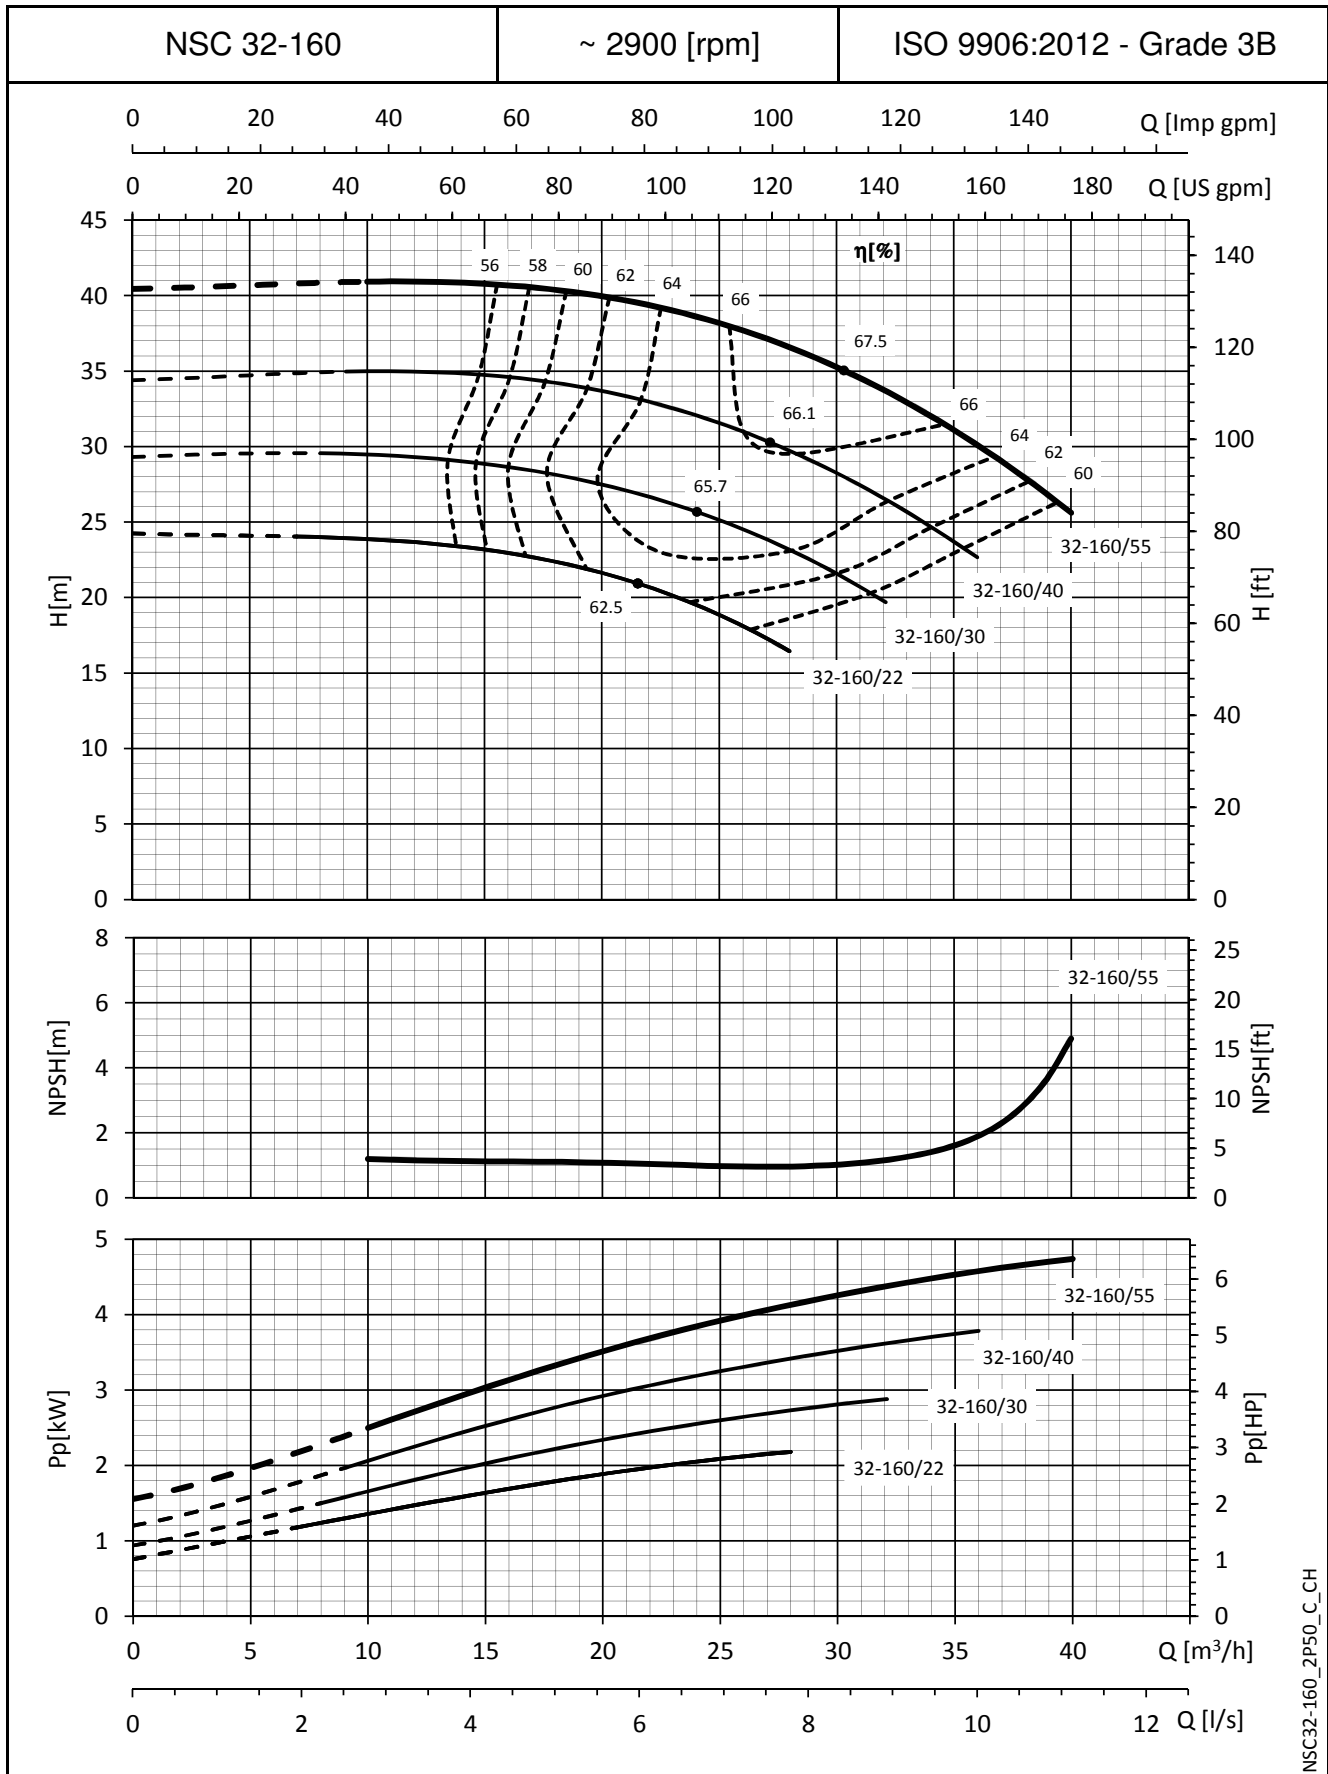


NSC32-160_2P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

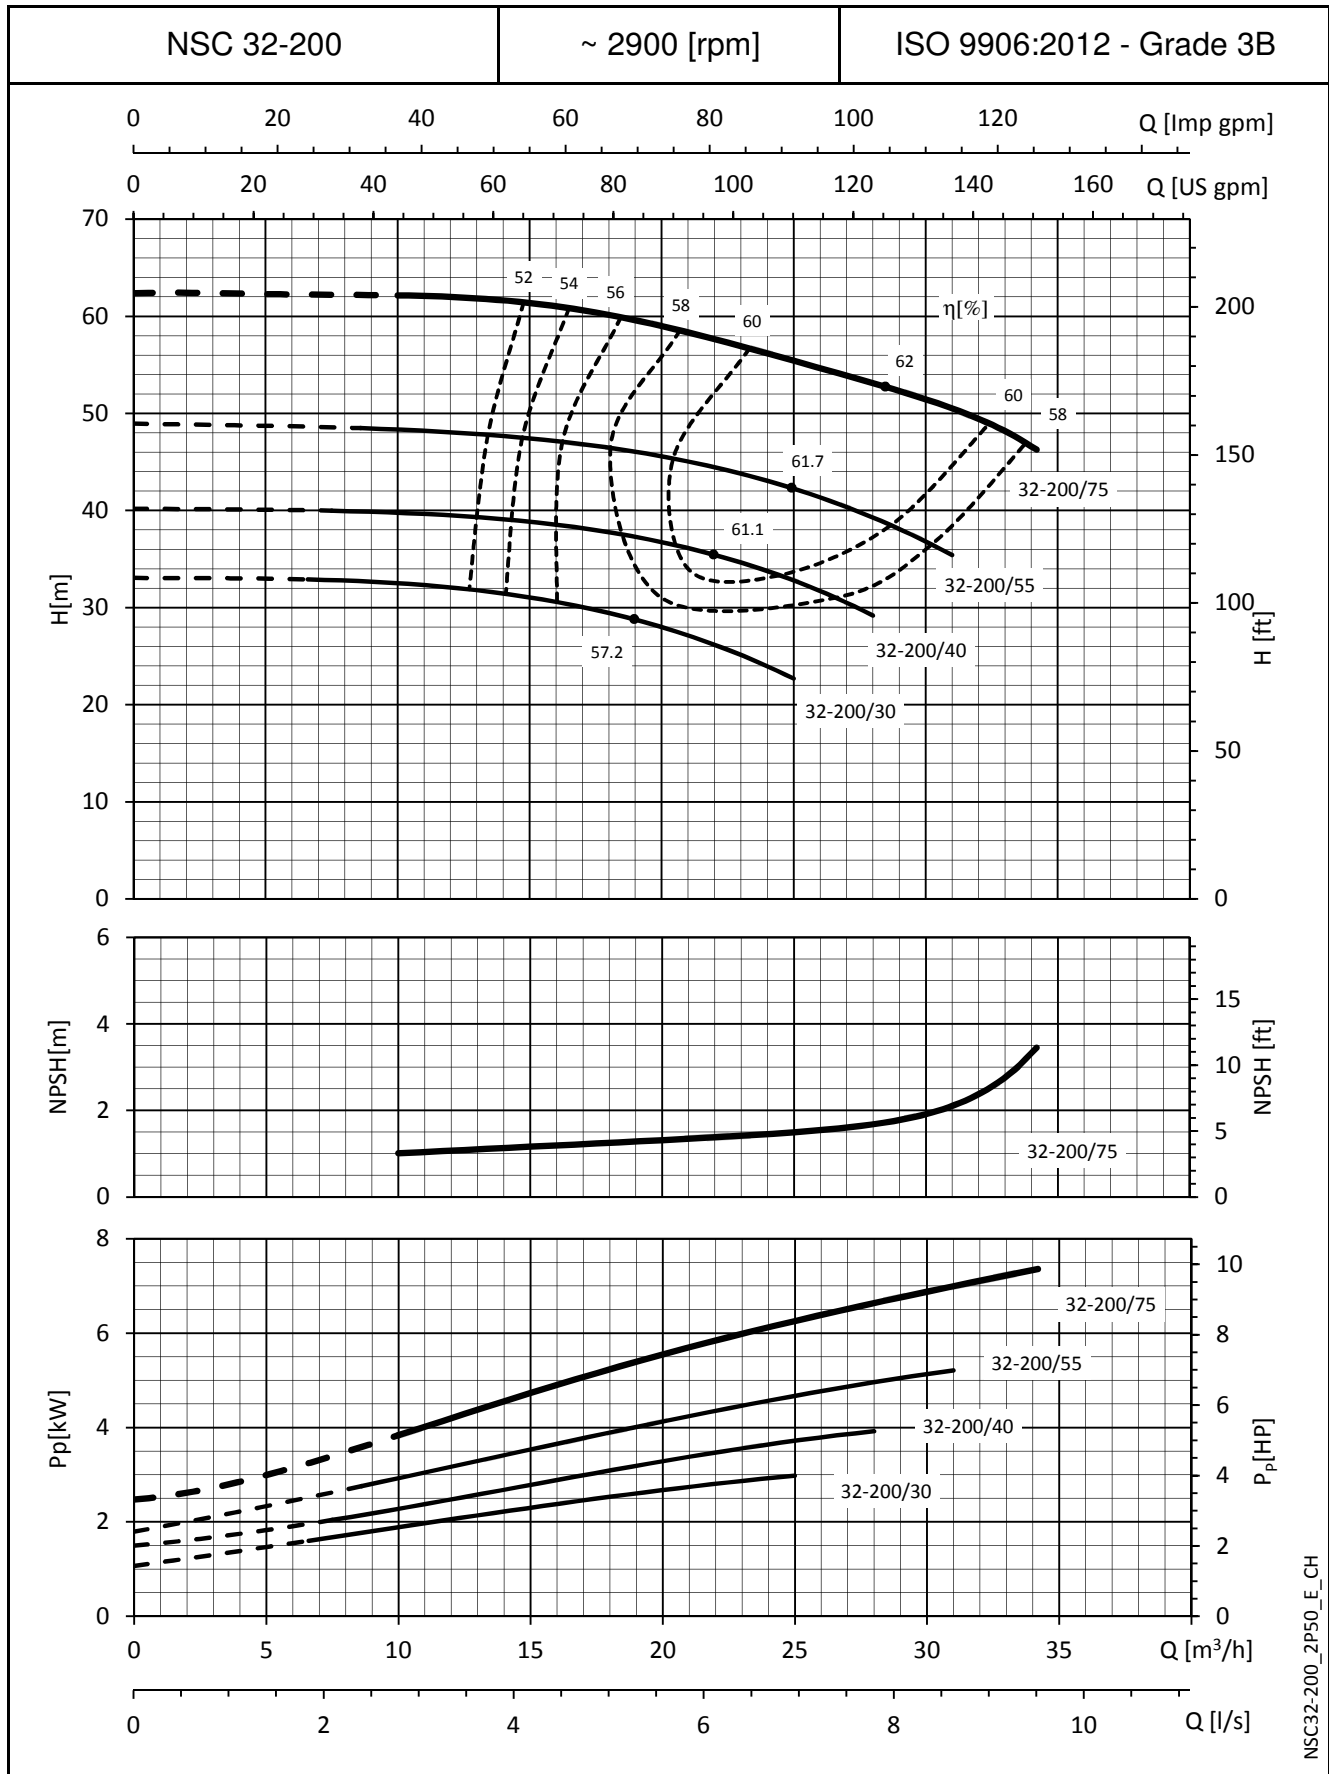

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

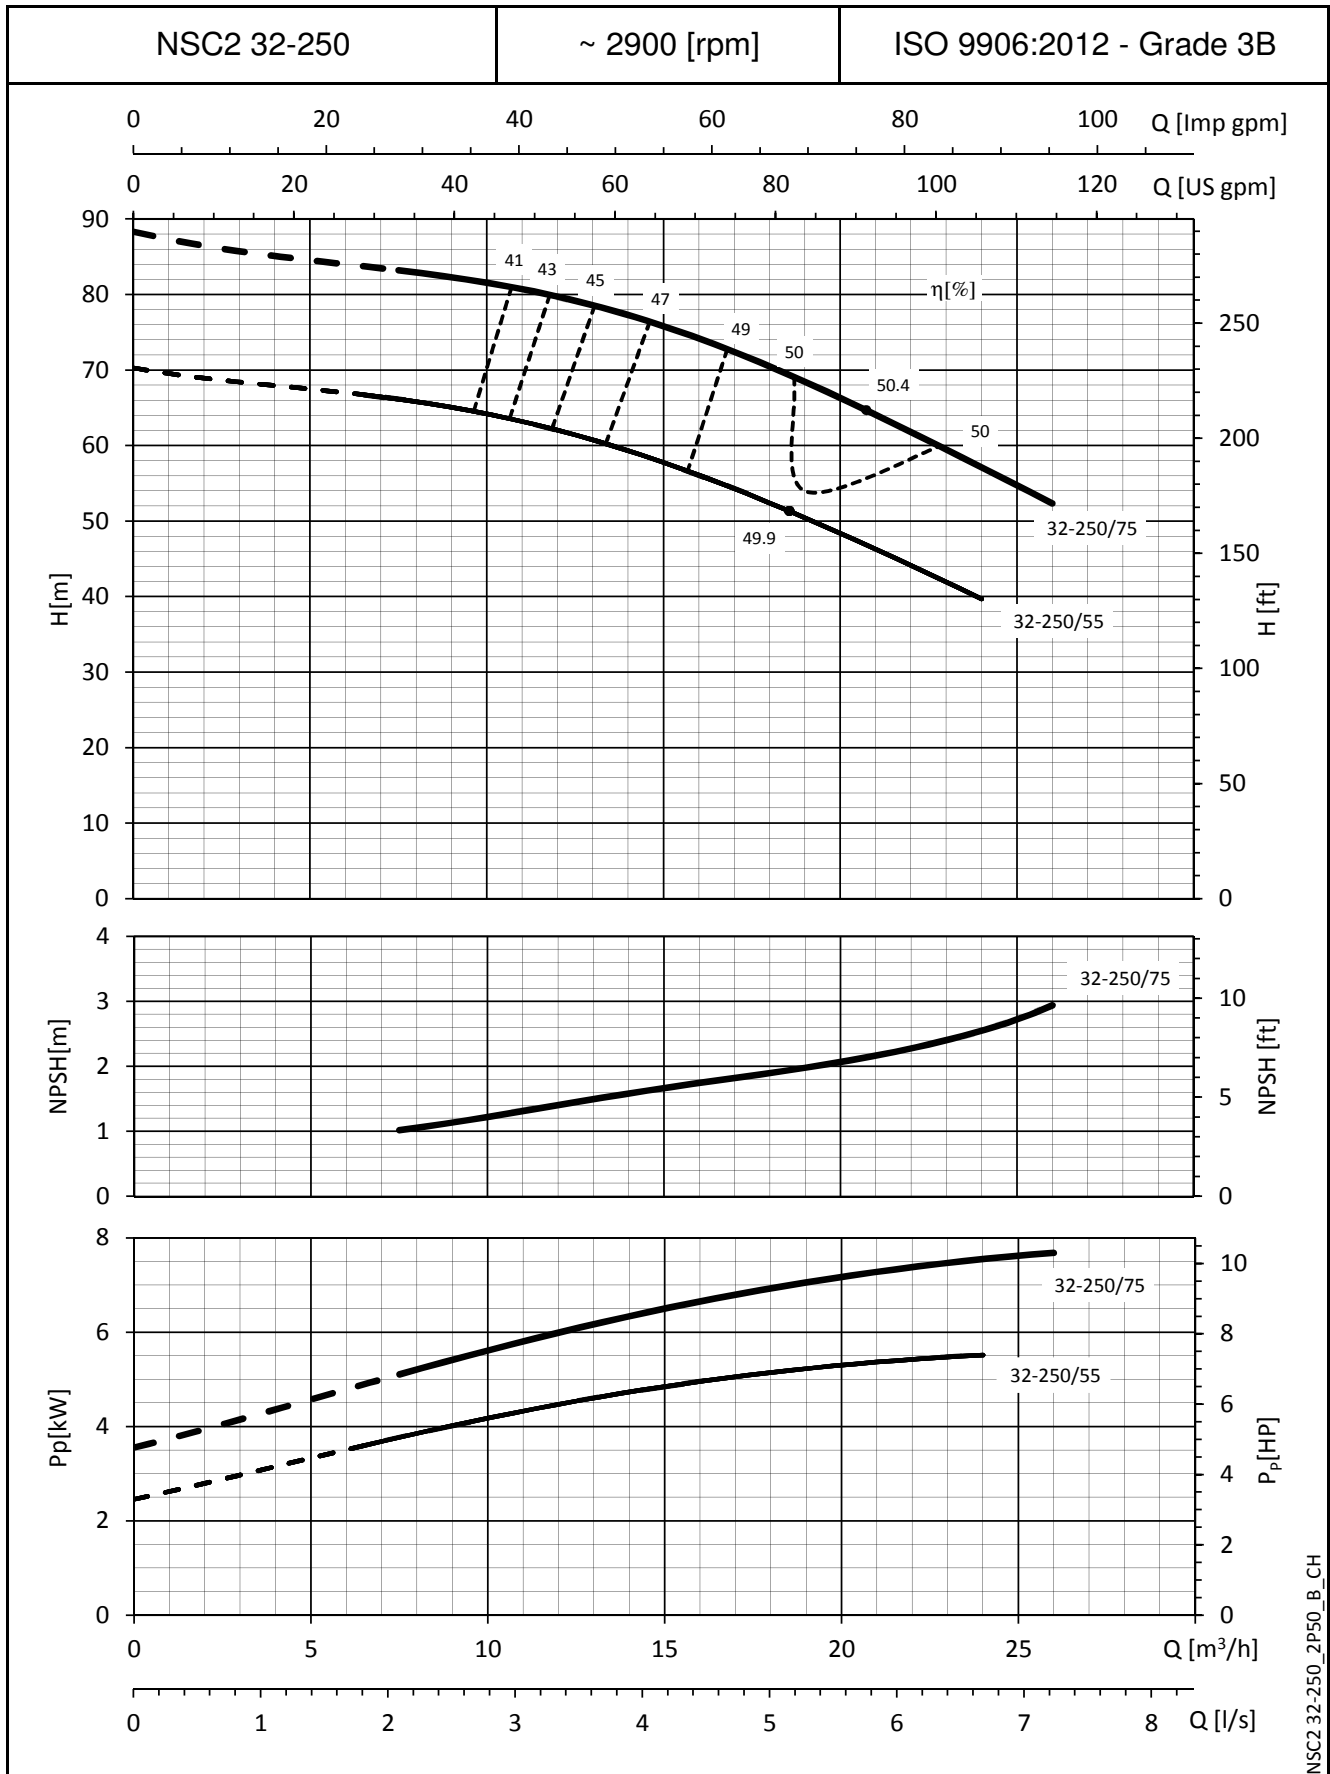

NSC2 32-250_2P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.


e-NSC SERIES
OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

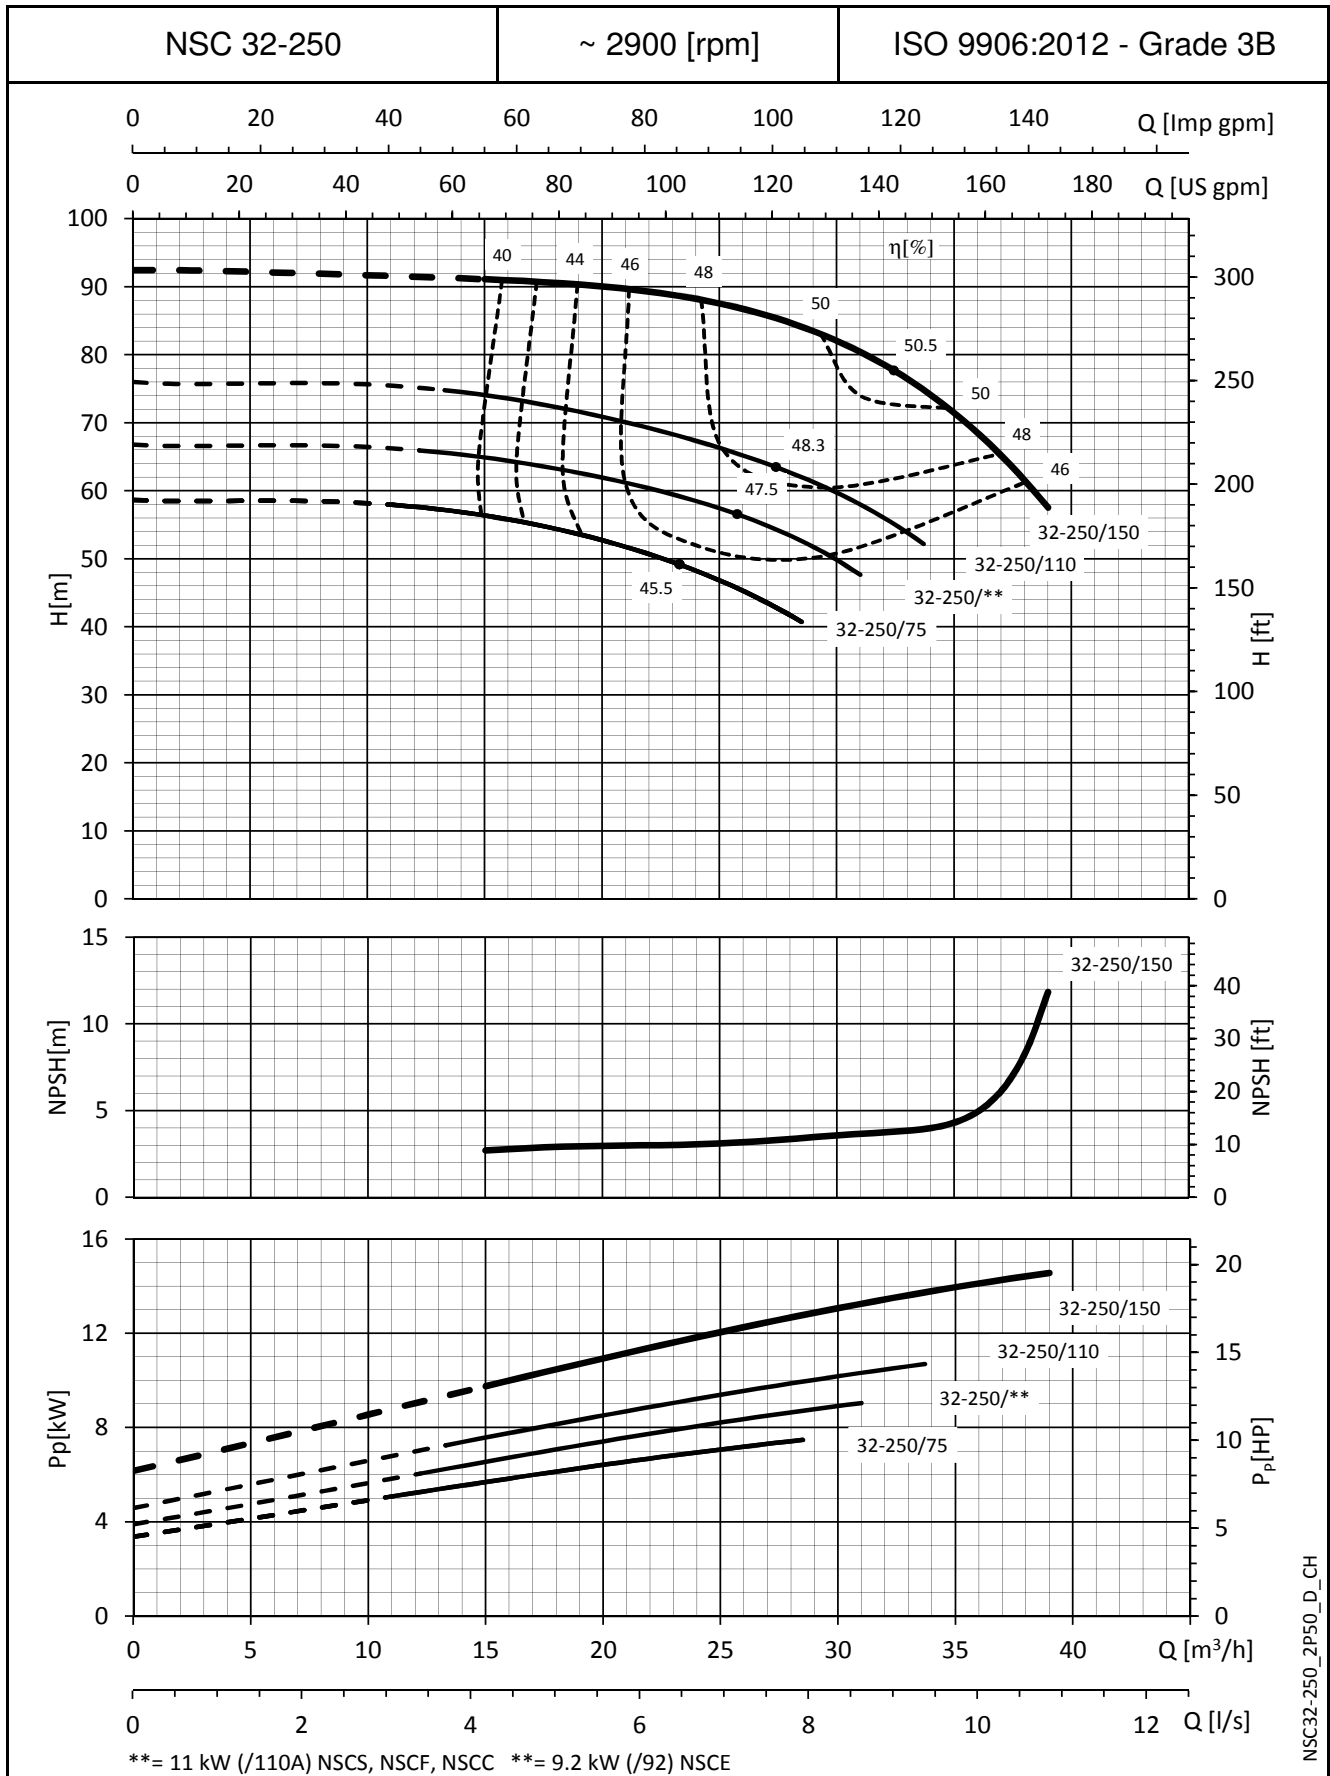

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

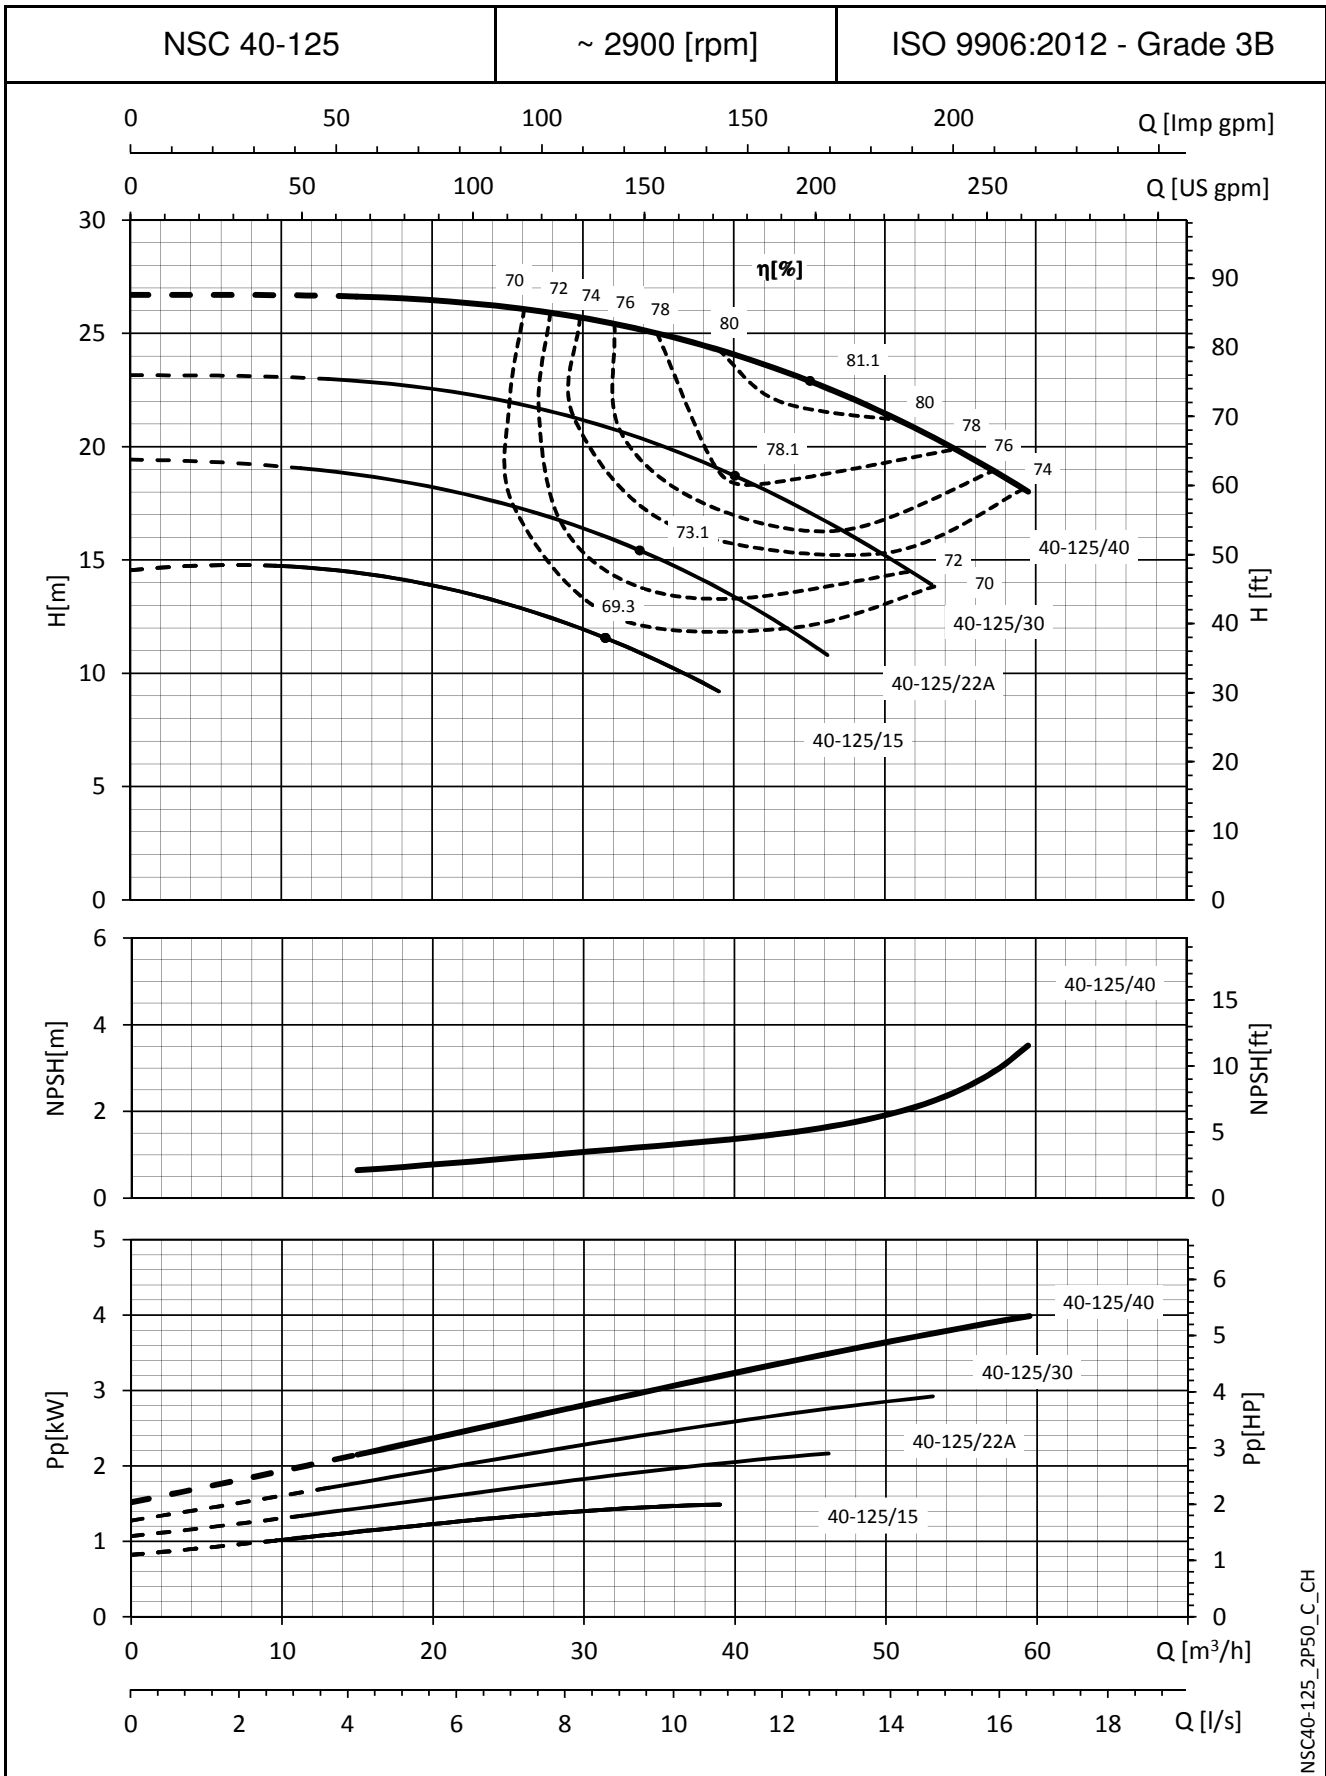


NSC40-125_2P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

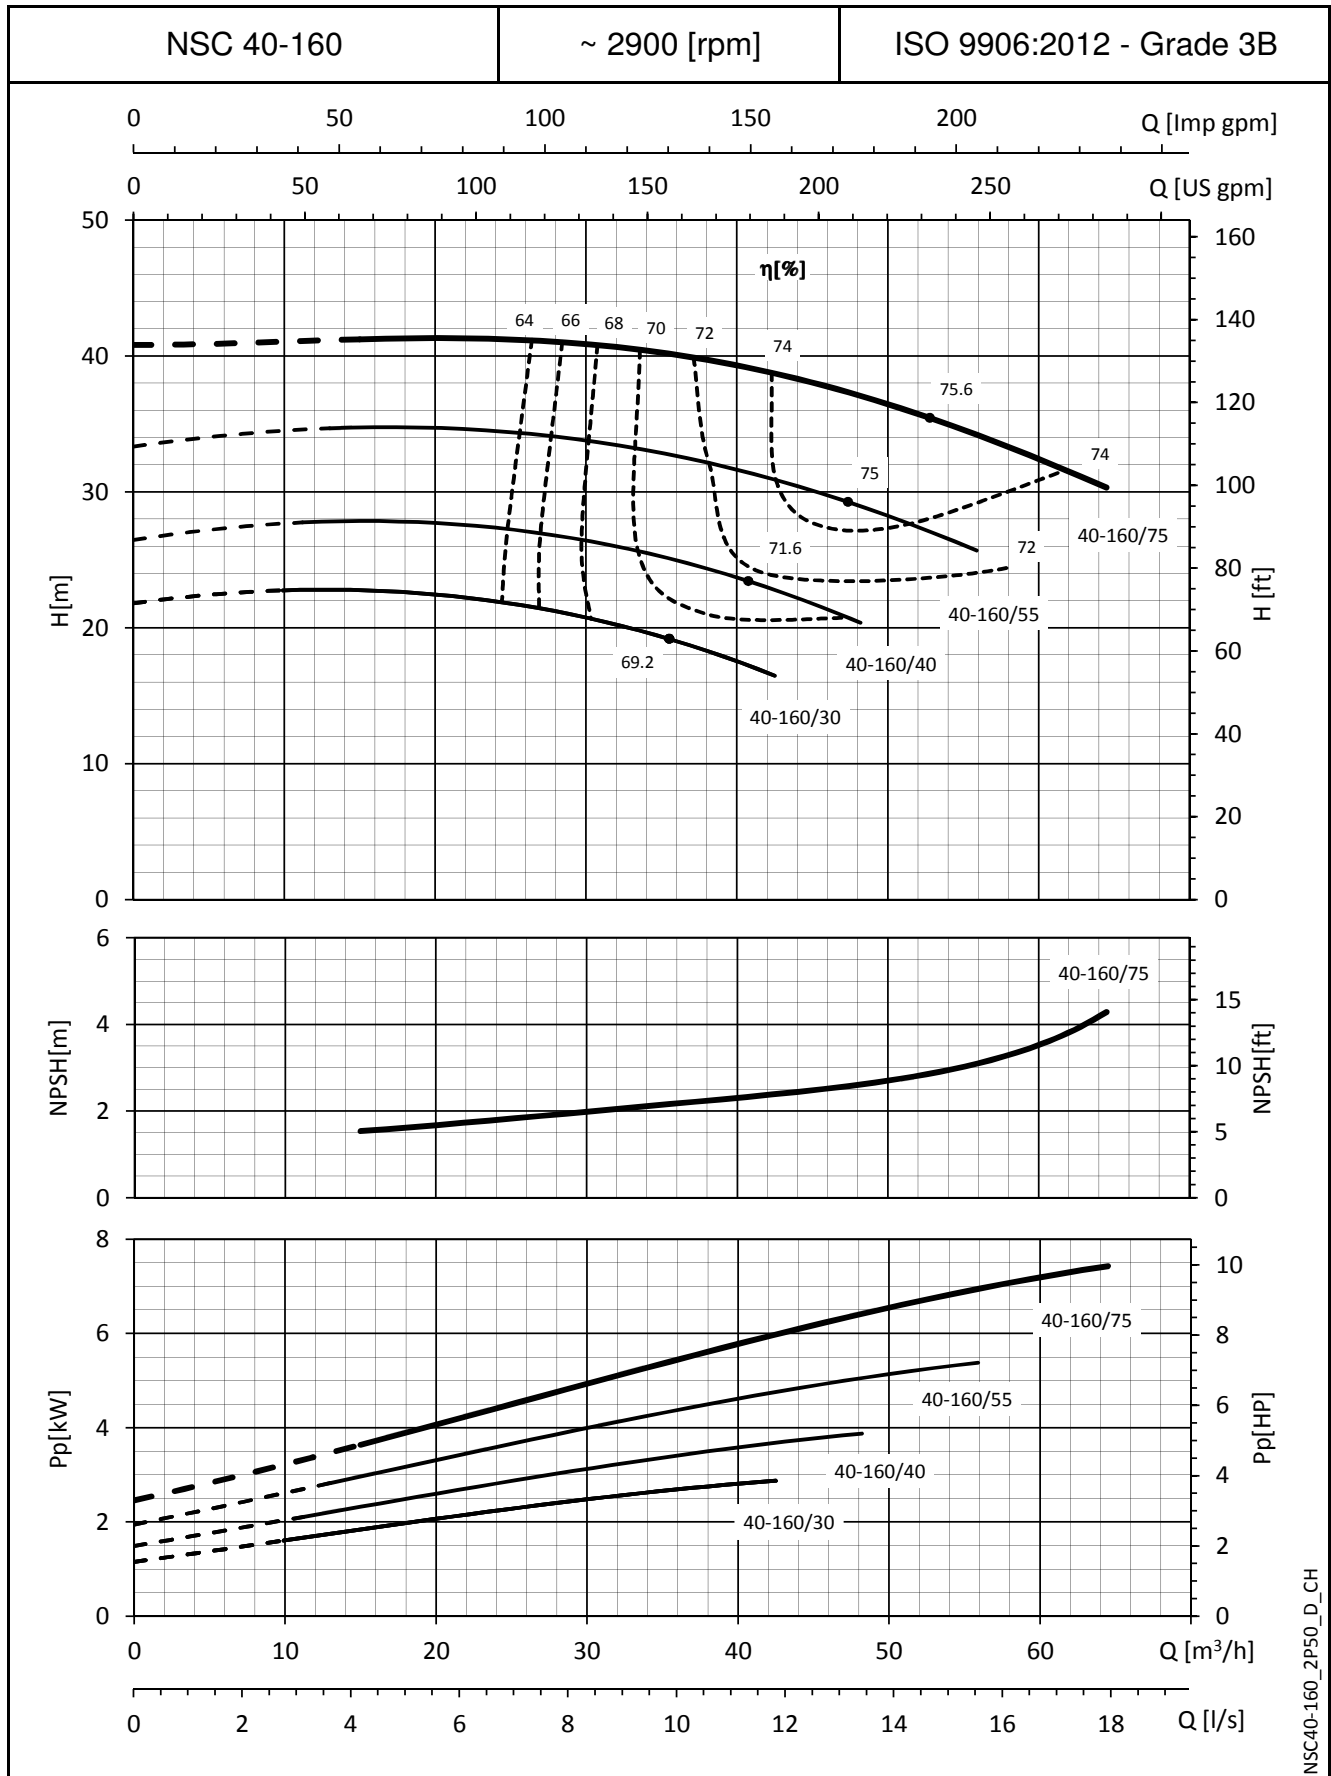


NSC40-160_2P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

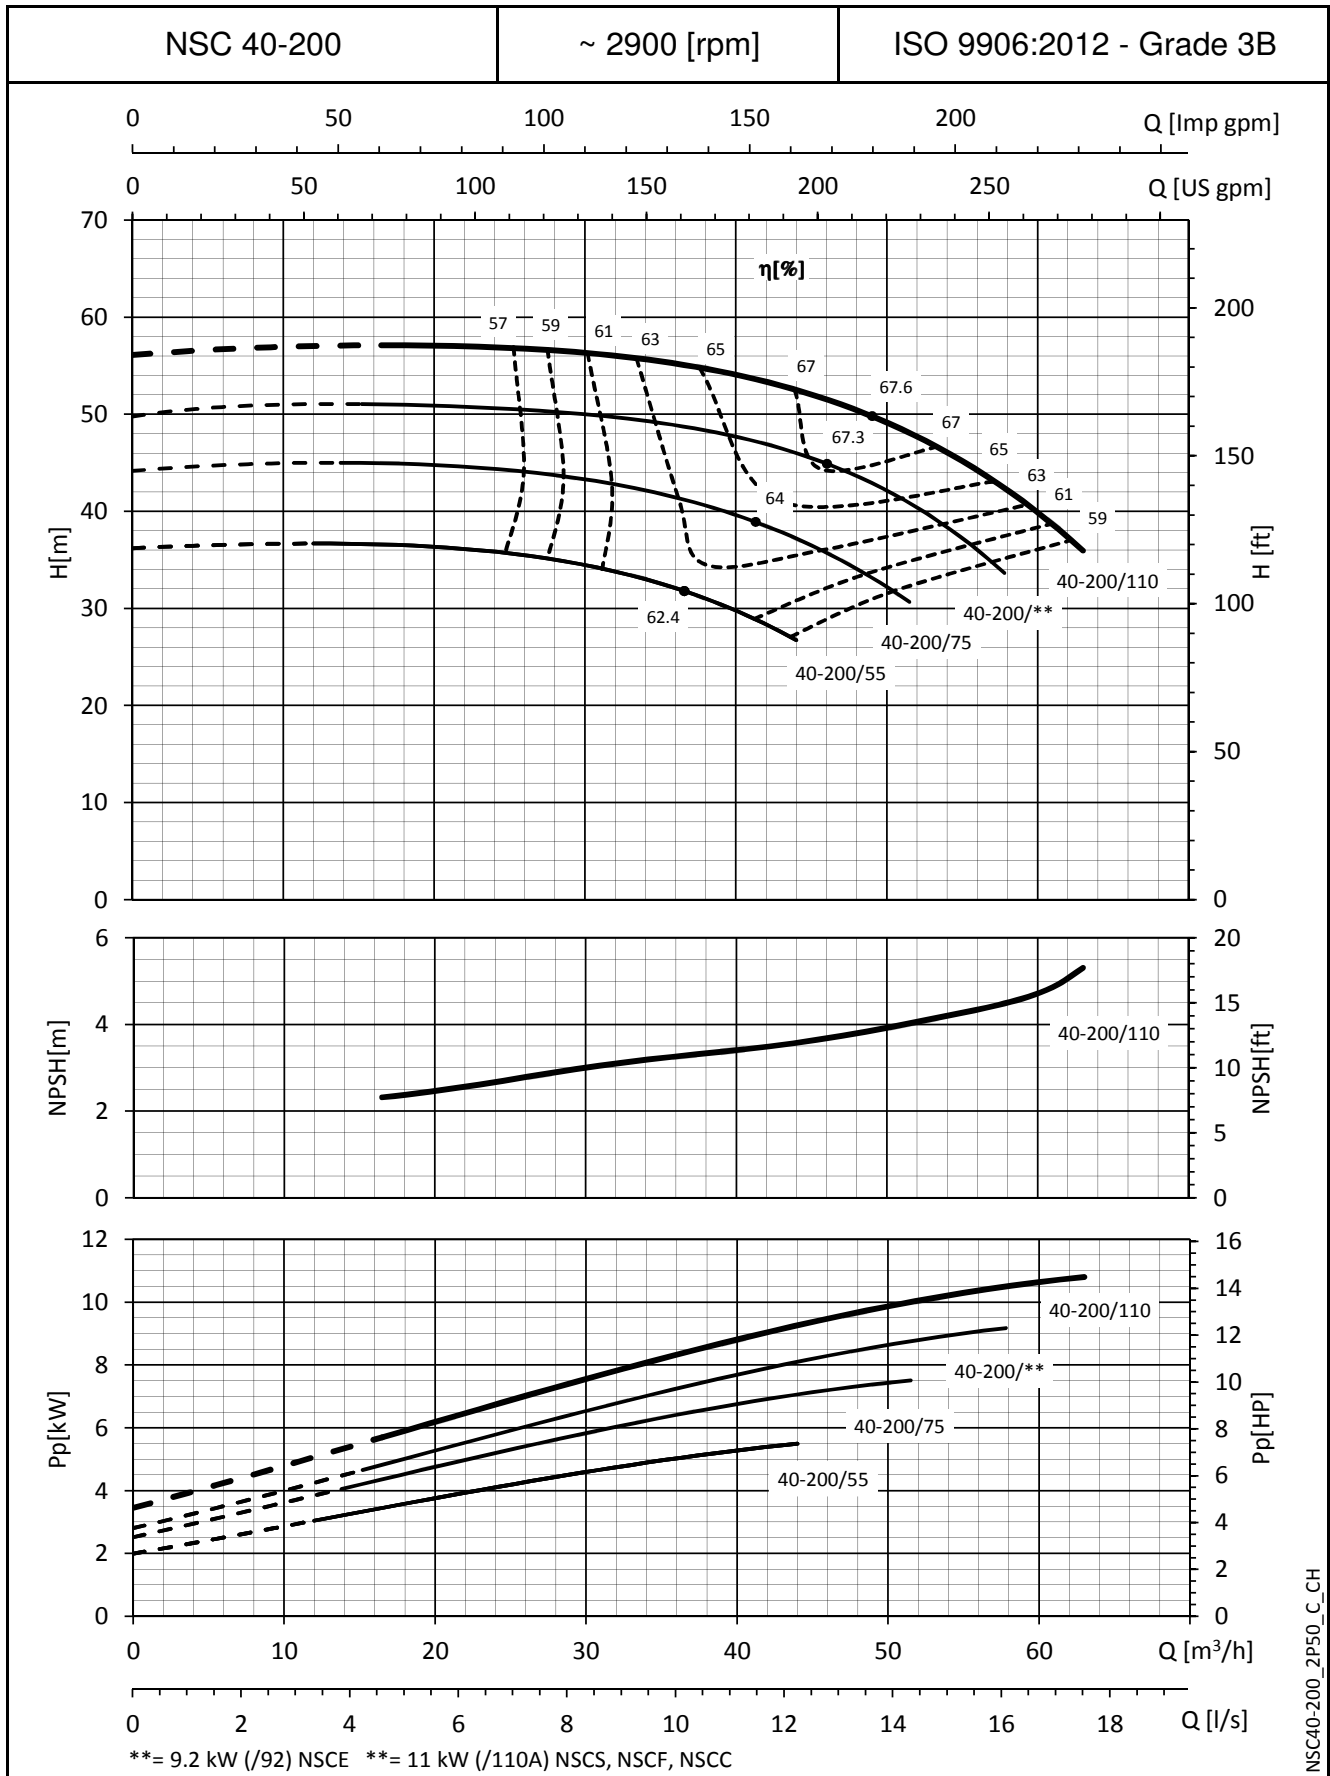

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

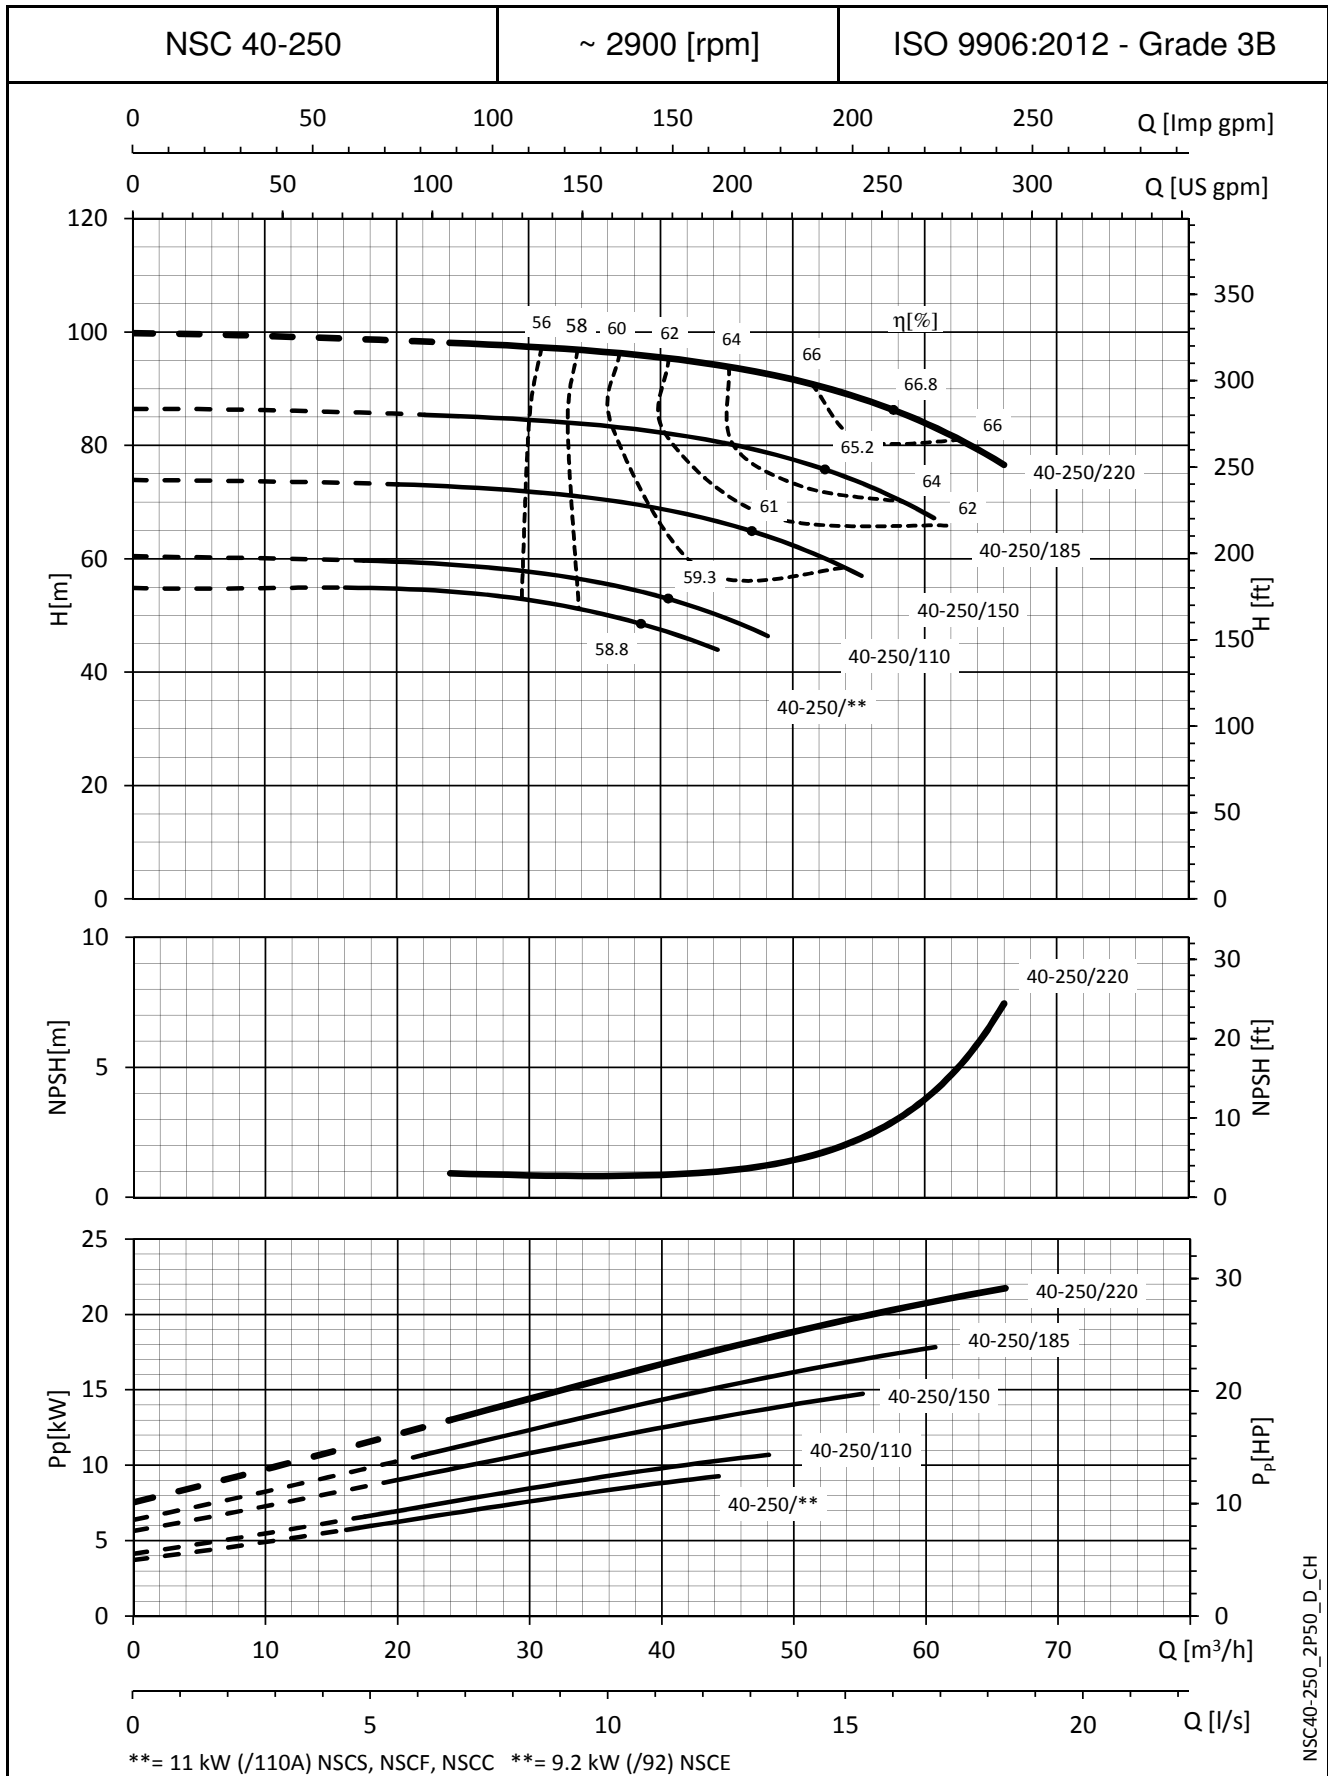


NSC40-250_2P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

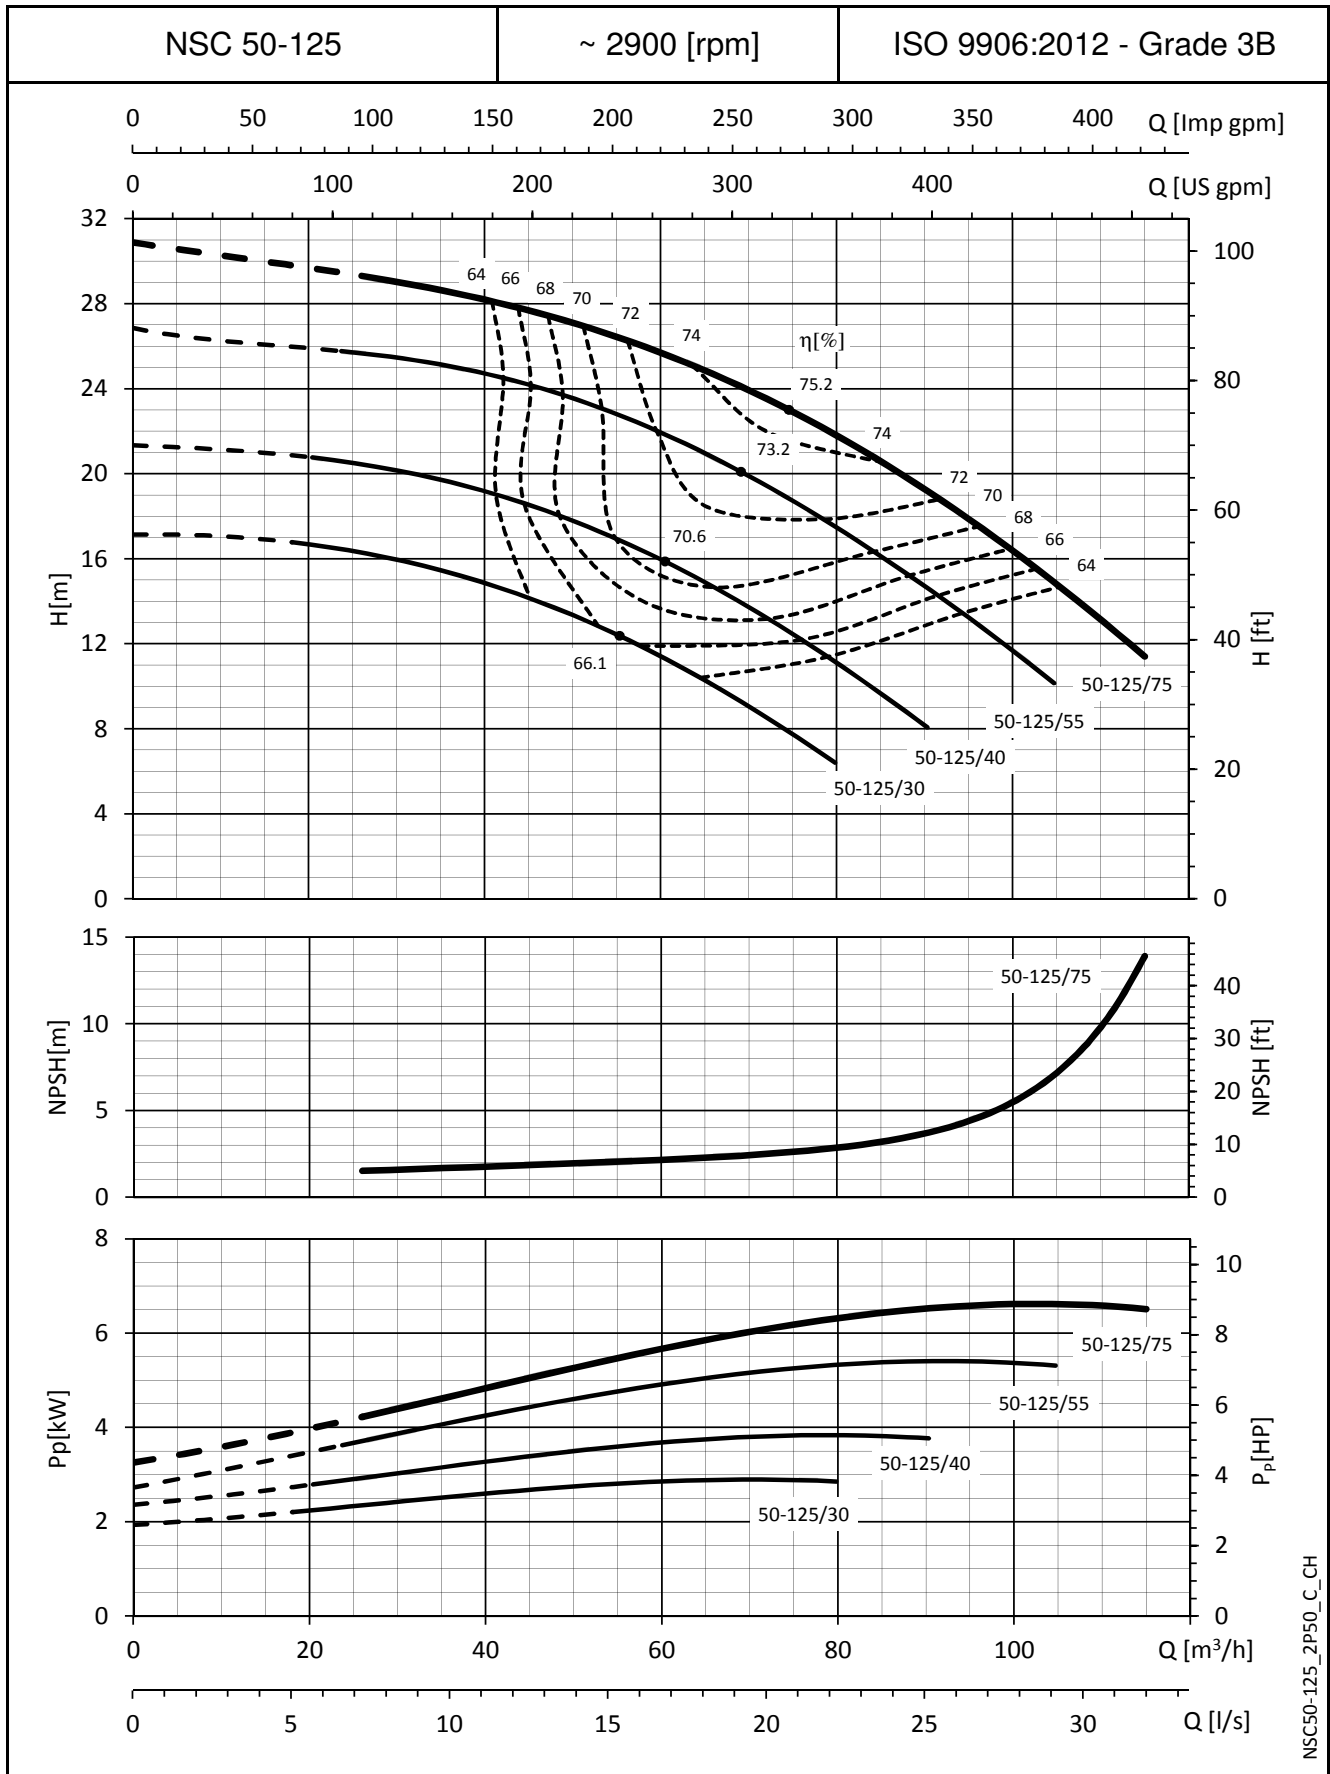


NSC50-125_2P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

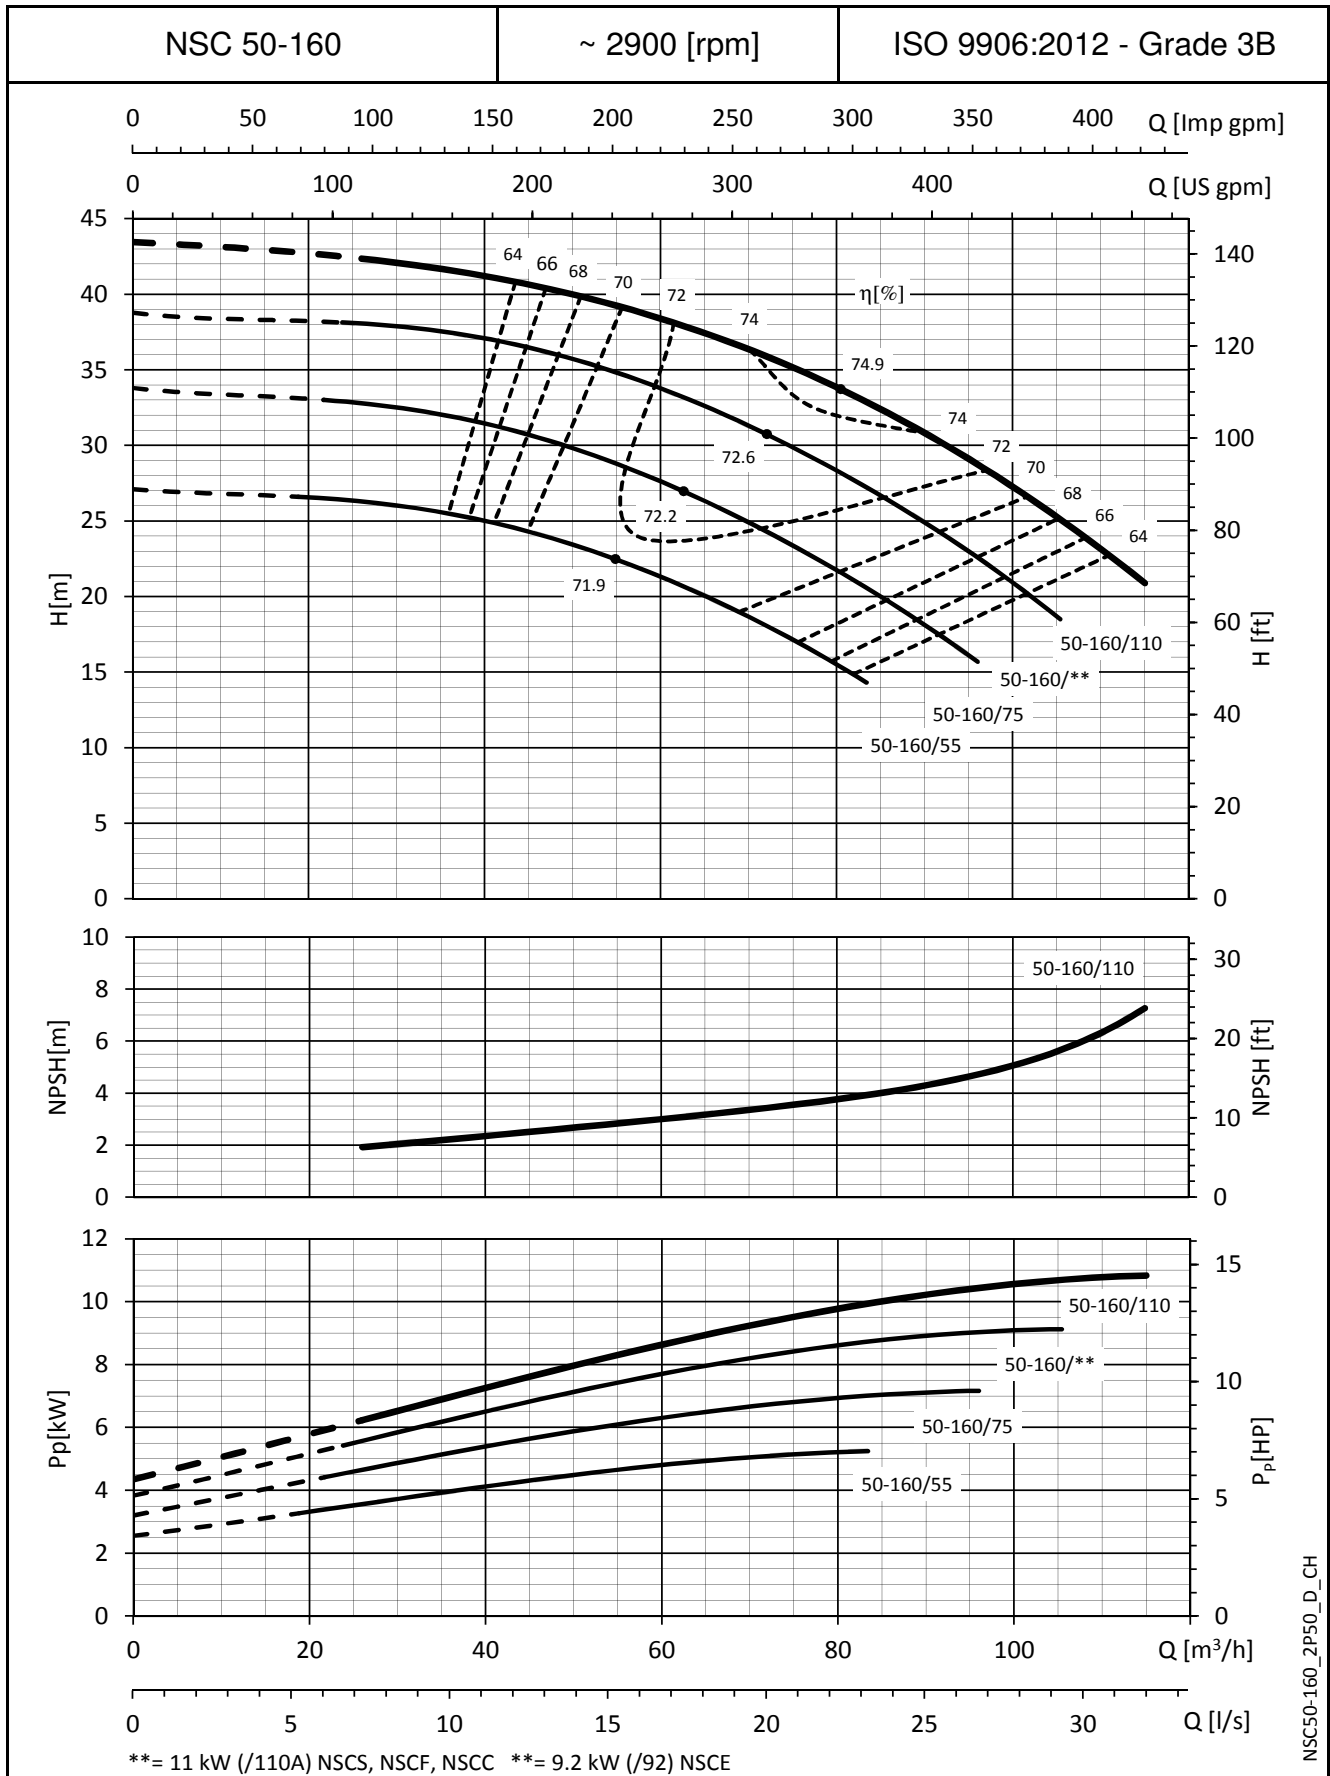


NSC50-160_2P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

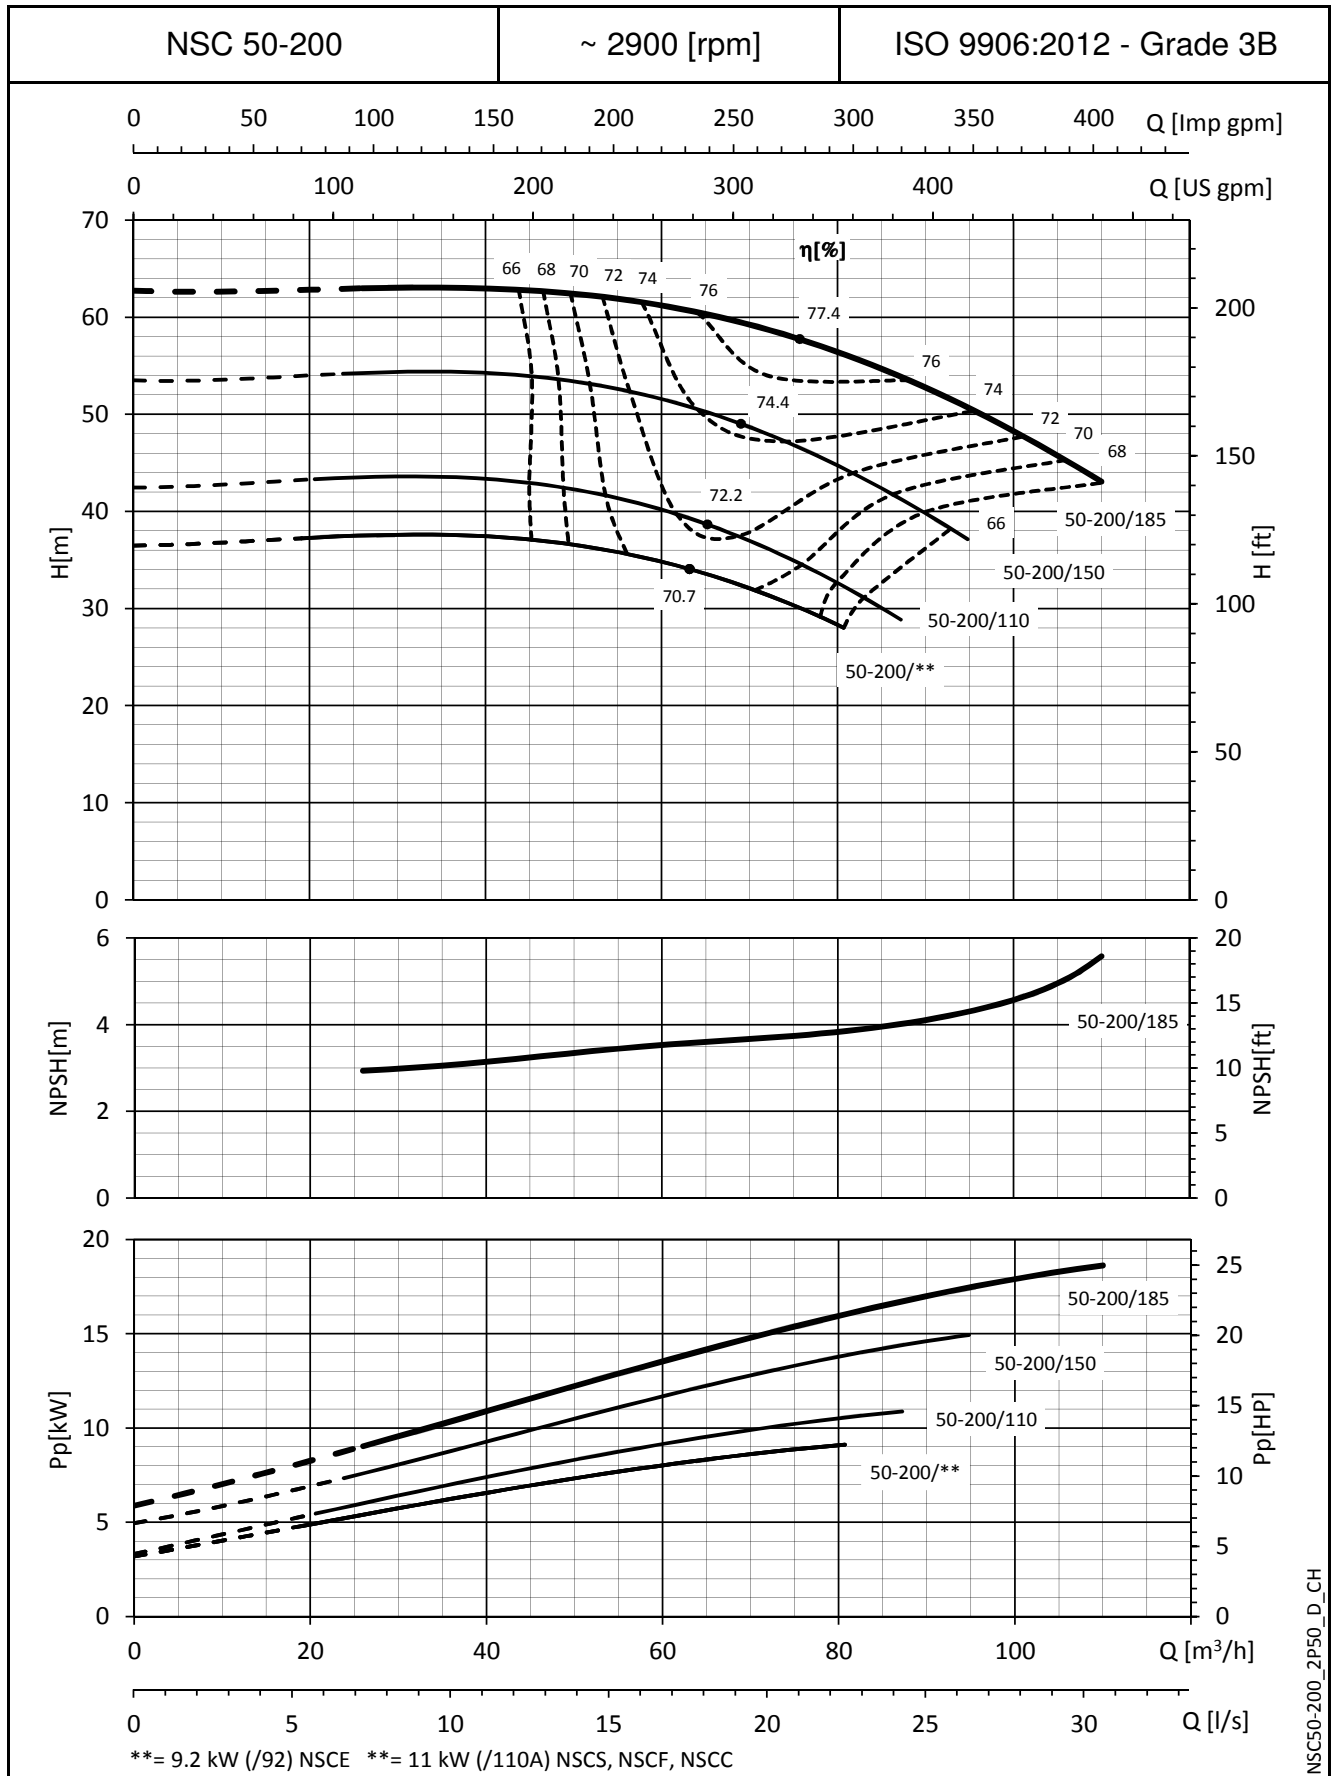


NSC50-200_2P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

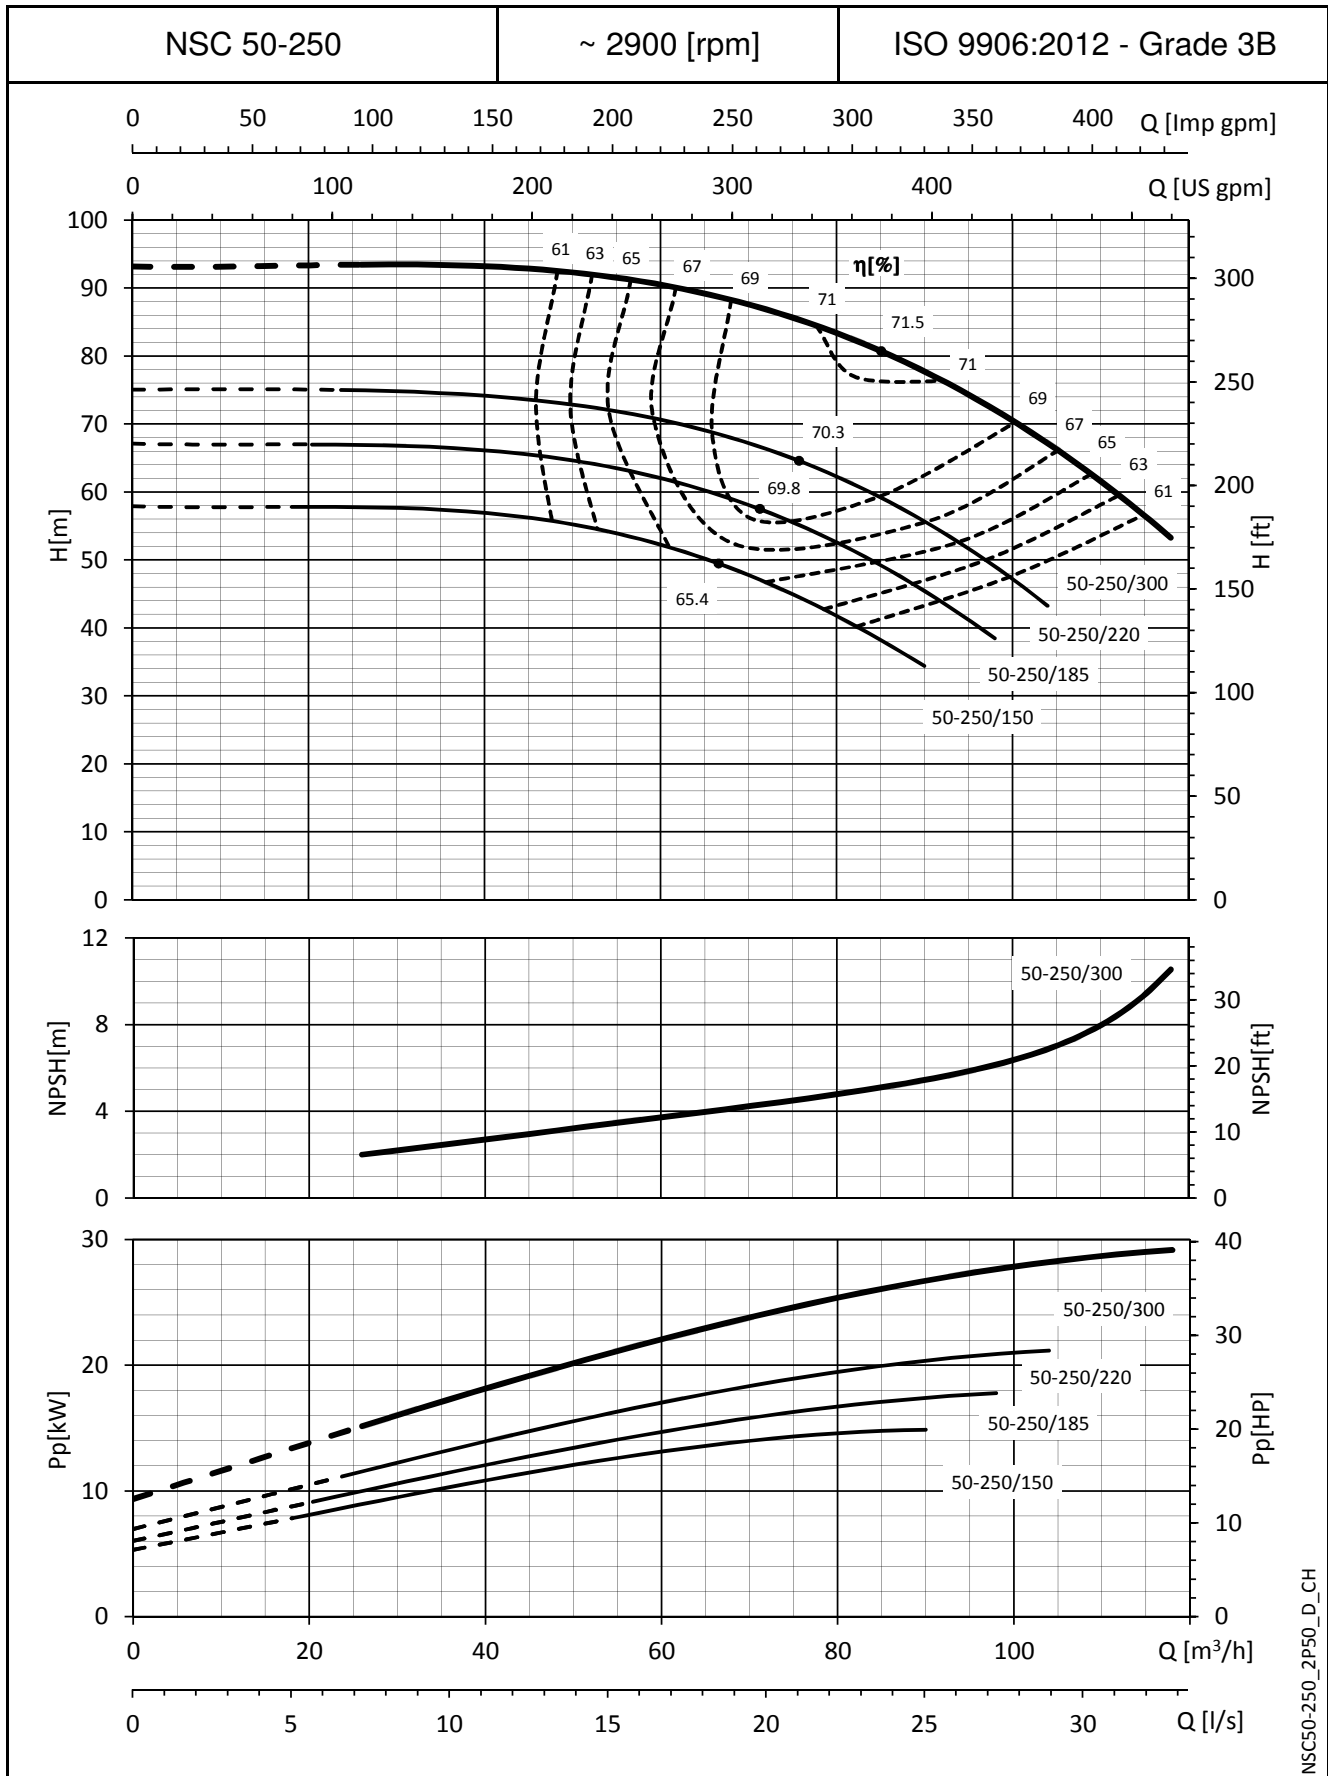


NSC50-250_2P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

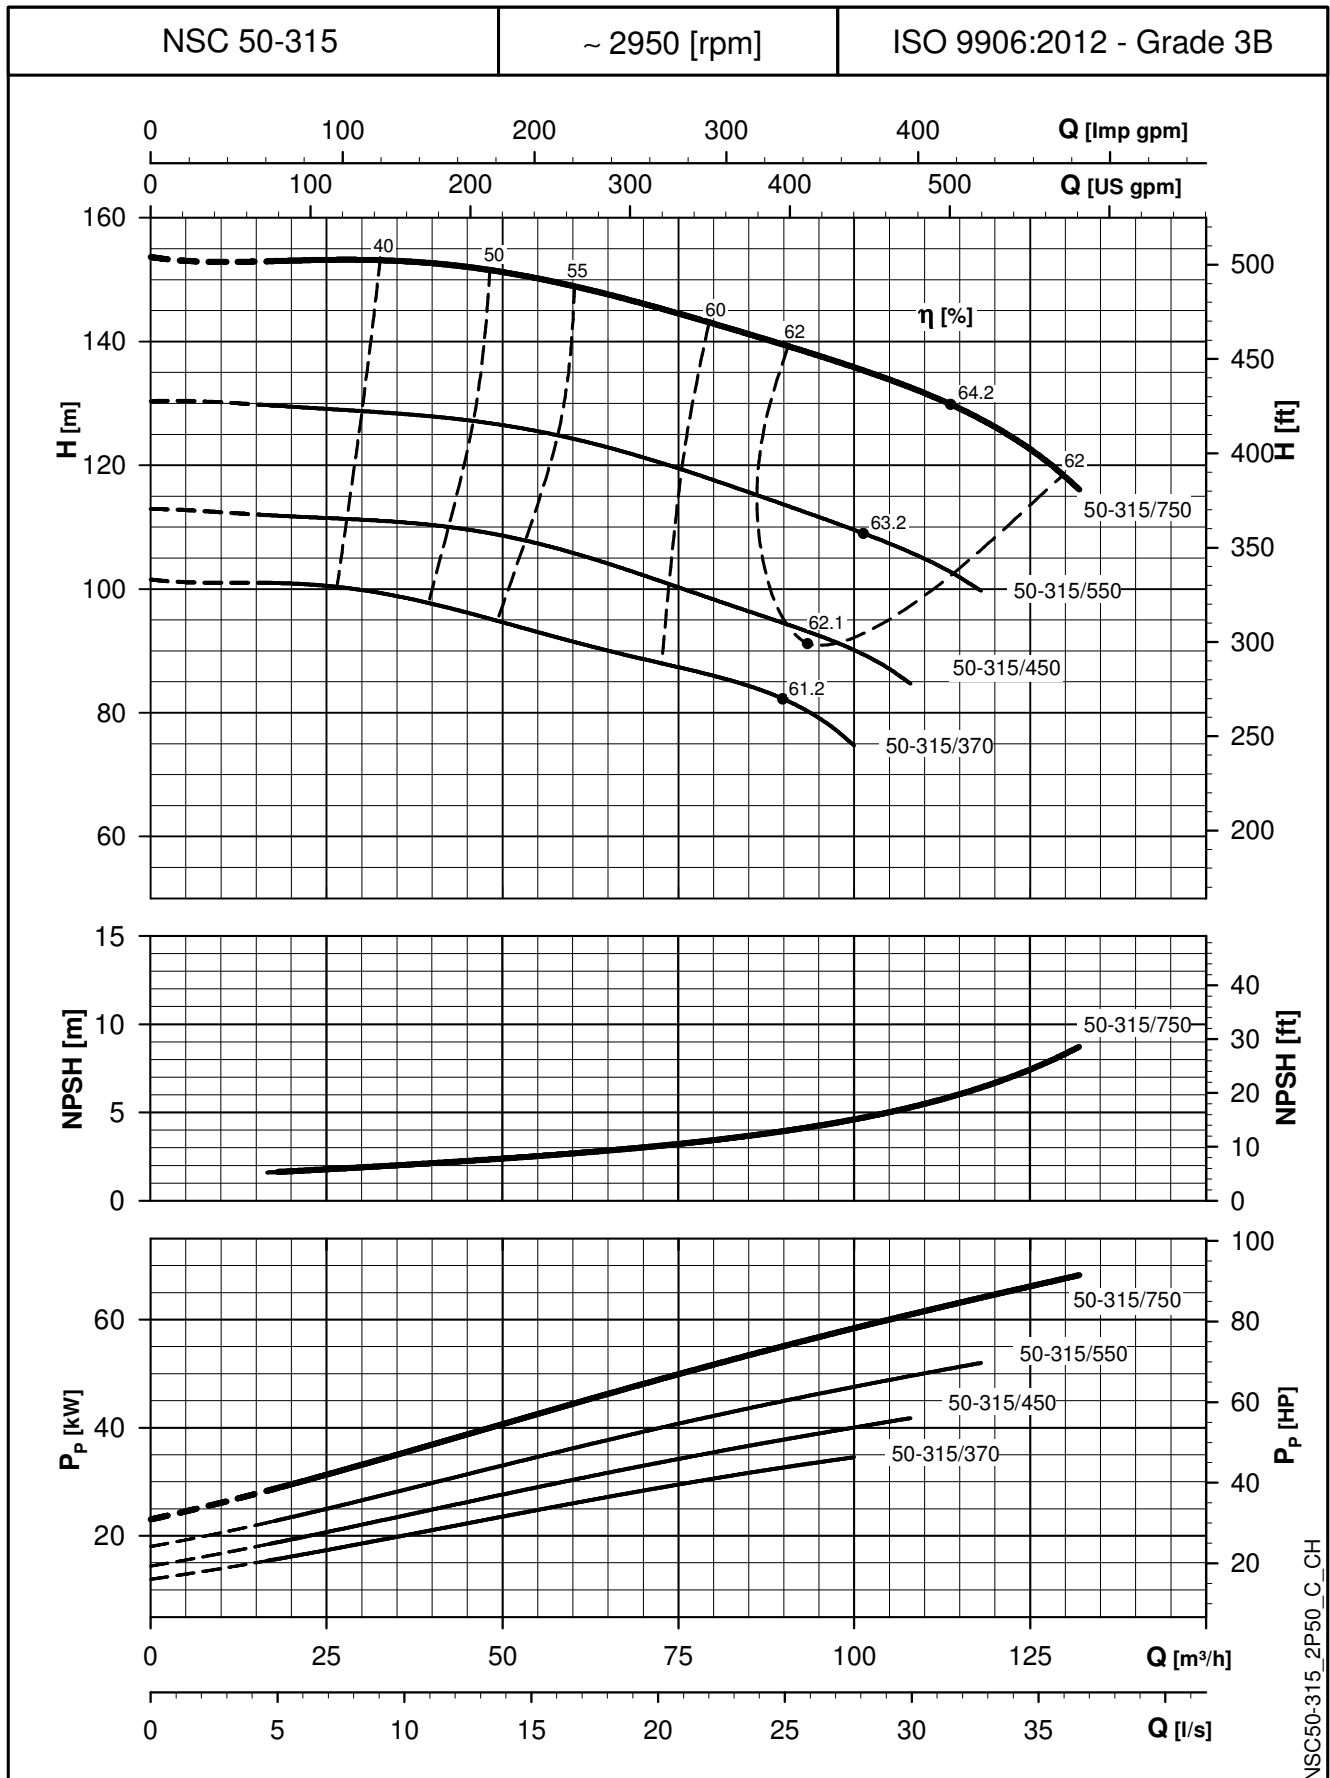

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

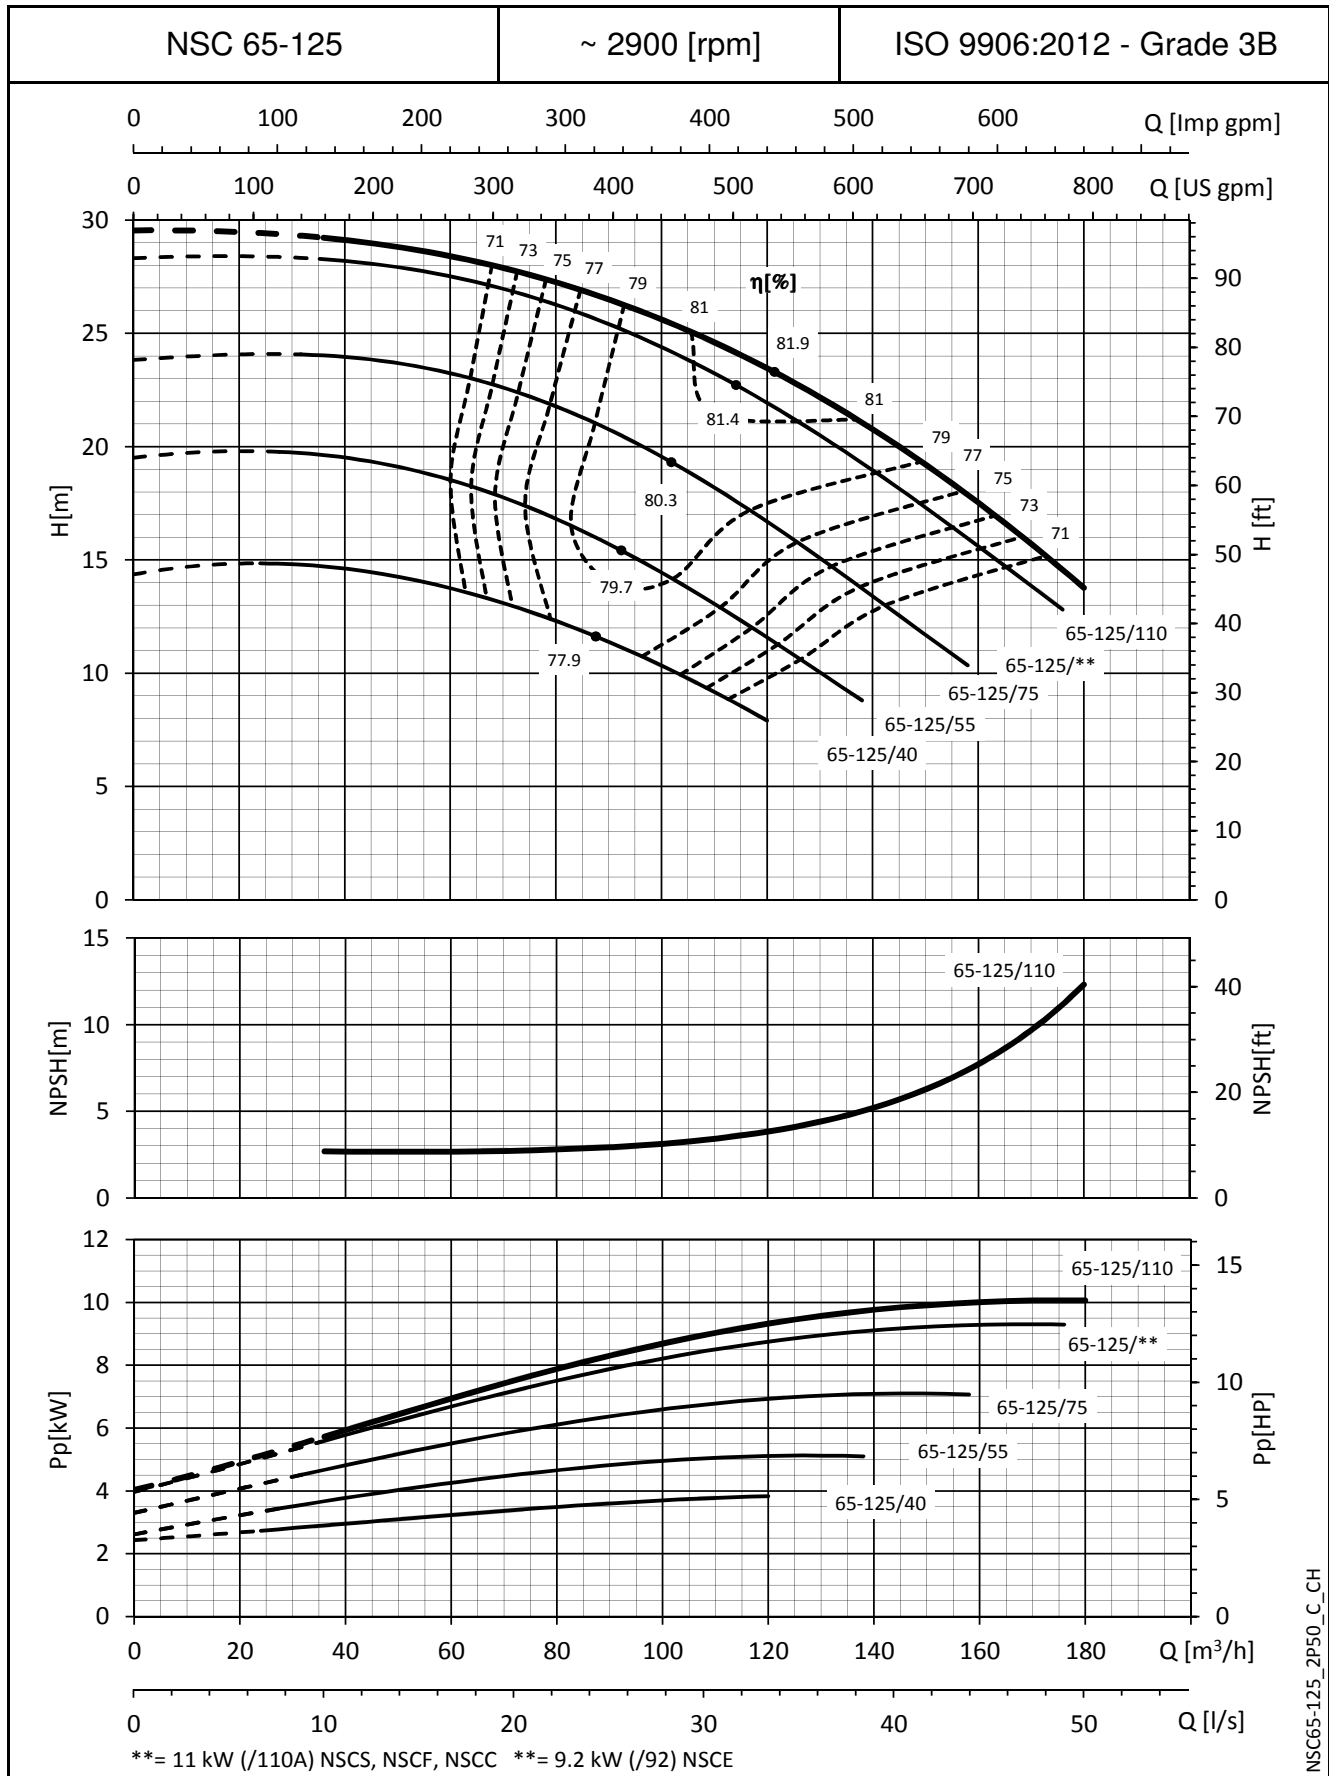


NSC65-125_2P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

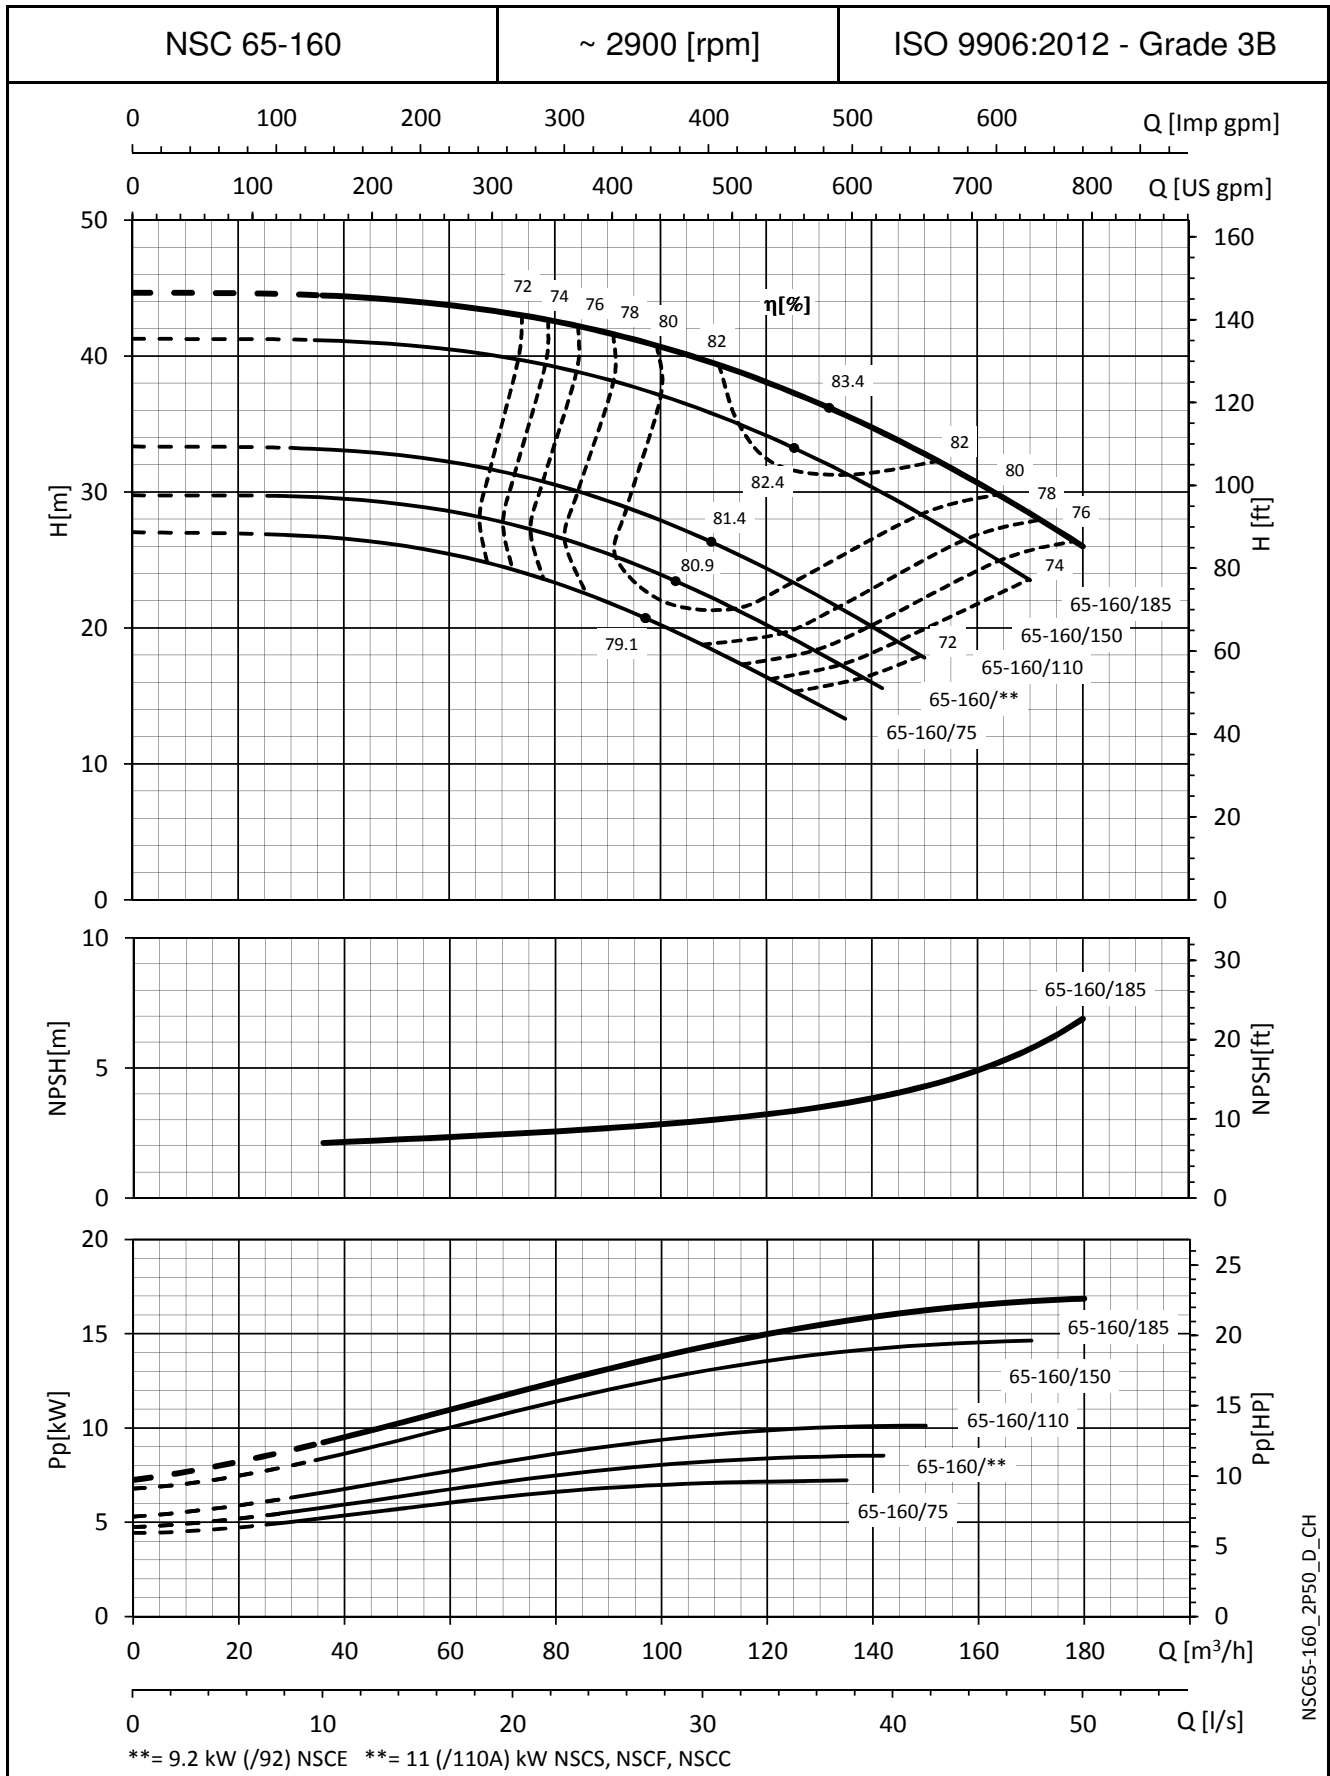

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

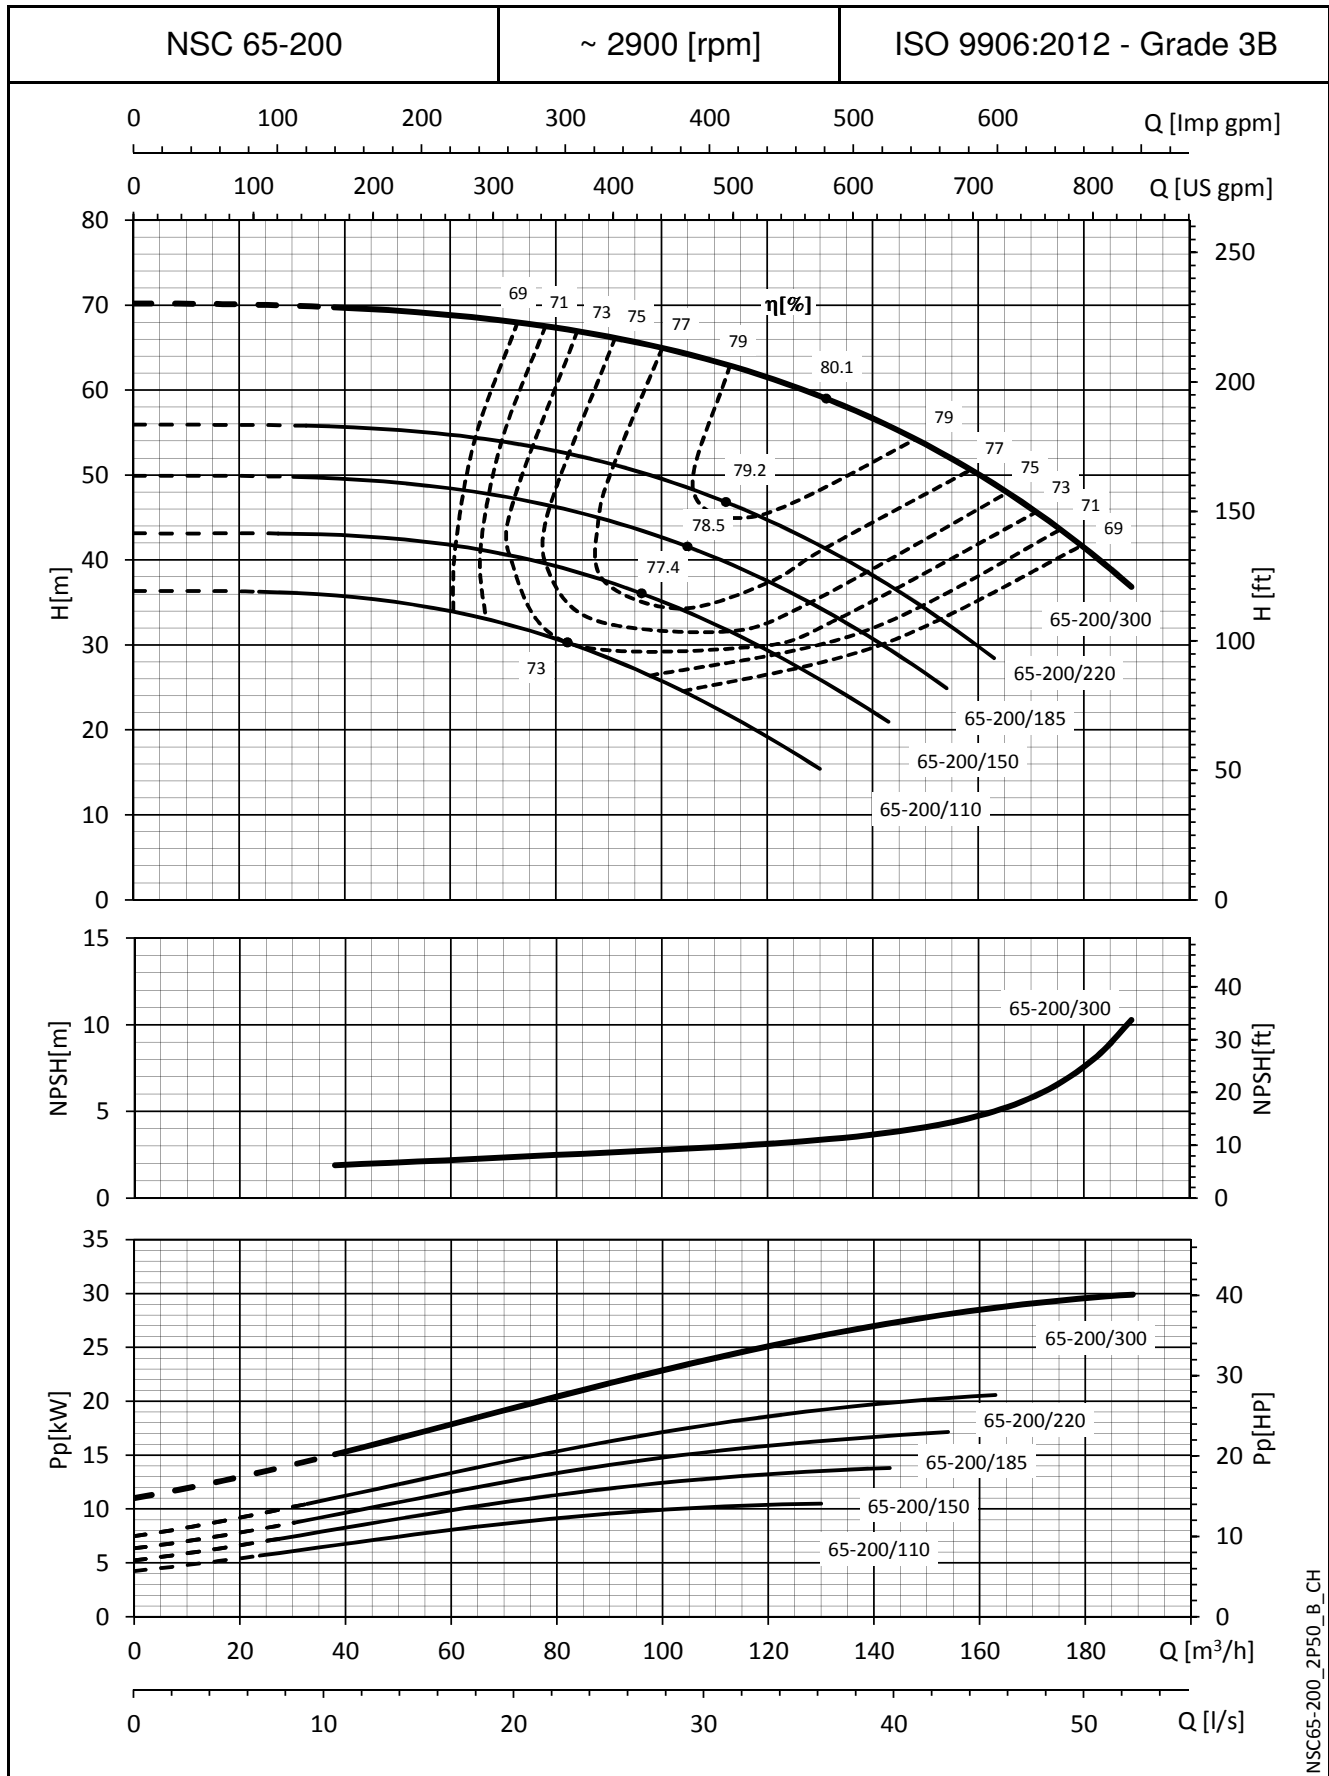


NSC65-200_2P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

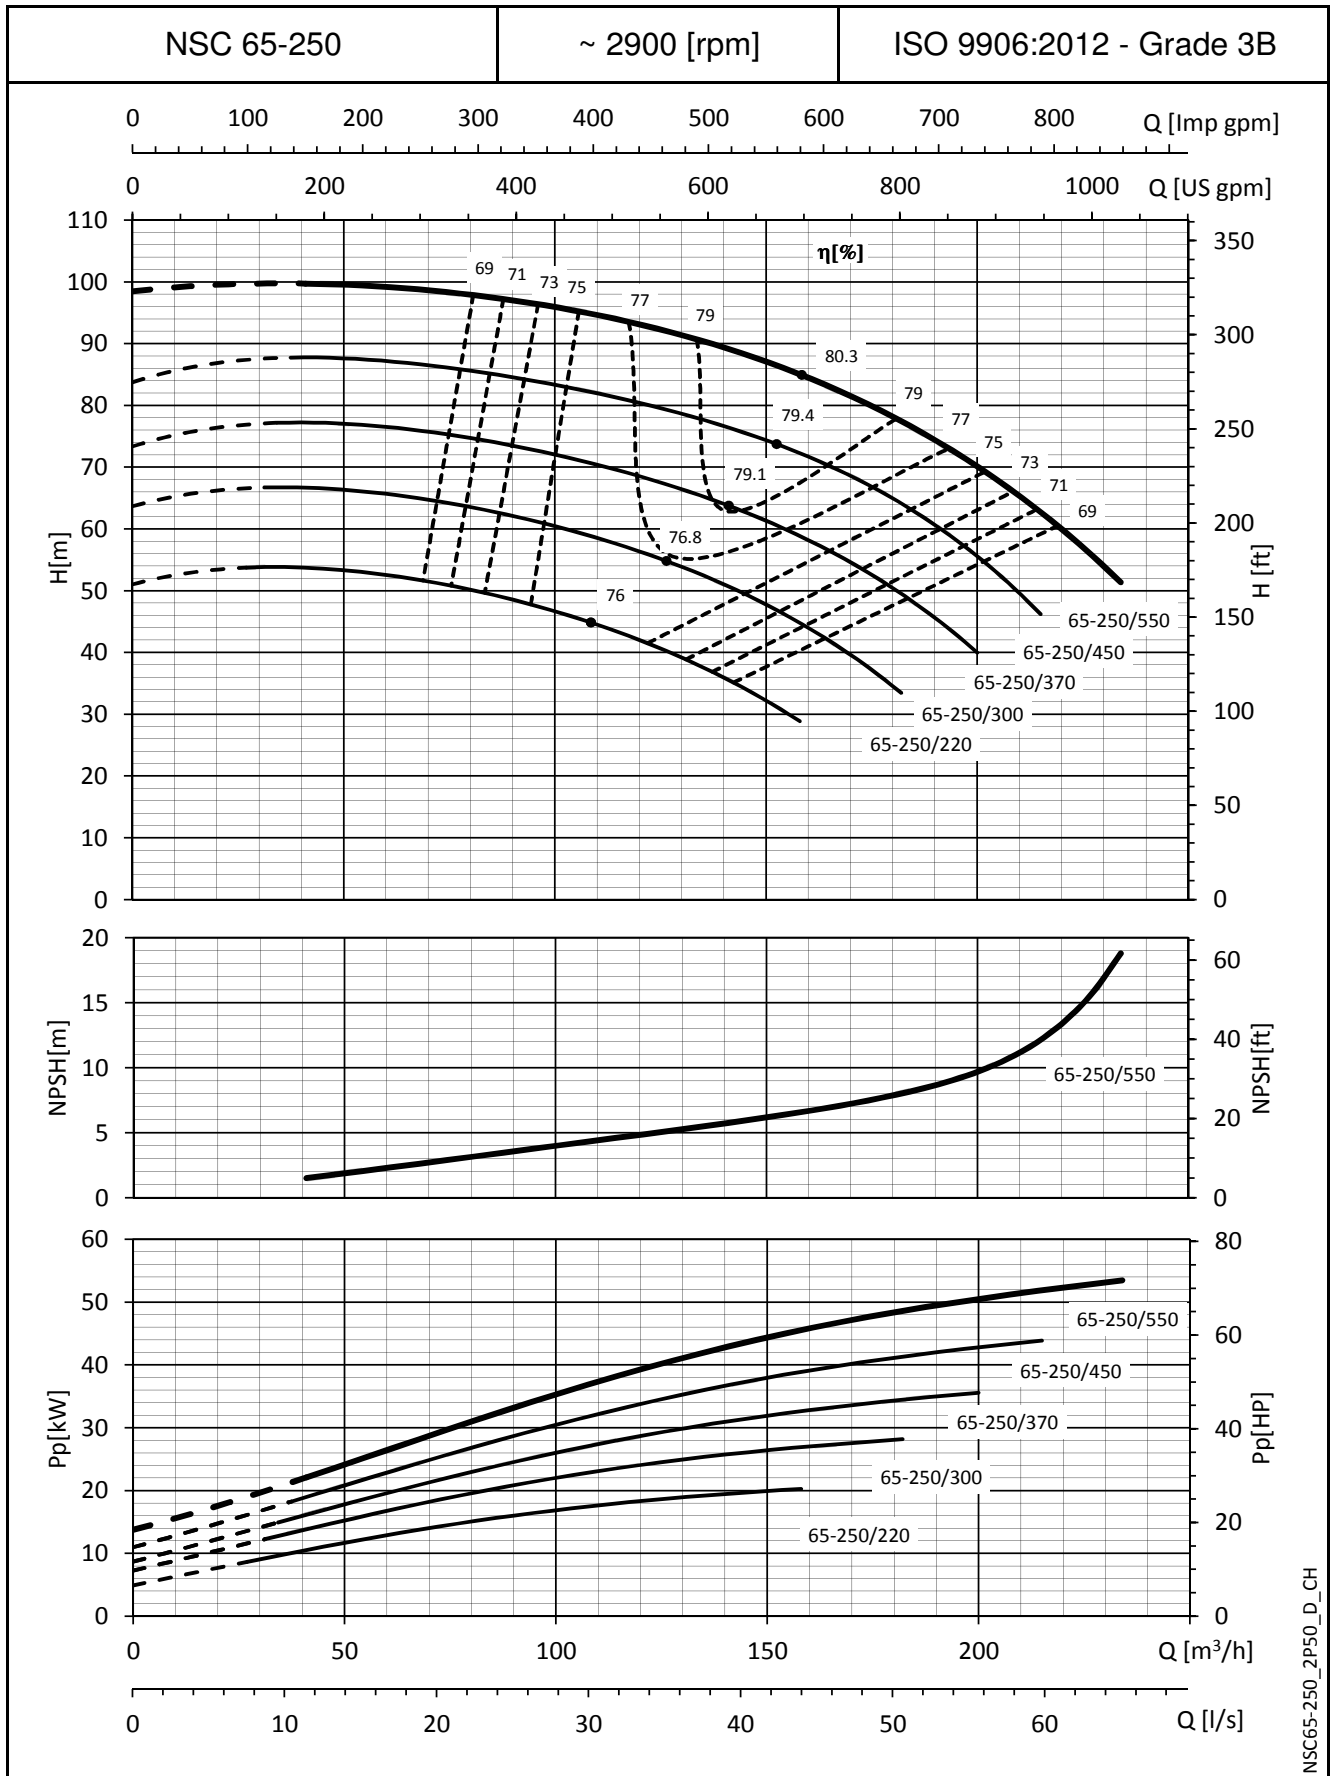


NSC65-250_2P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

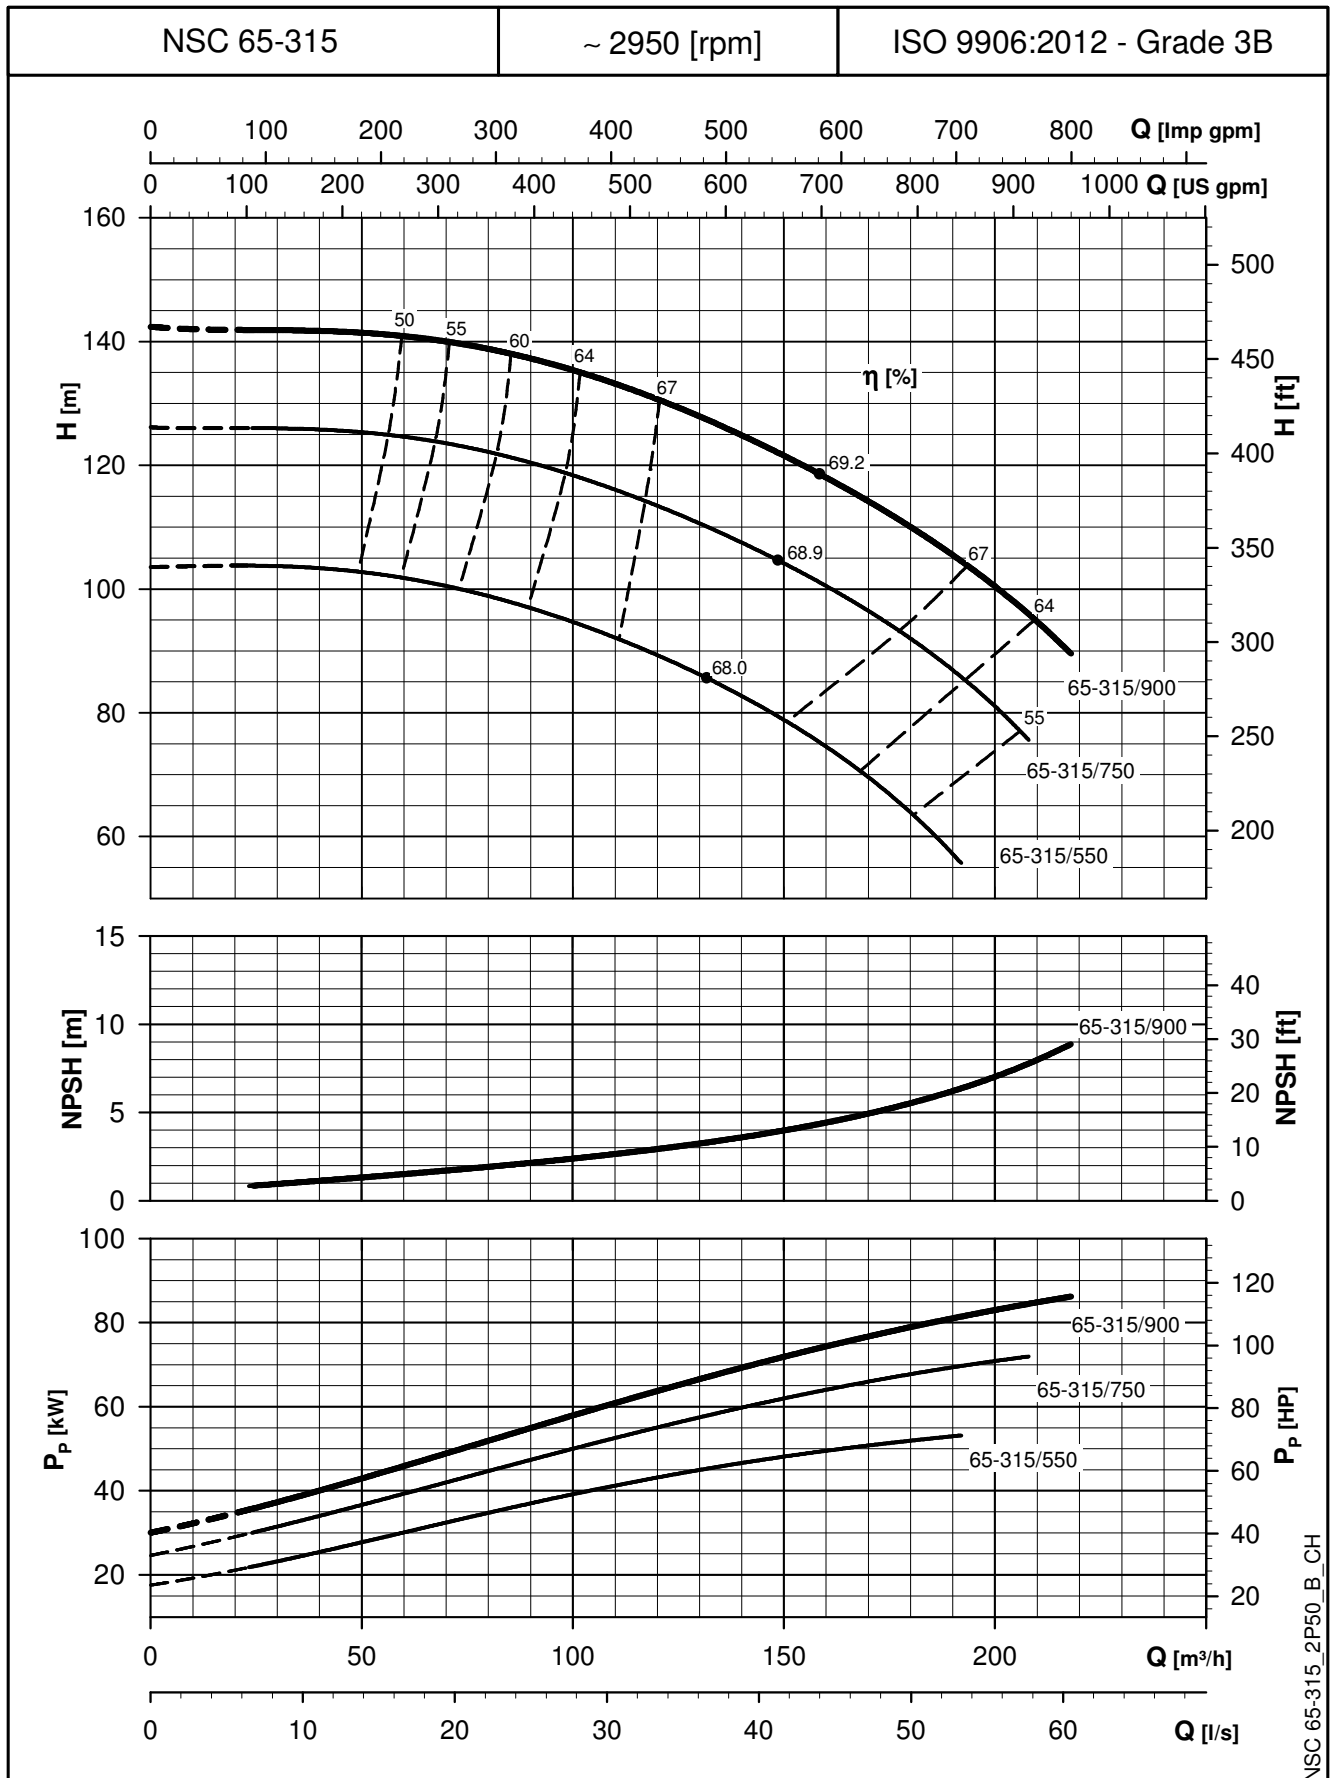

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

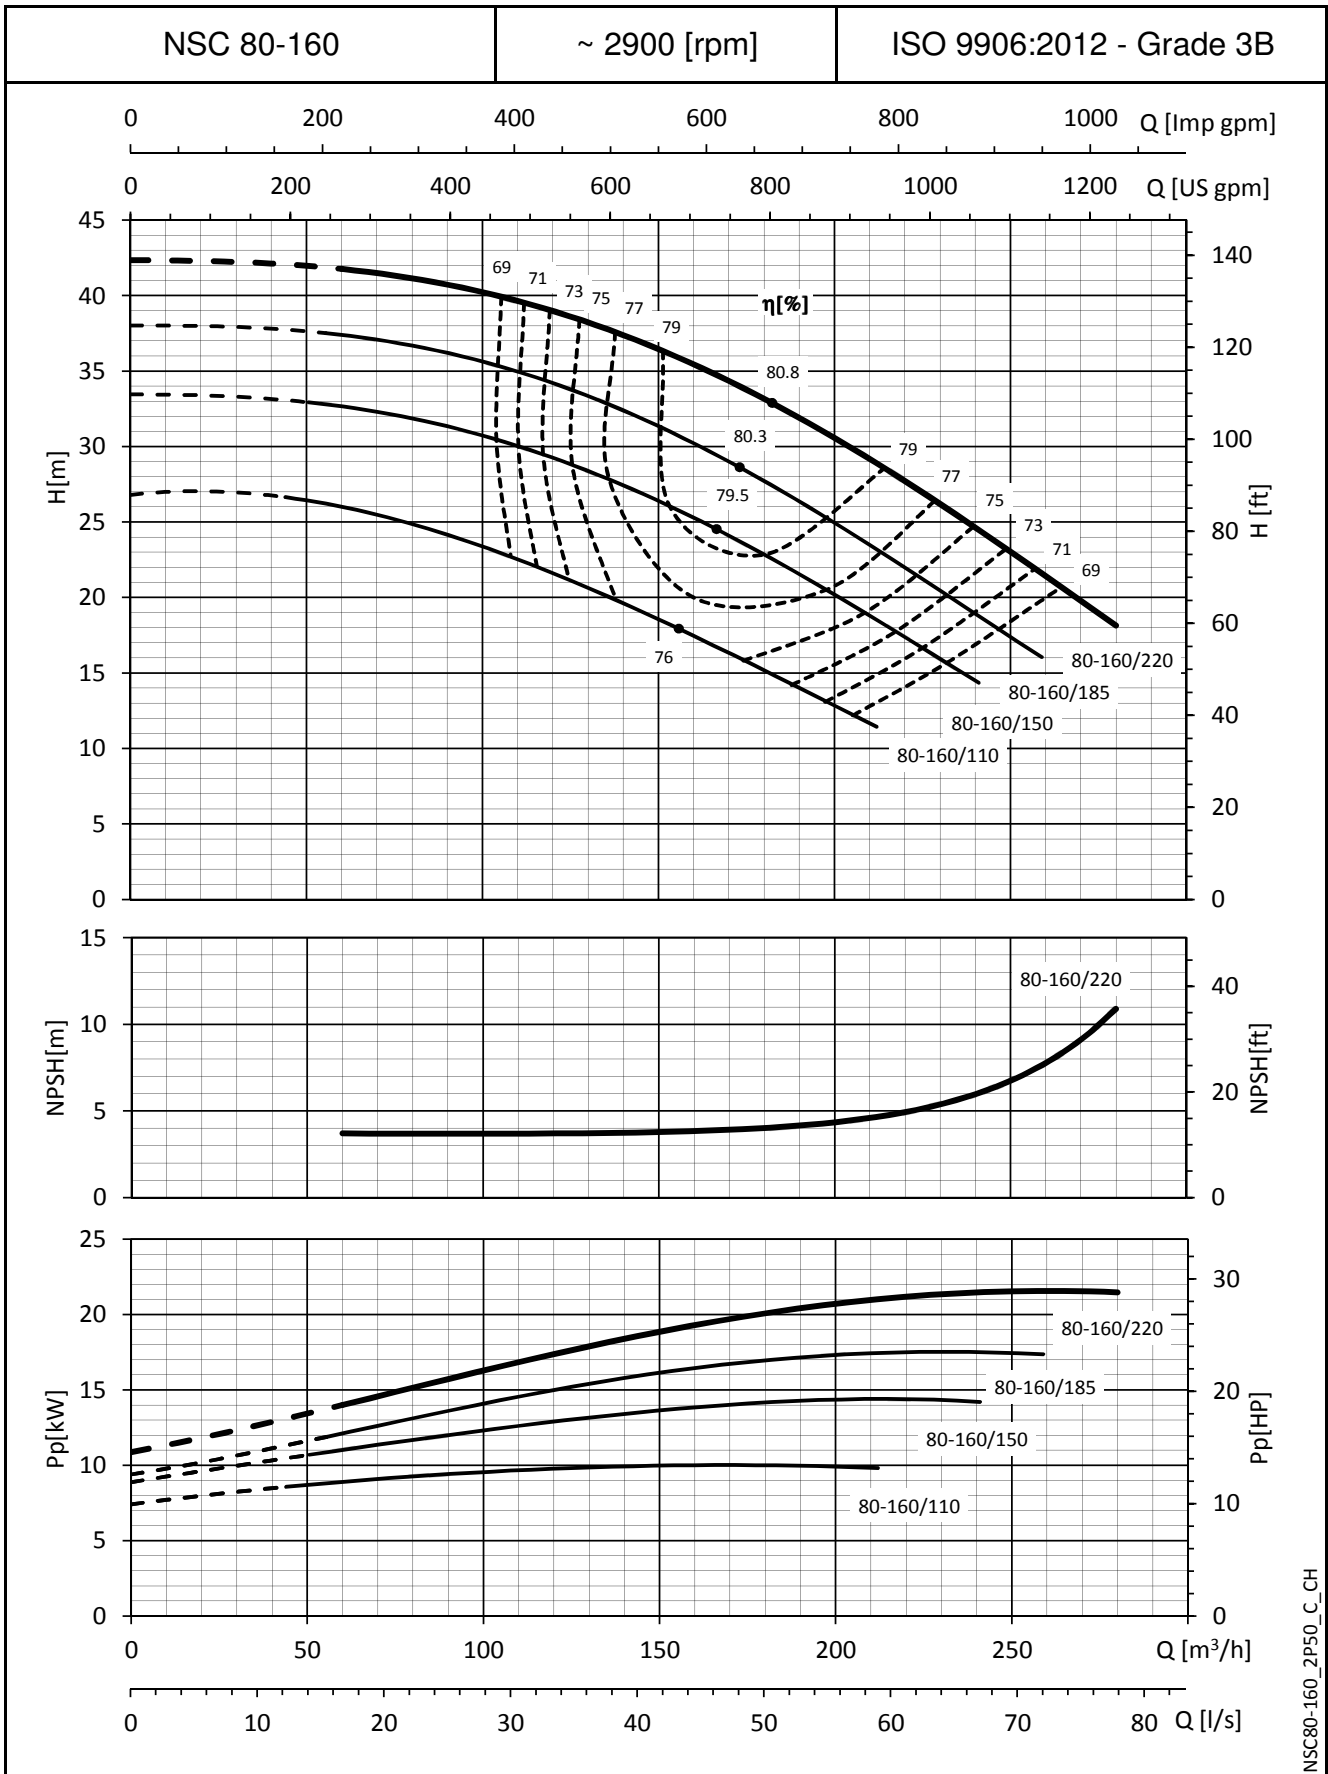


NSC80-160_2P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

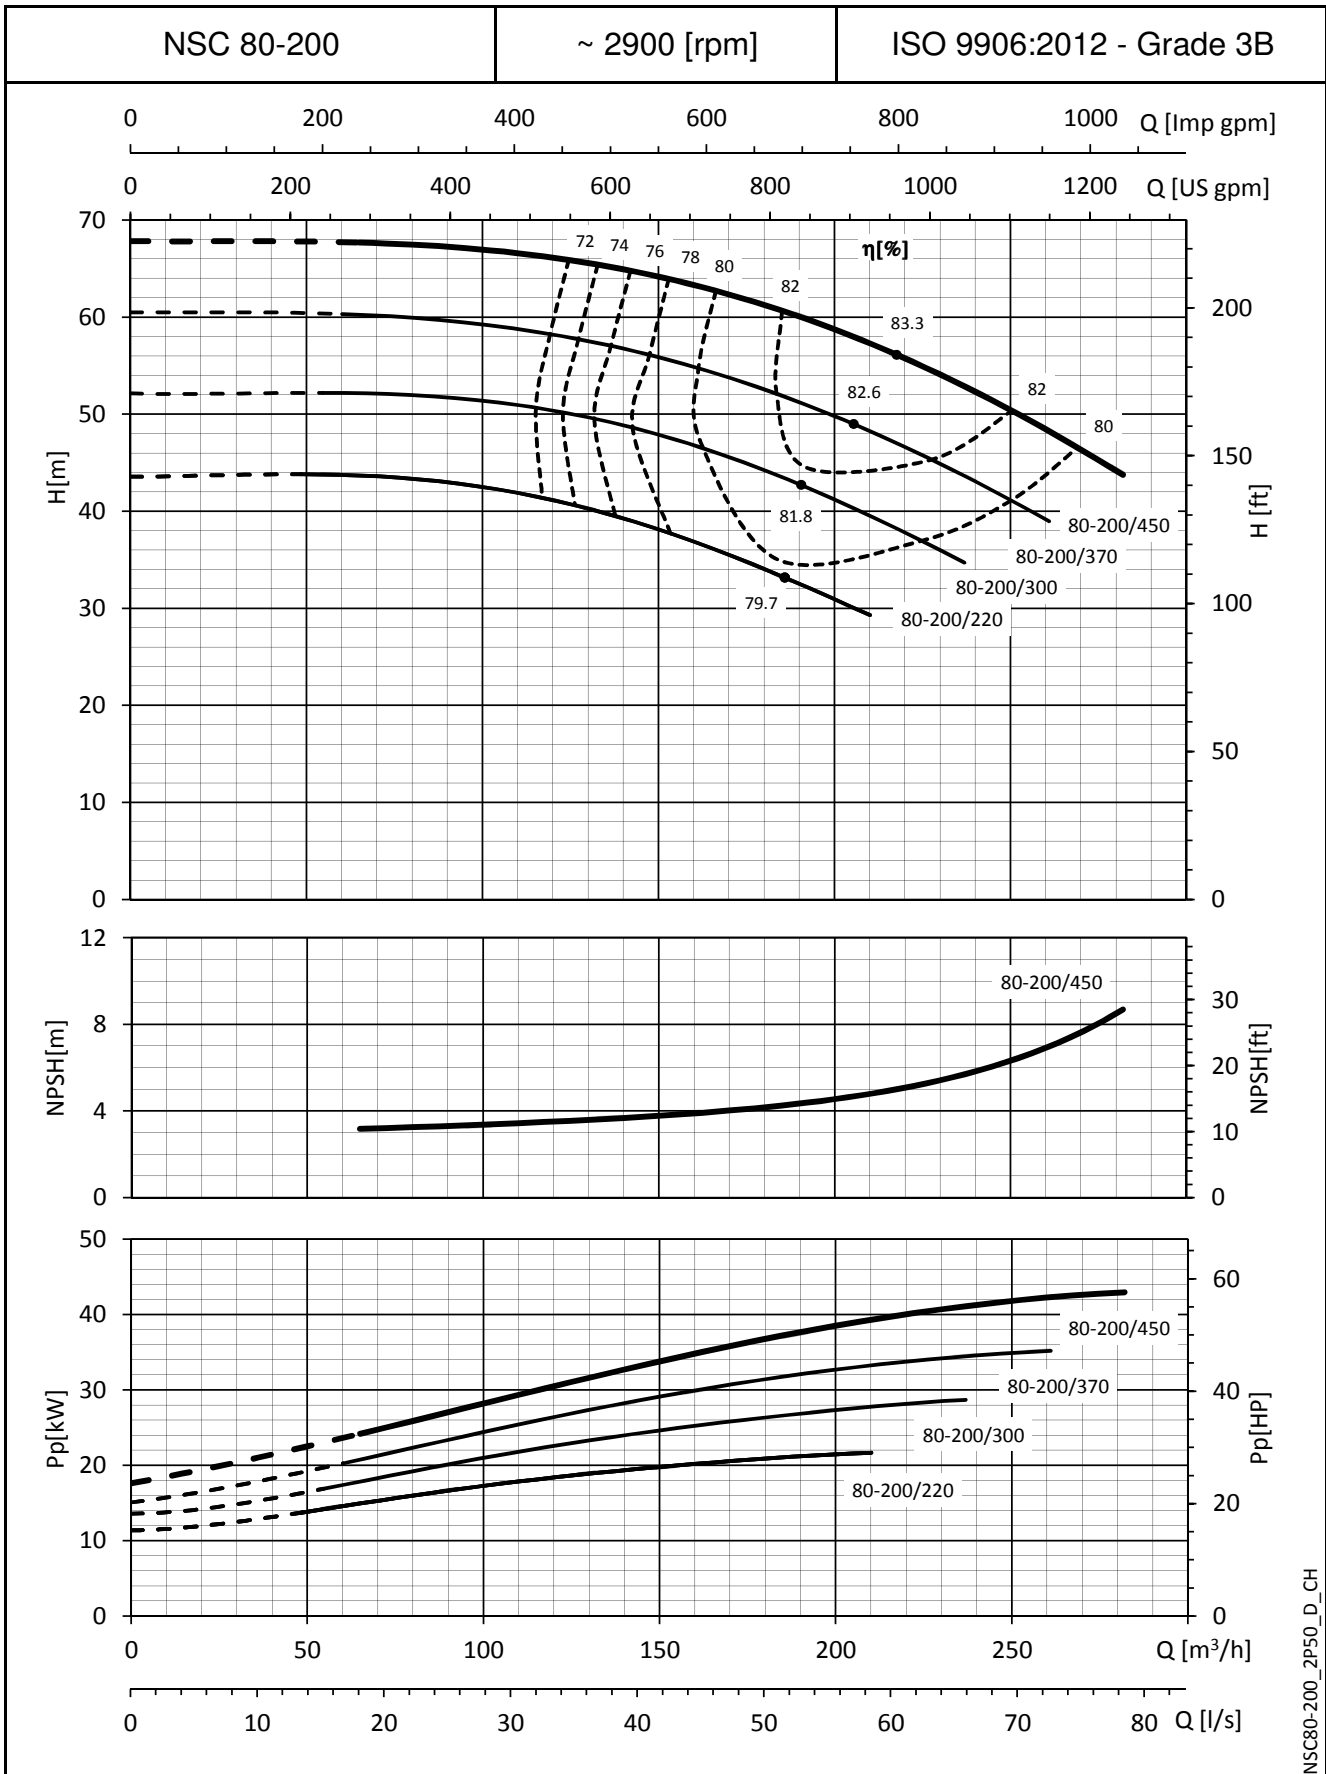


NSC80-200_2P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

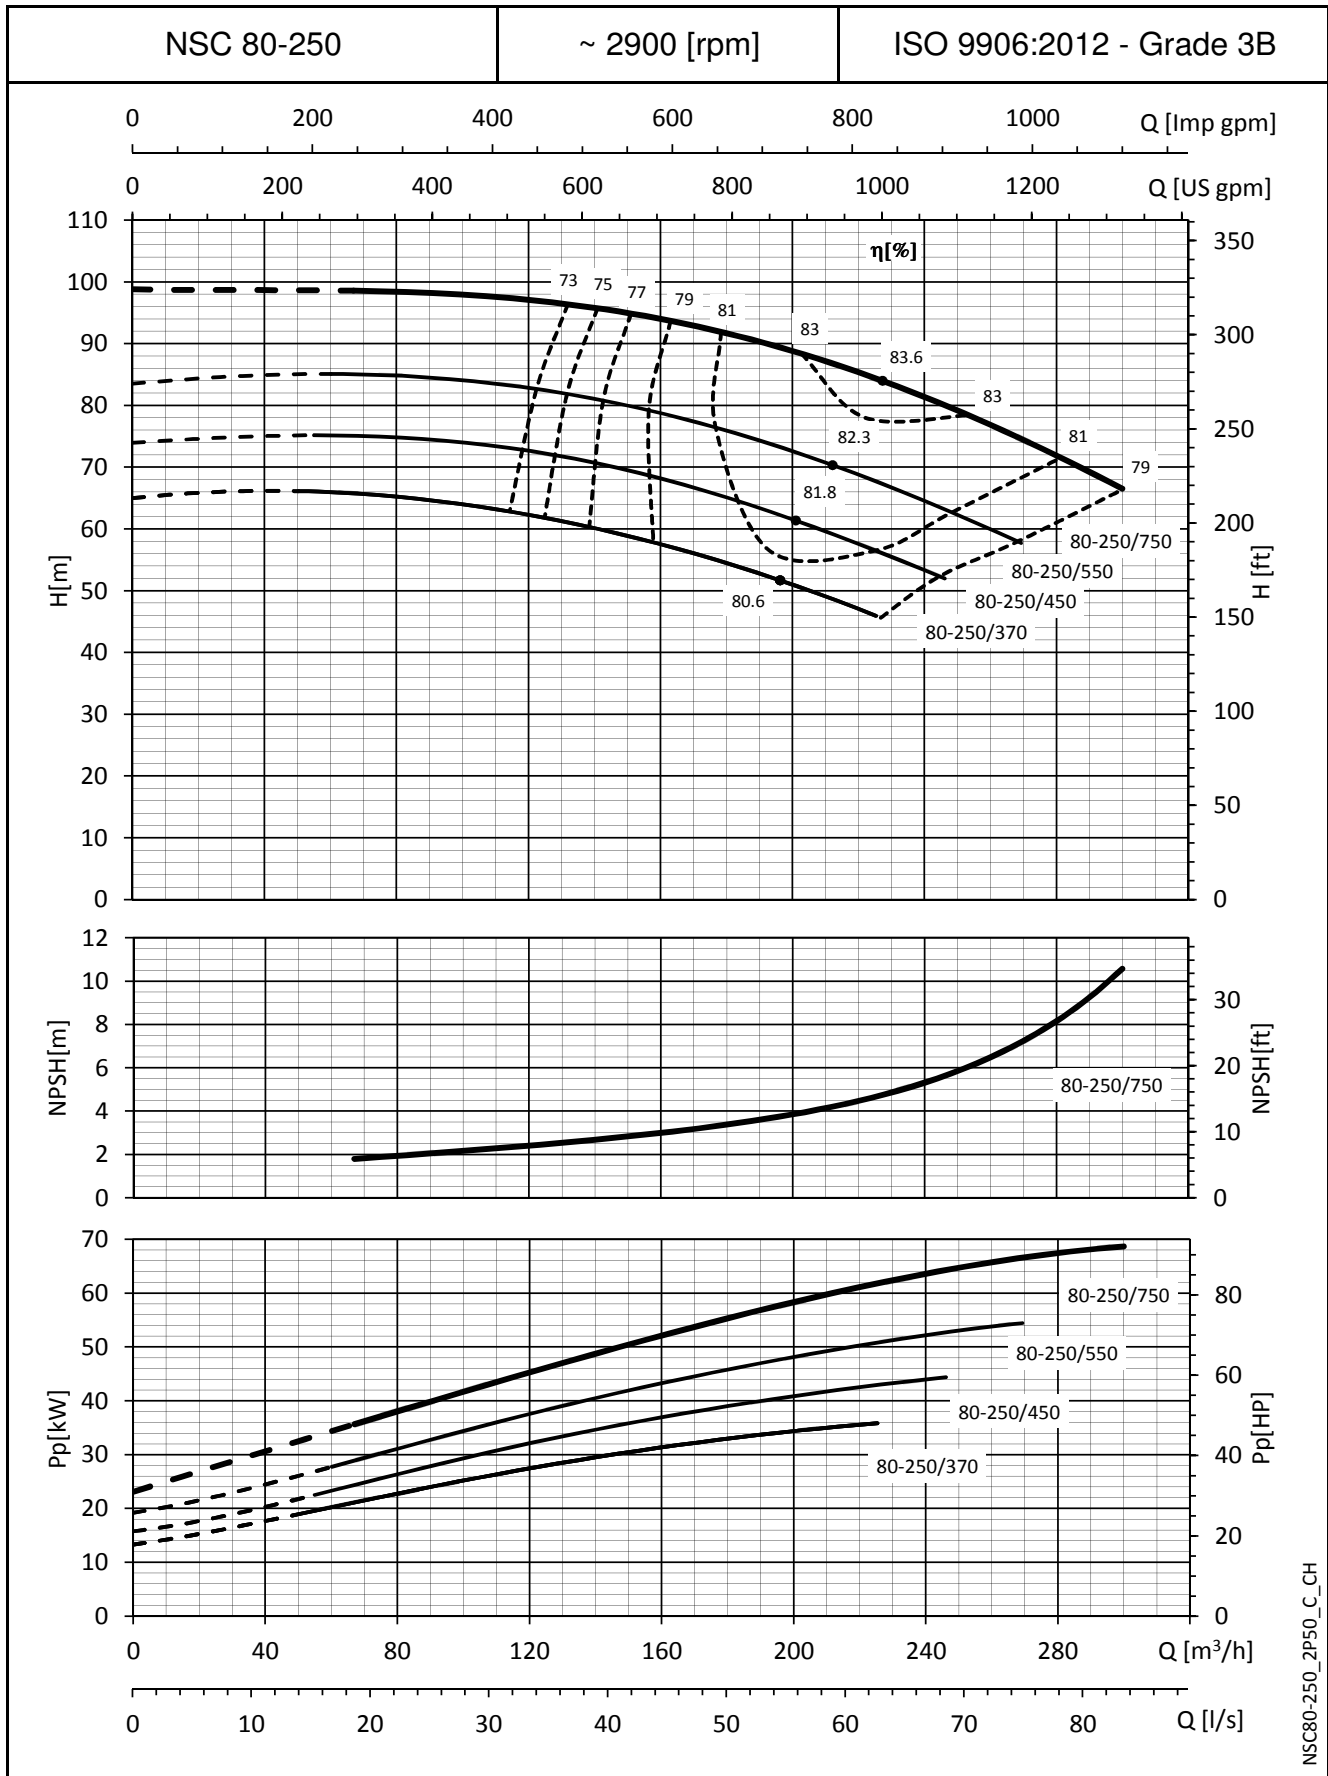


NSC80-250_2P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

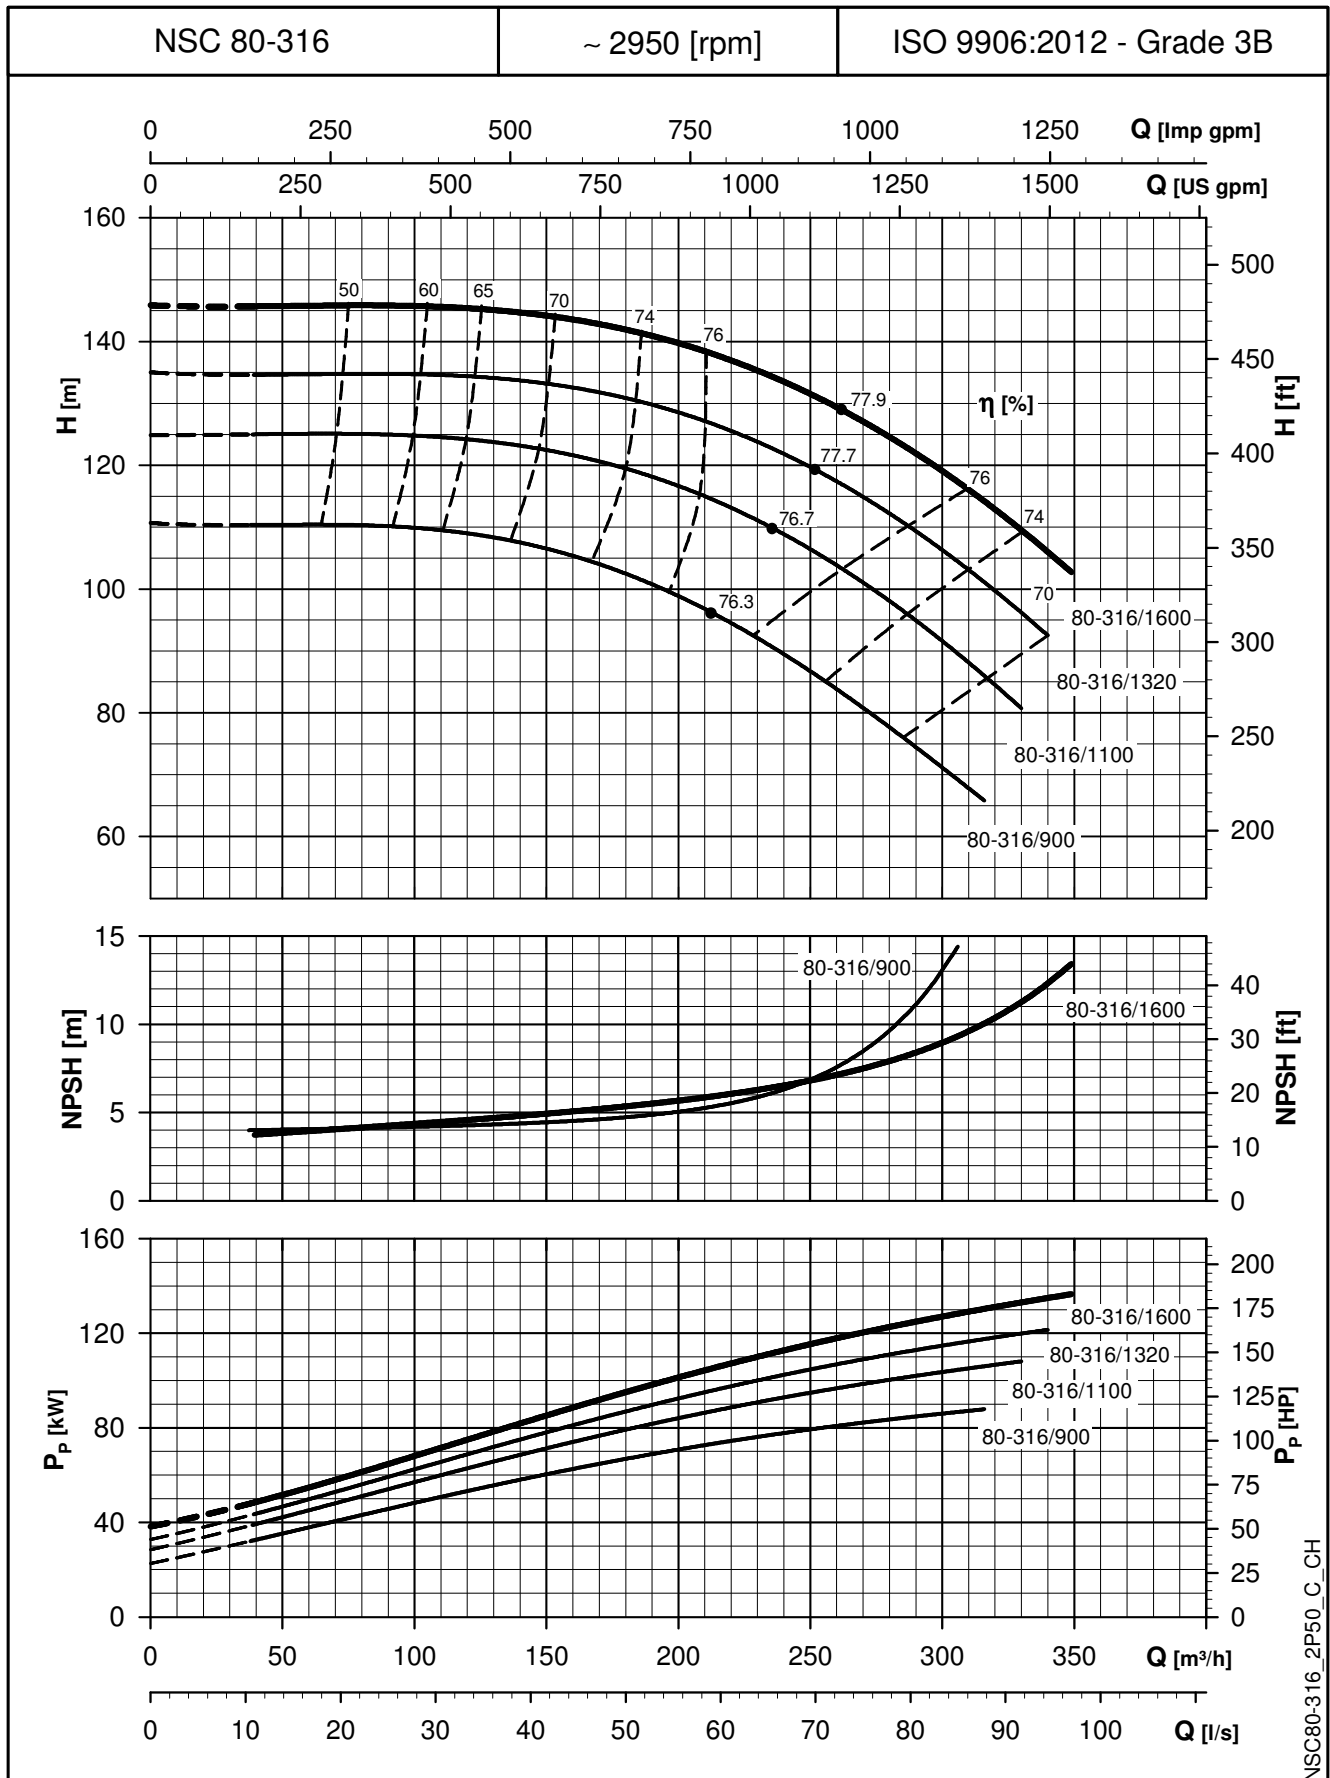


NSC80-316_2P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

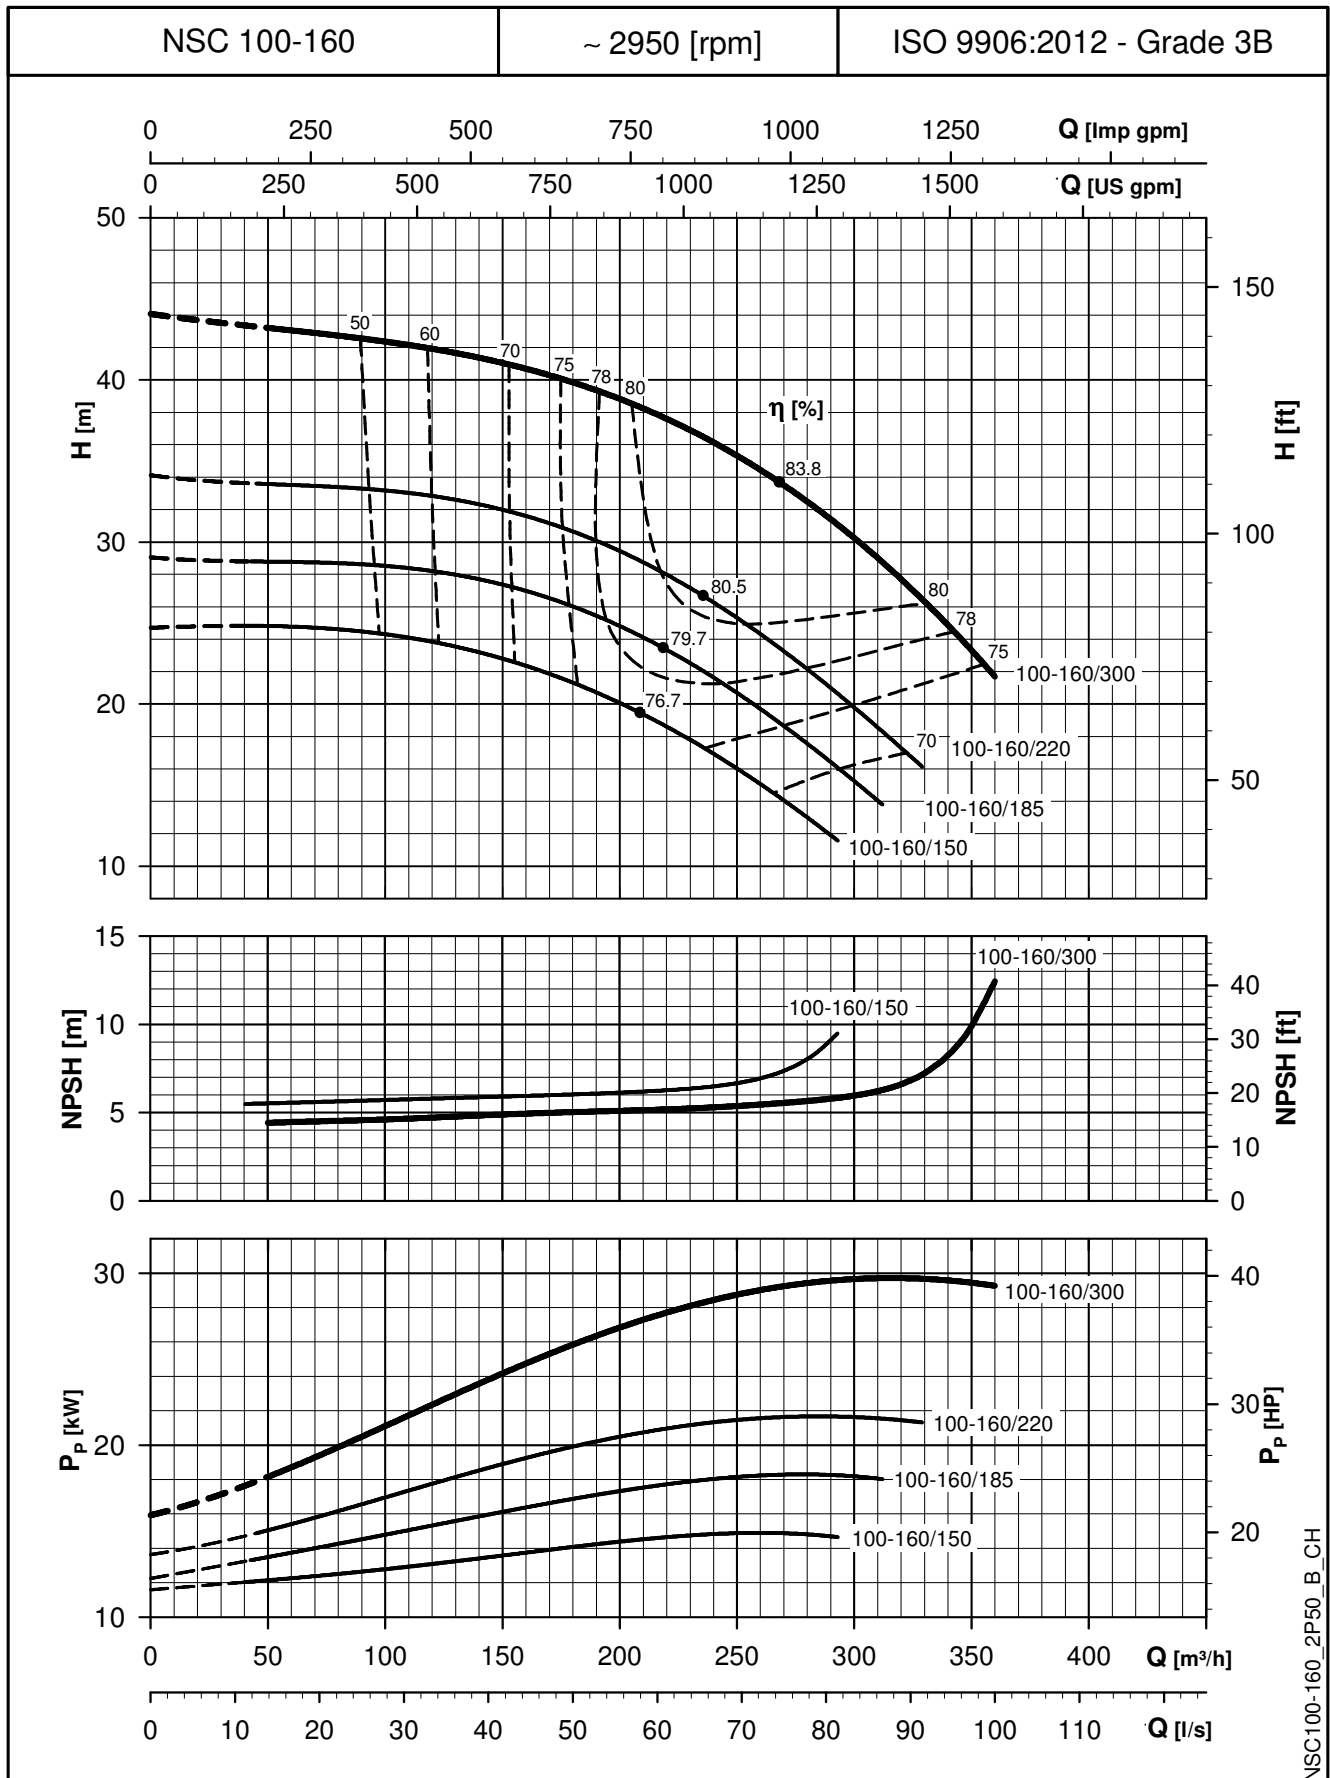


NSC100-160_2P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

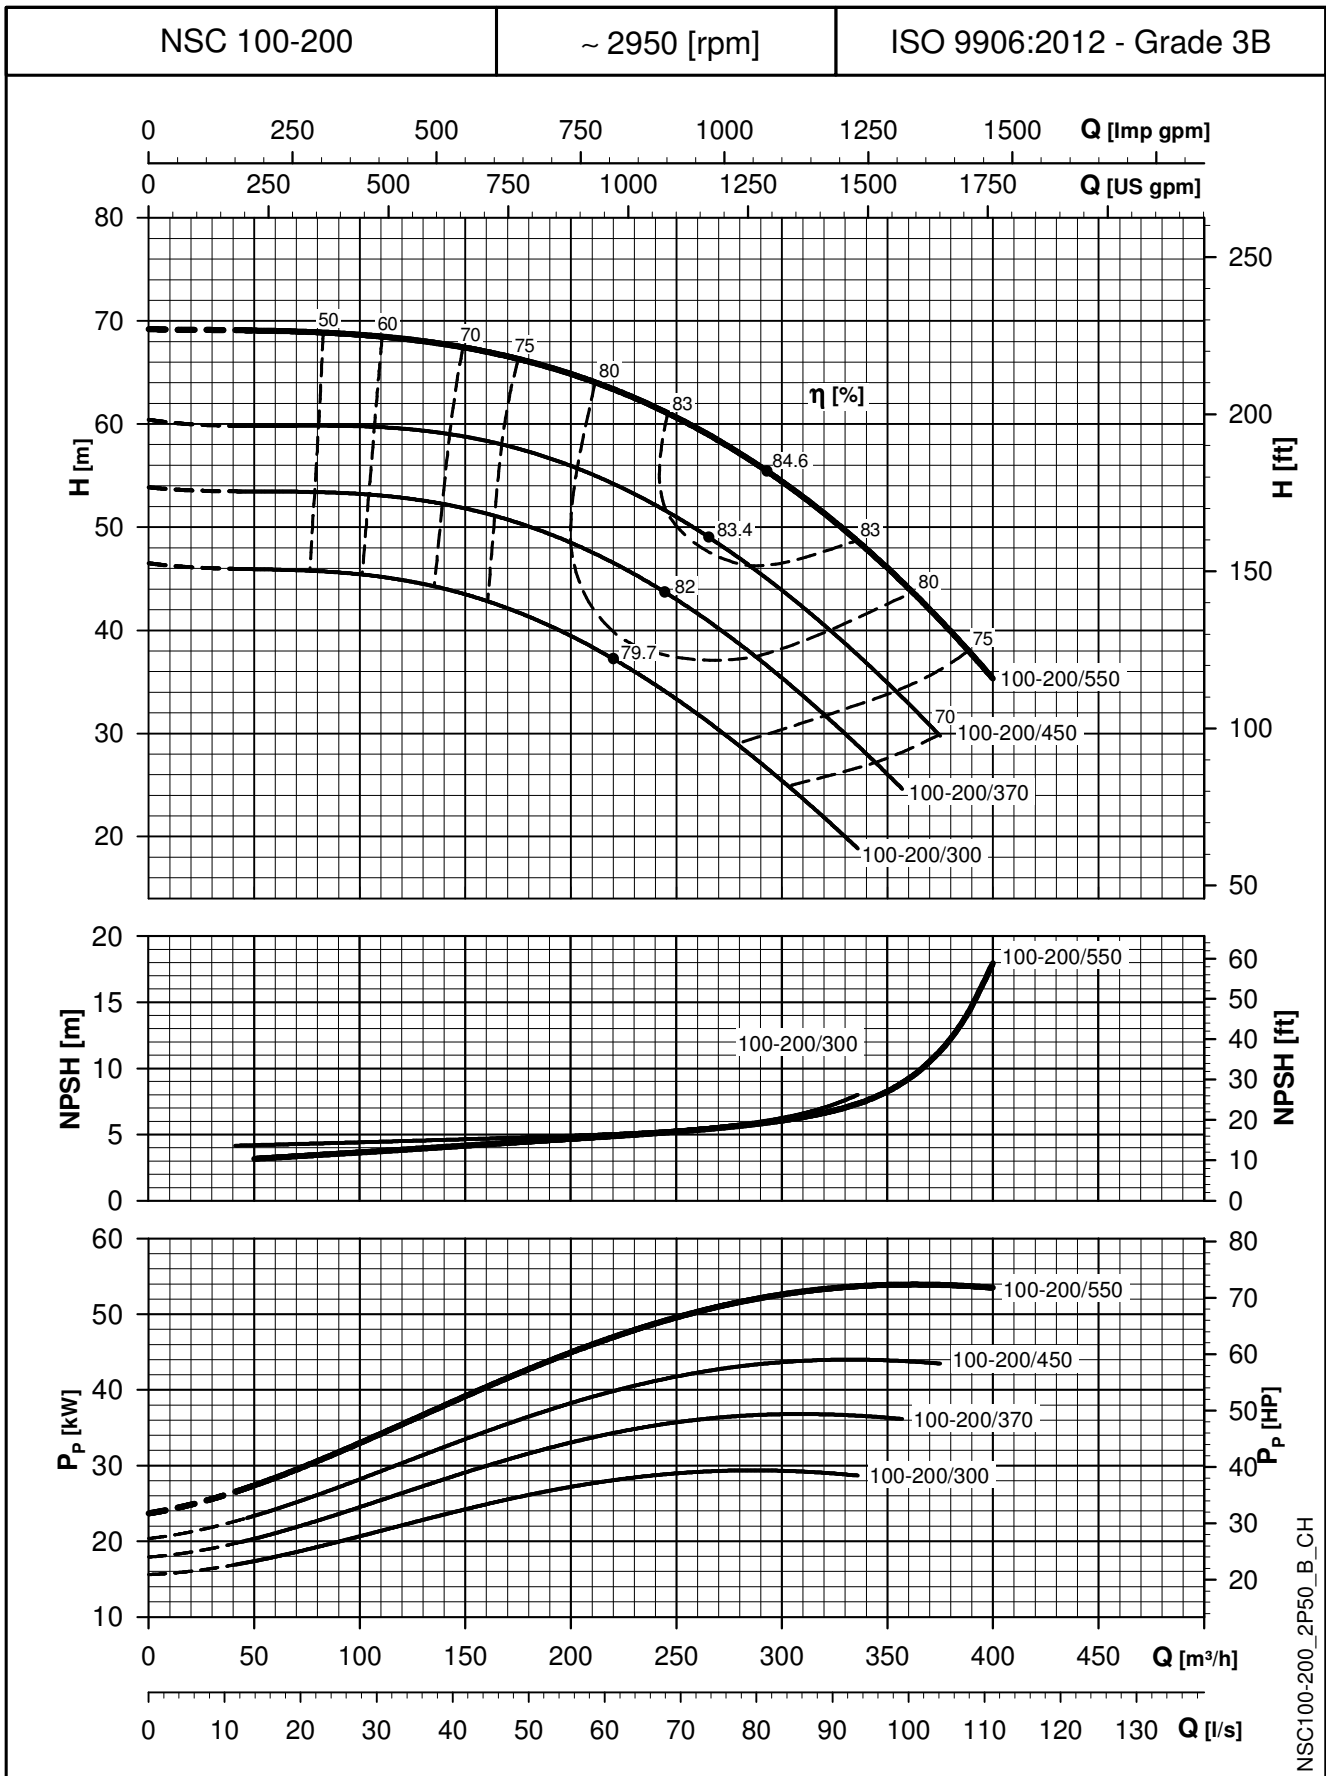


NSC100-200_2P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

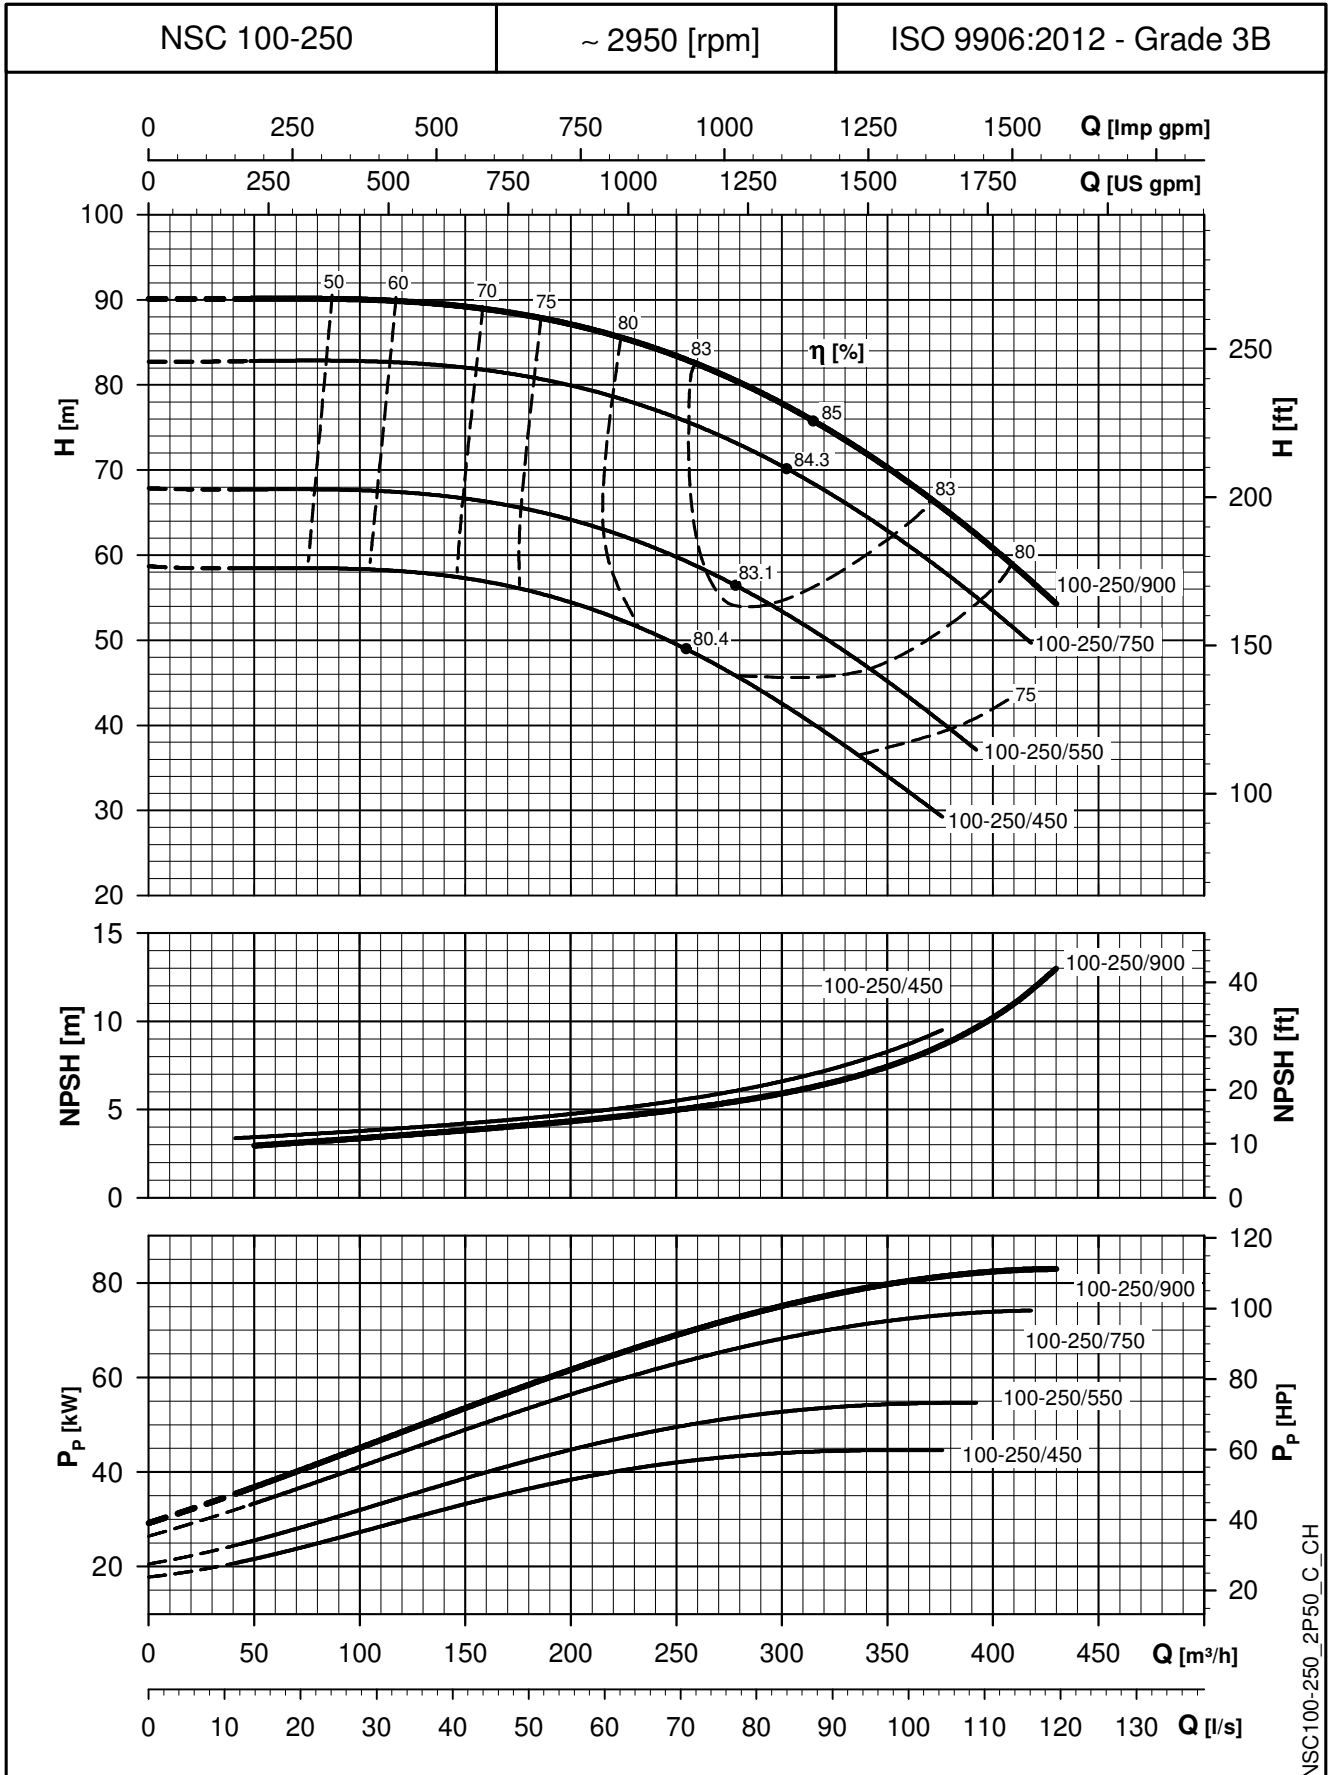


NSC100-250_2P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

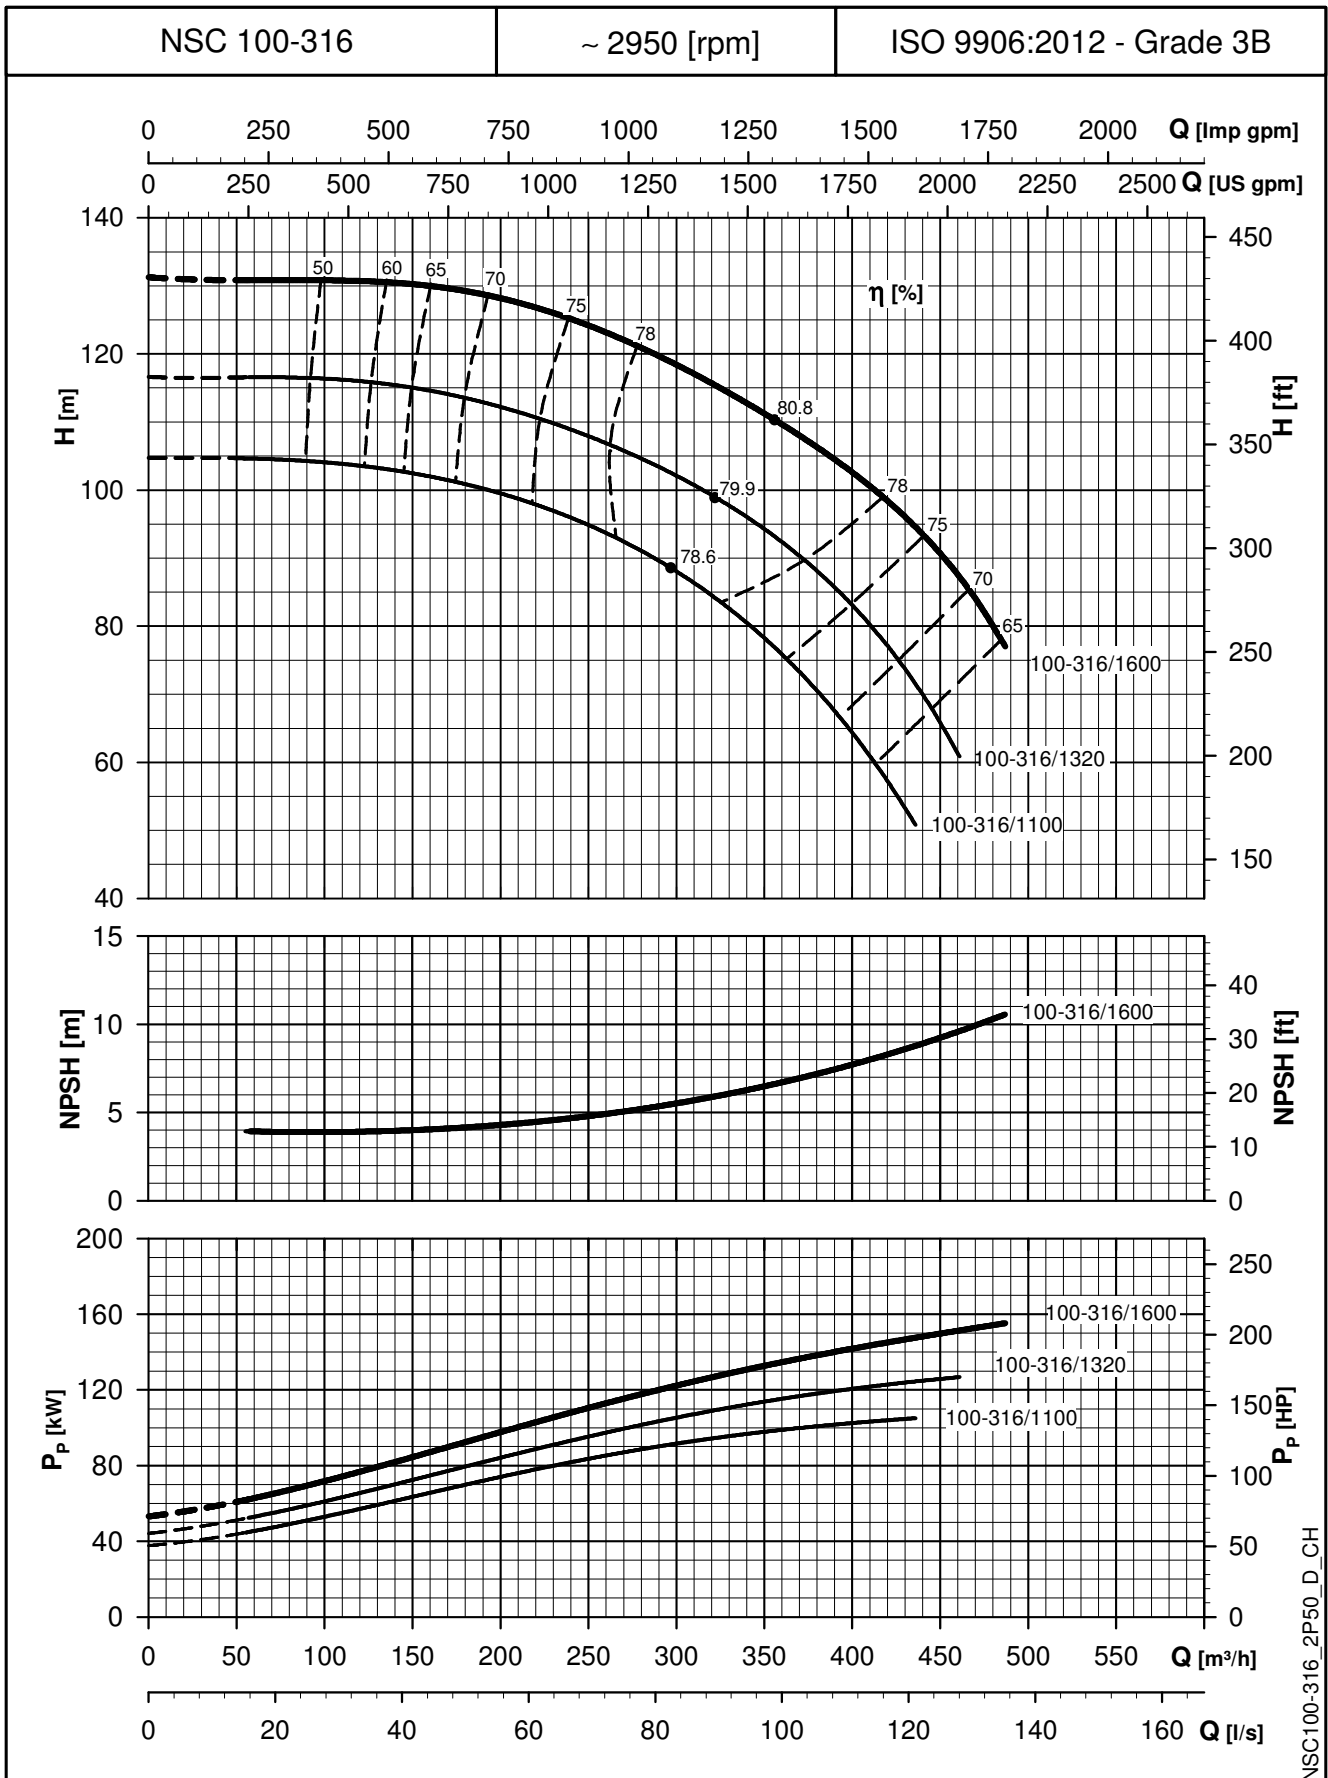


NSC100-316_2P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

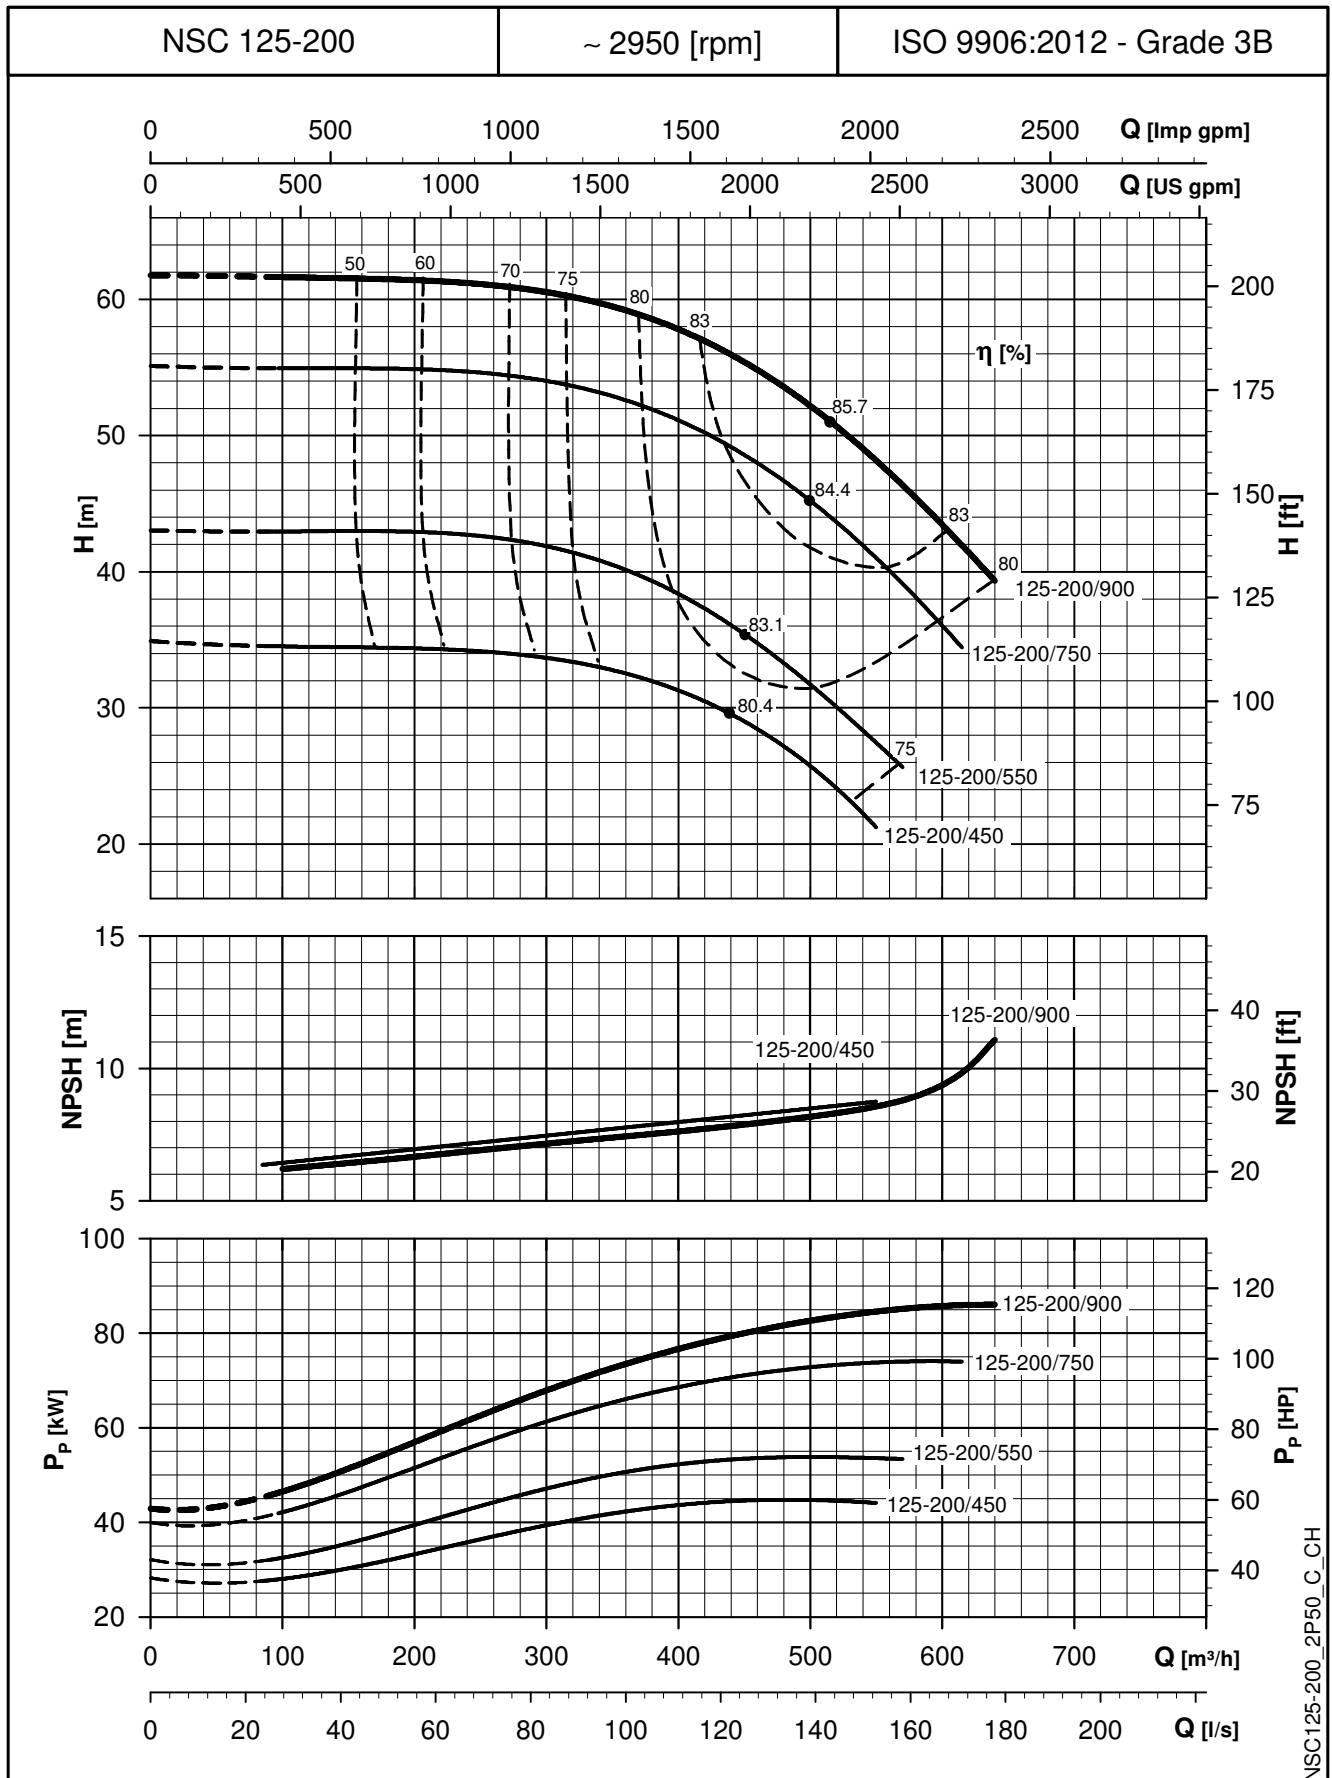


NSC125-200_2P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

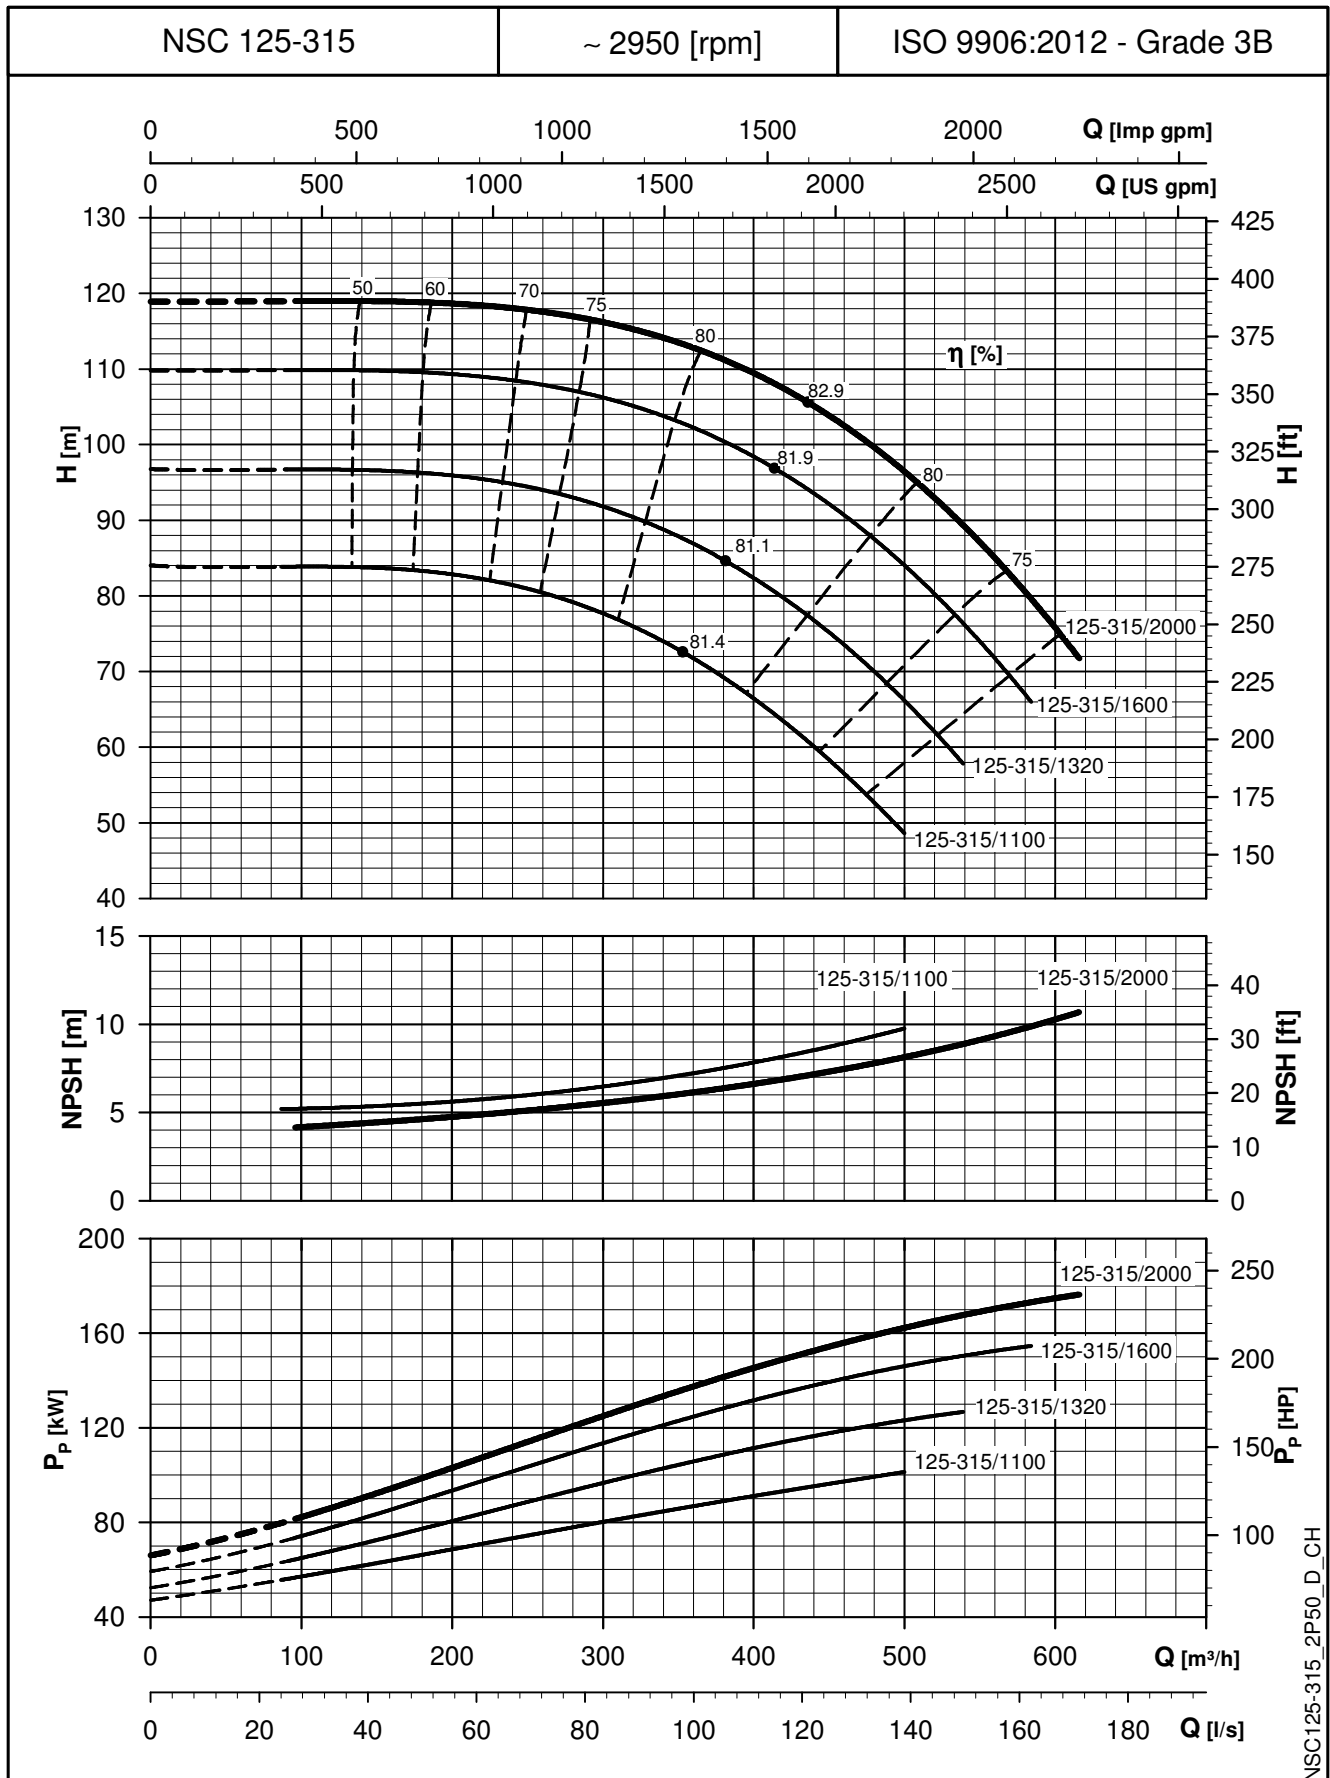

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

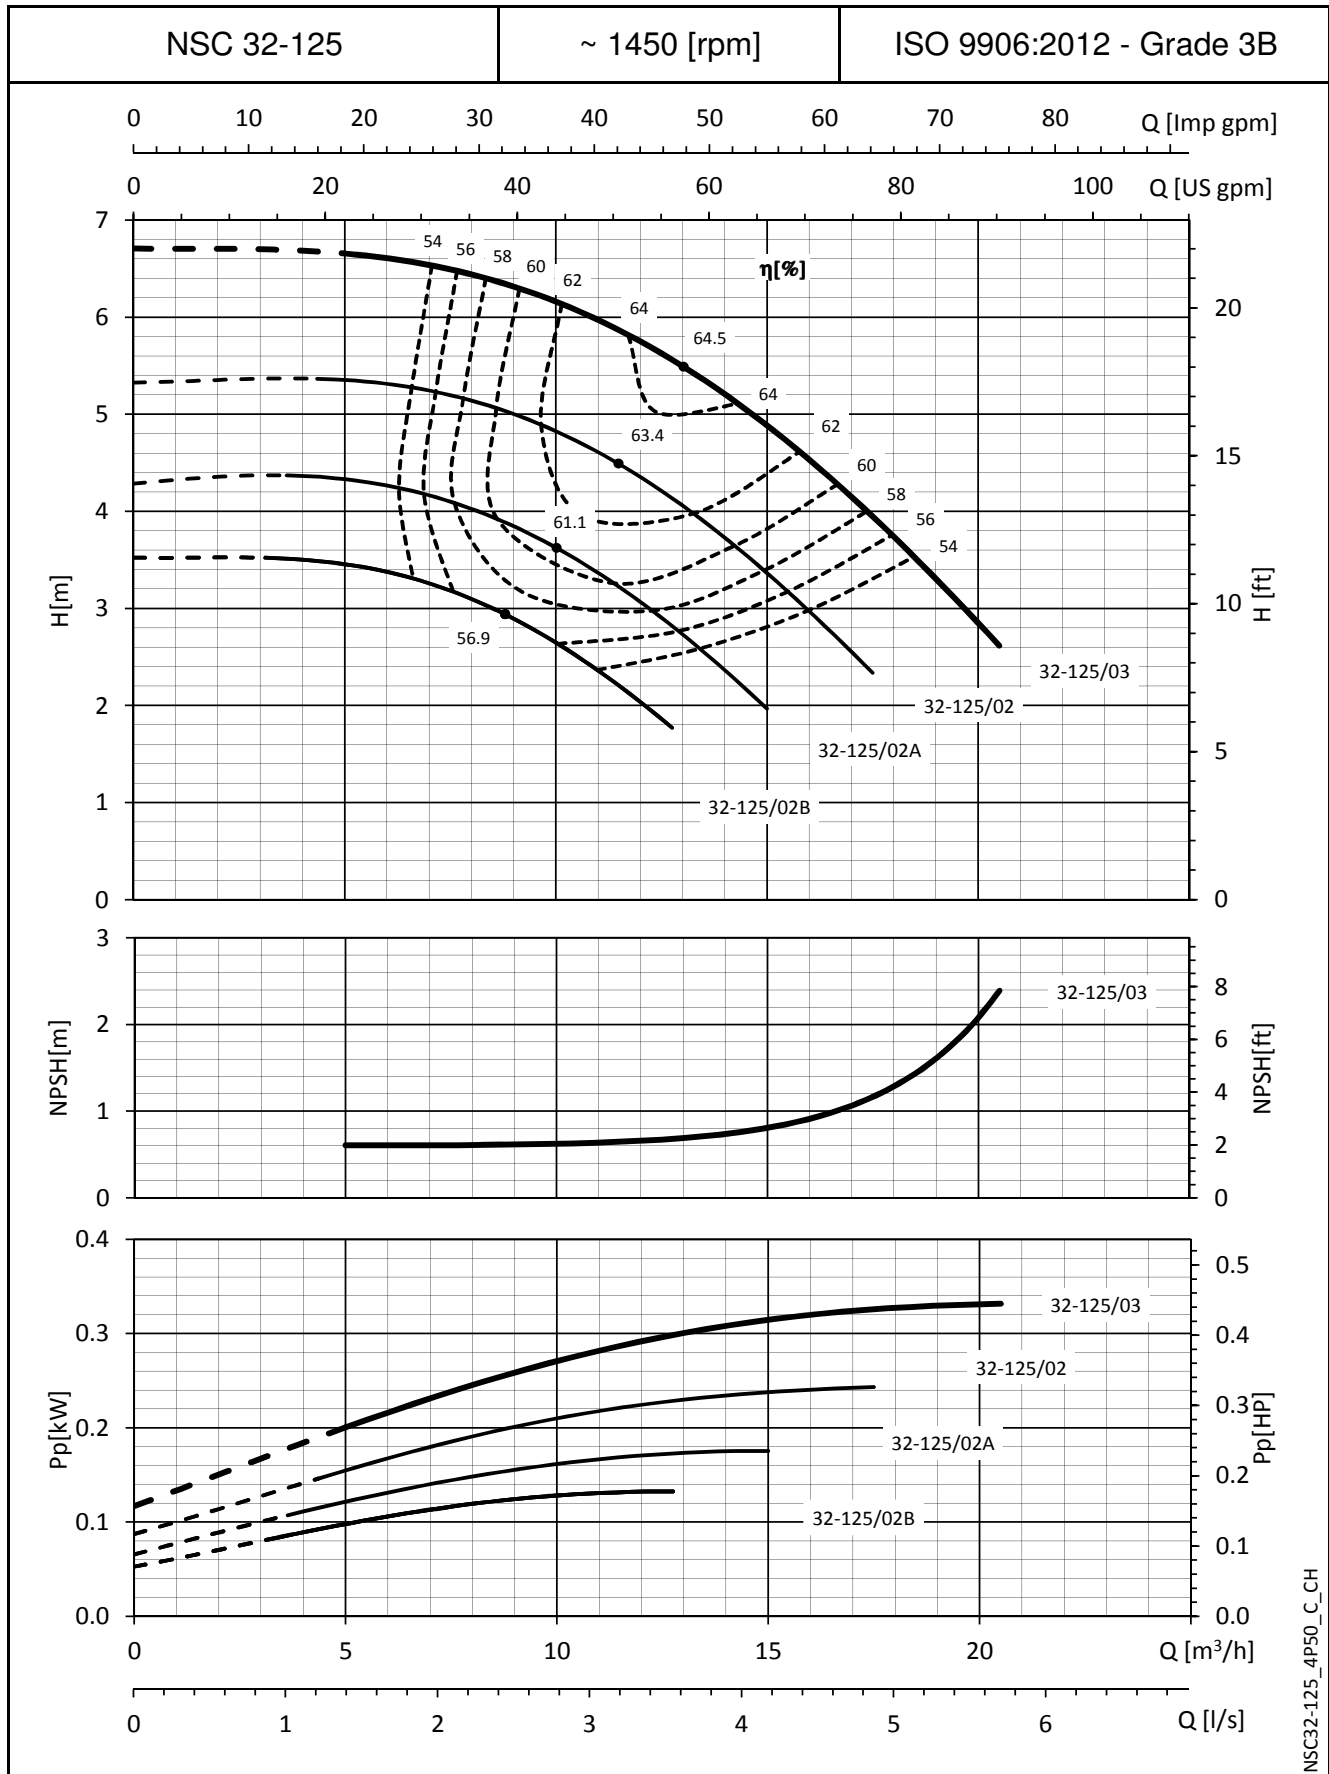


NSC32-125_4P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

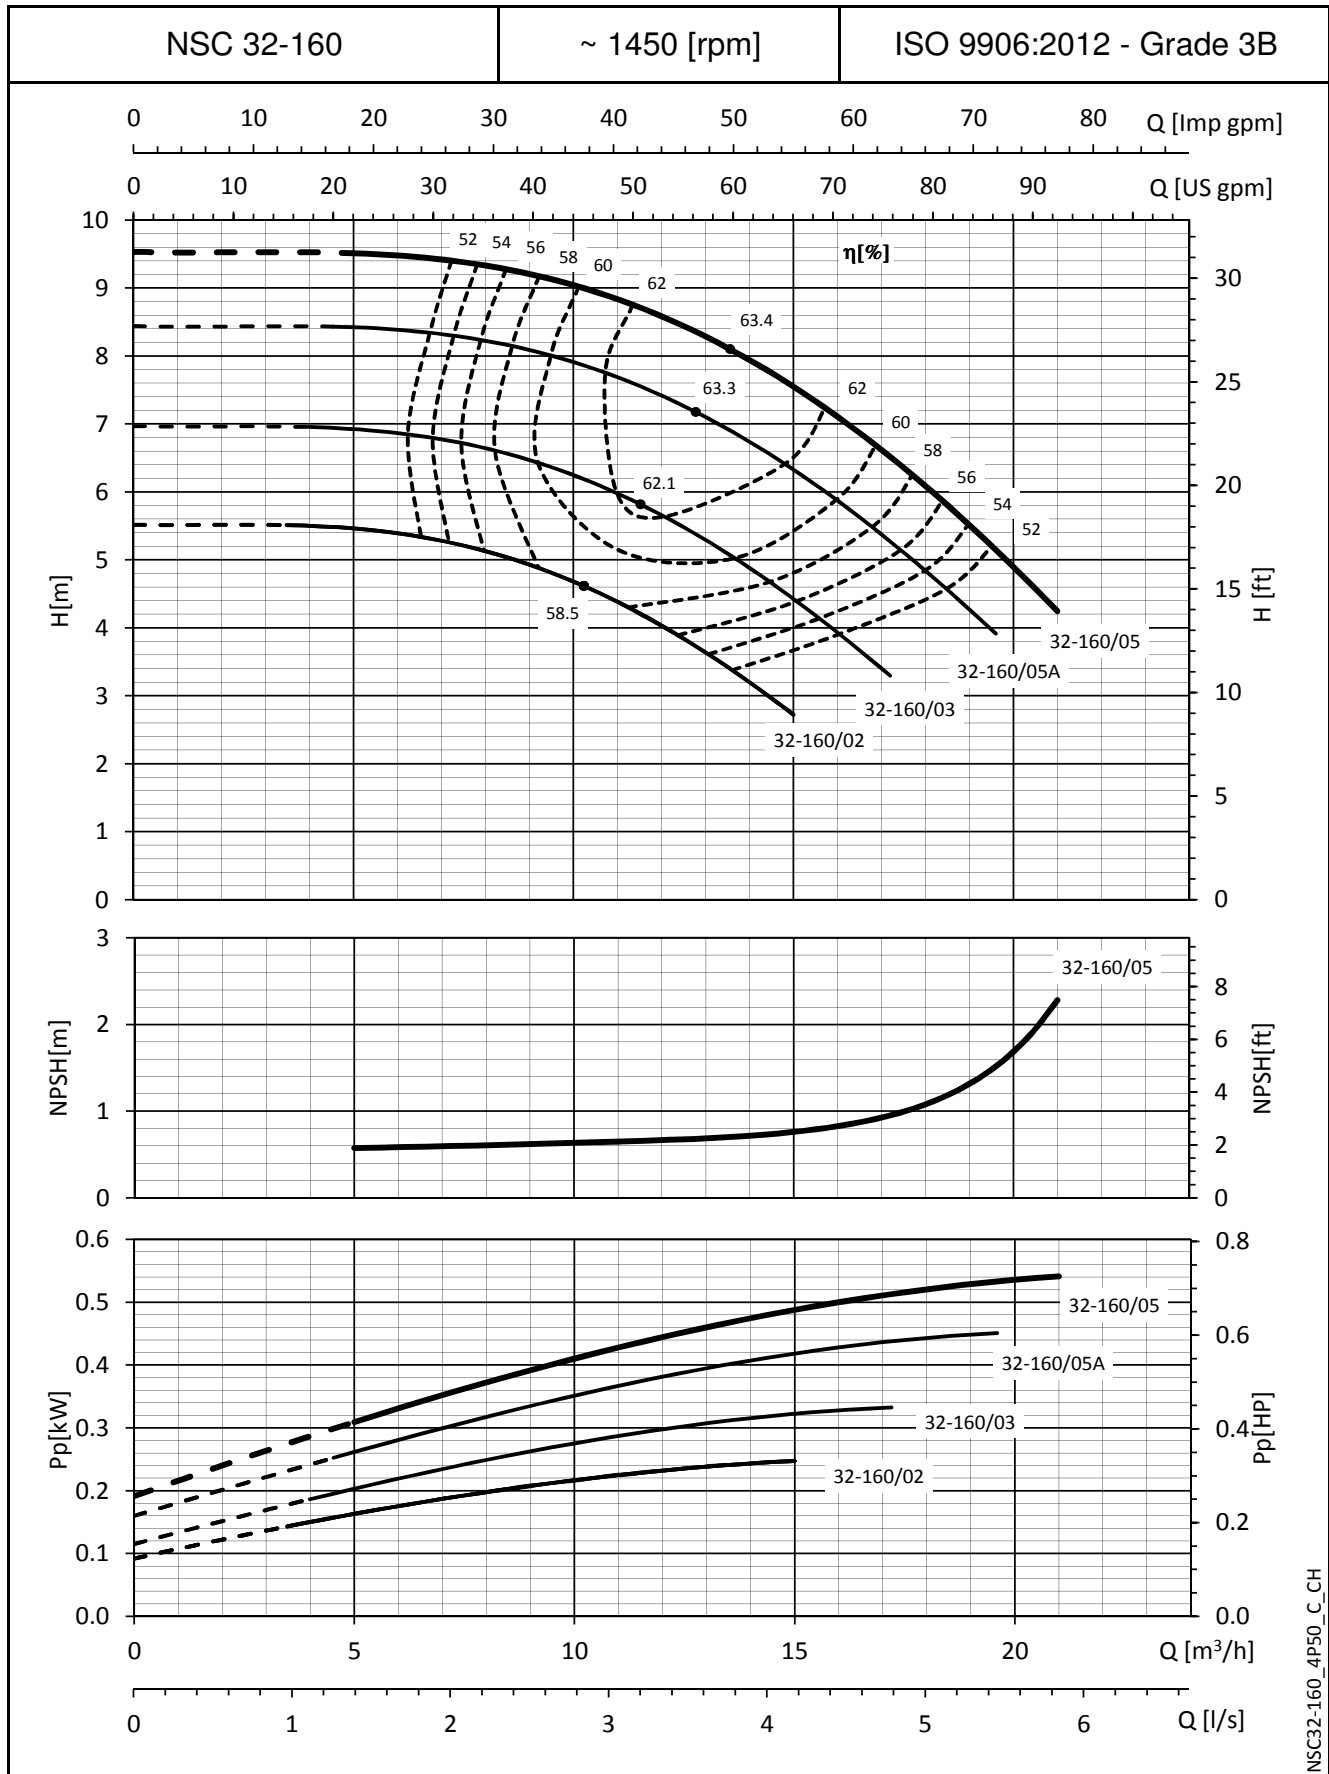


NSC32-160_4P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

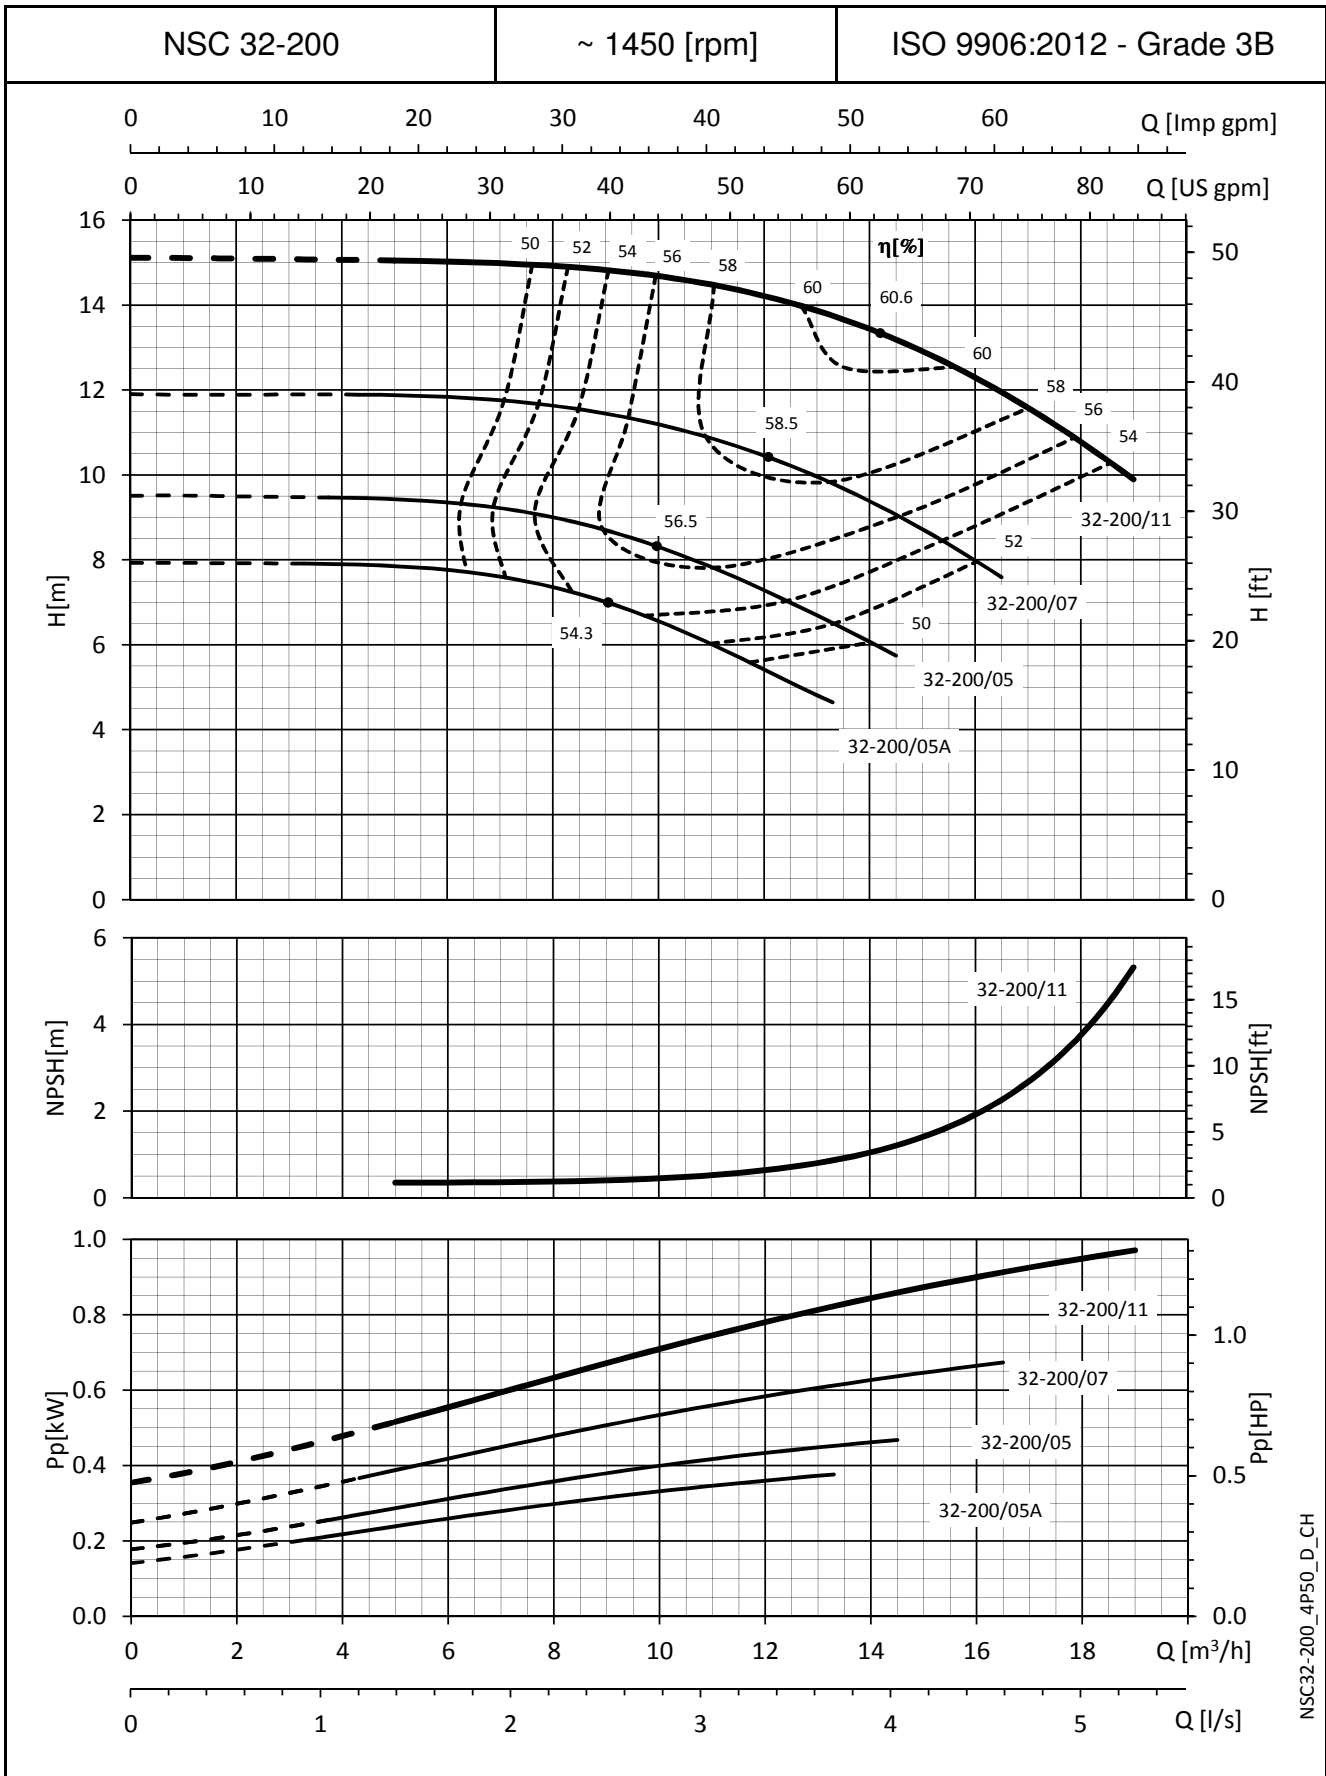


NSC32-200_4P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

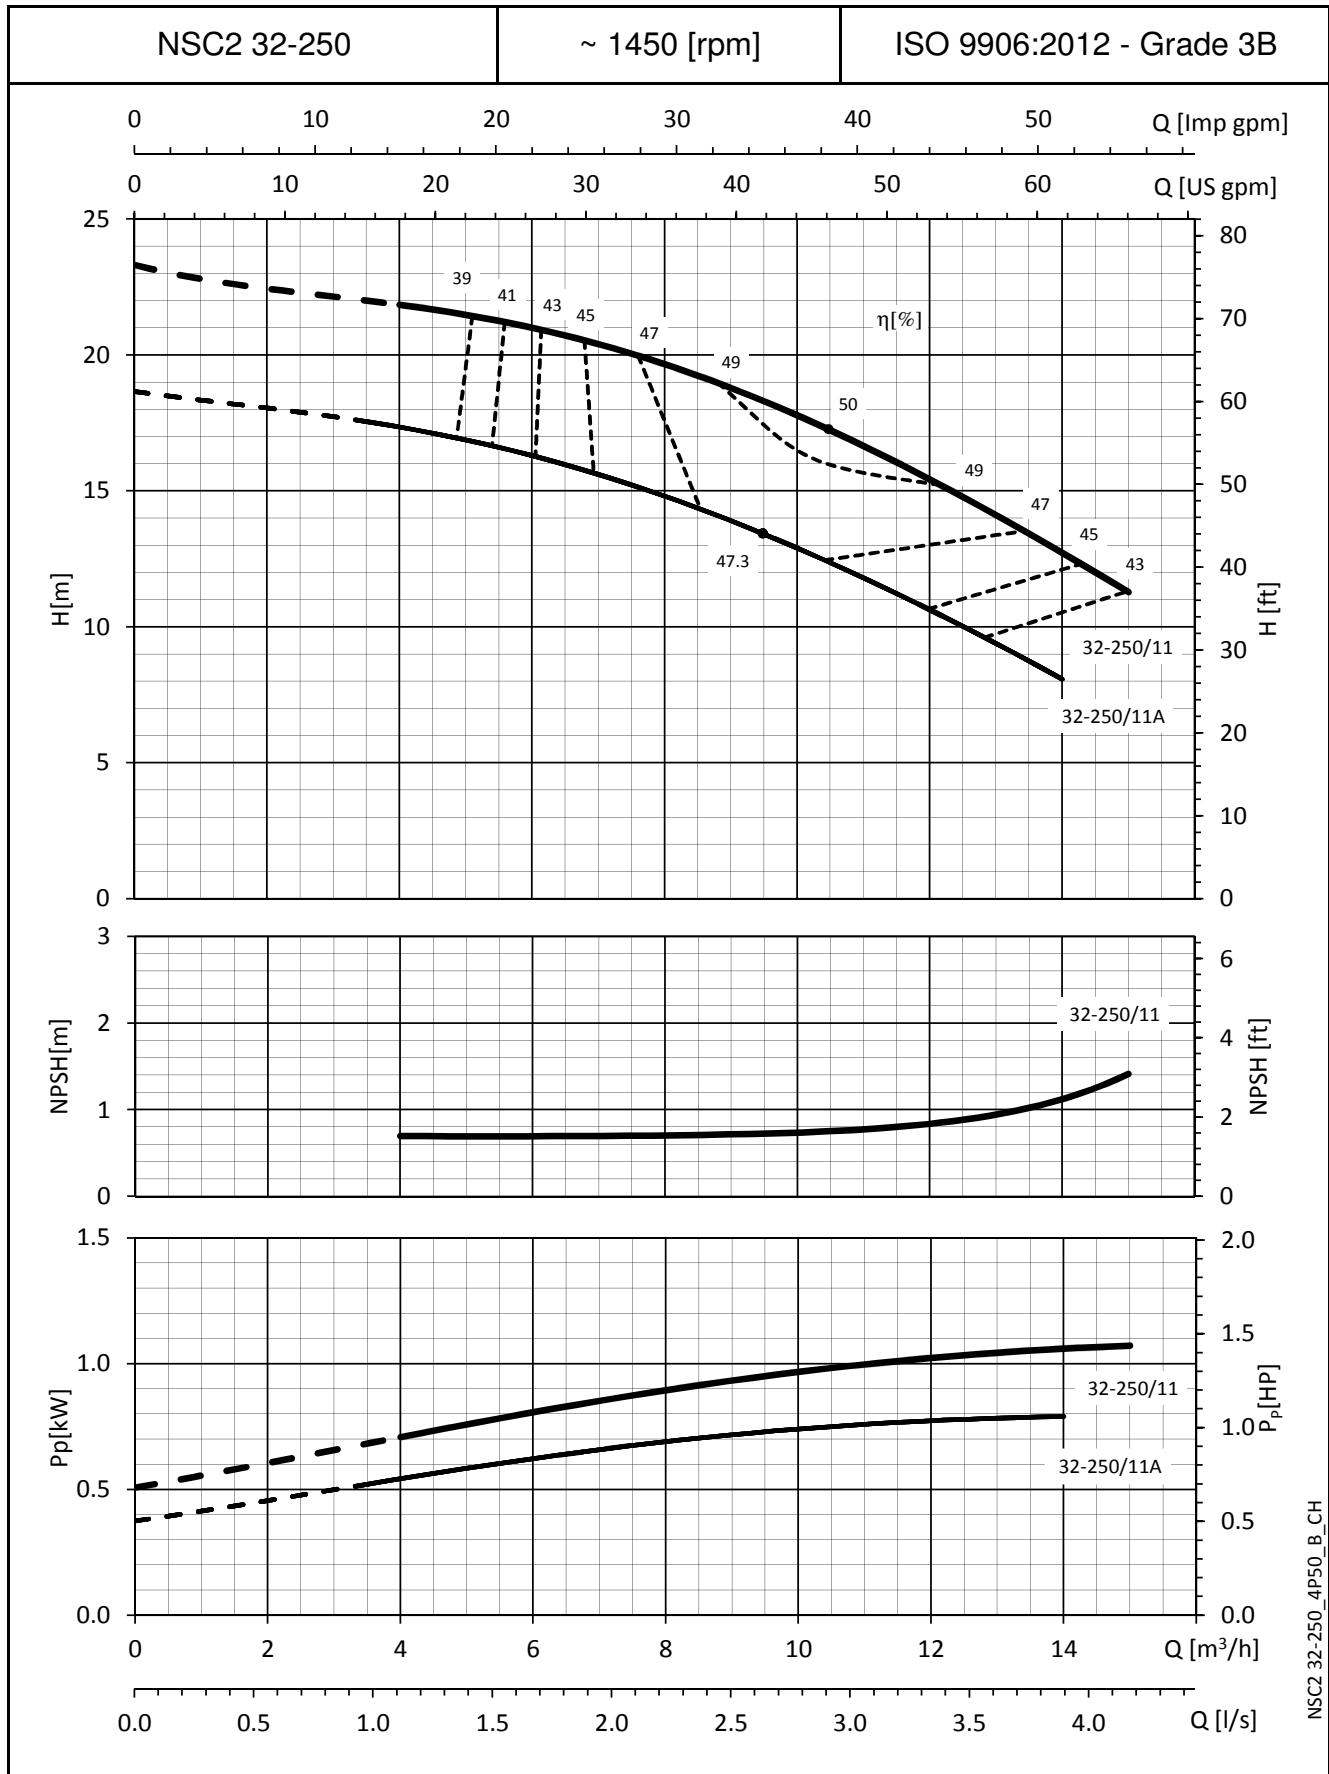

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

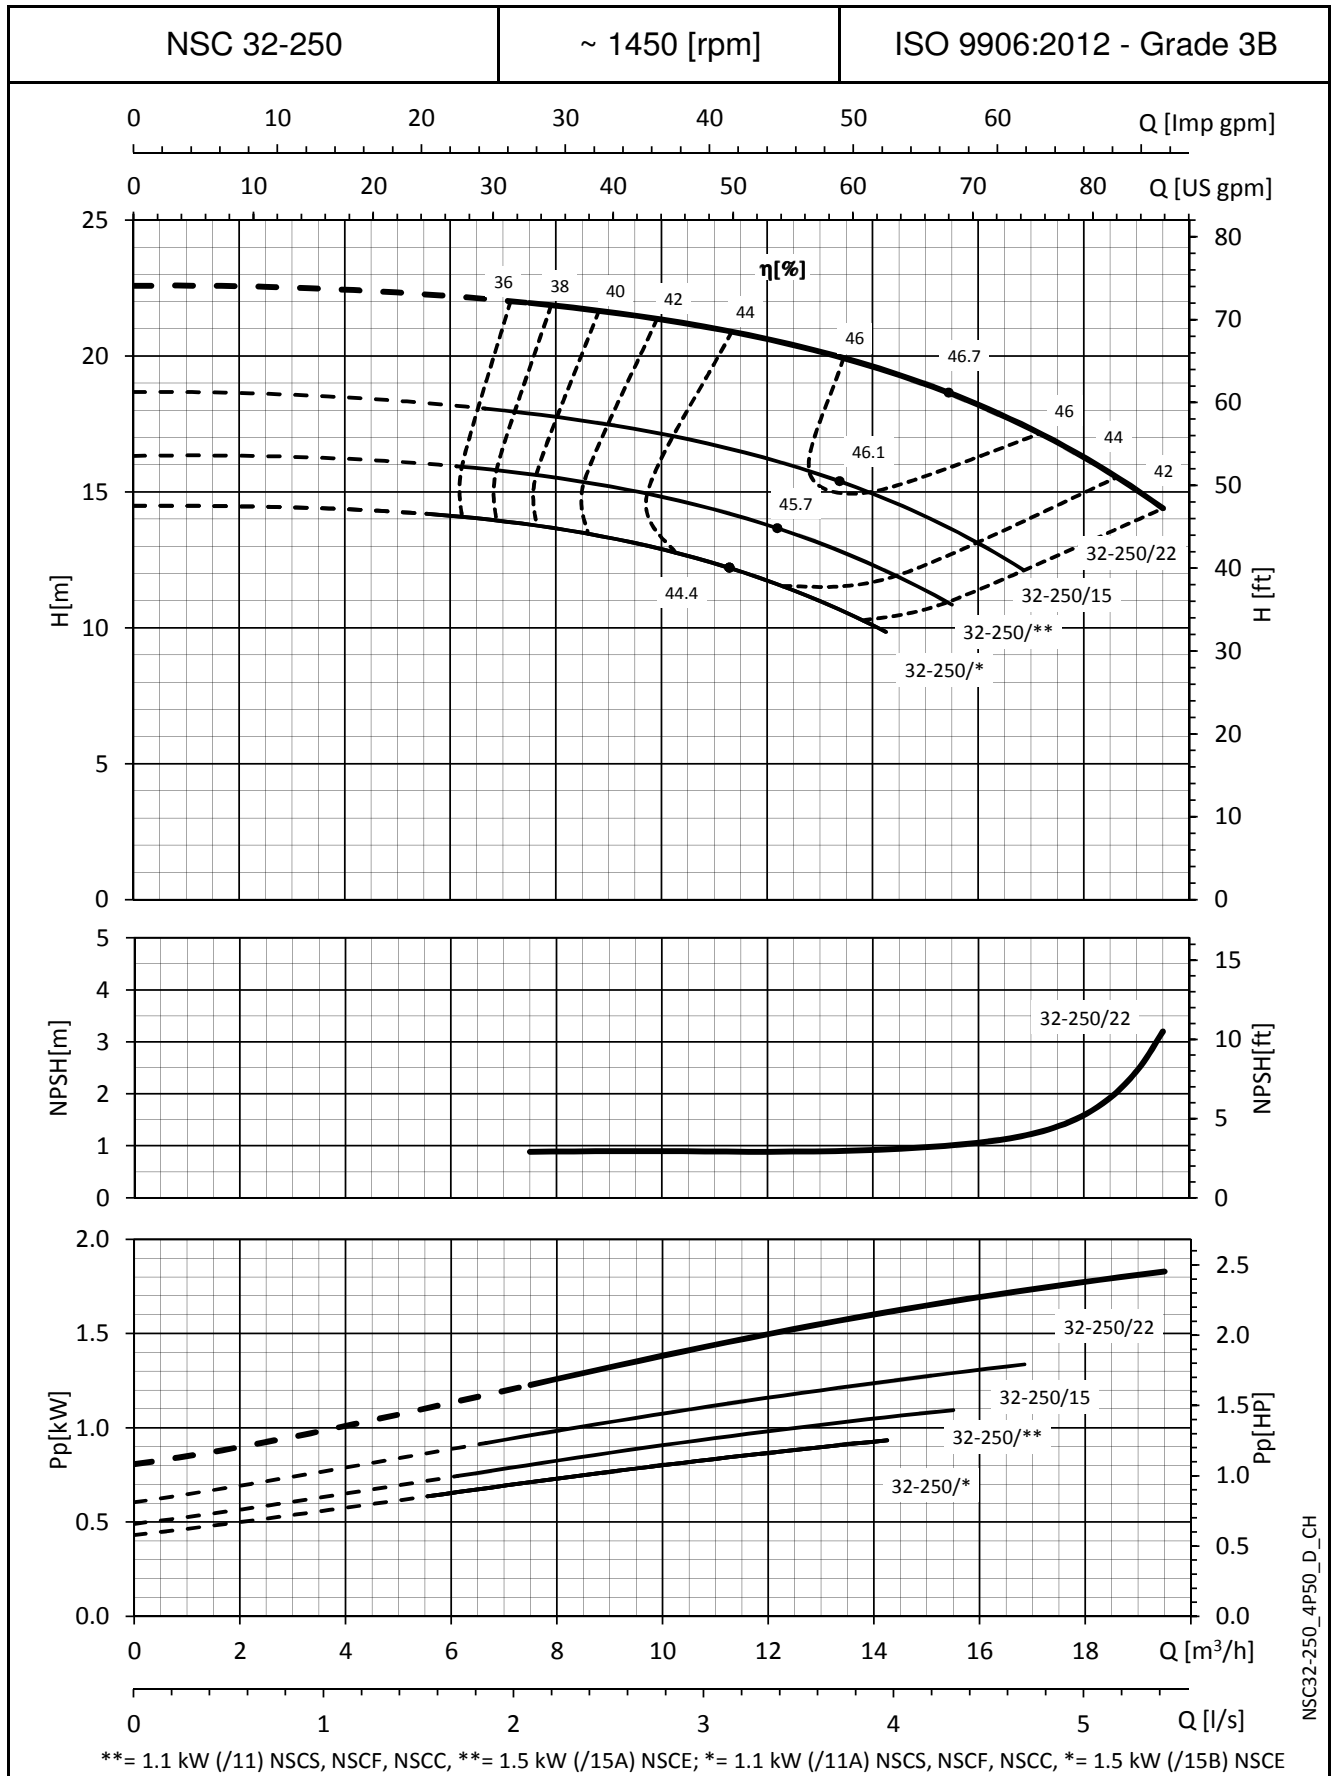

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

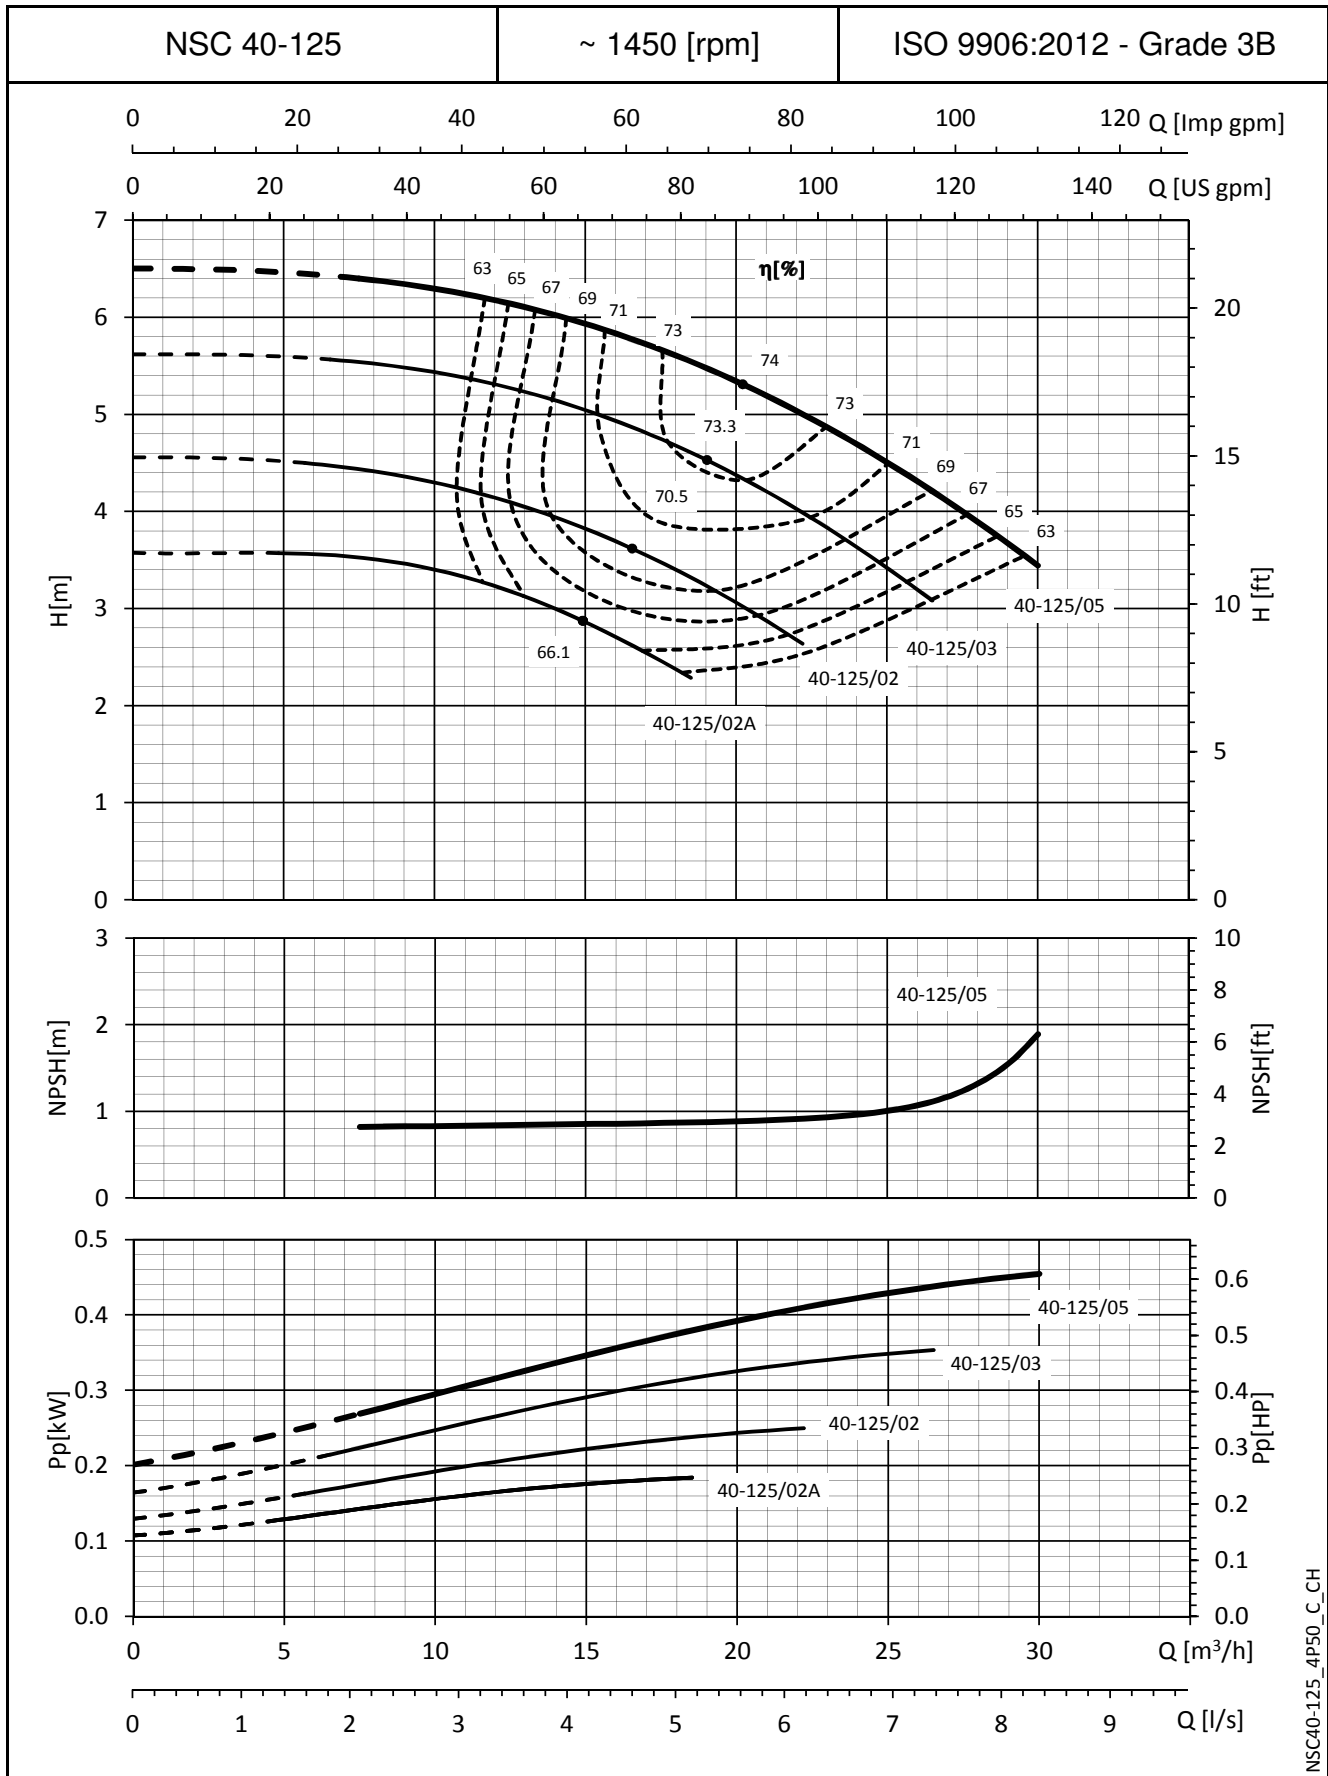


NSC40-125_4P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

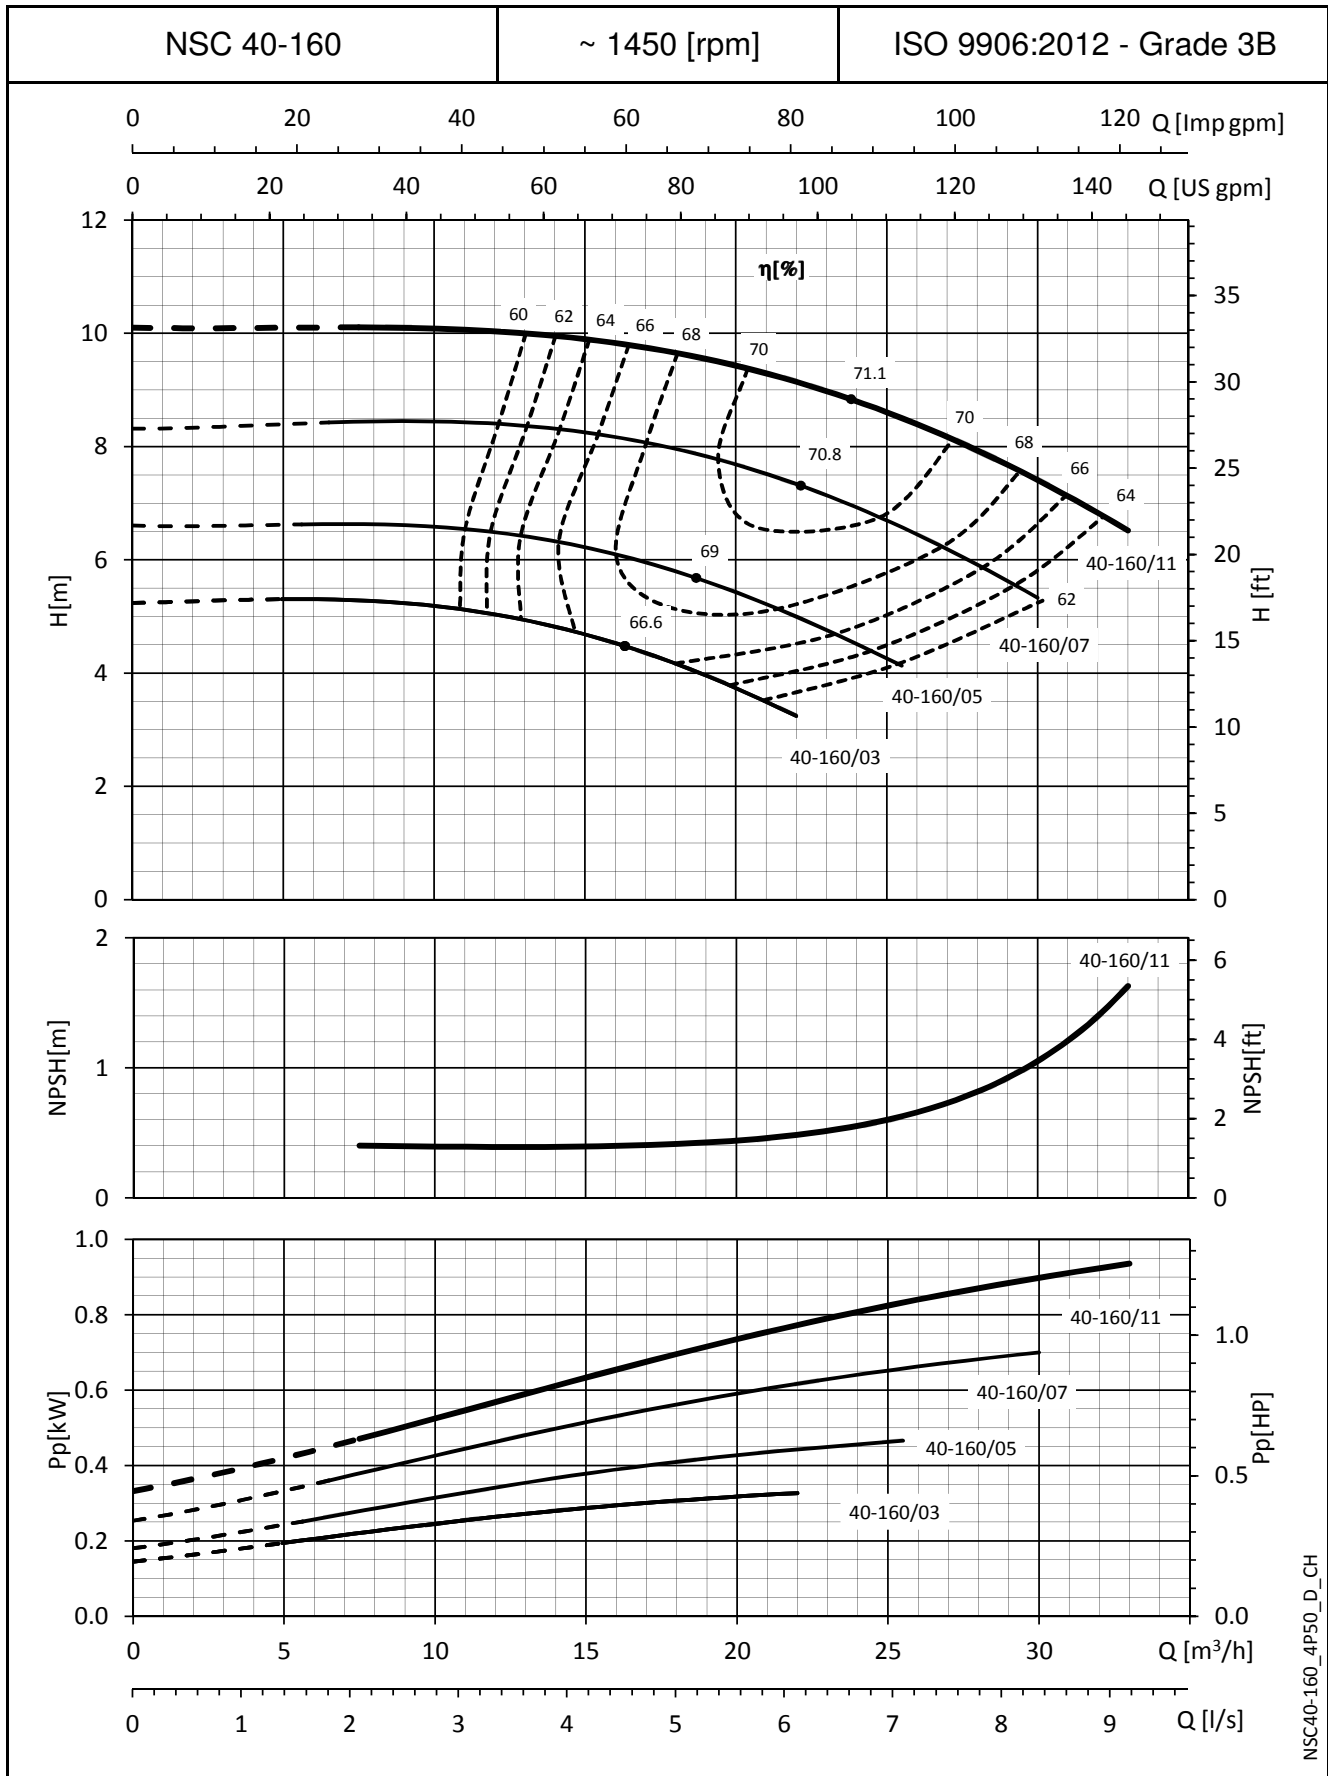


NSC40-160_4P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

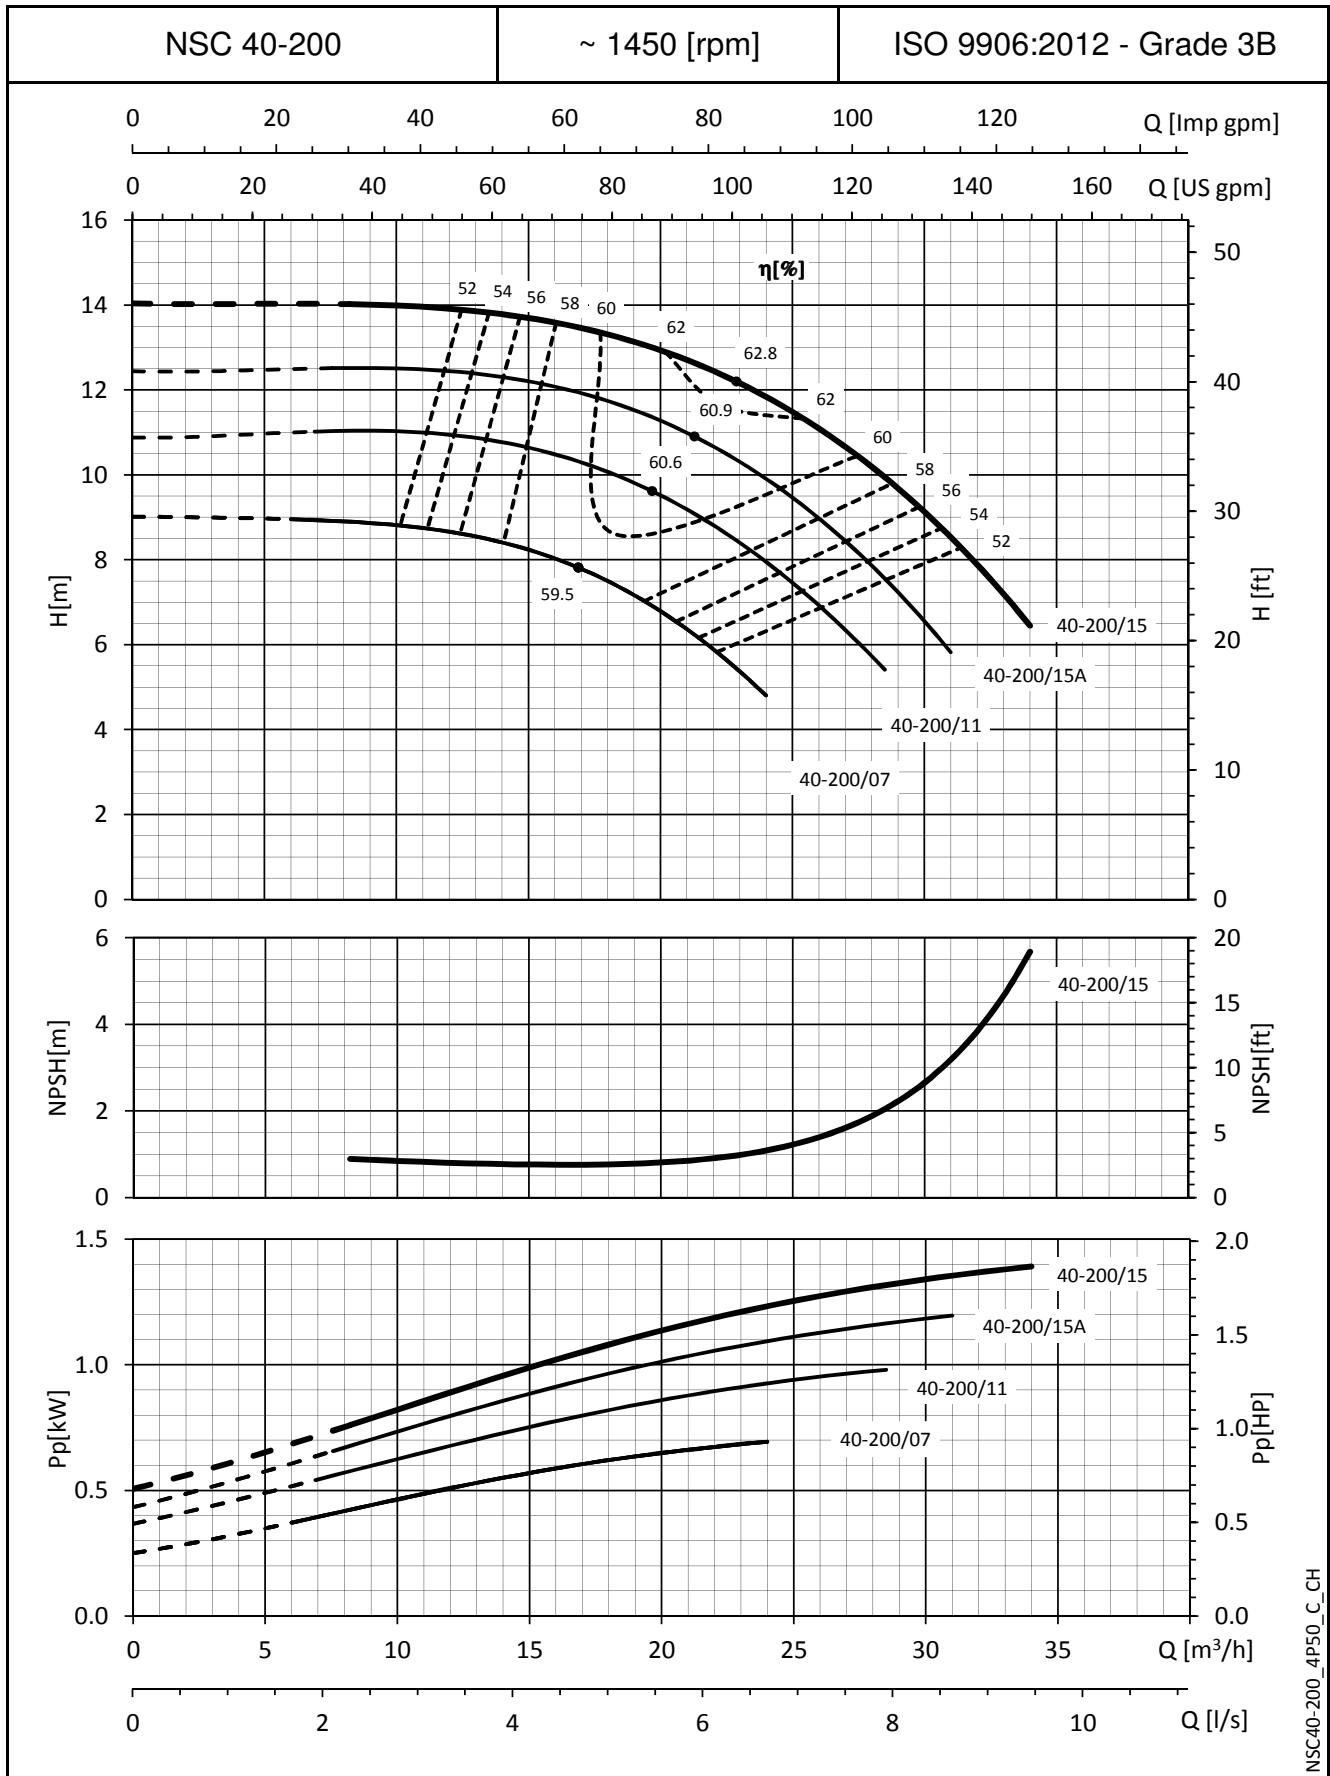


NSC40-200_4P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

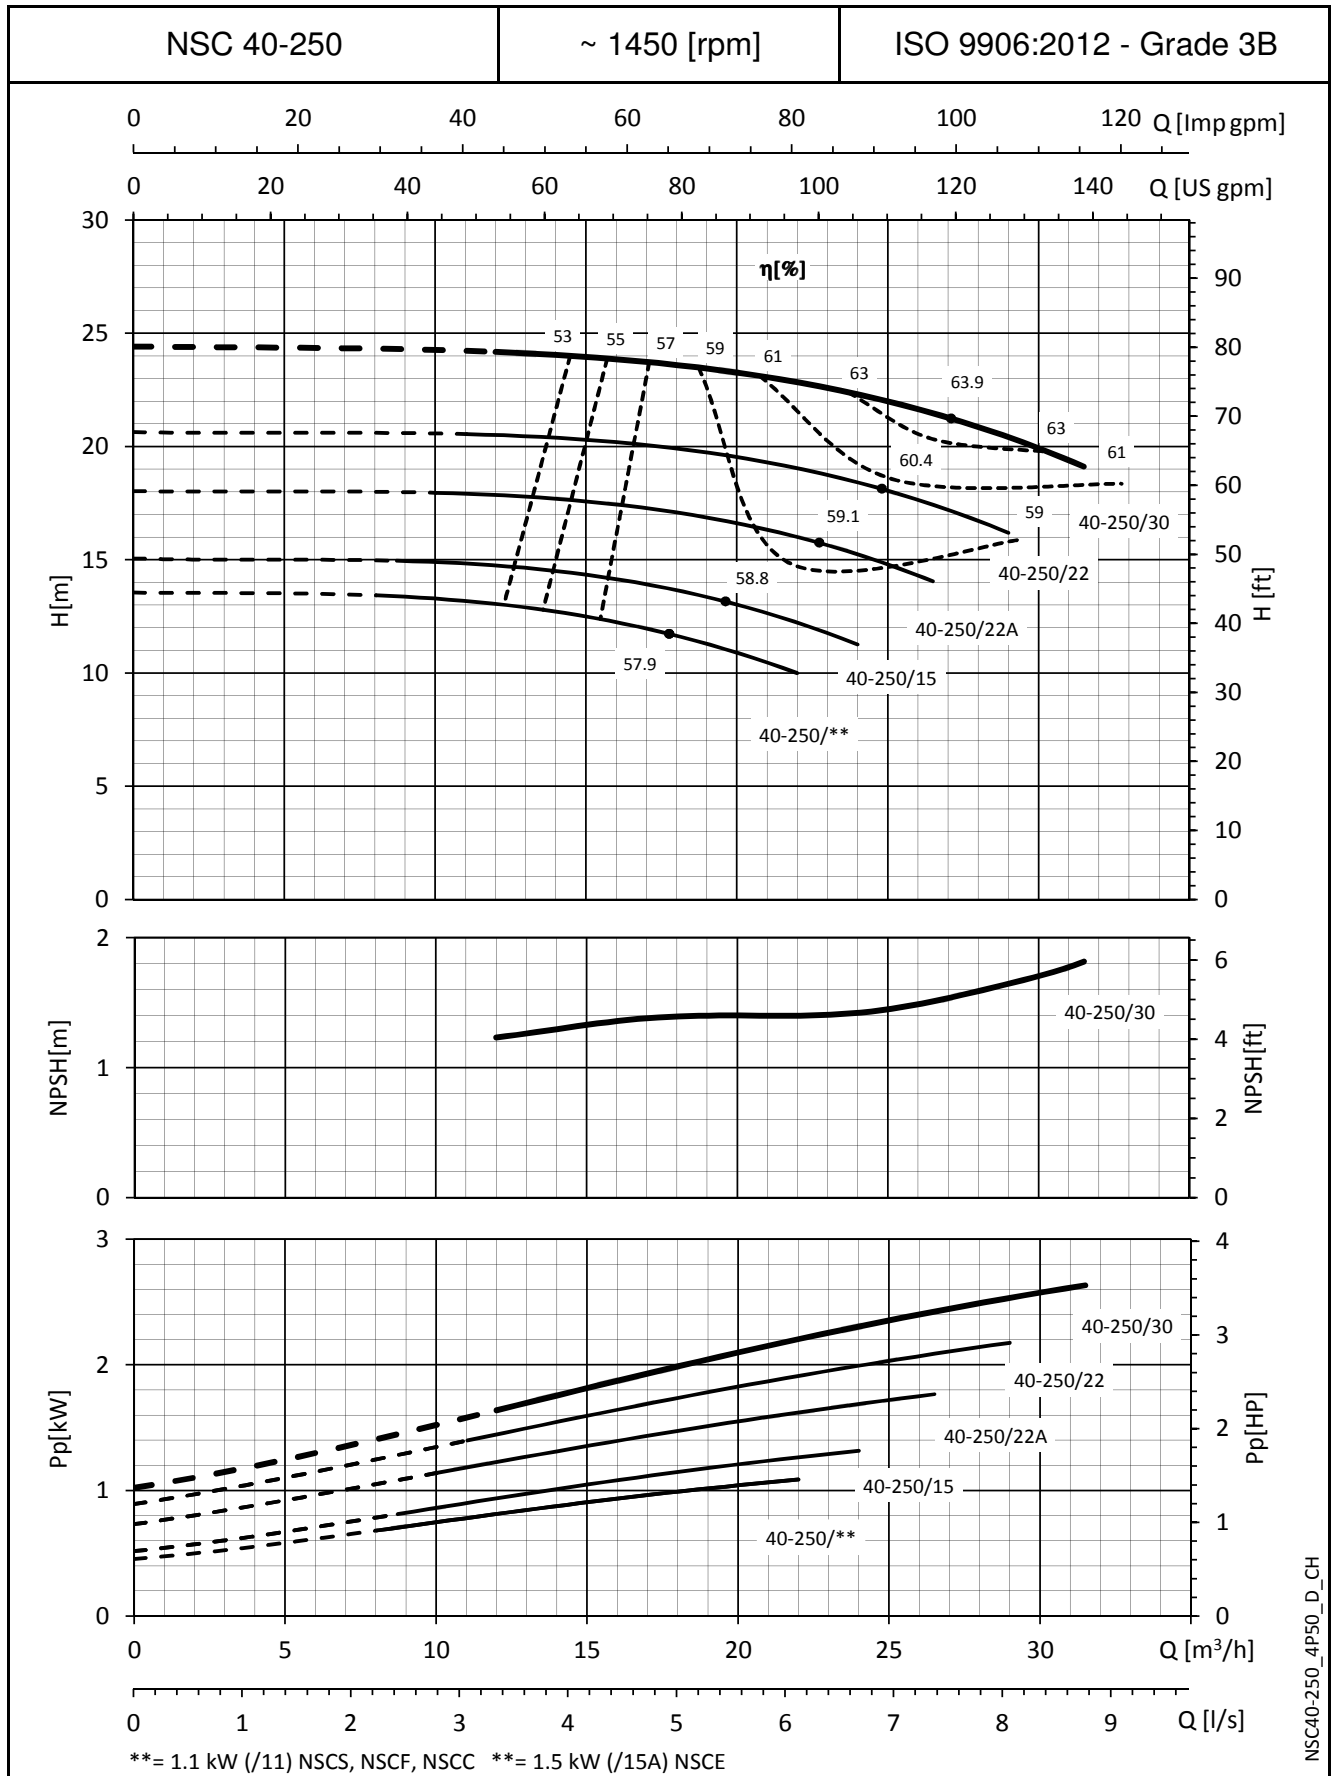


NSC40-250_4P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

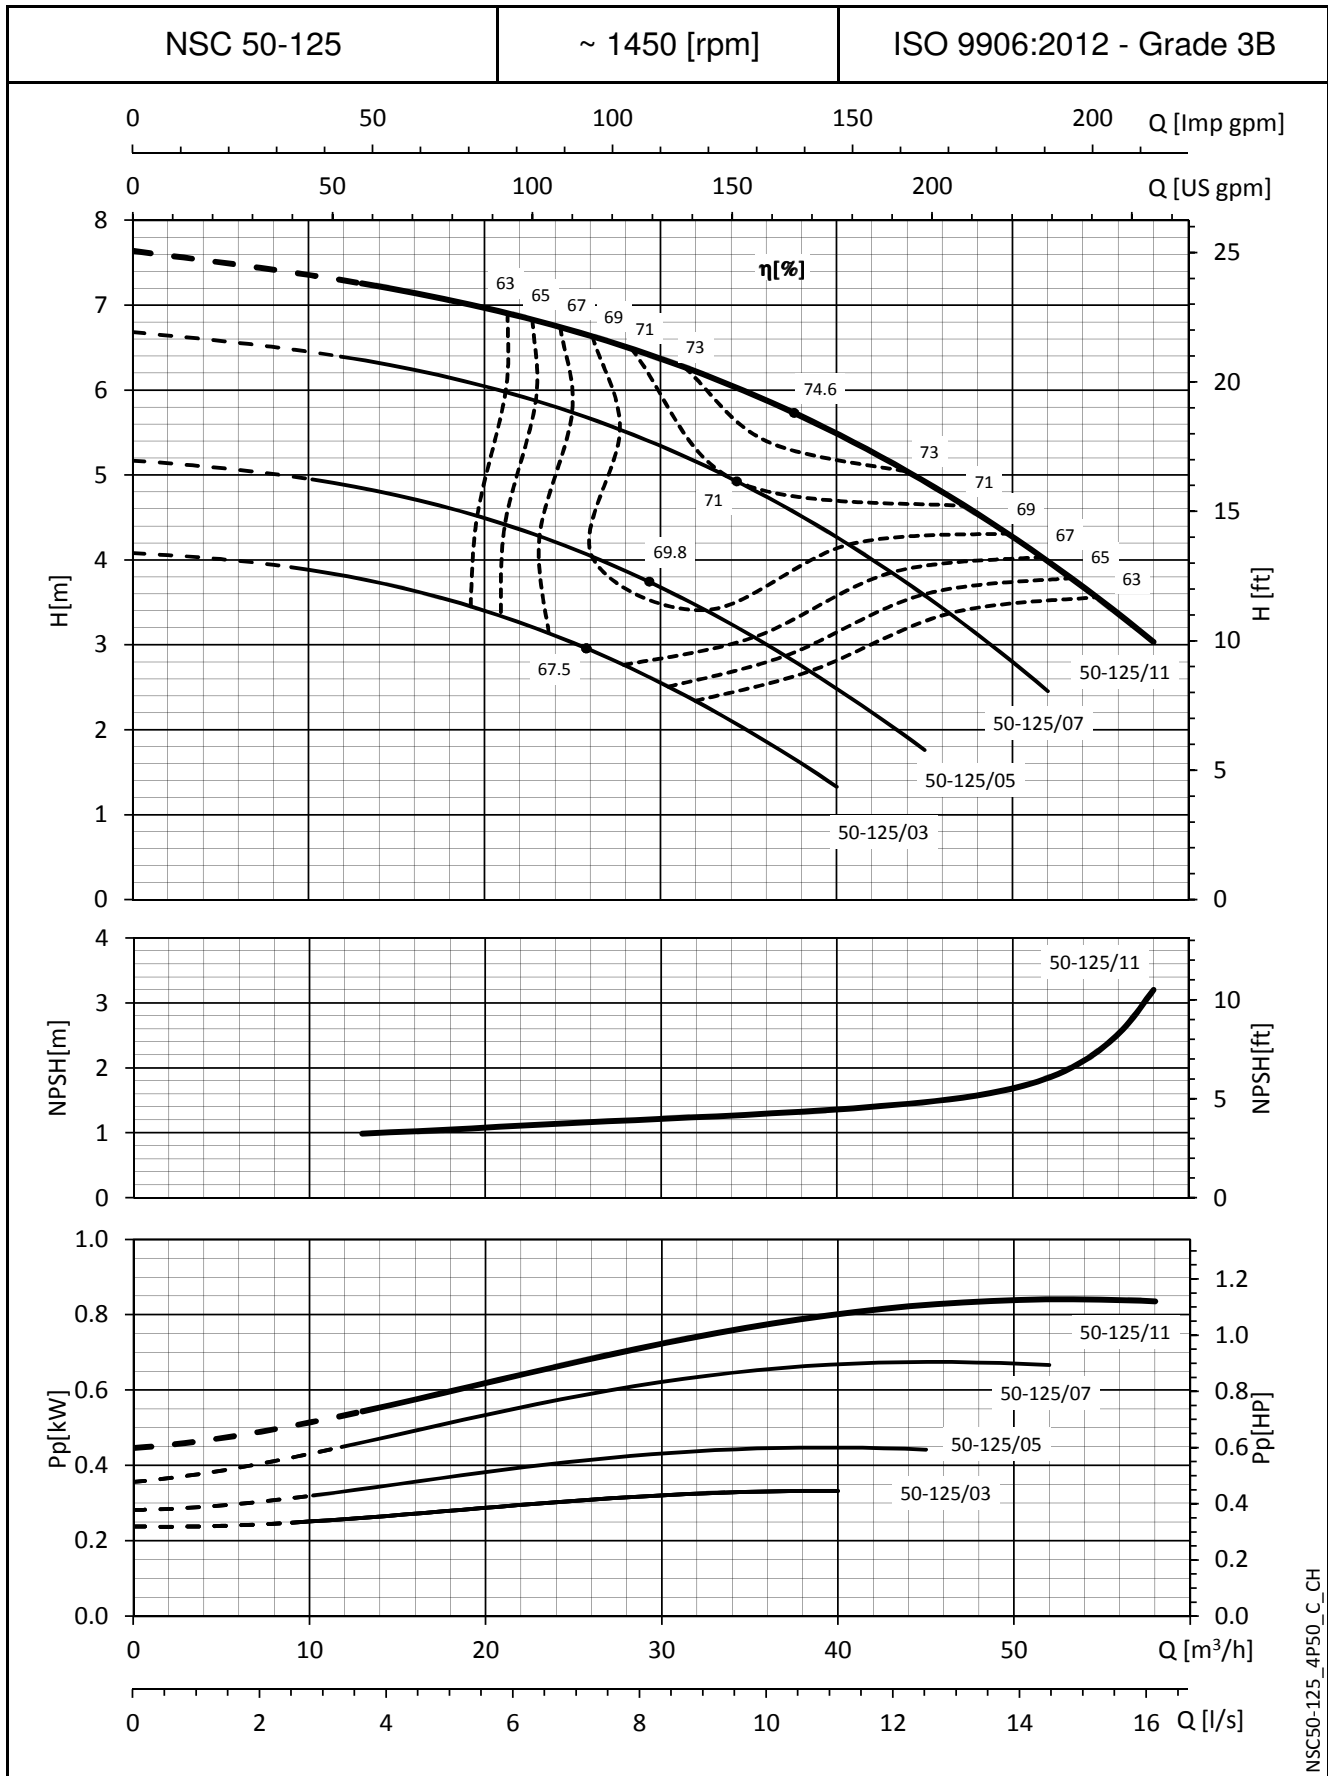


NSC50-125_4P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

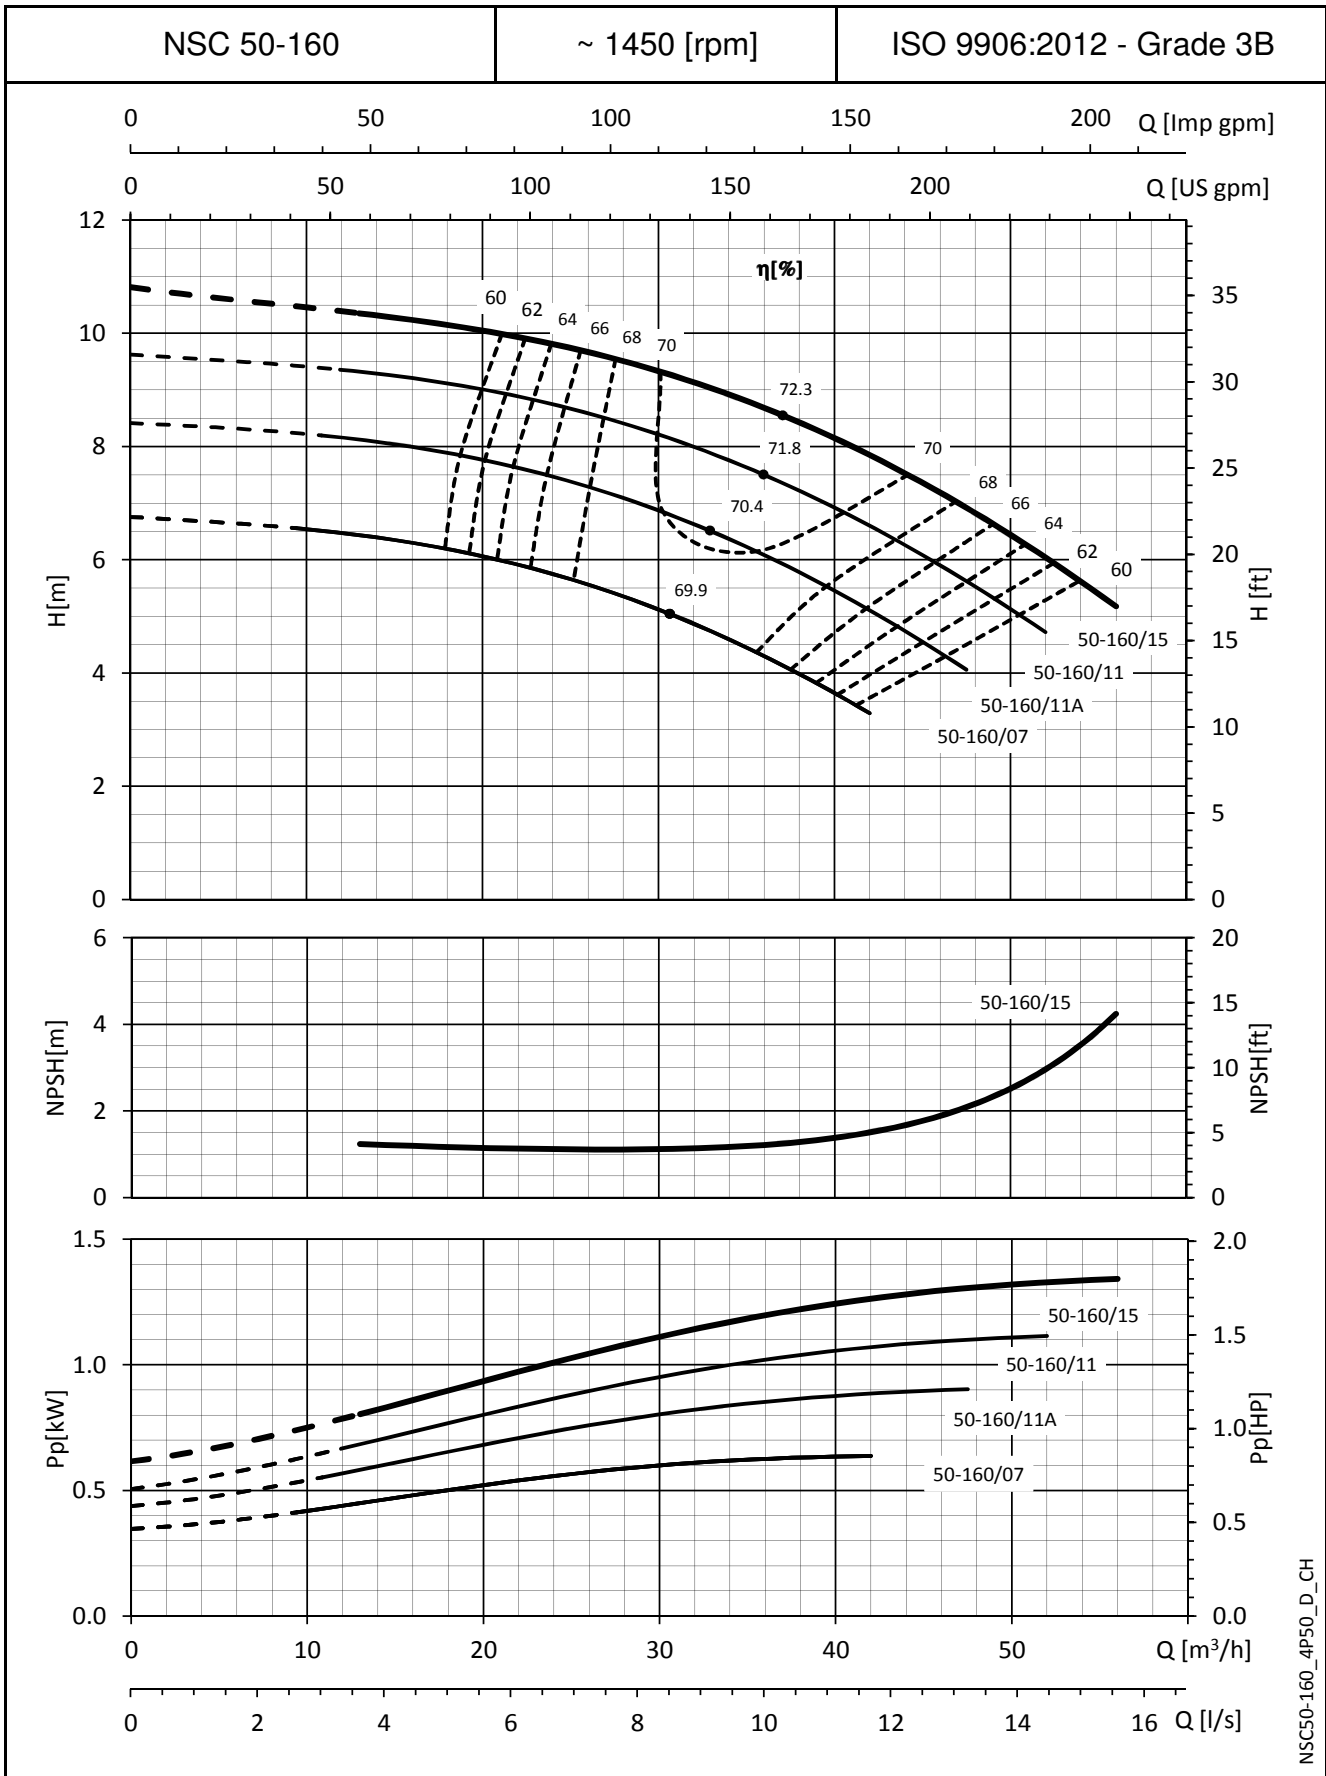


NSC50-160_4P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

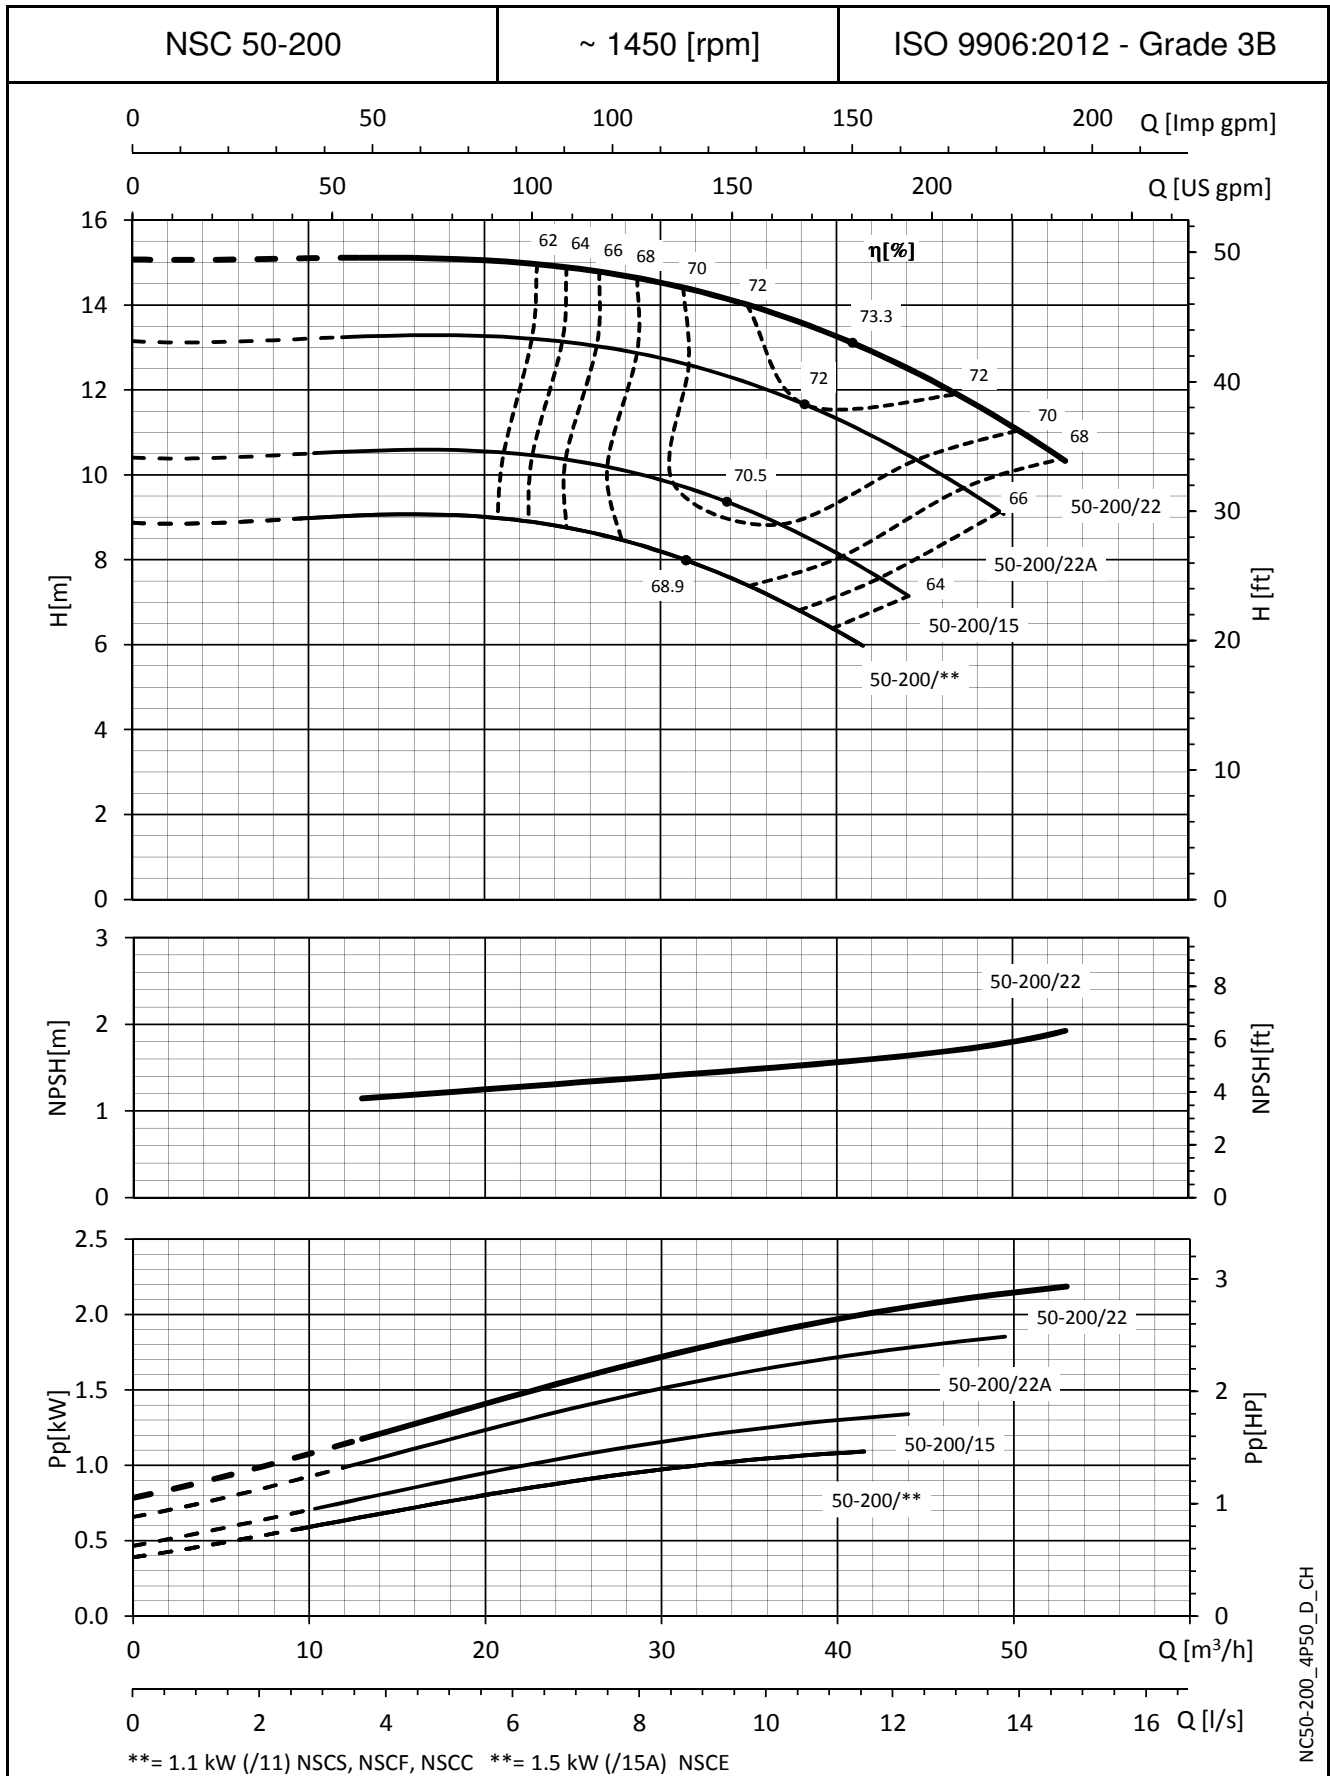

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

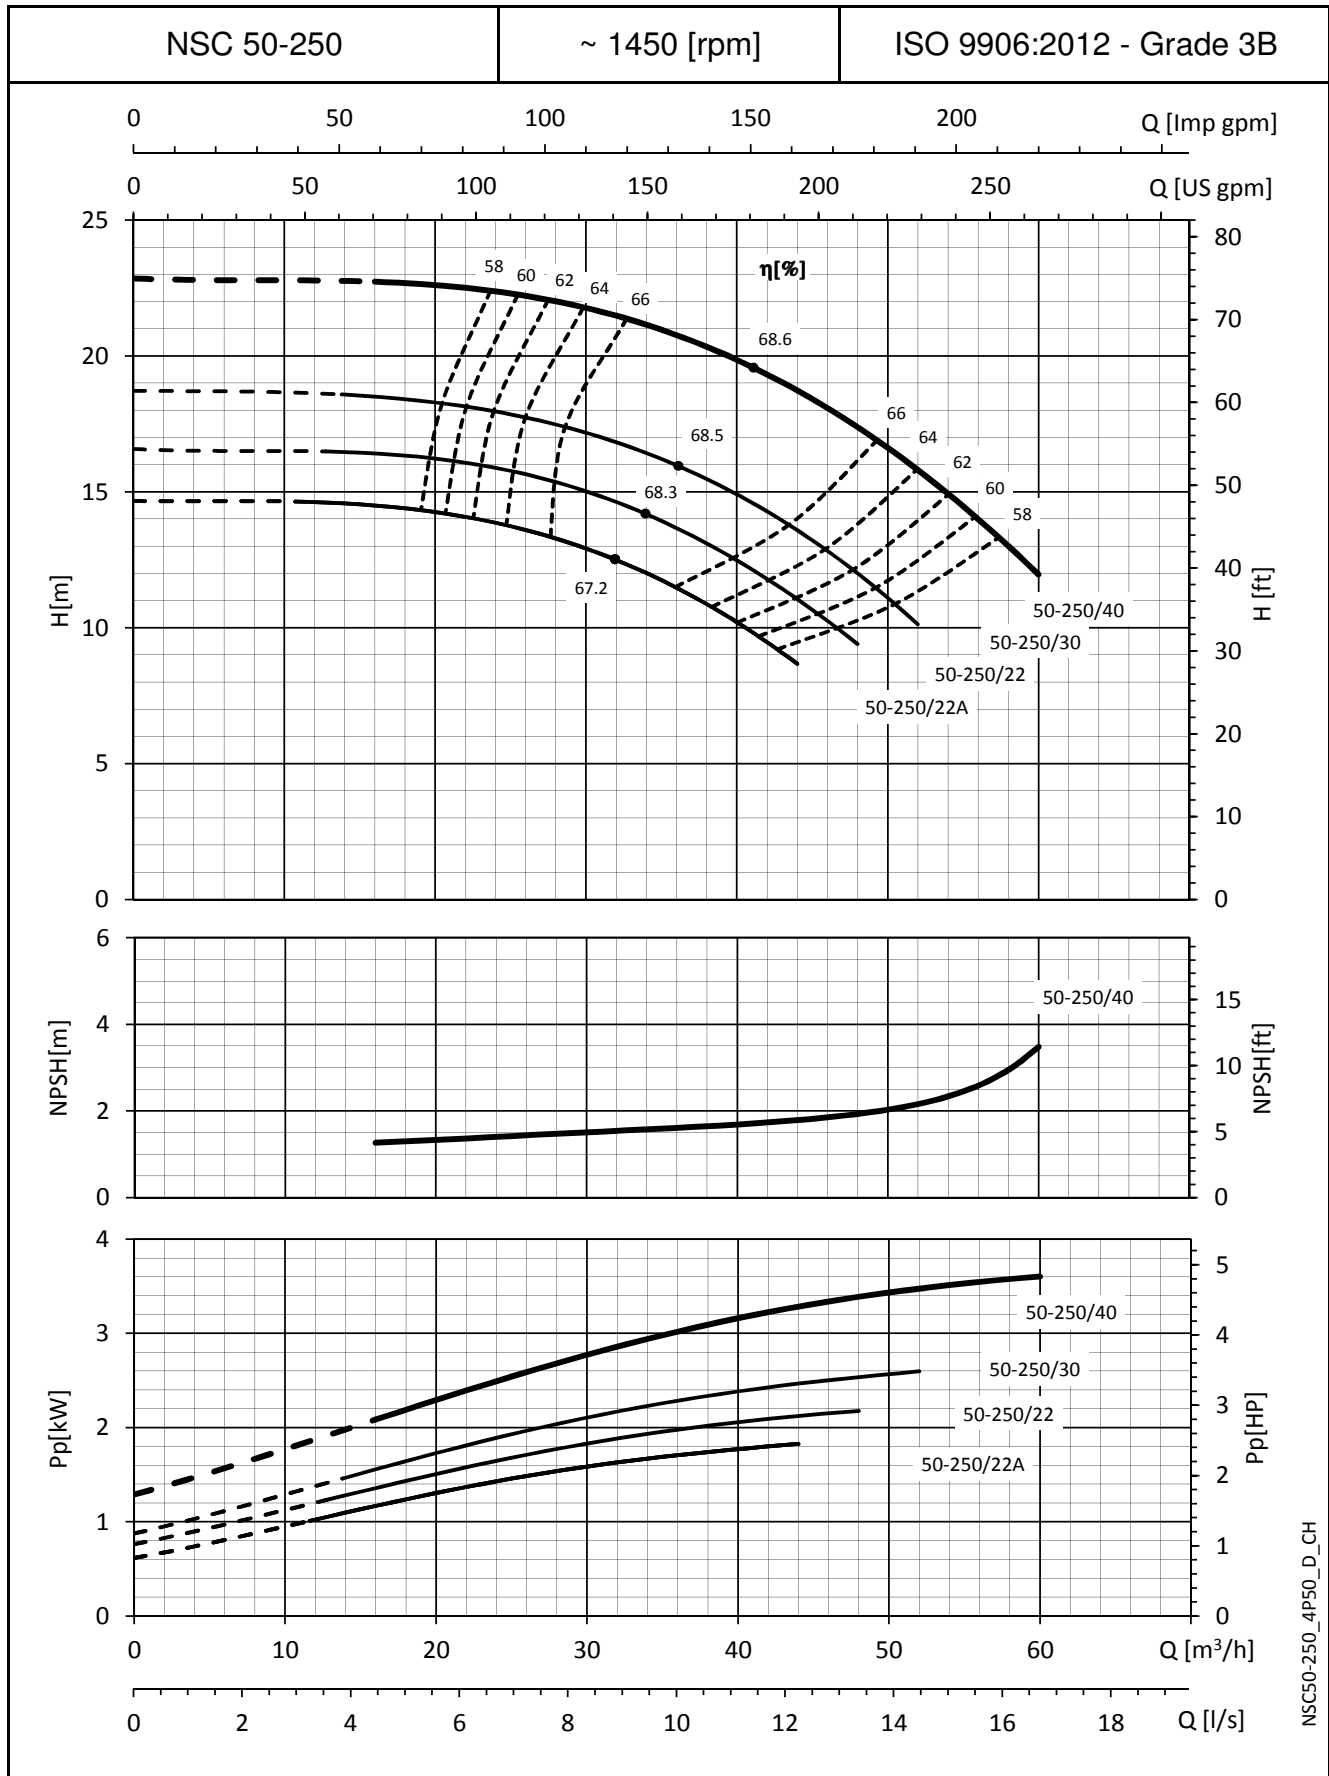

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

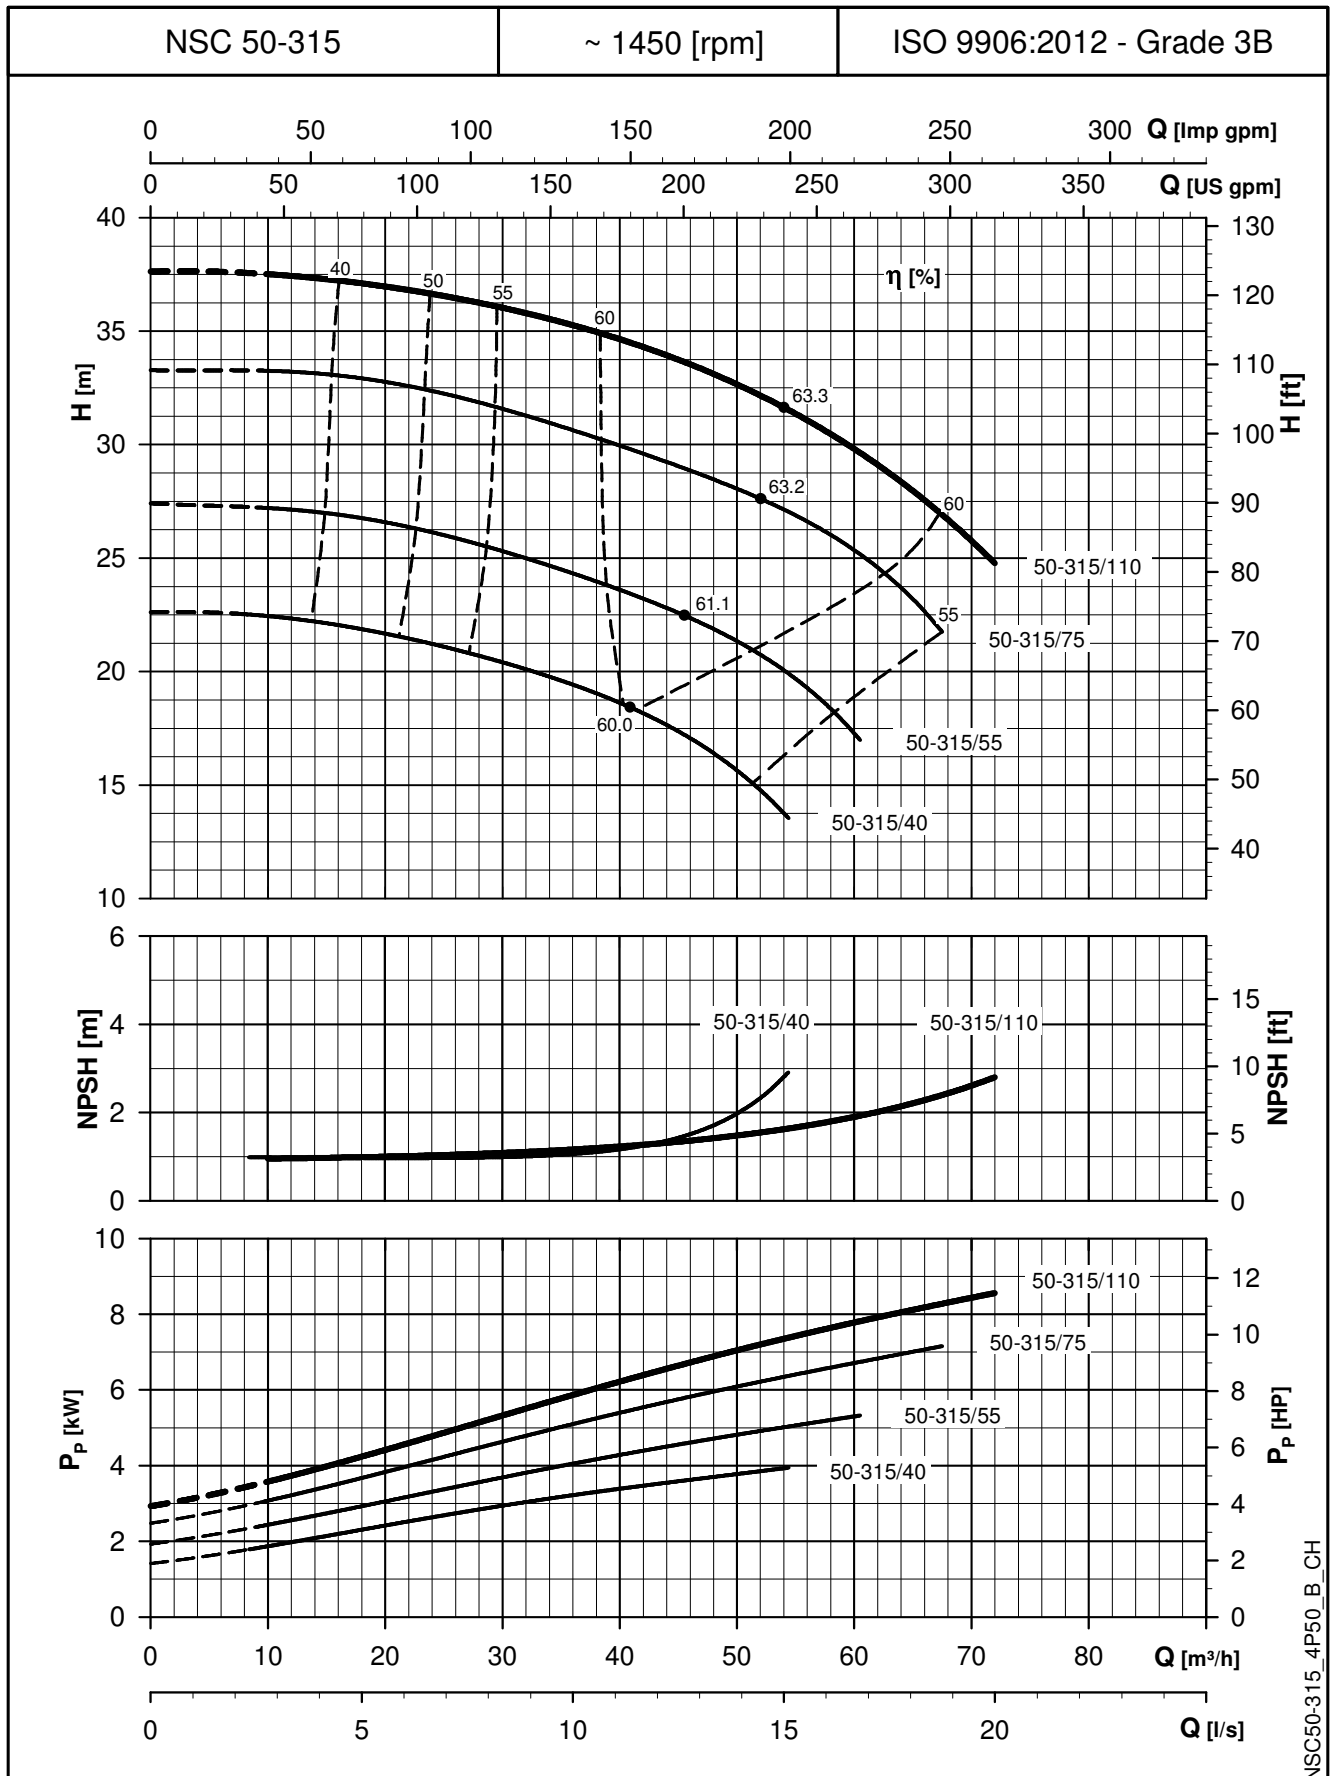


NSC50-315_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

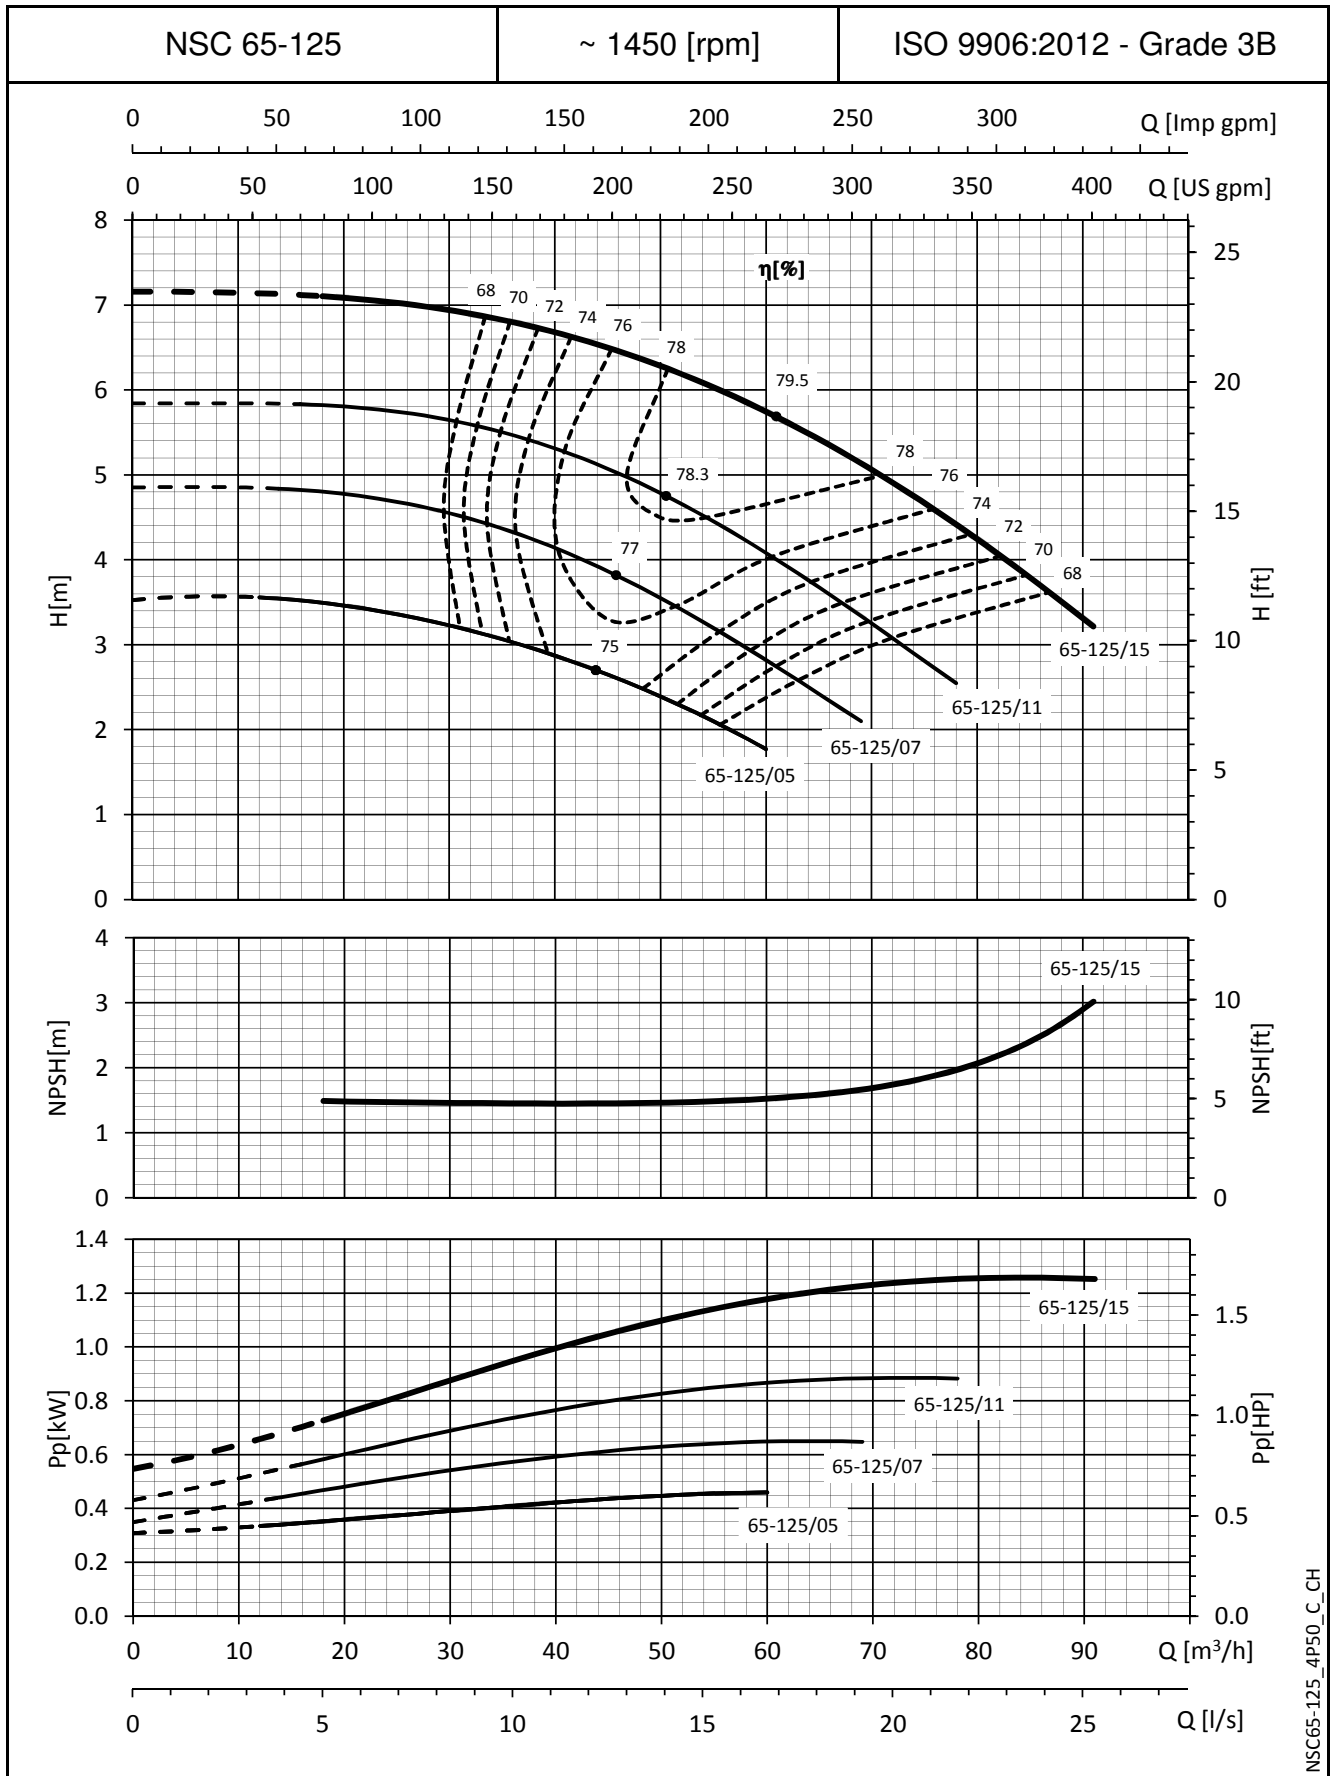


NSC65-125_4P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

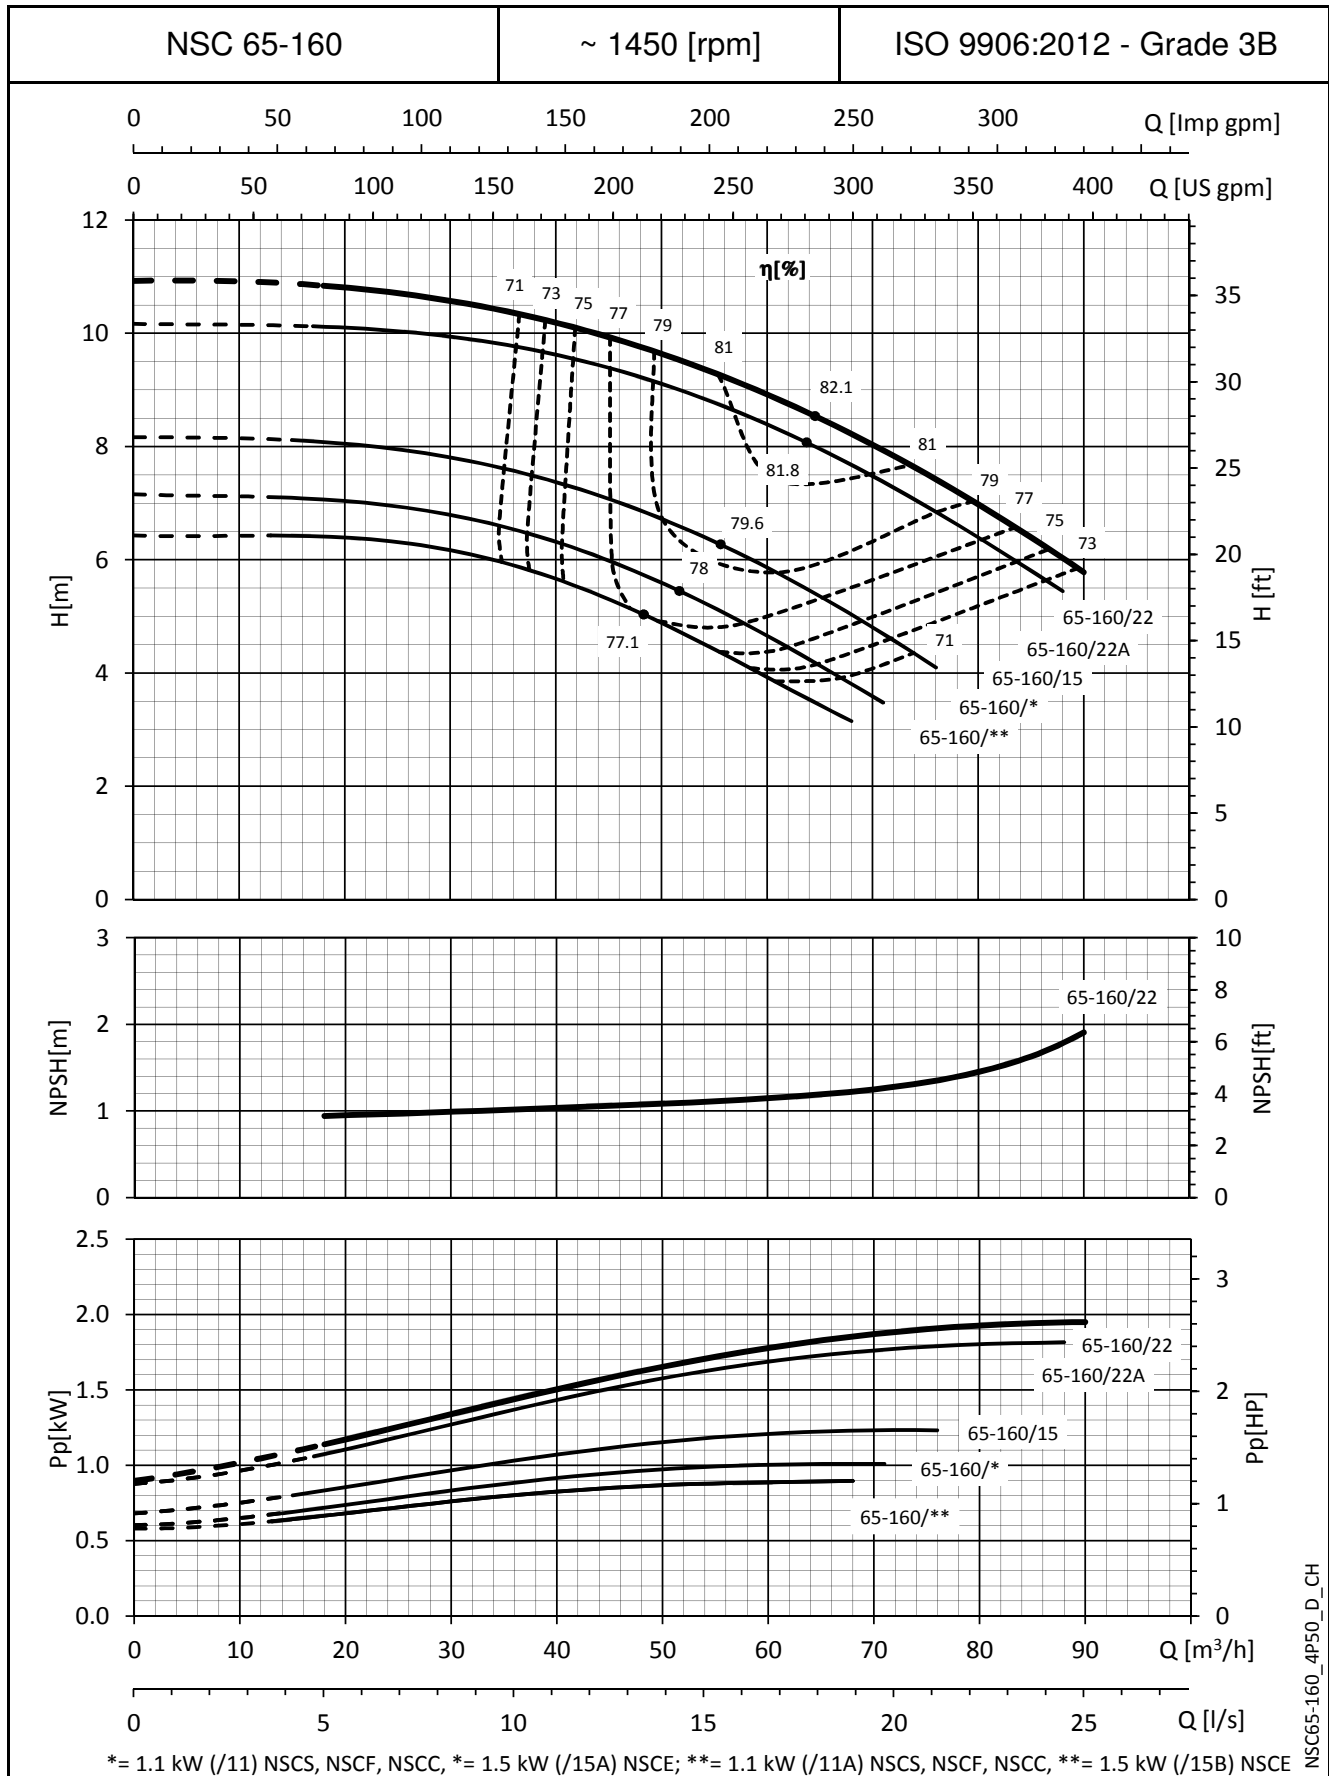

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

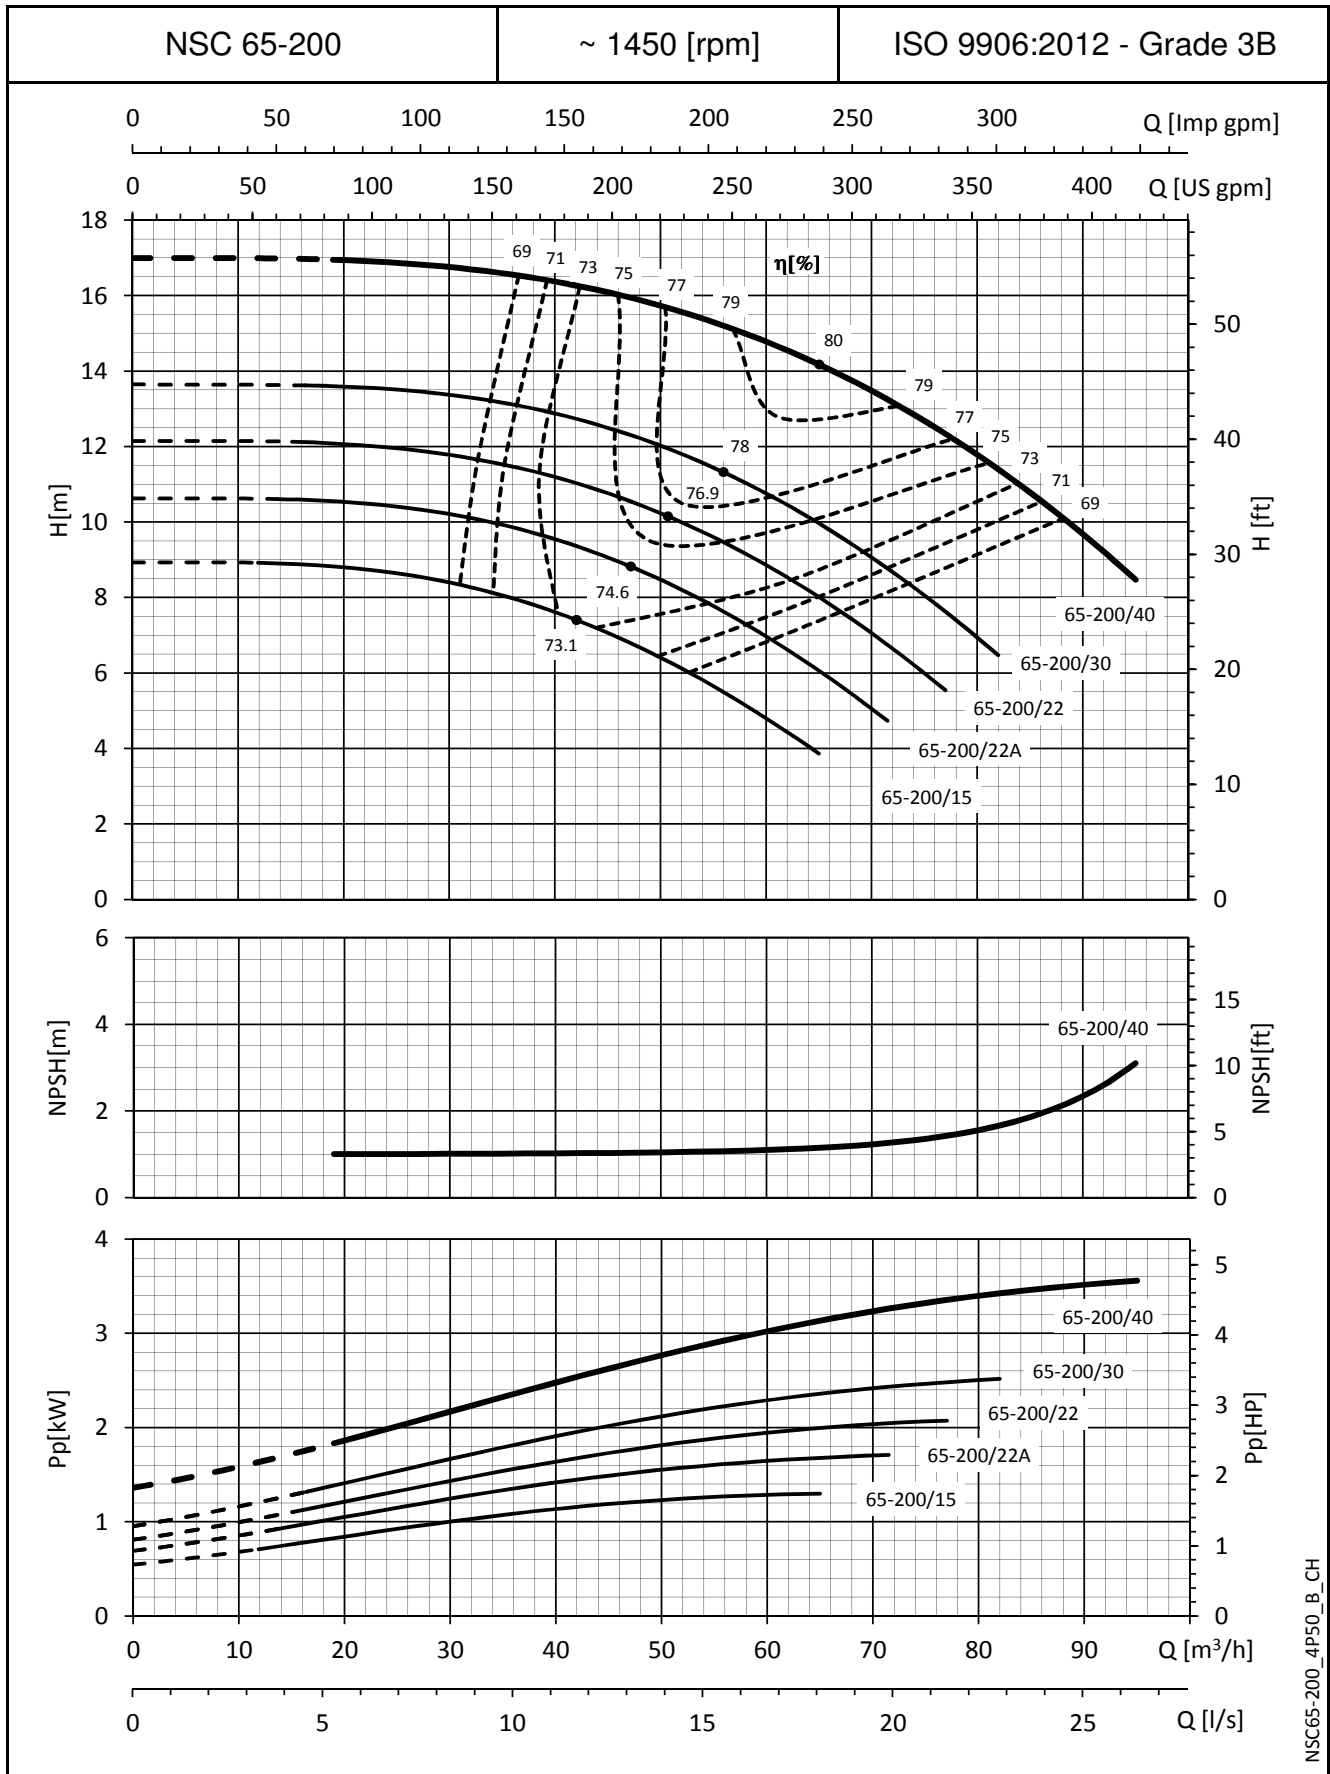


NSC65-200_4IP50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

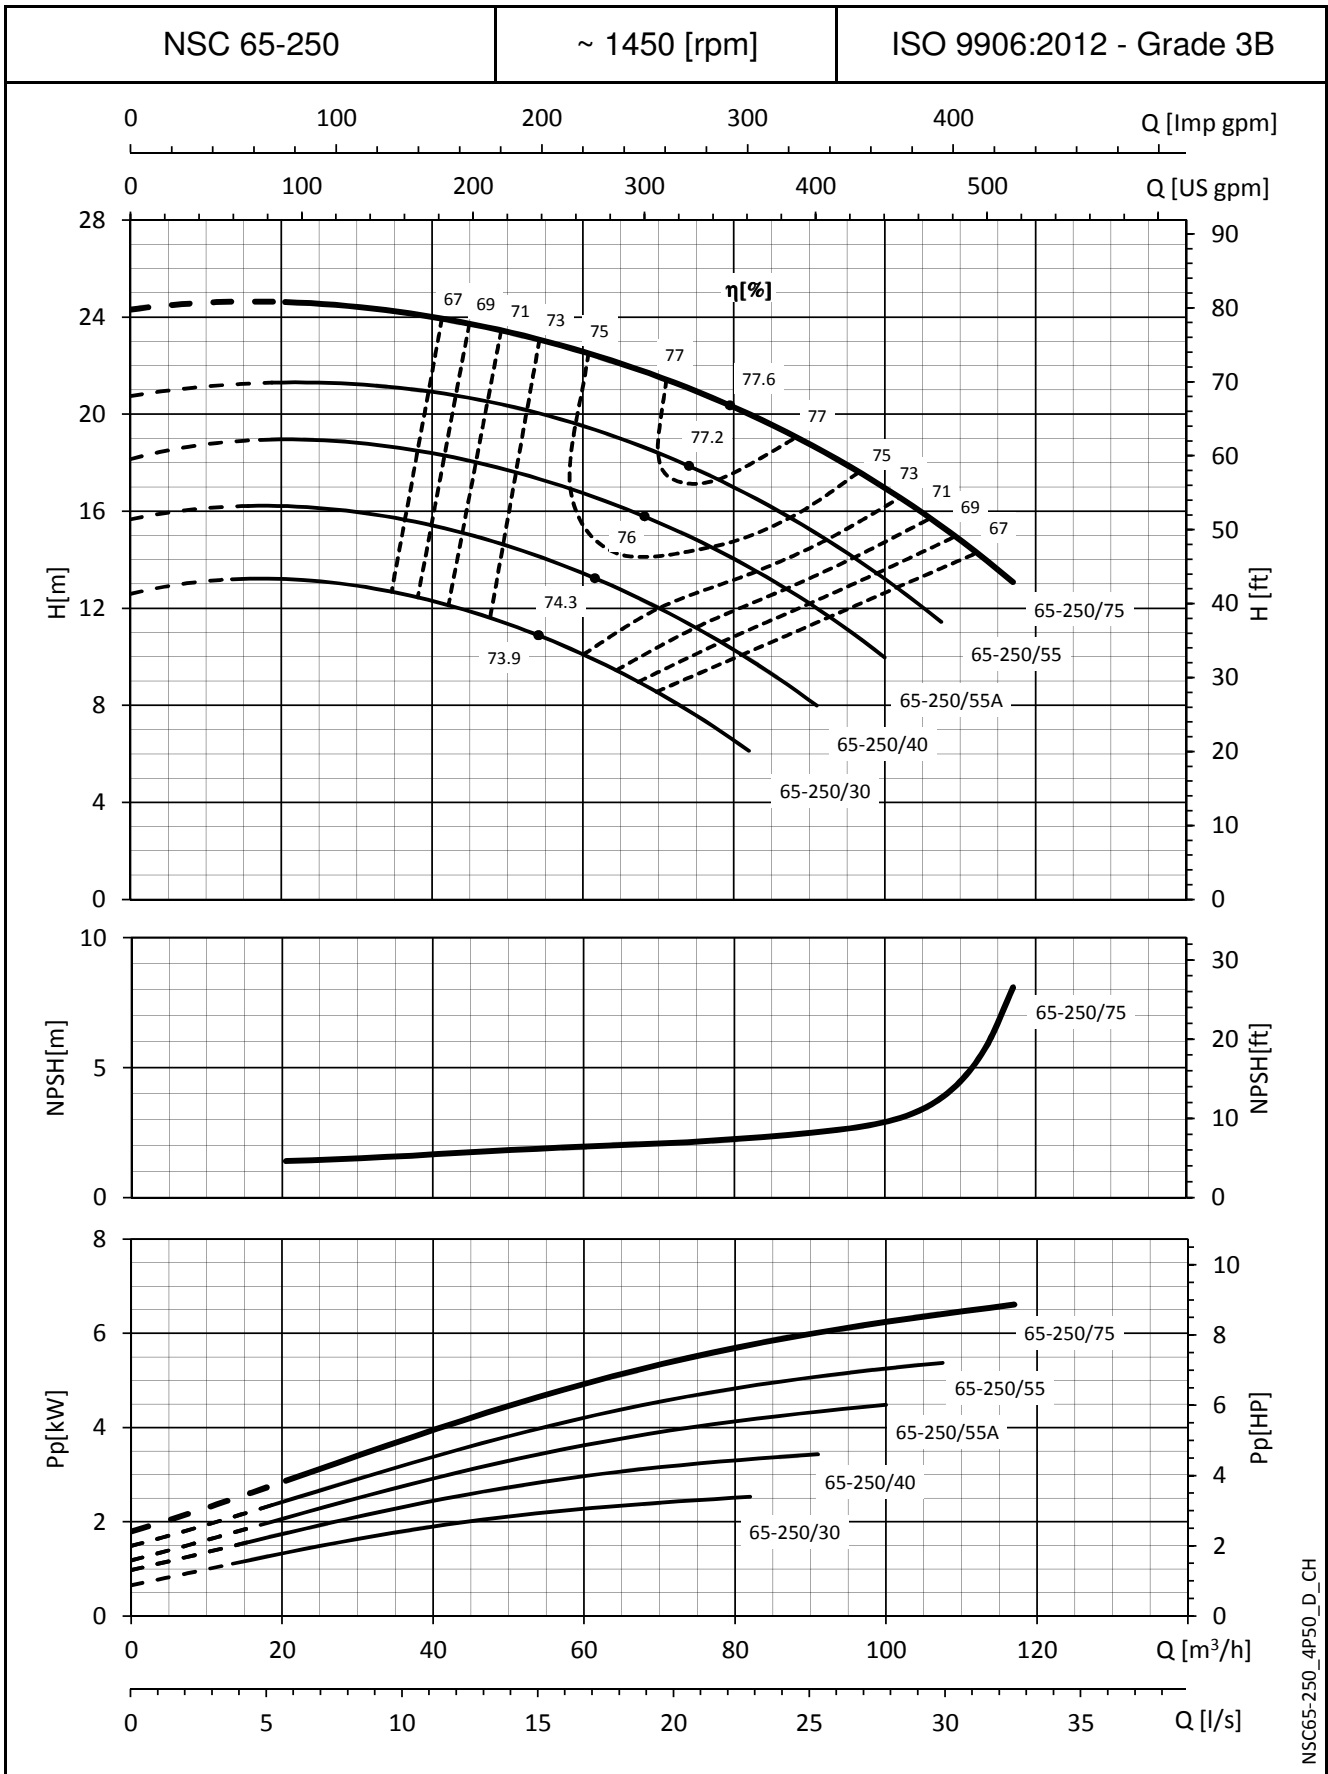


NSC65-250_4P50_D_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

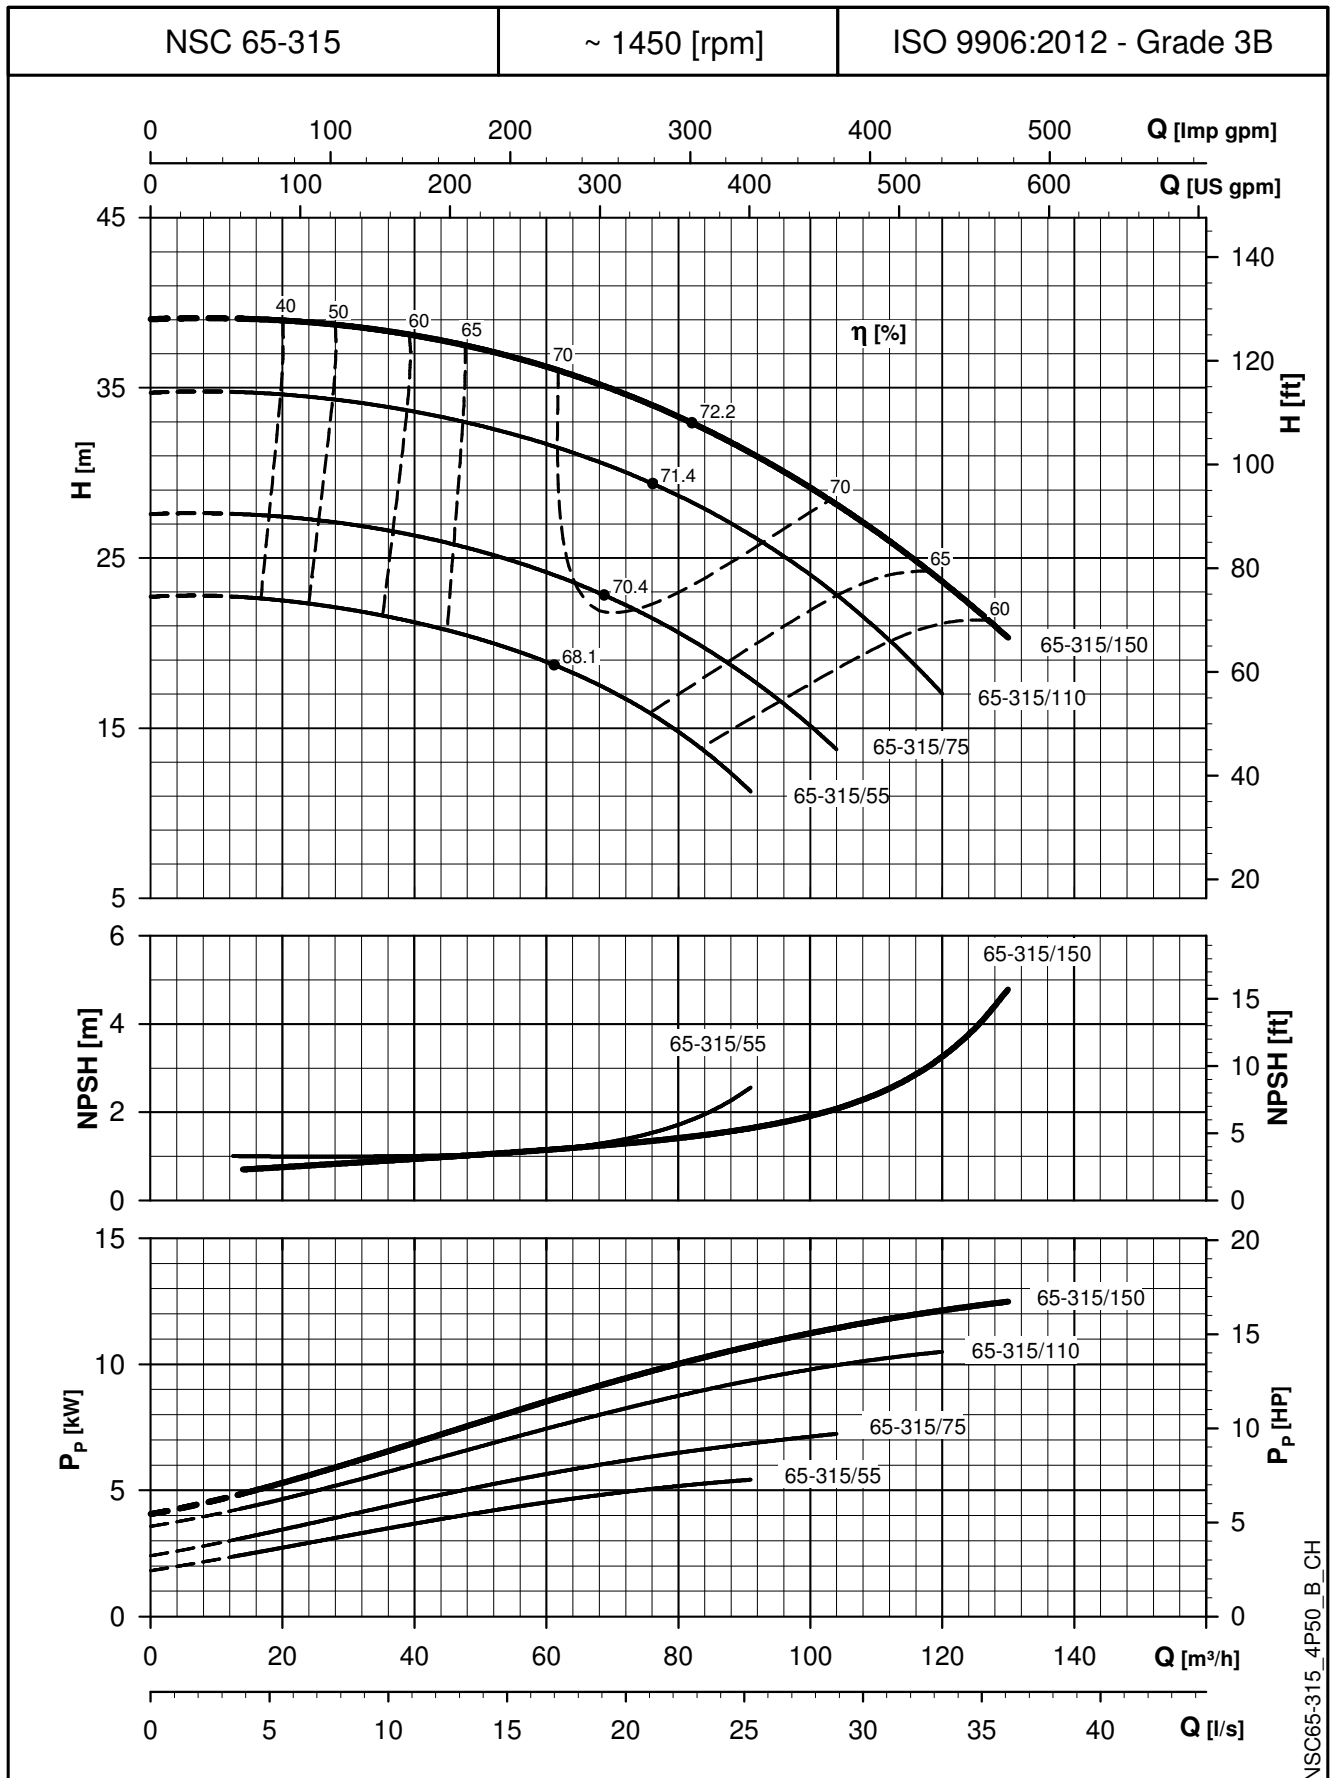

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

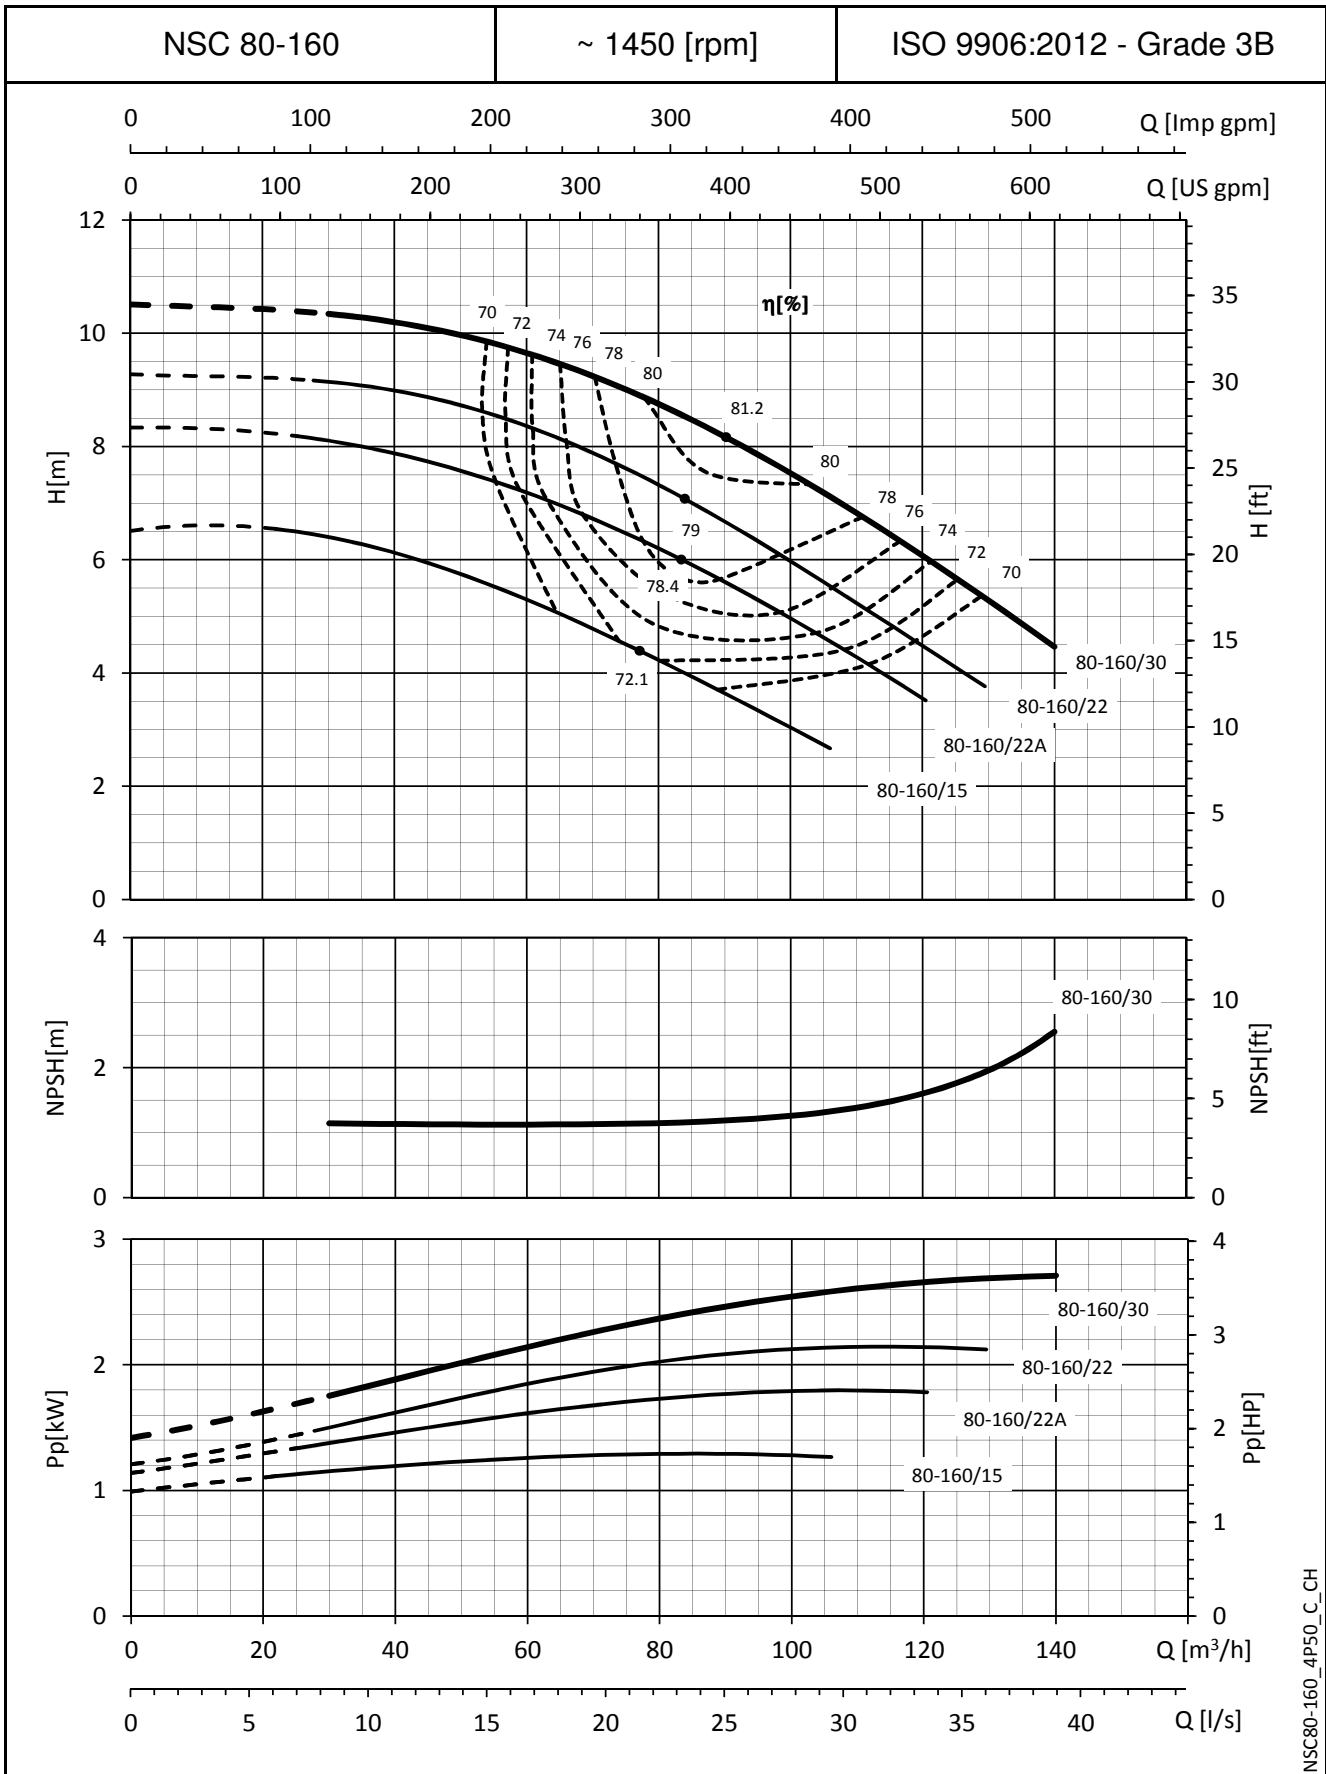


NSC80-160_4P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

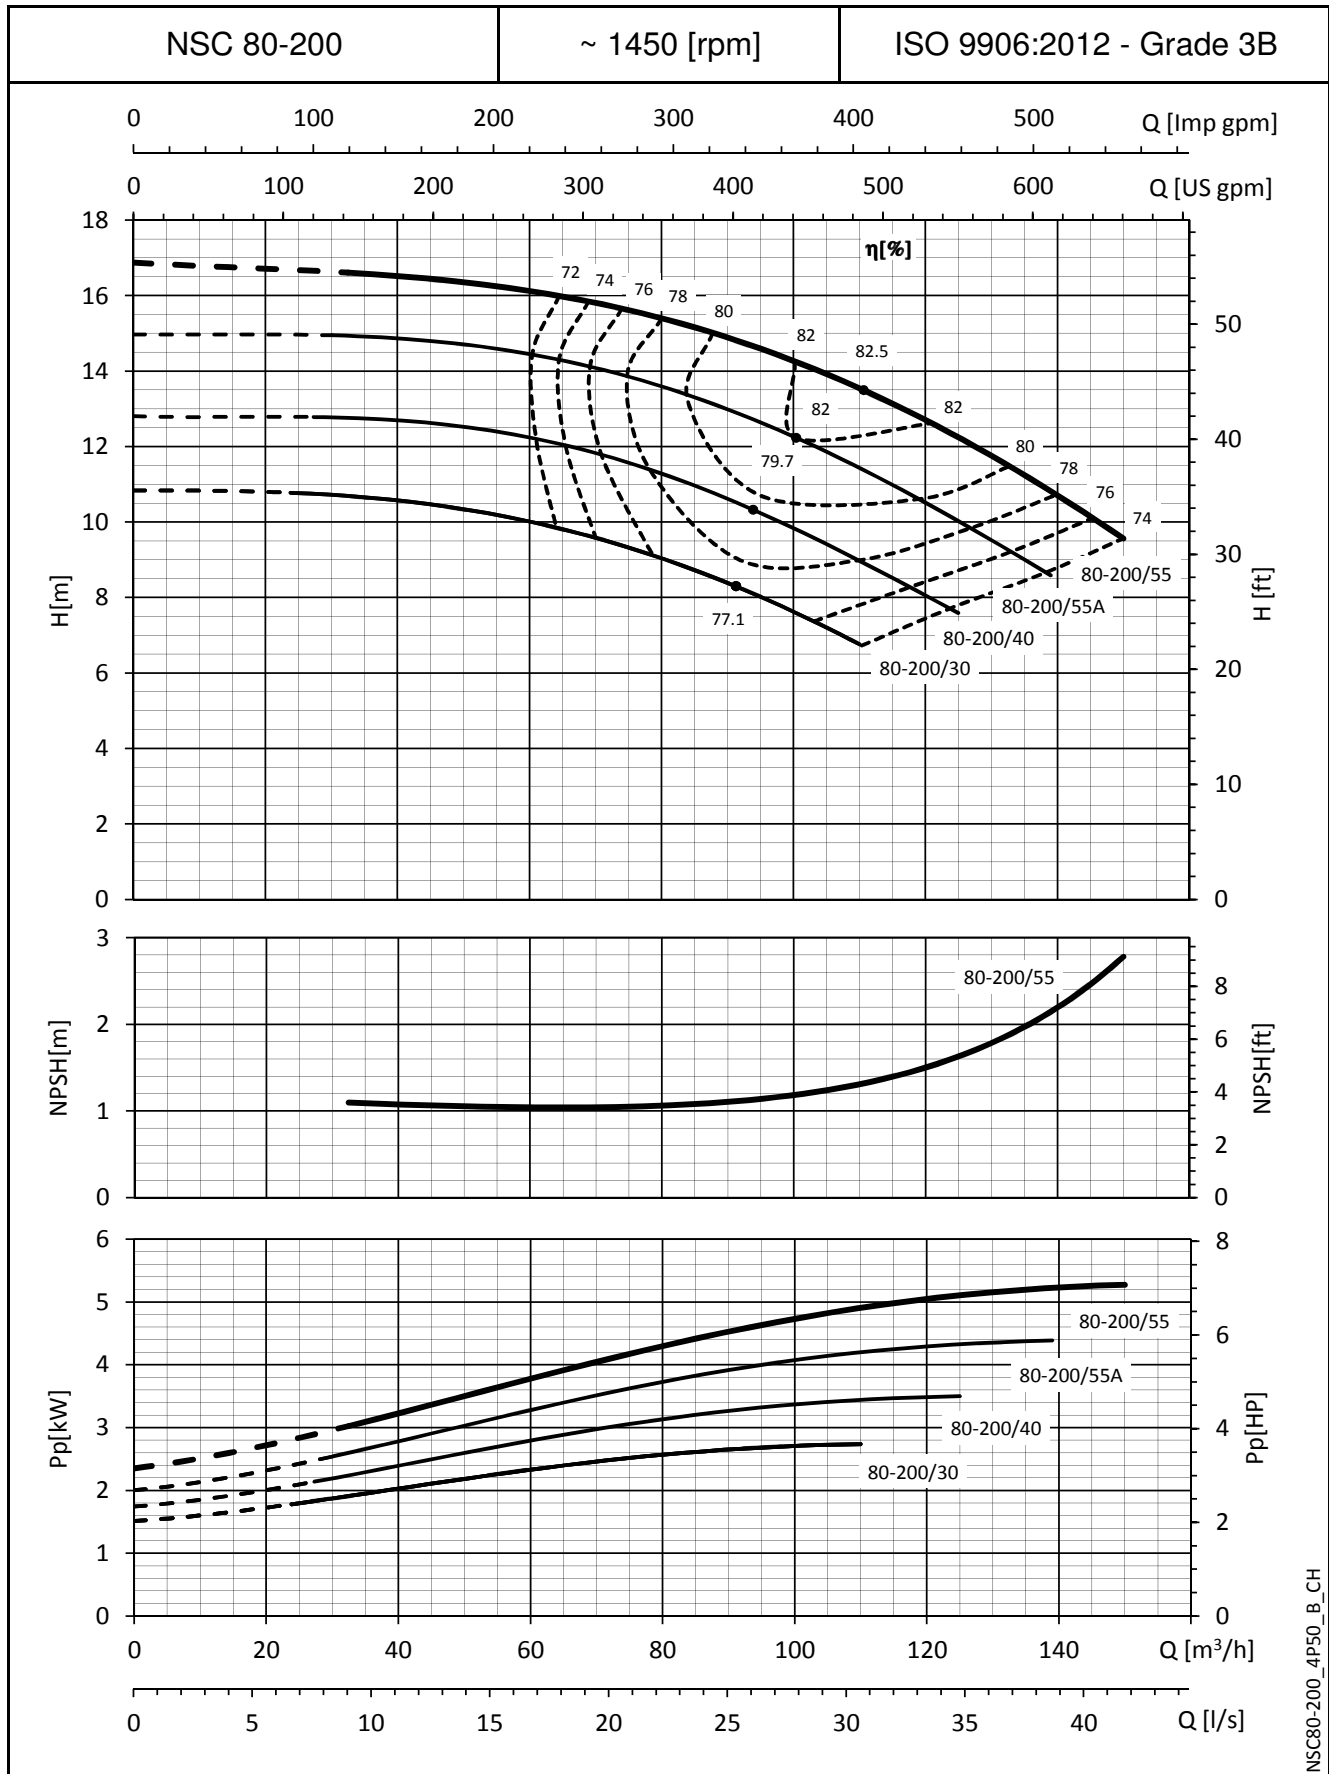


NSC80-200_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

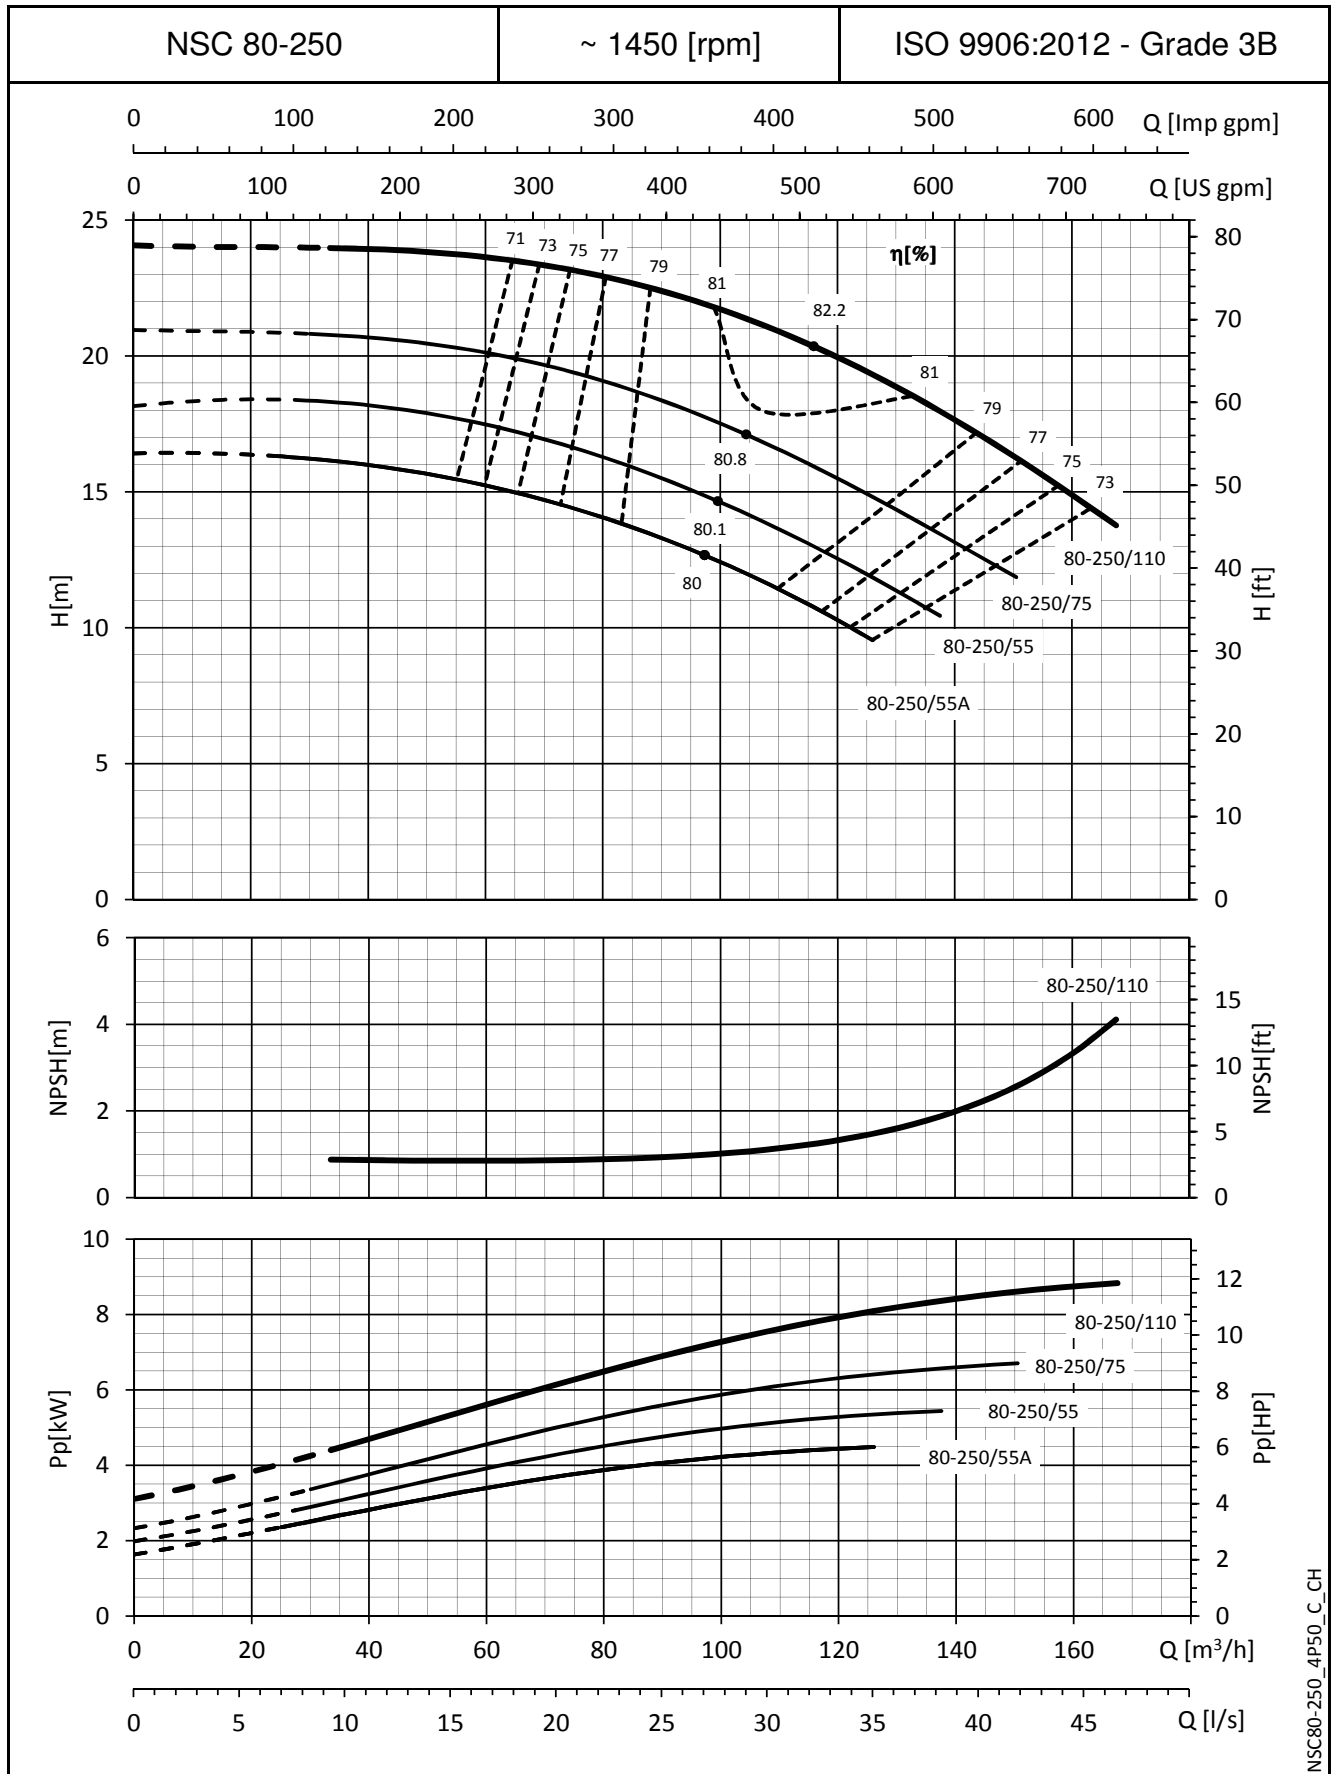


NSC80-250_4P50_C_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

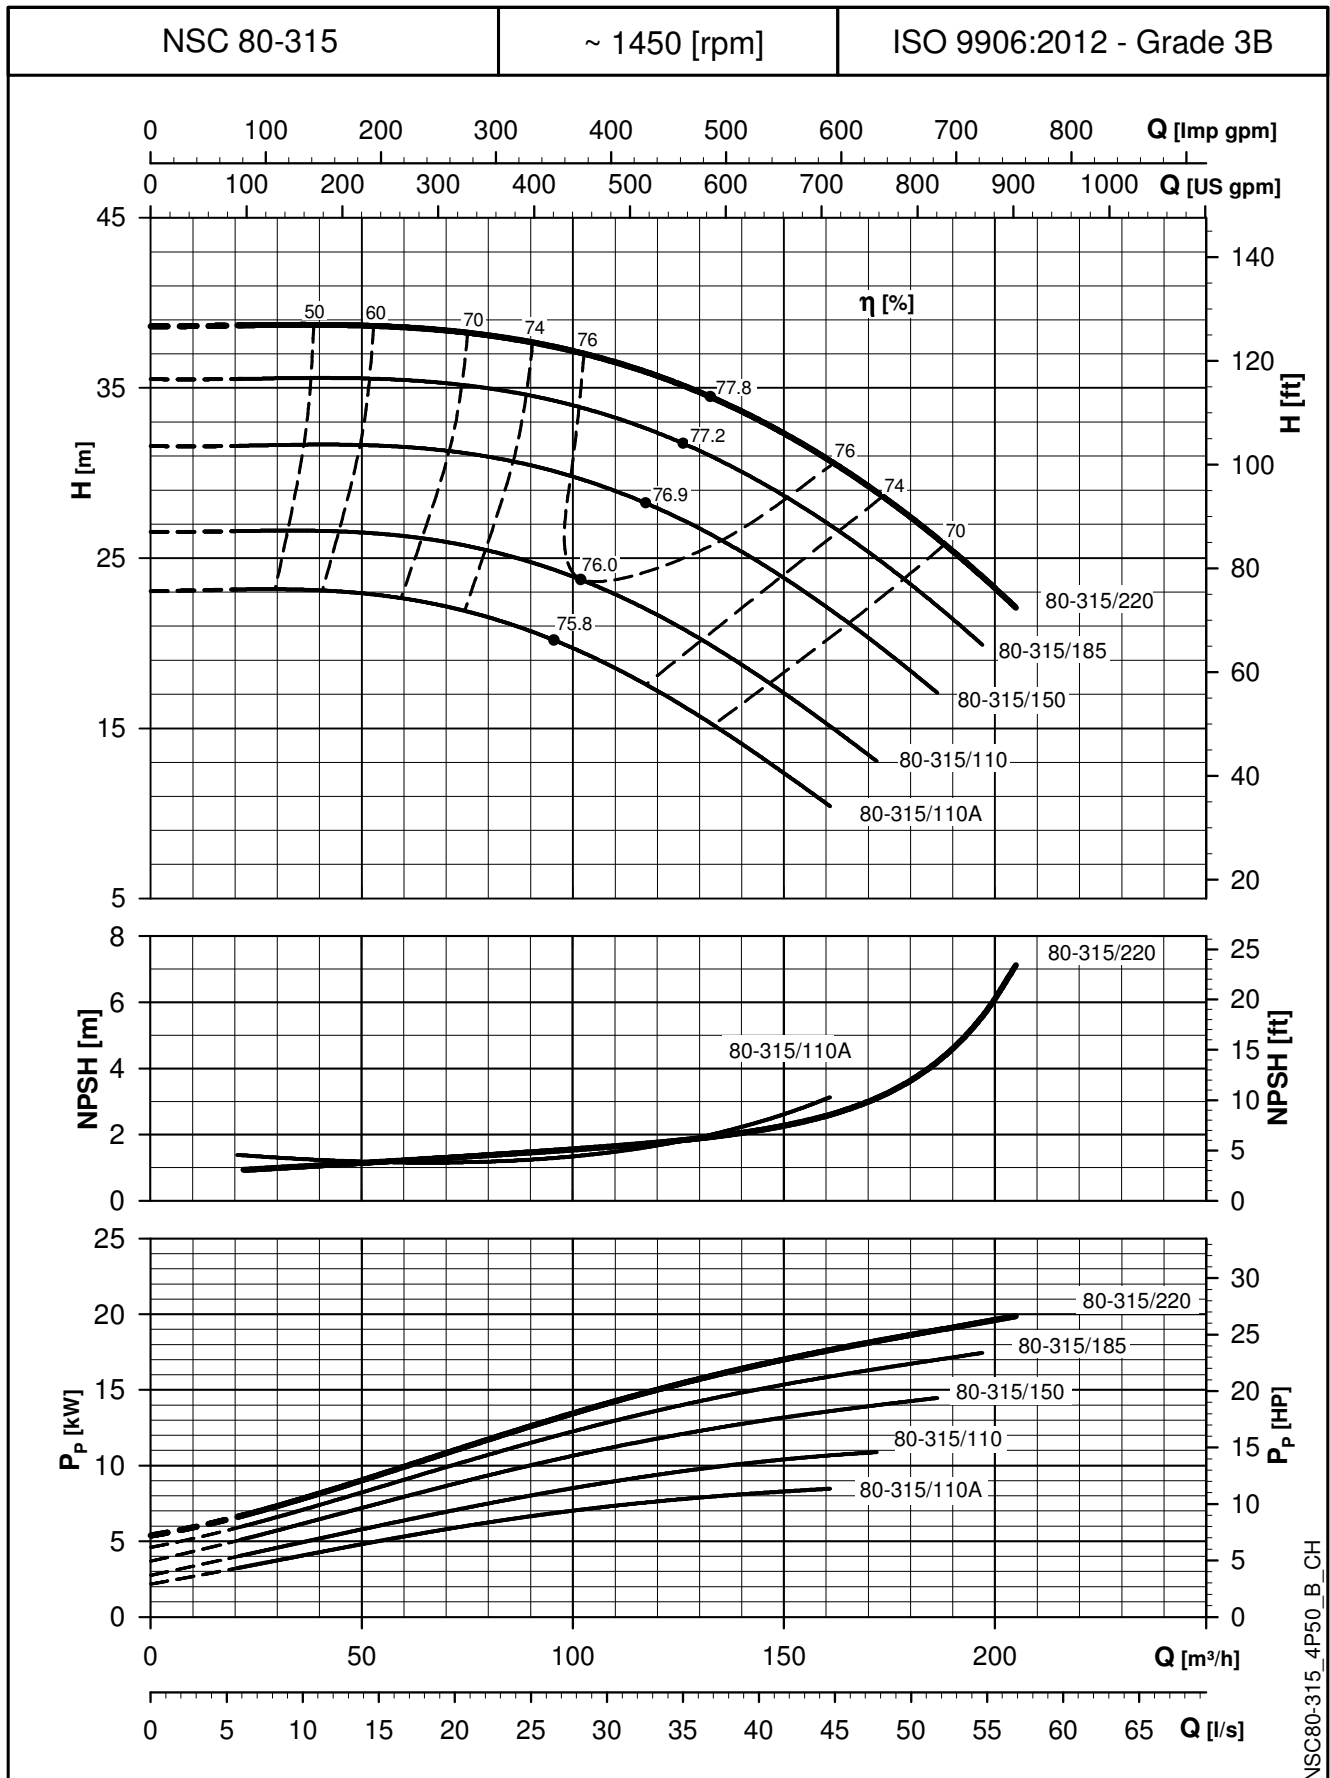

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density ρ = 1,0 Kg/dm³ and kinematic viscosity ν = 1 mm²/sec.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

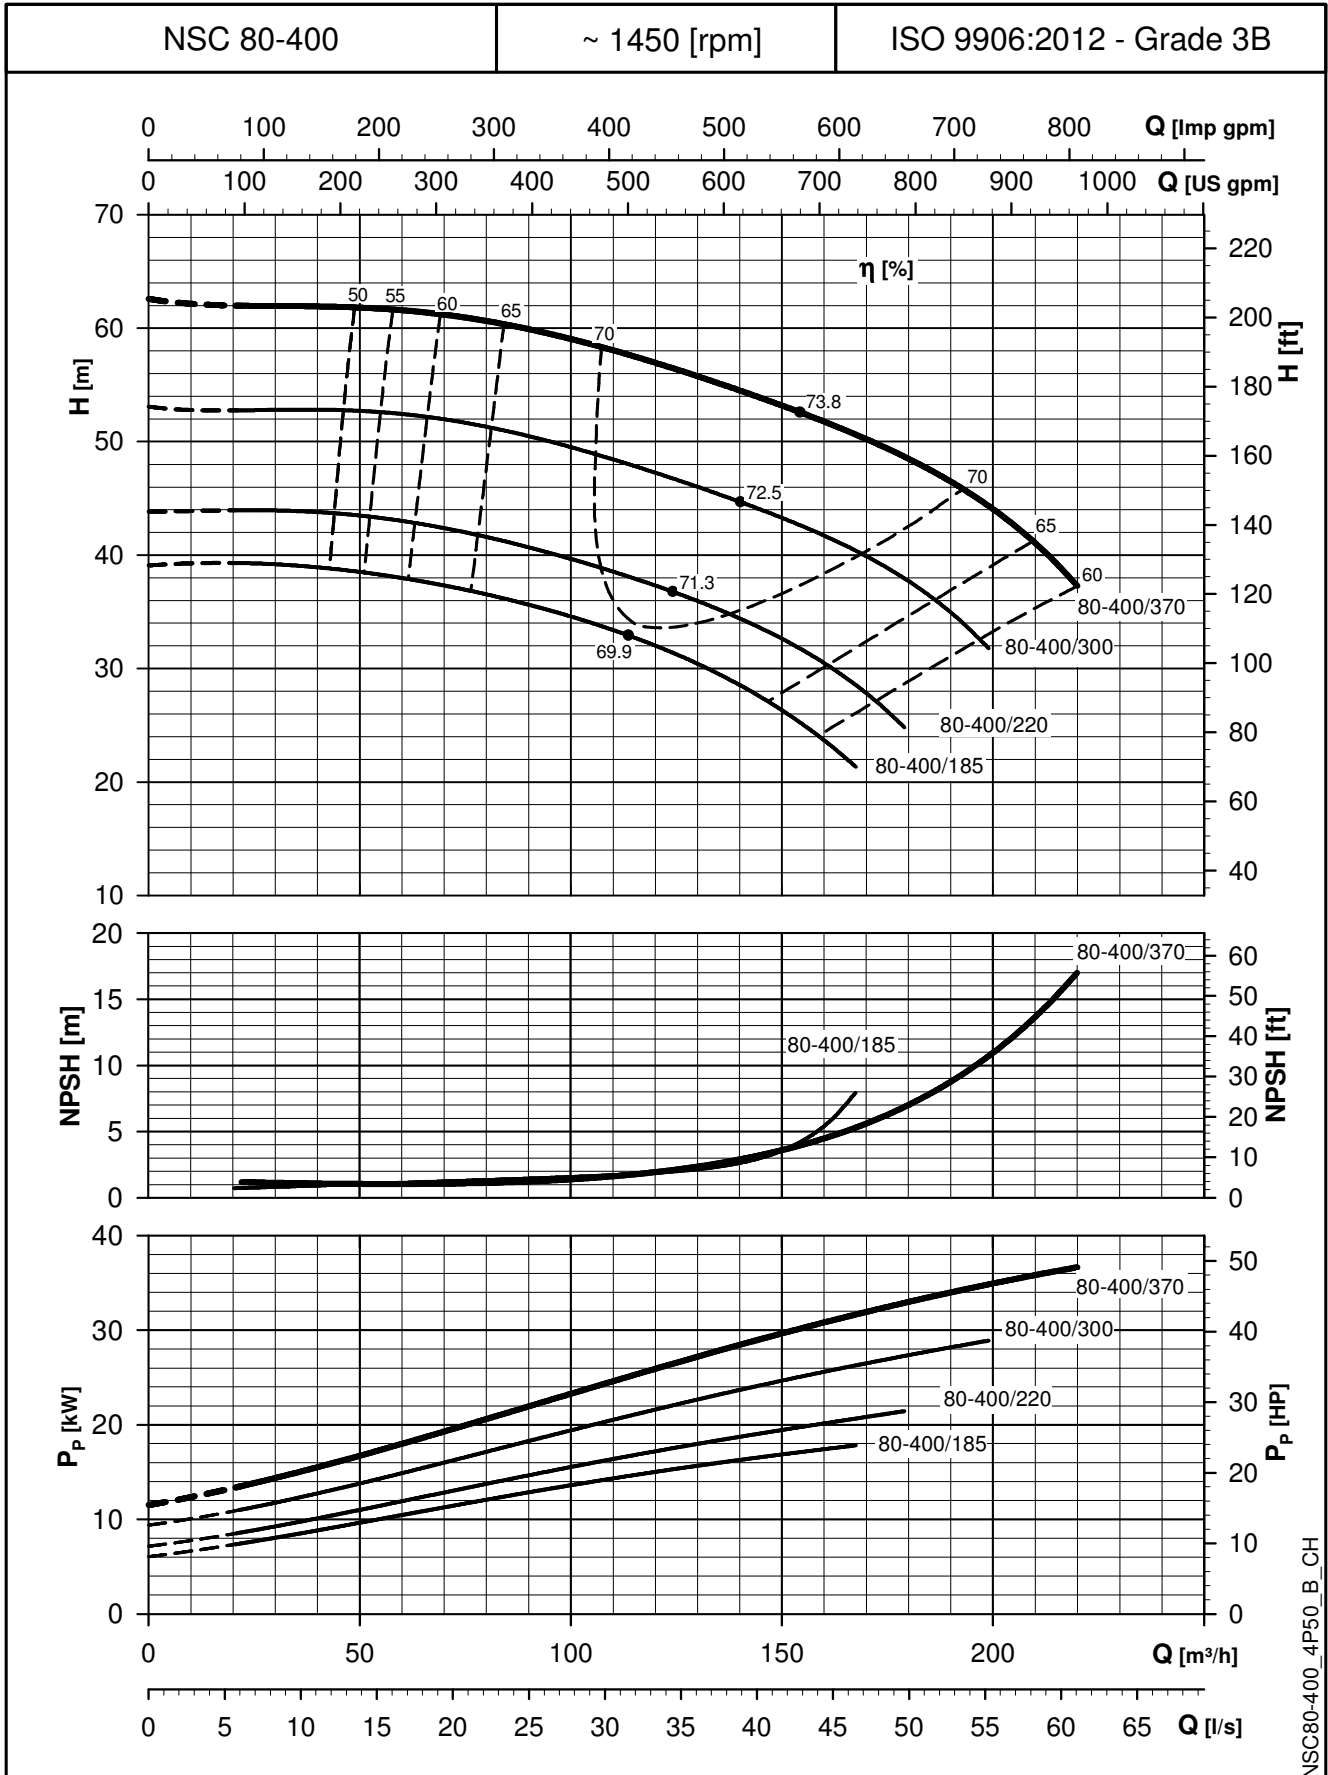


NSC80-400_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

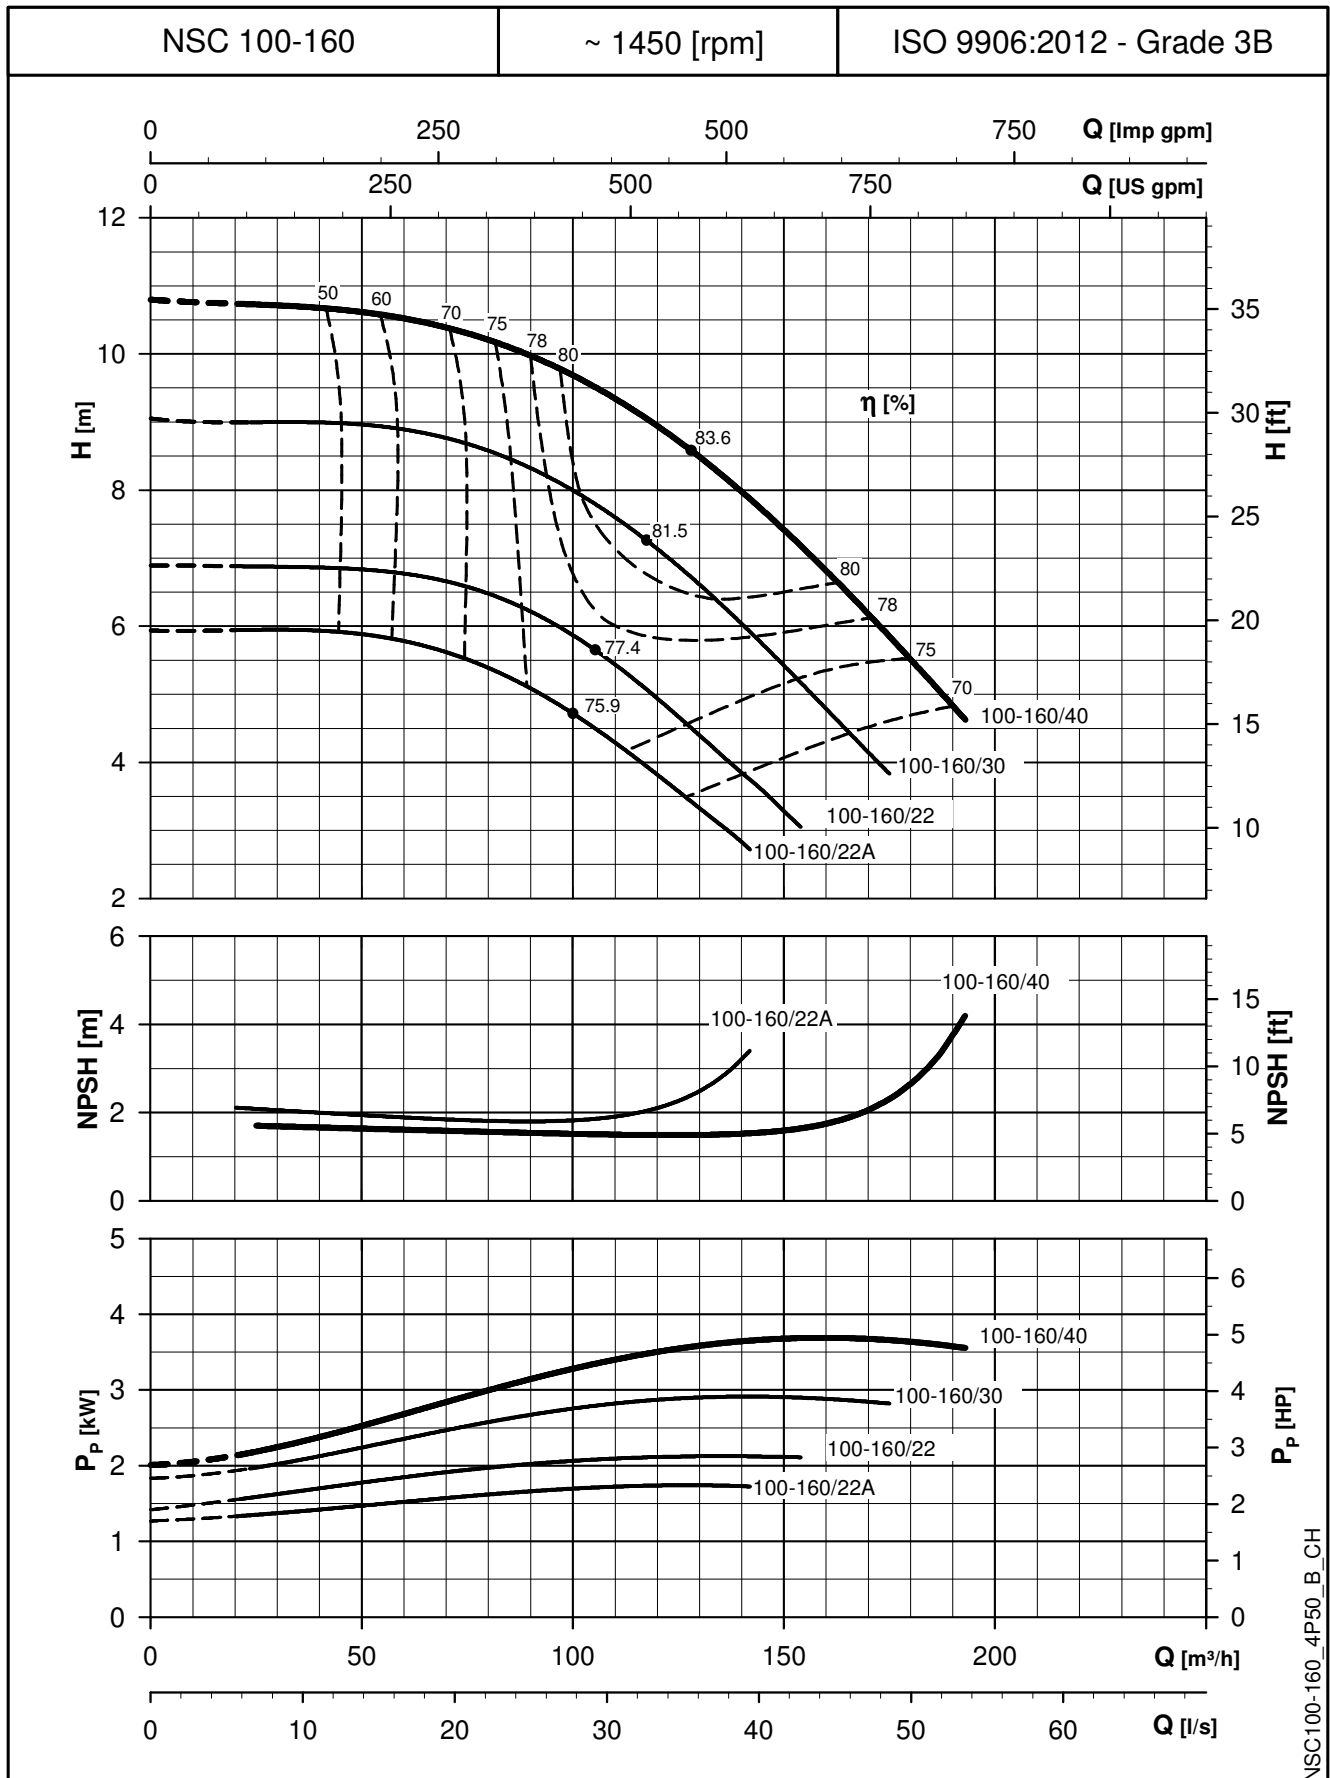


NSC100-160_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

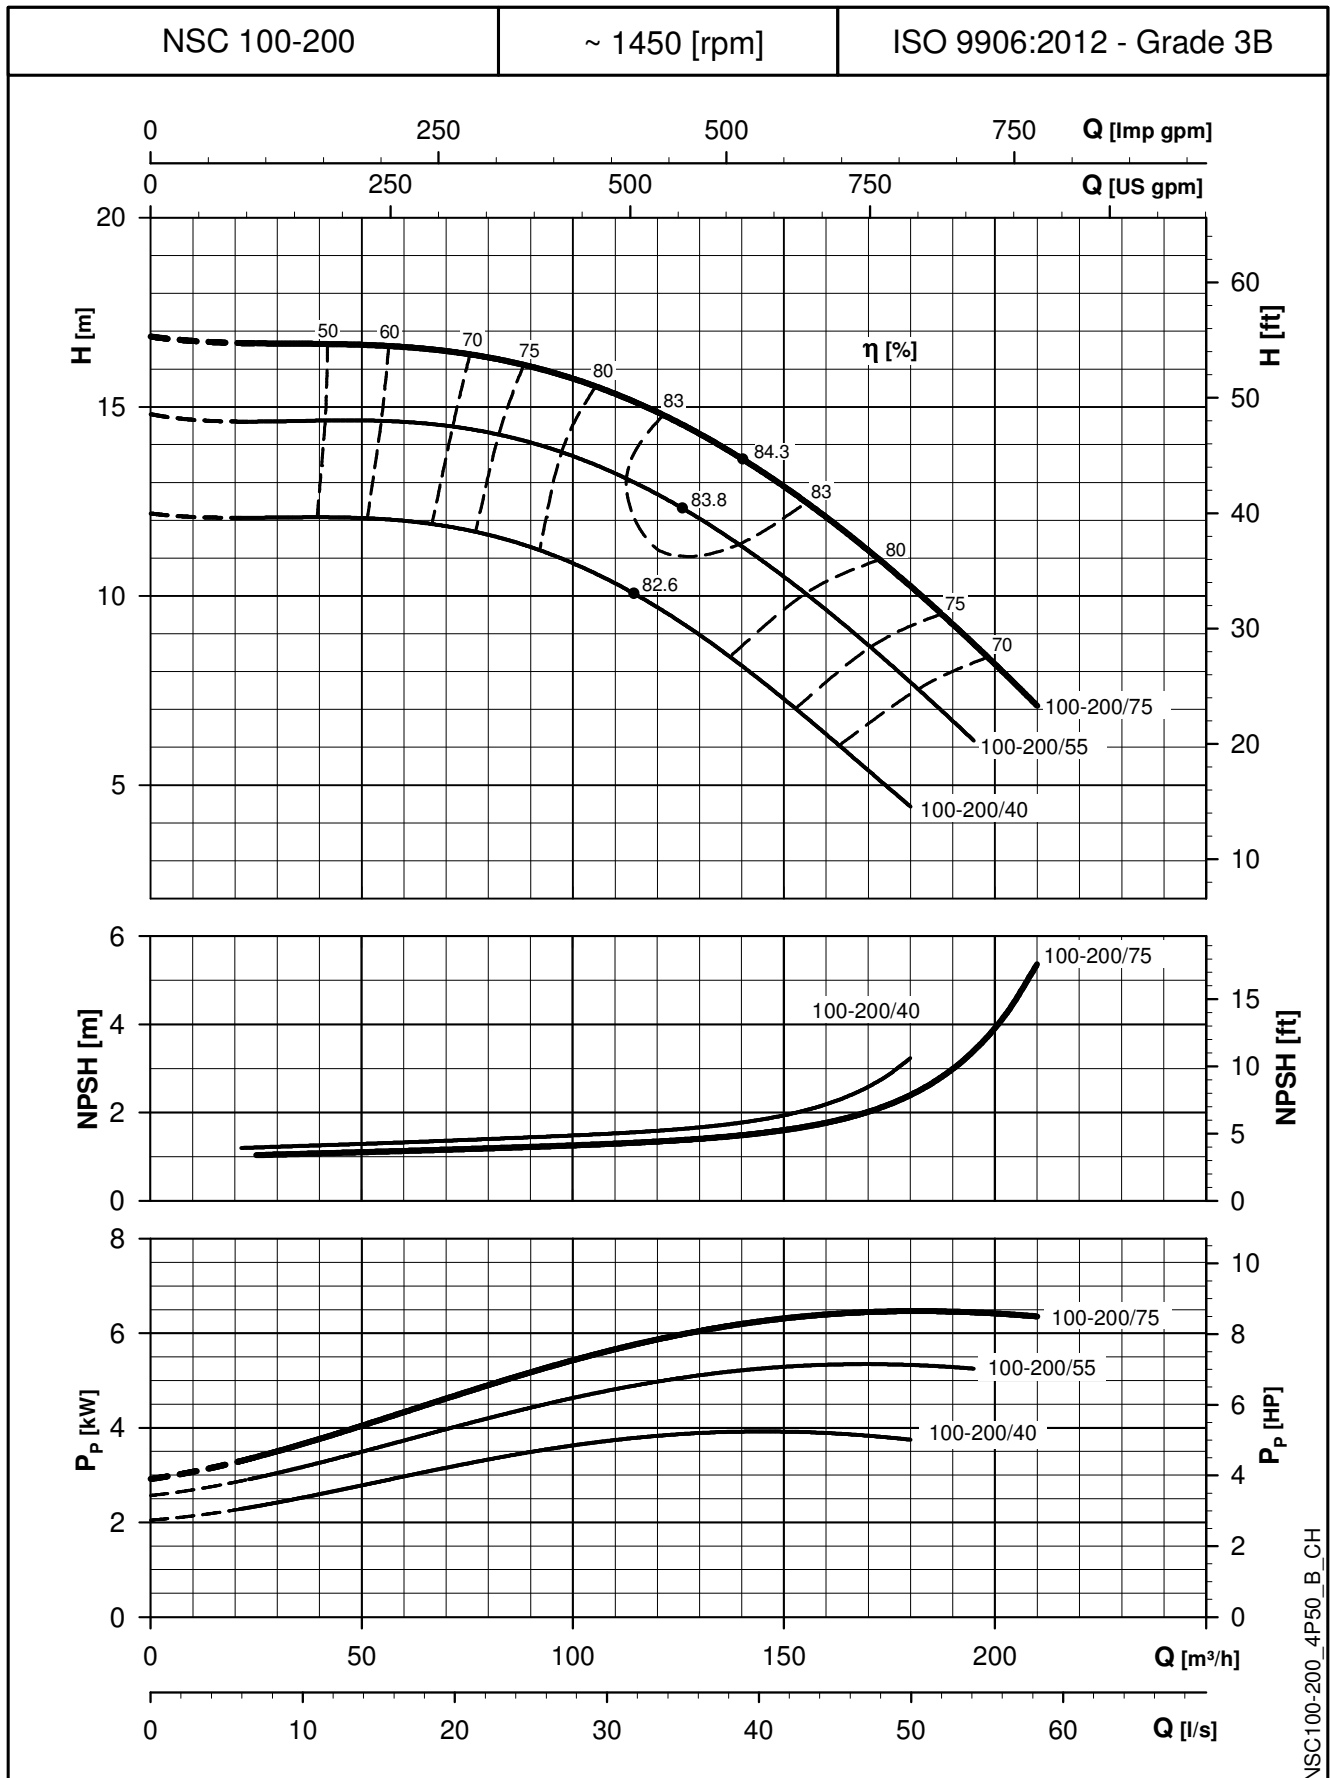


NSC100-200_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

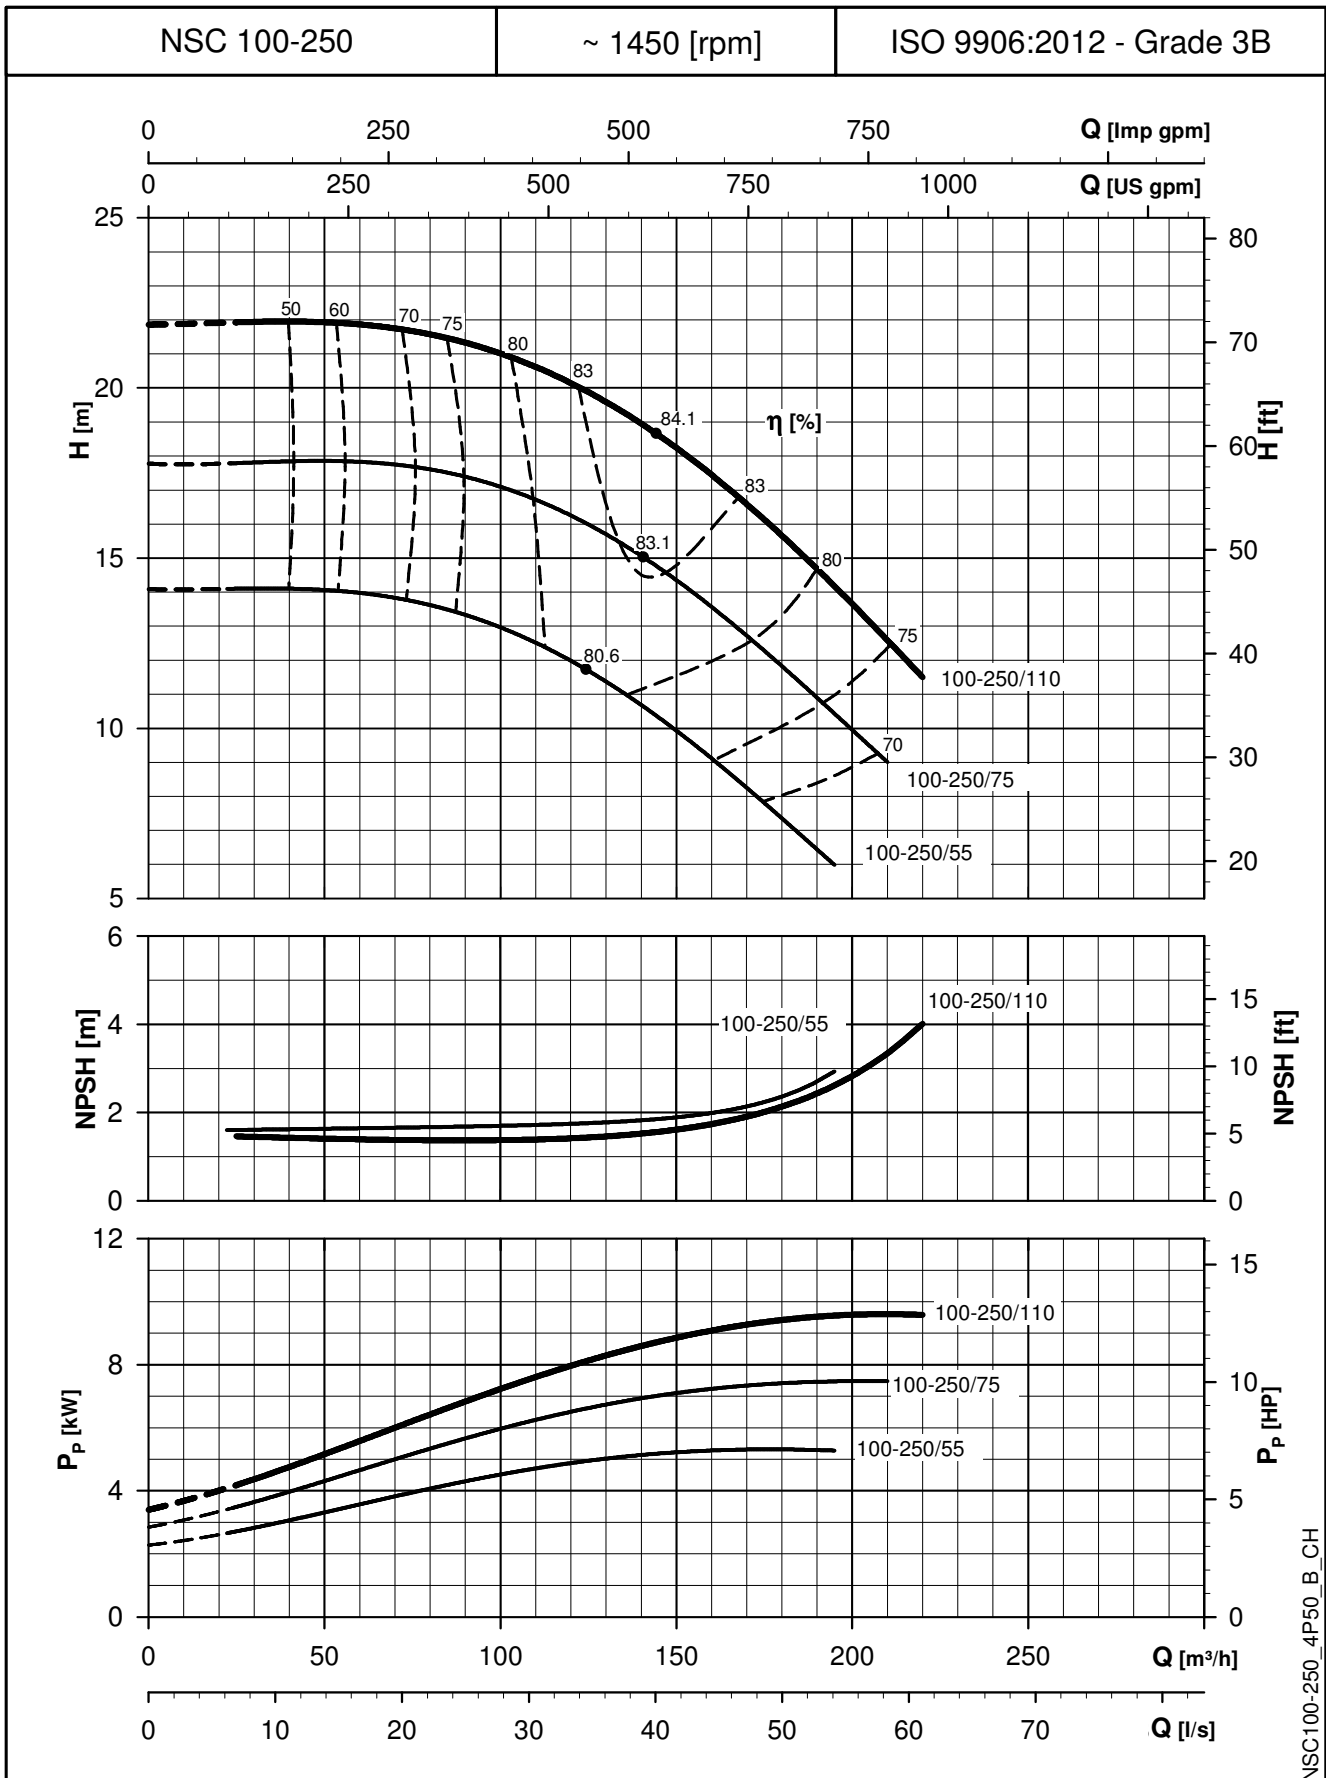


NSC100-250_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

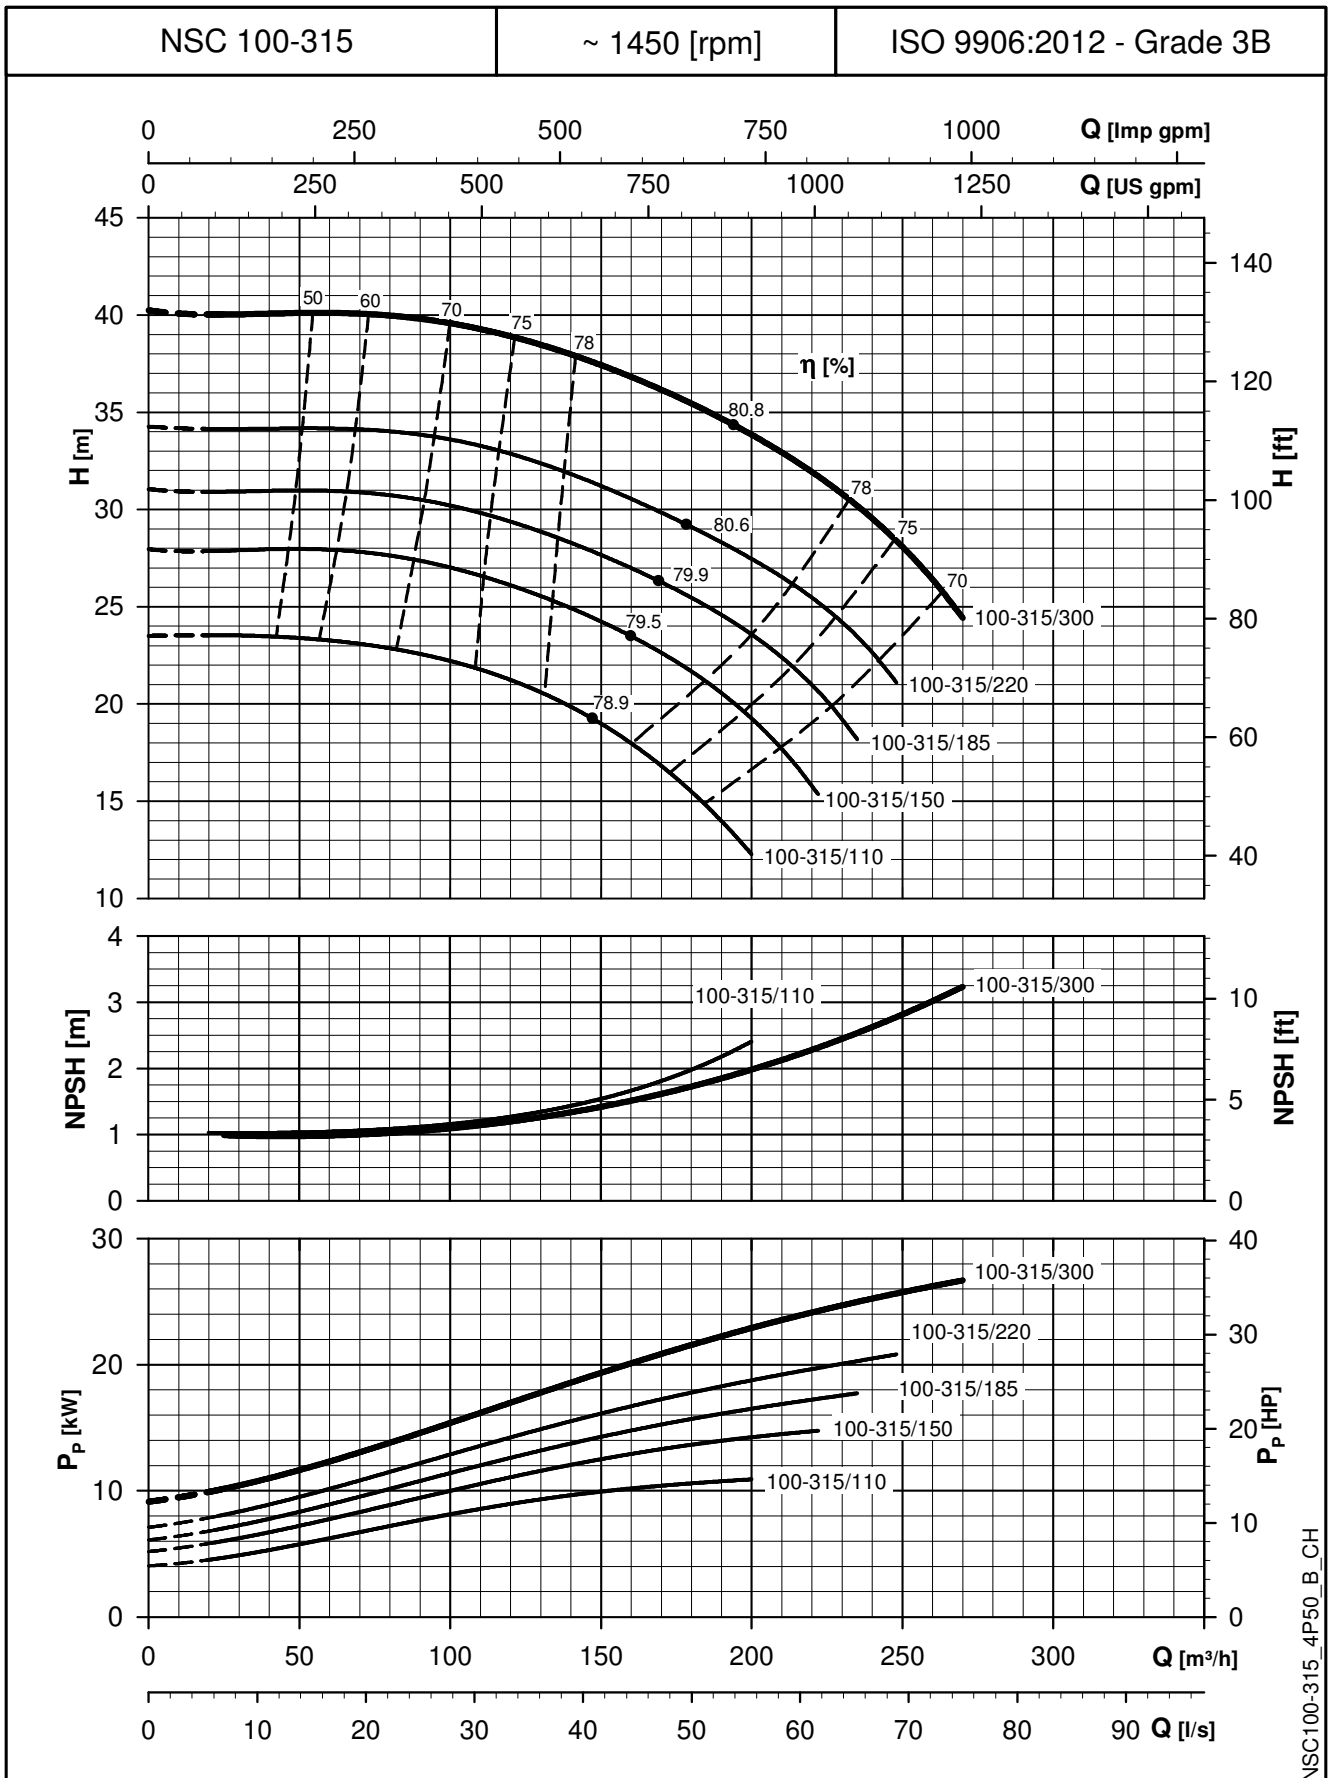


NSC100-315_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

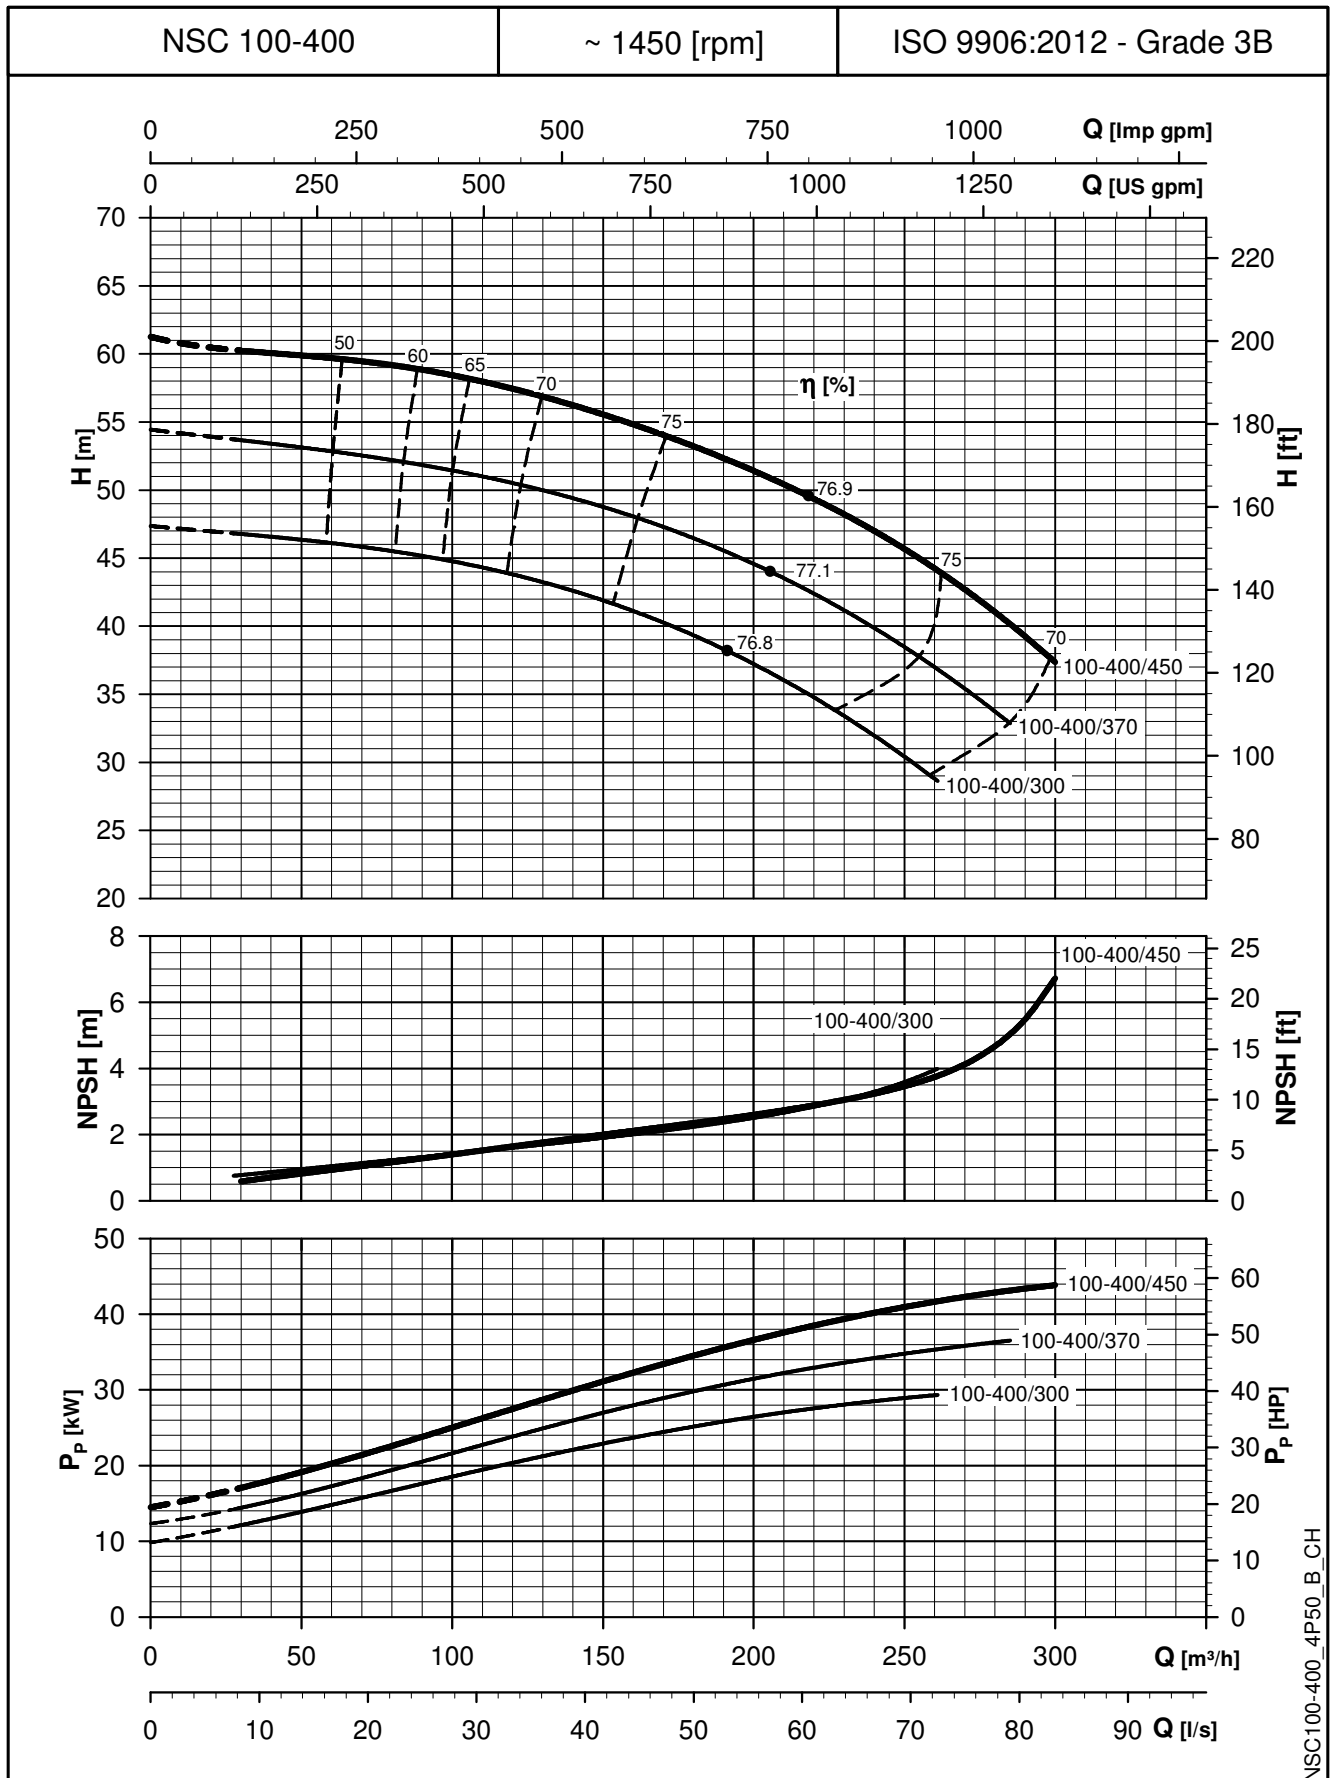

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

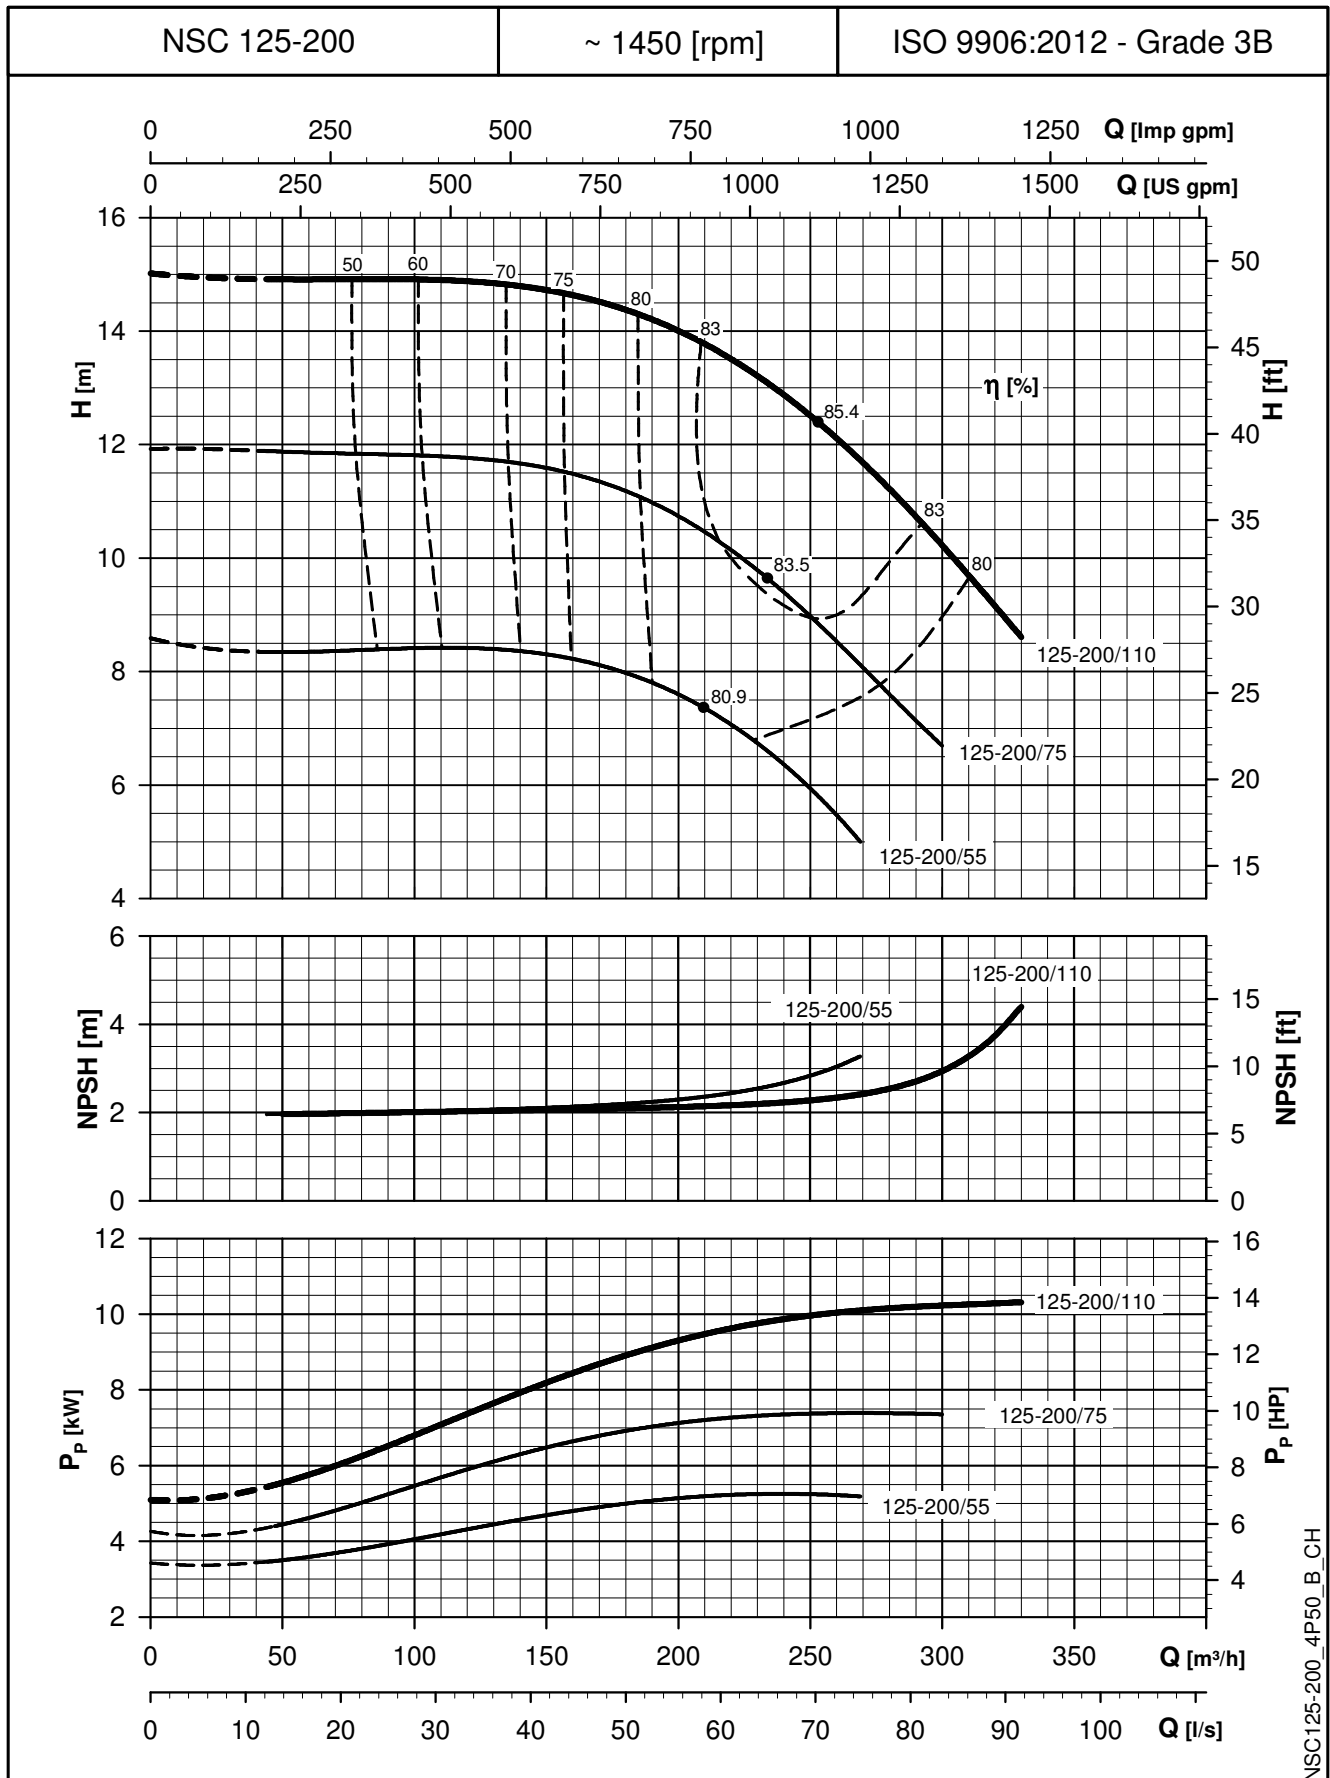


NSC125-200_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

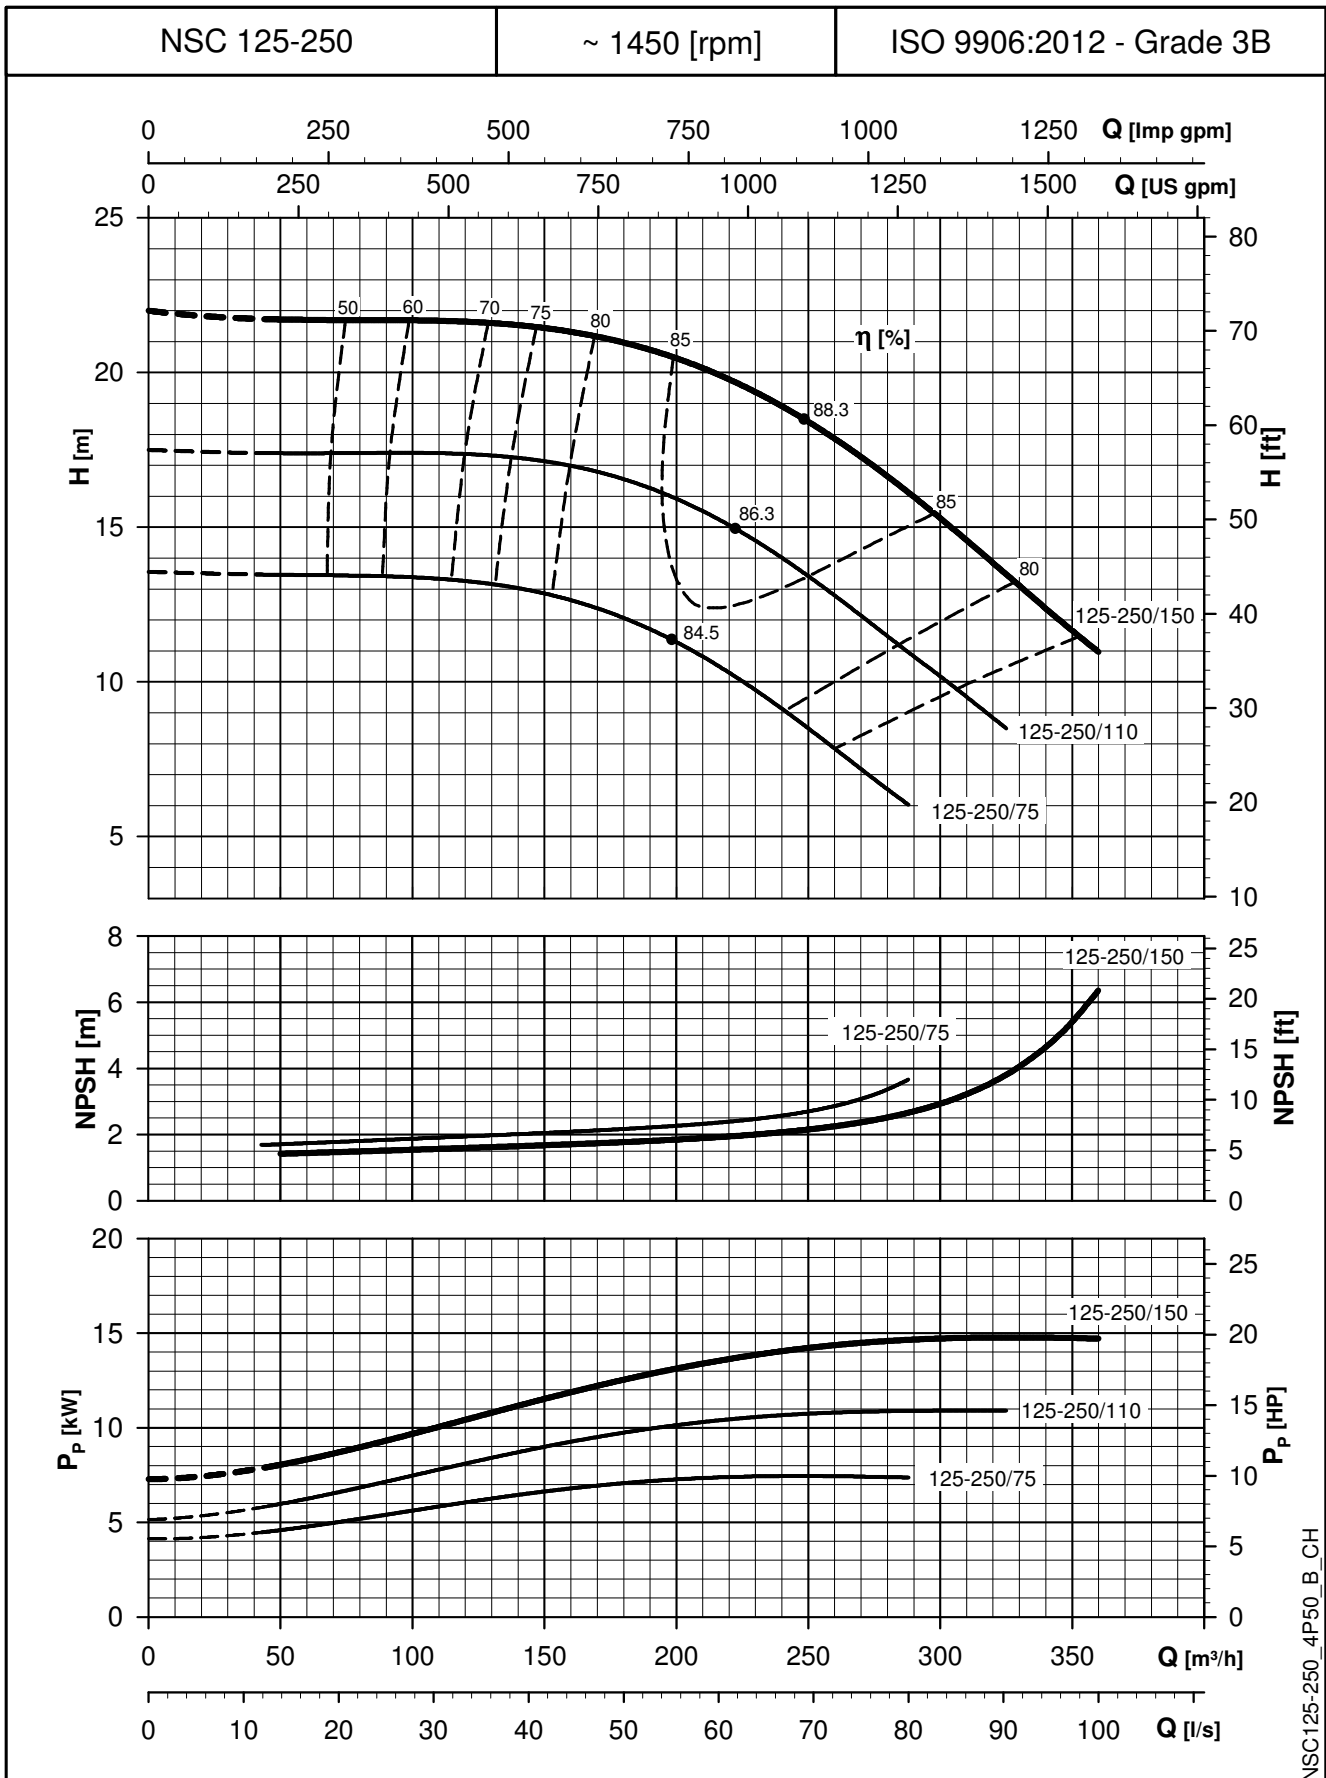


NSC125-250_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

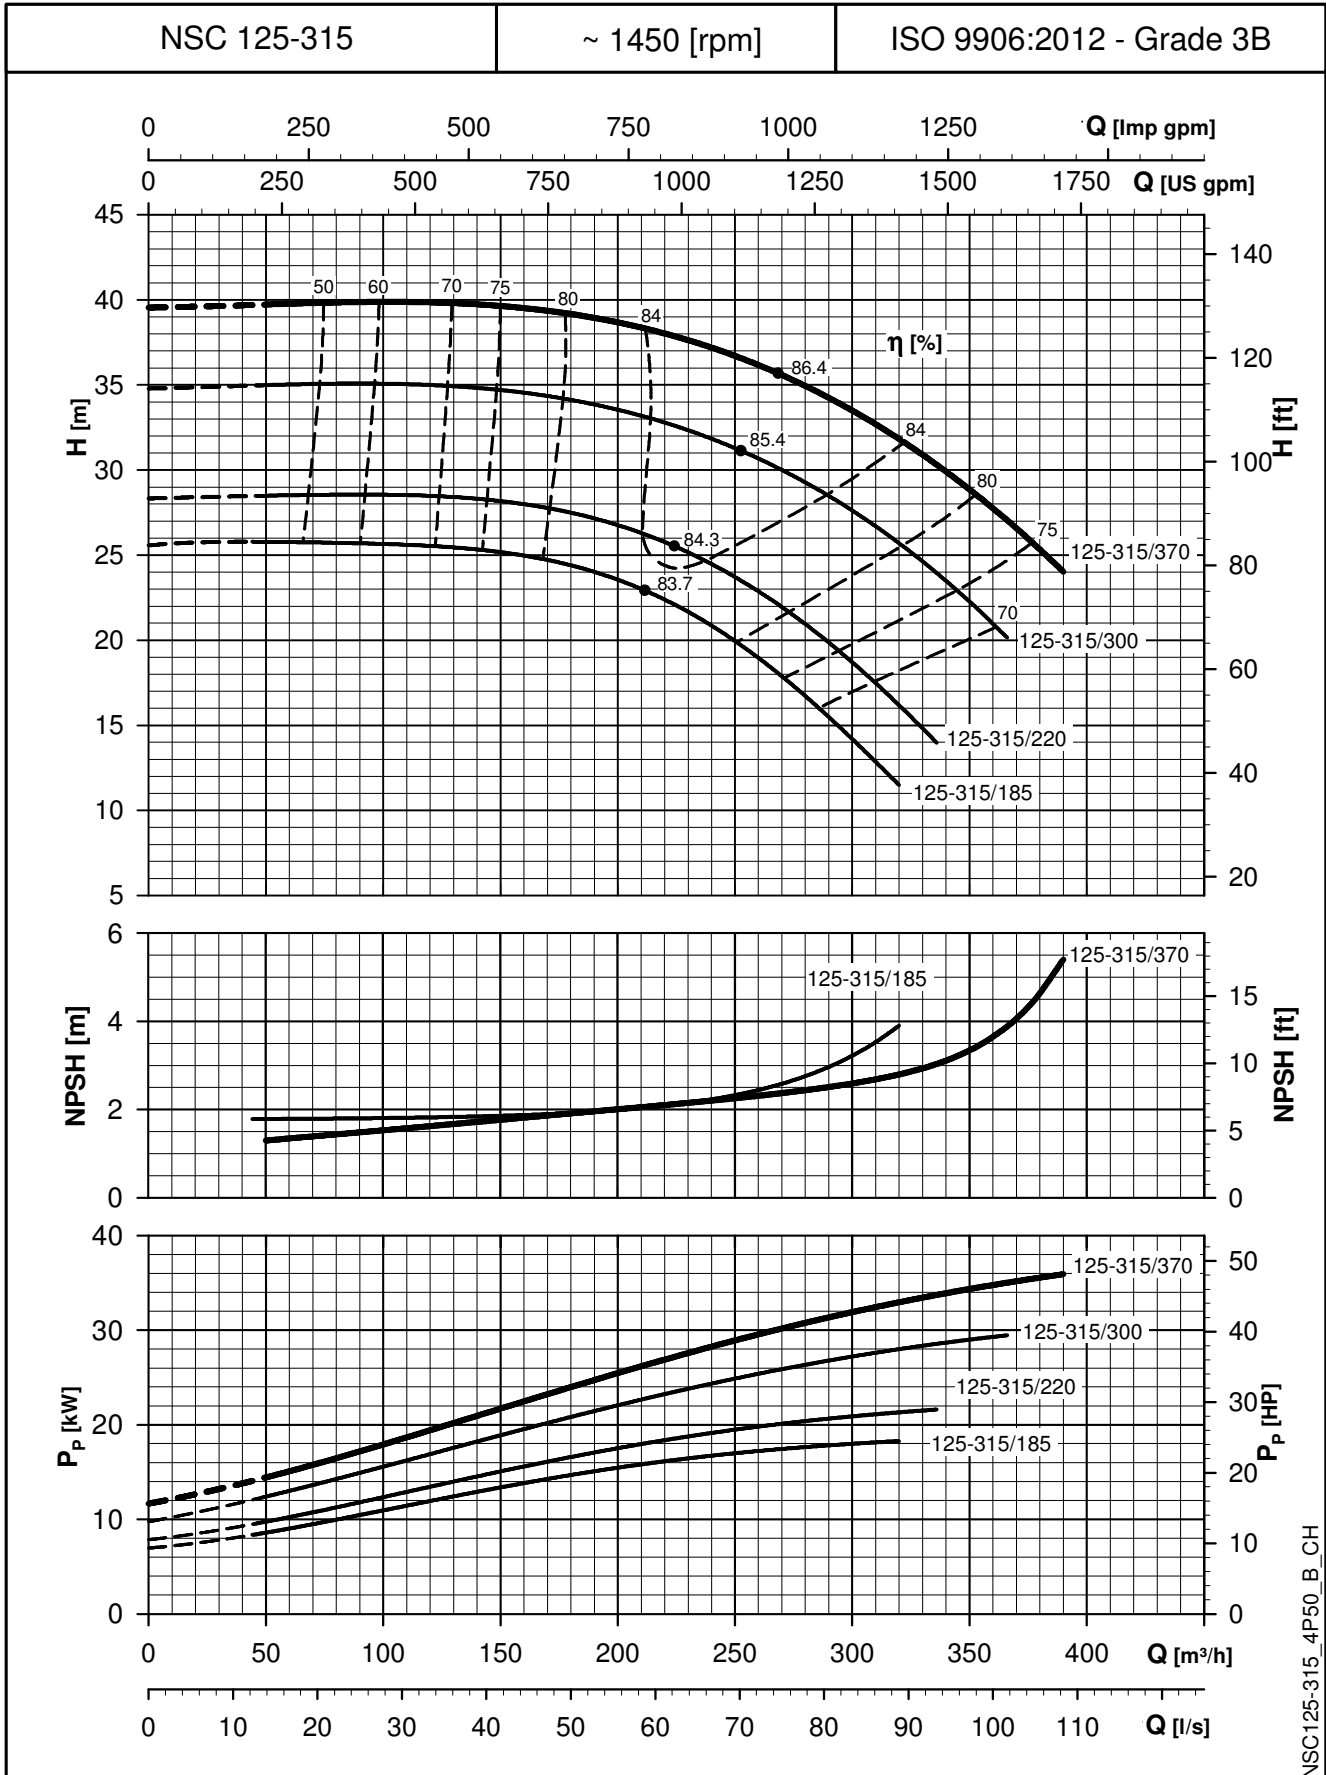


NSC125-315_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density ρ = 1,0 Kg/dm³ and kinematic viscosity ν = 1 mm²/sec.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

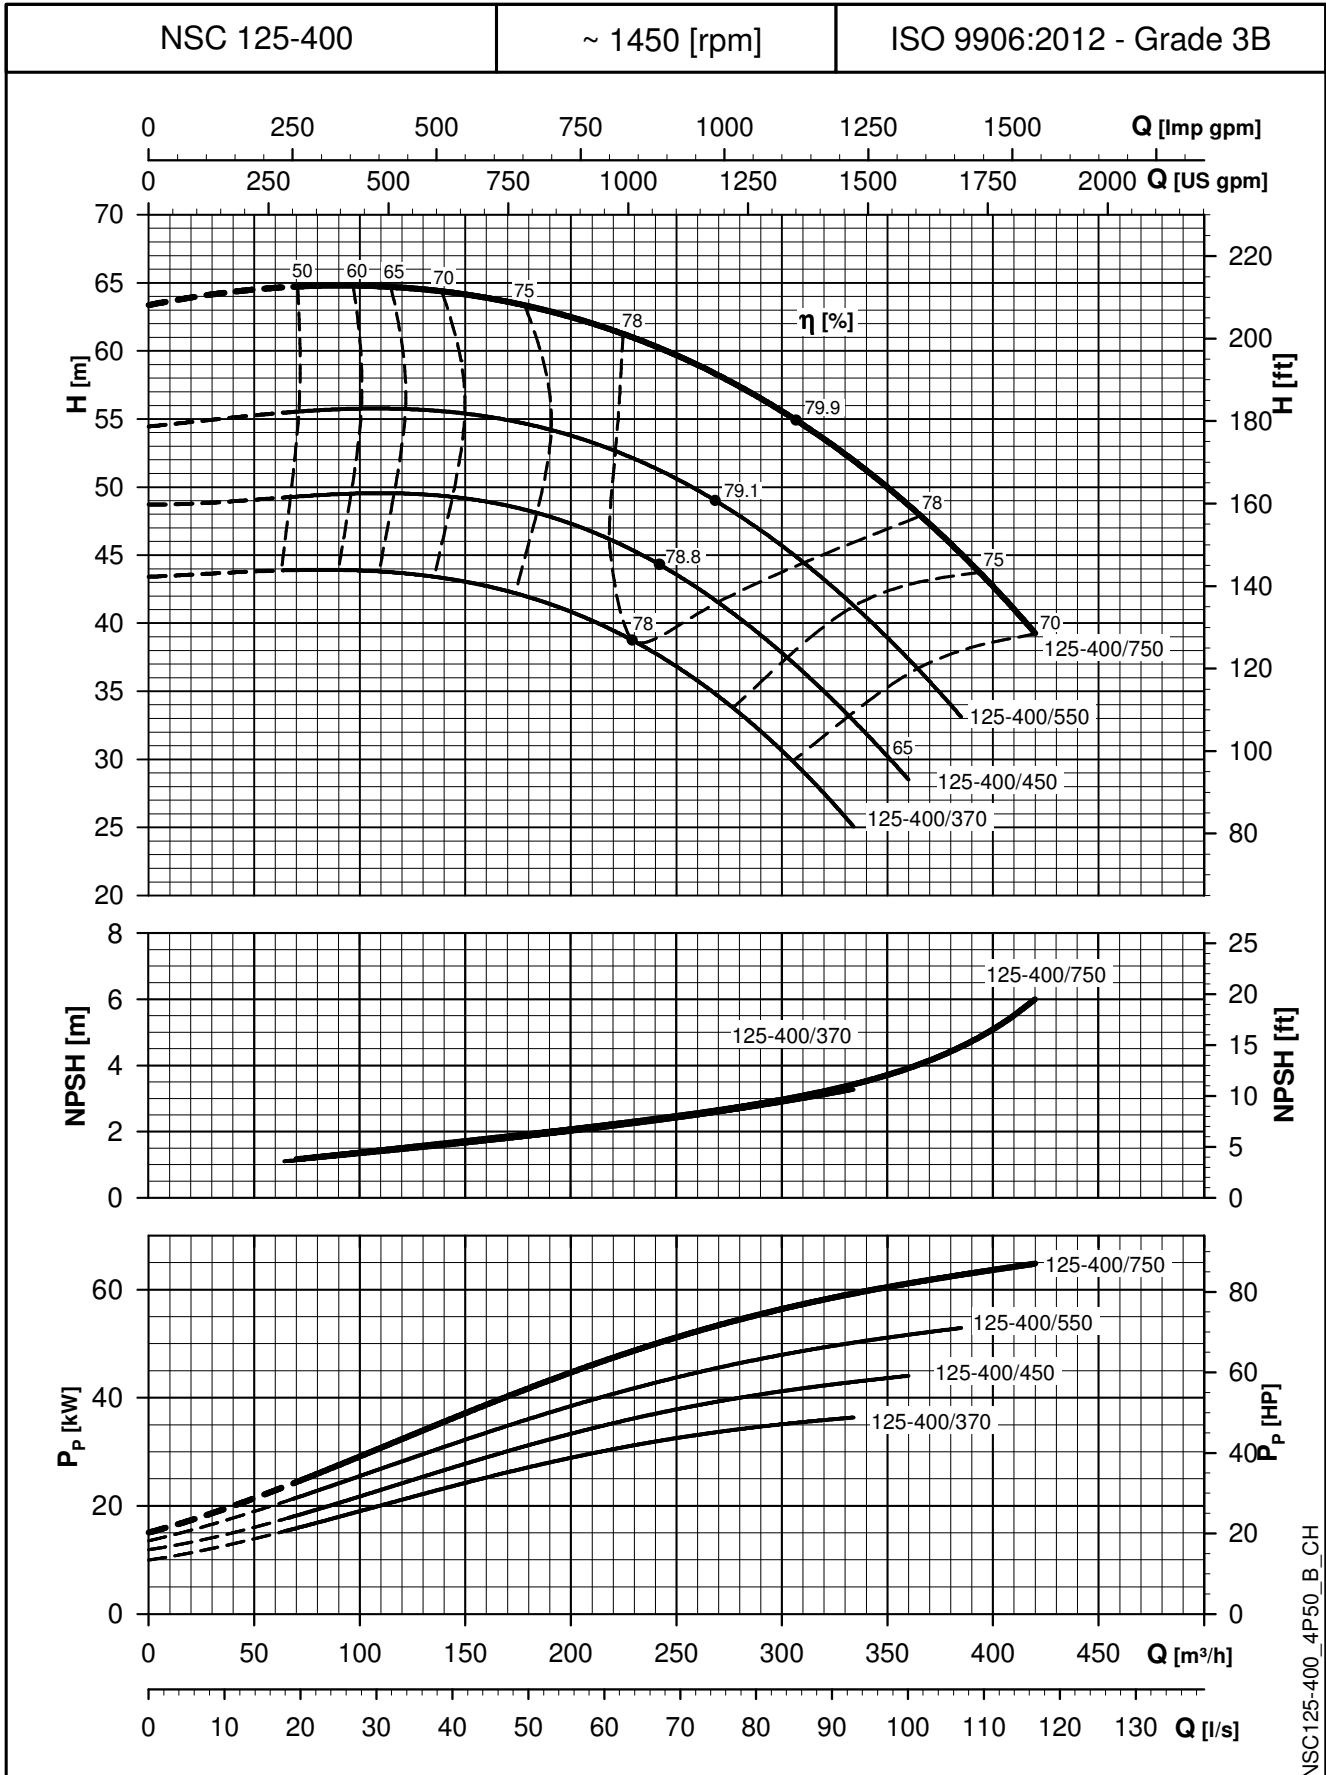


NSC125-400_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

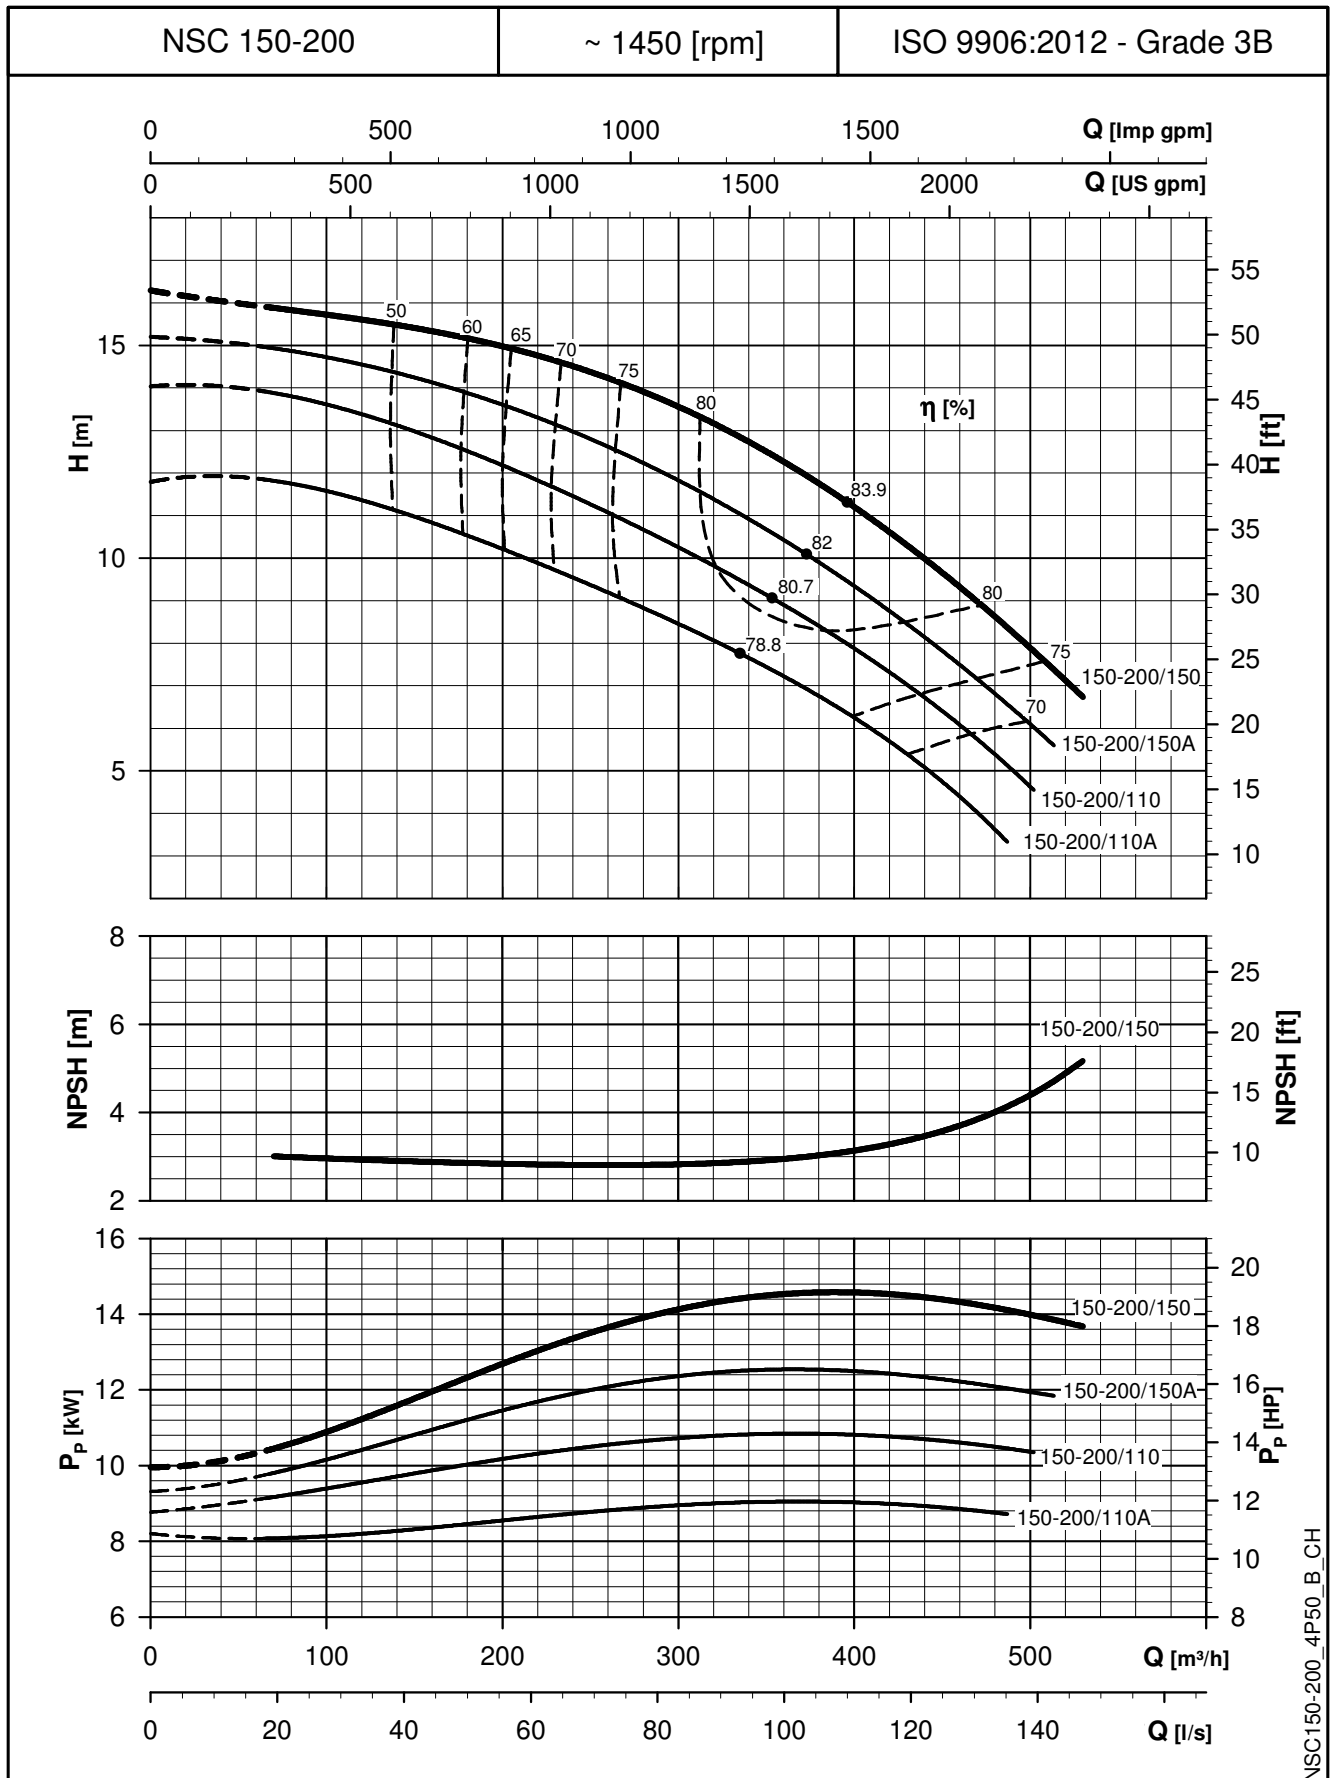


NSC150-200_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

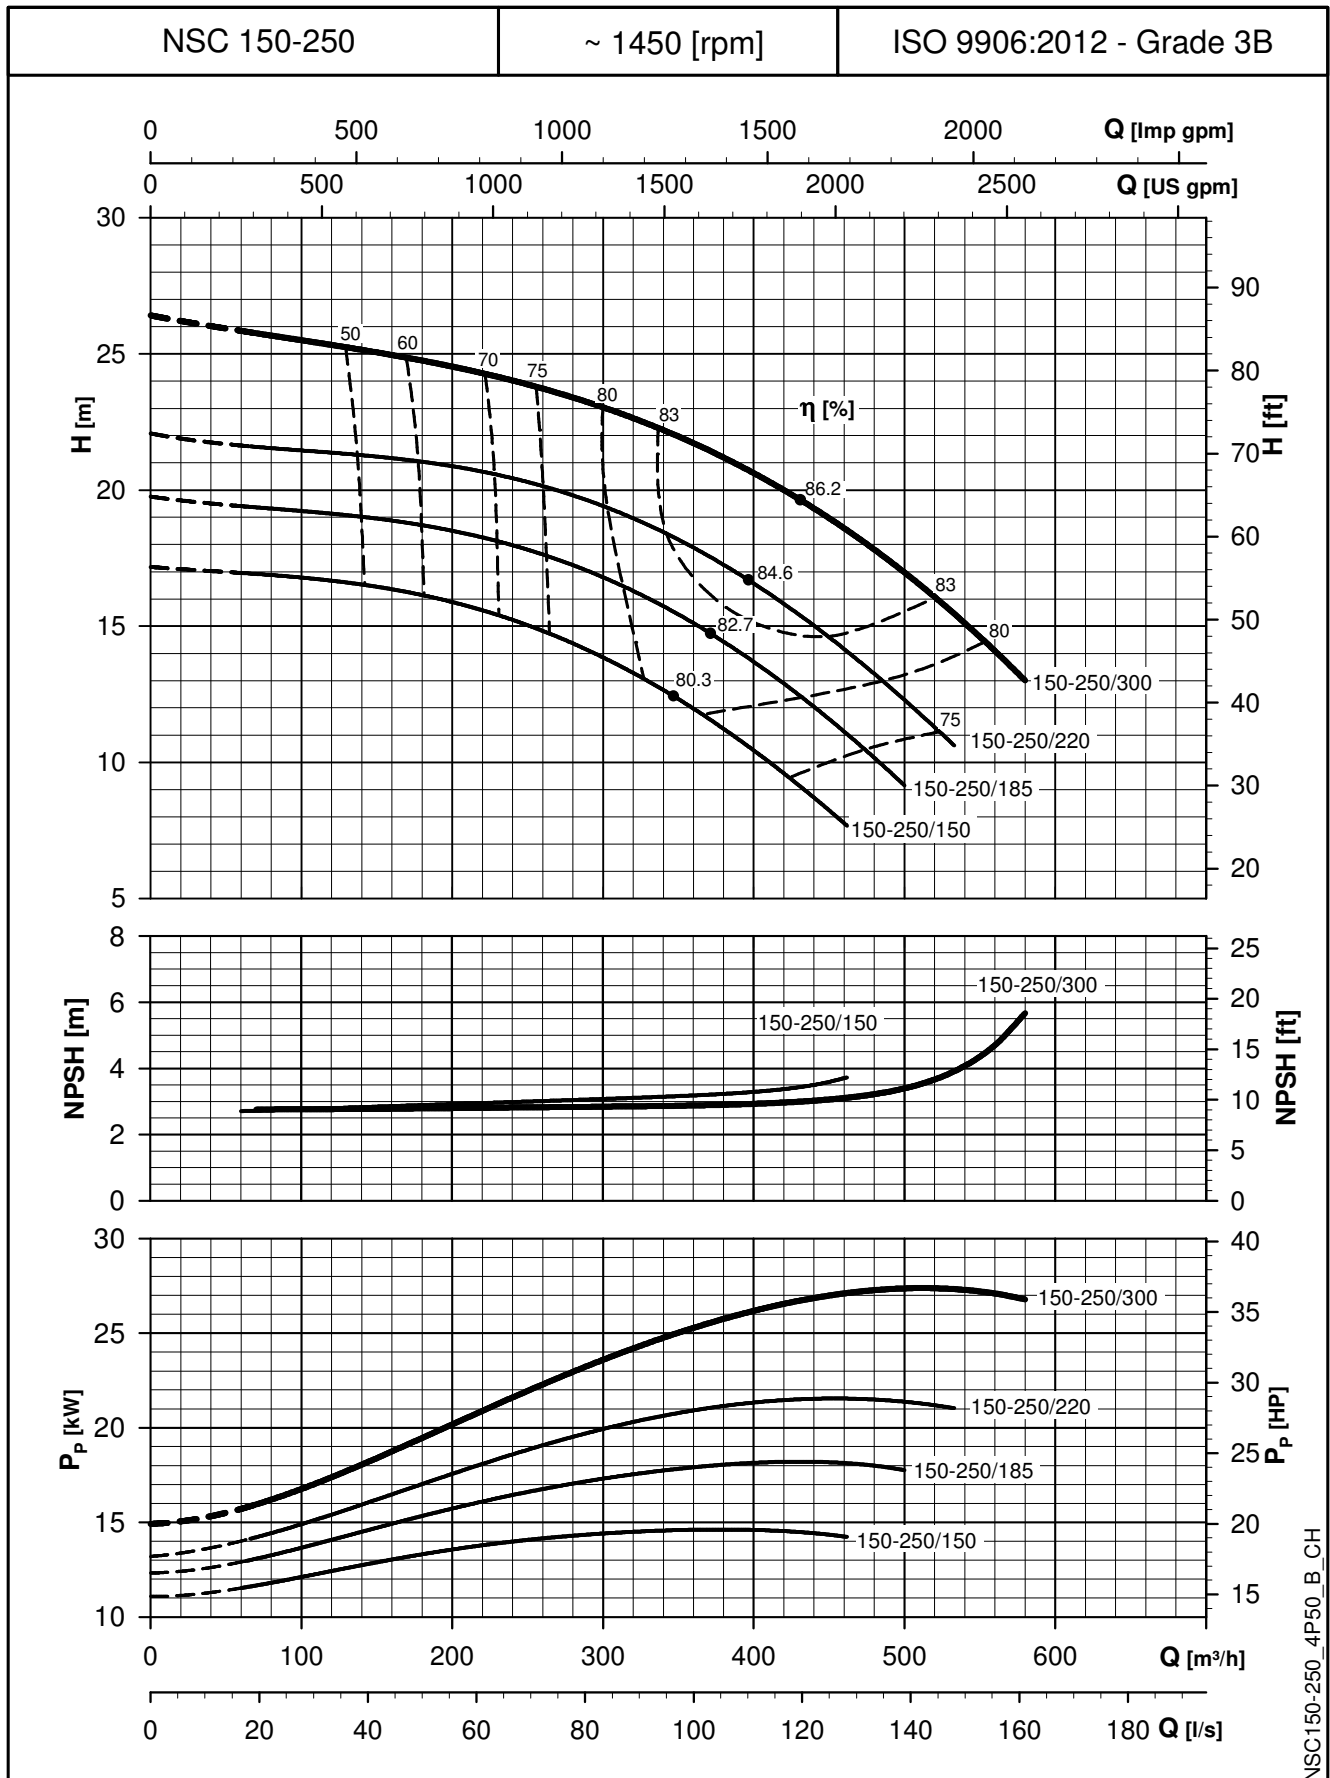


NSC150-250_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

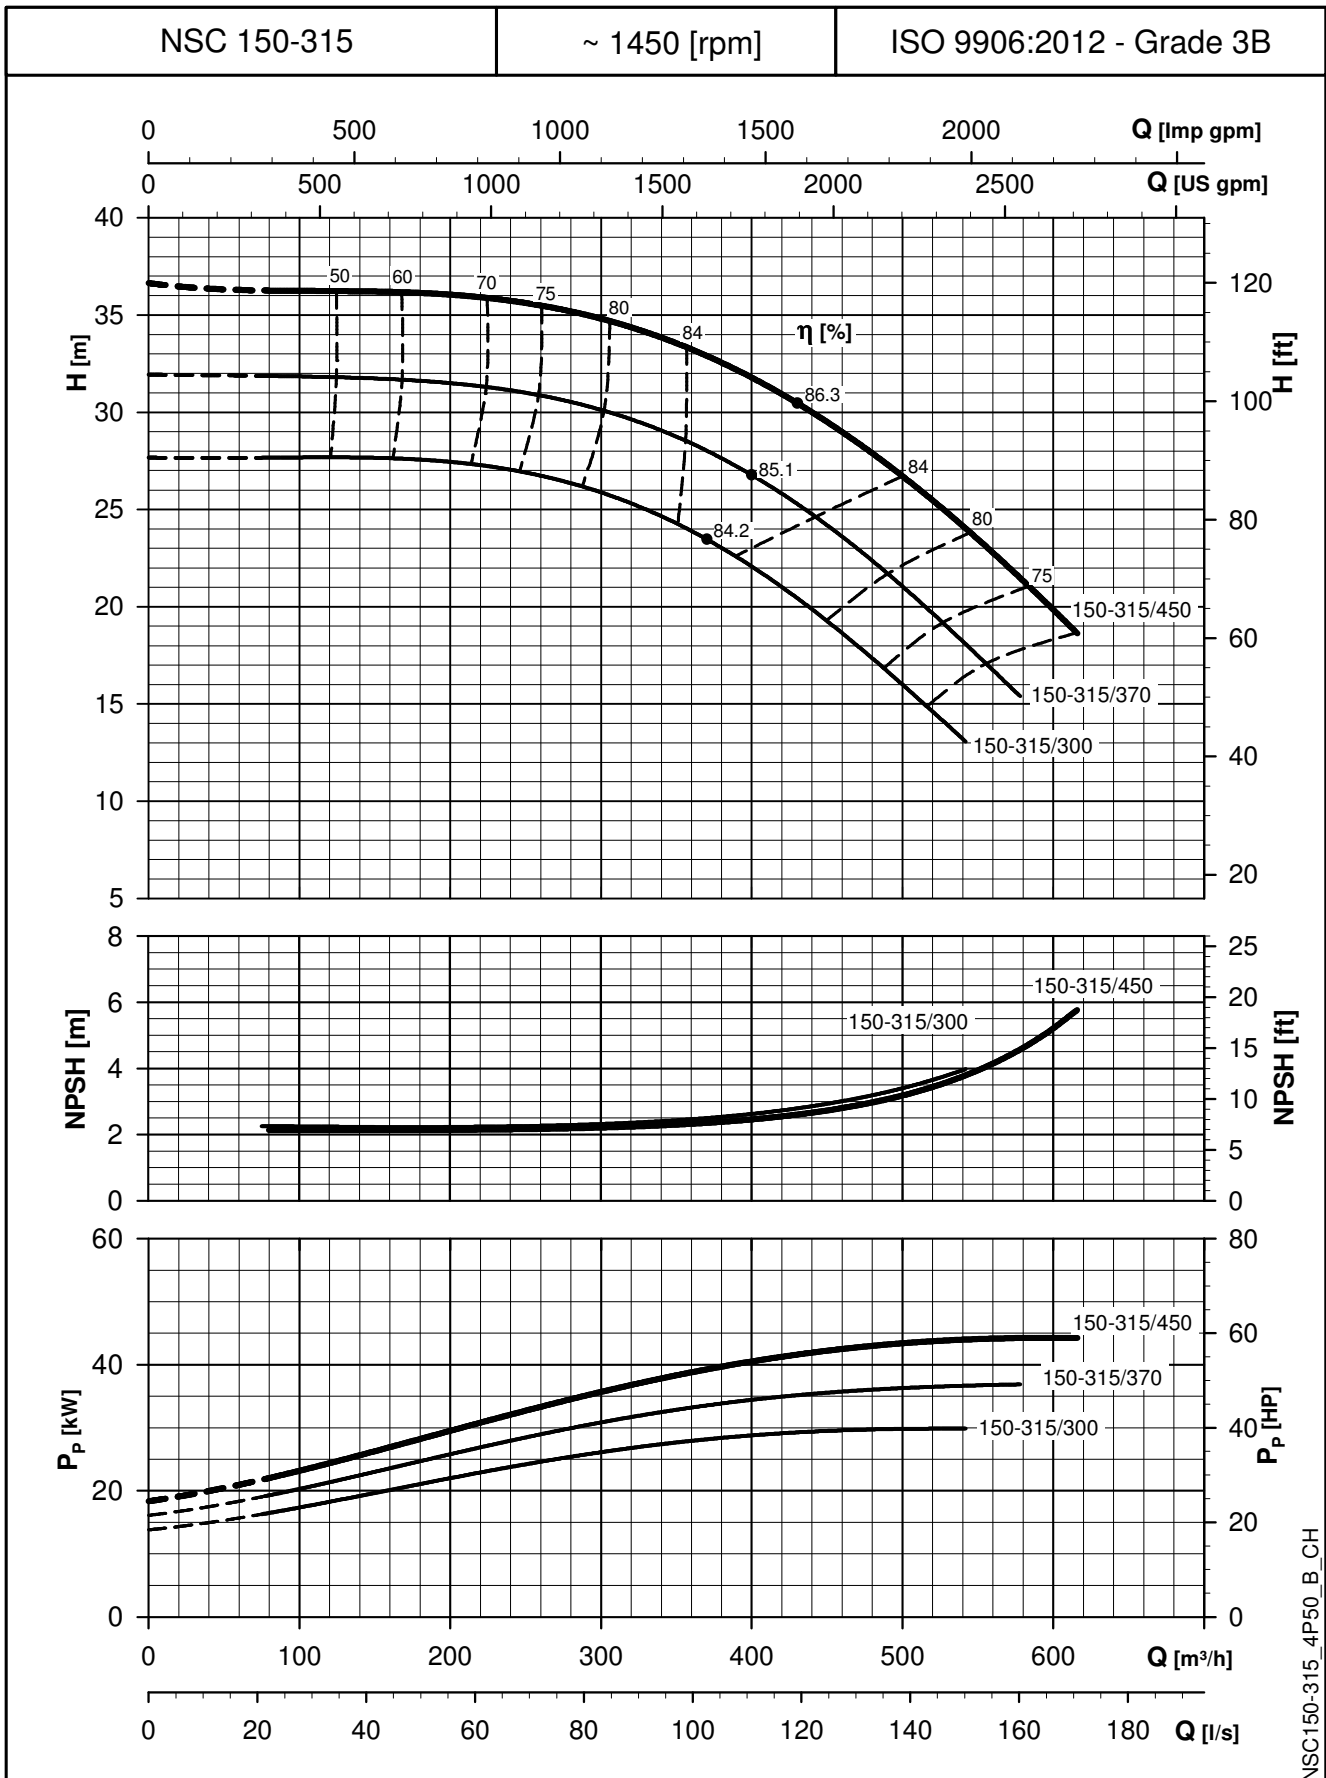


NSC150-315_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

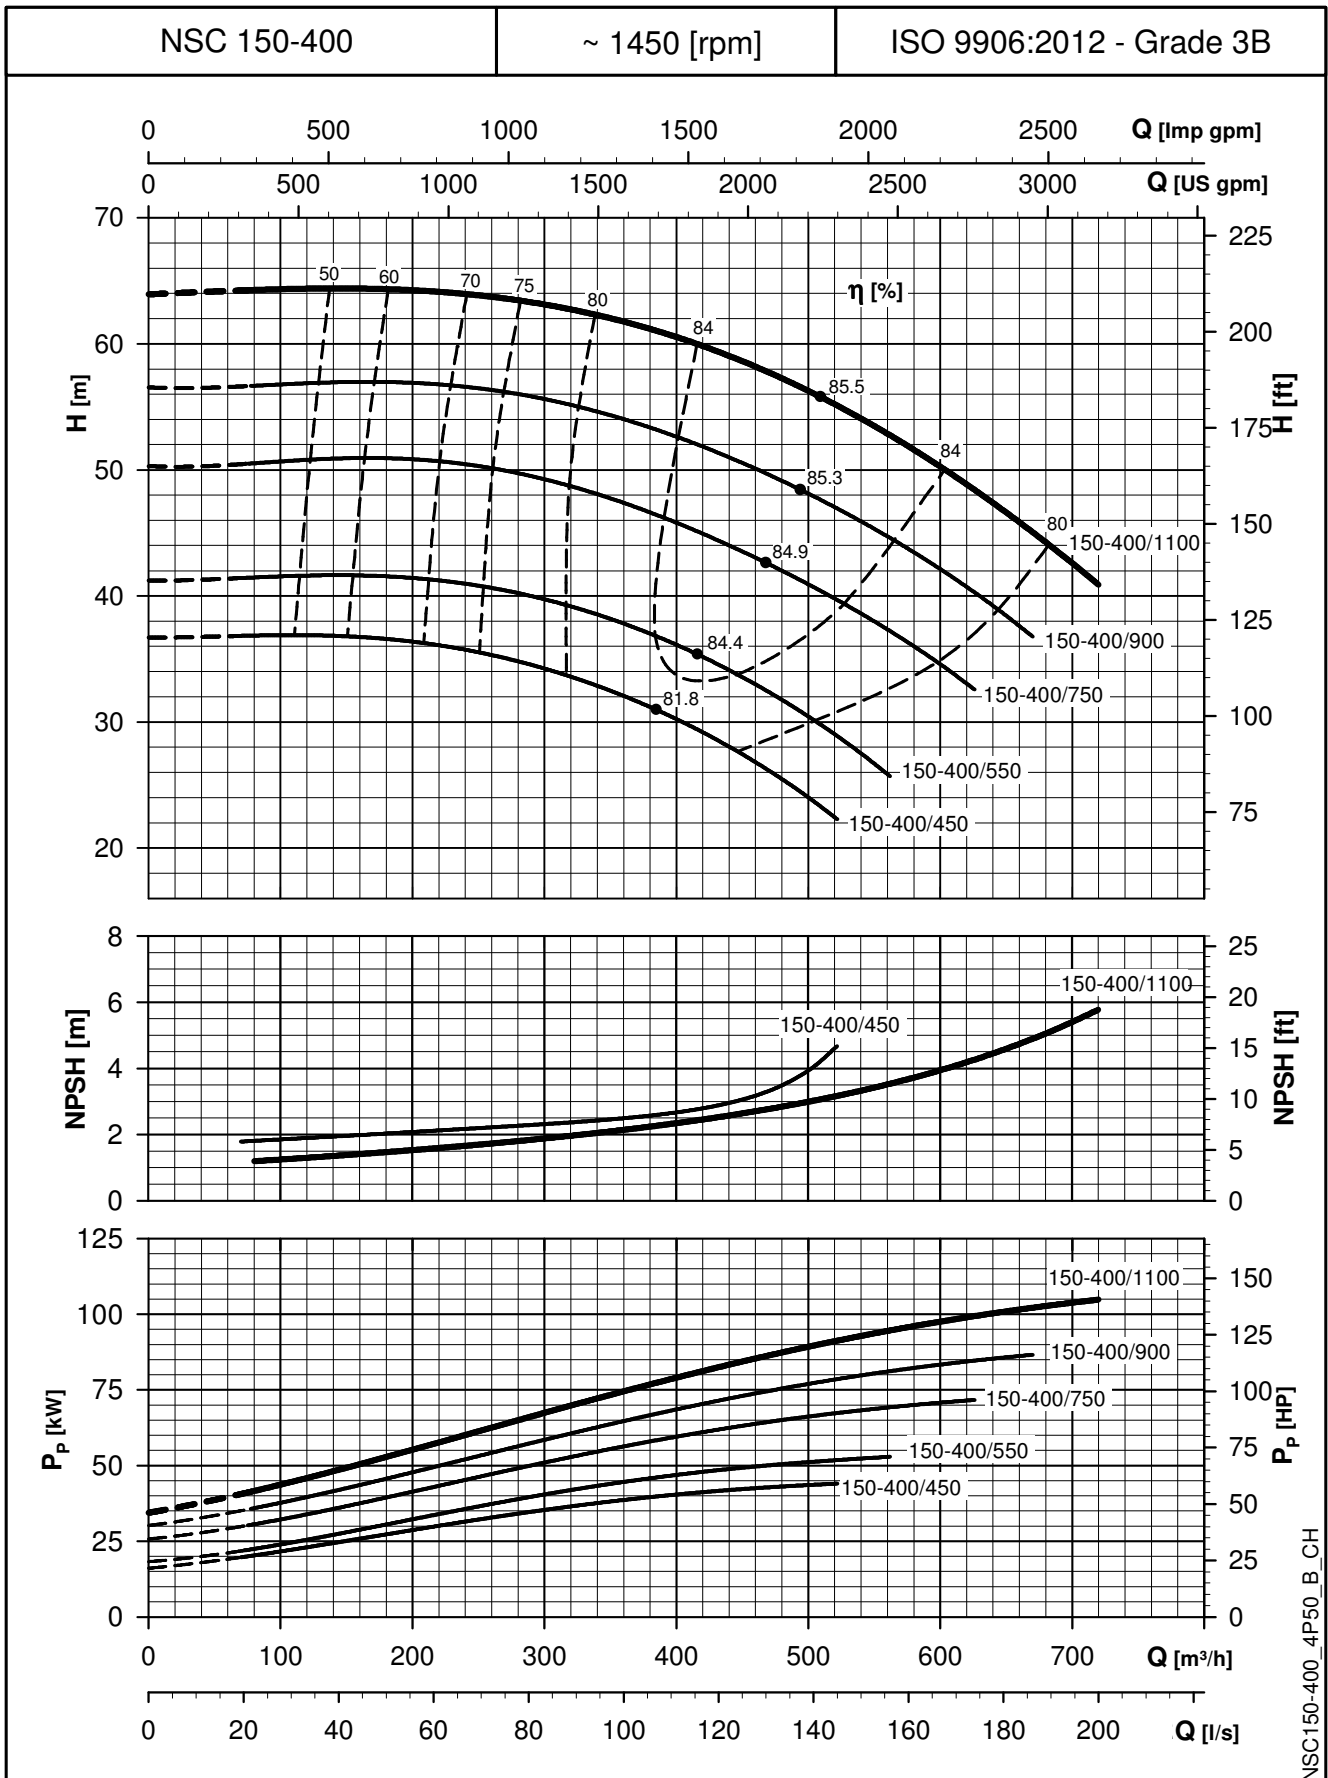


NSC150-400_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

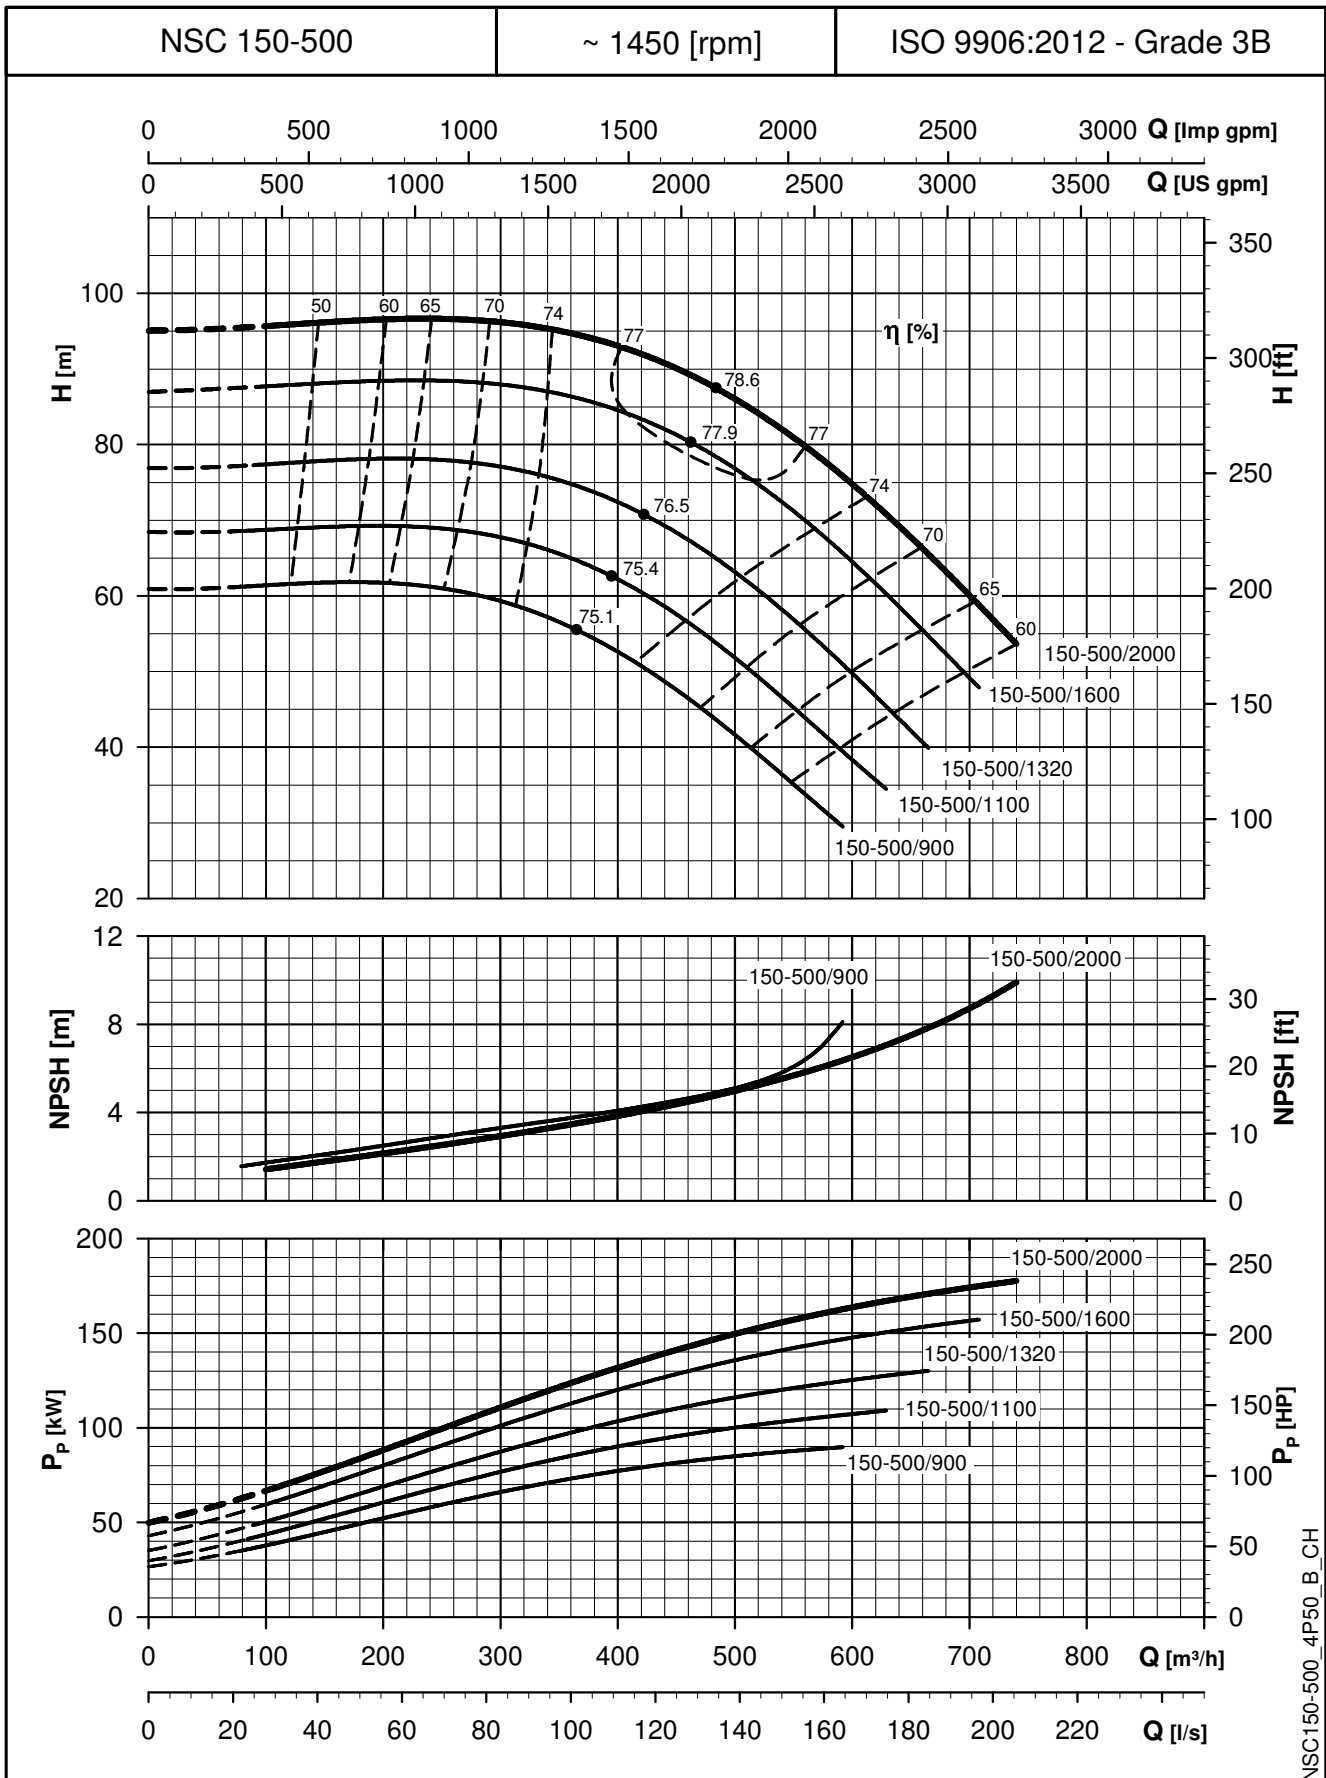


NSC150-500_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

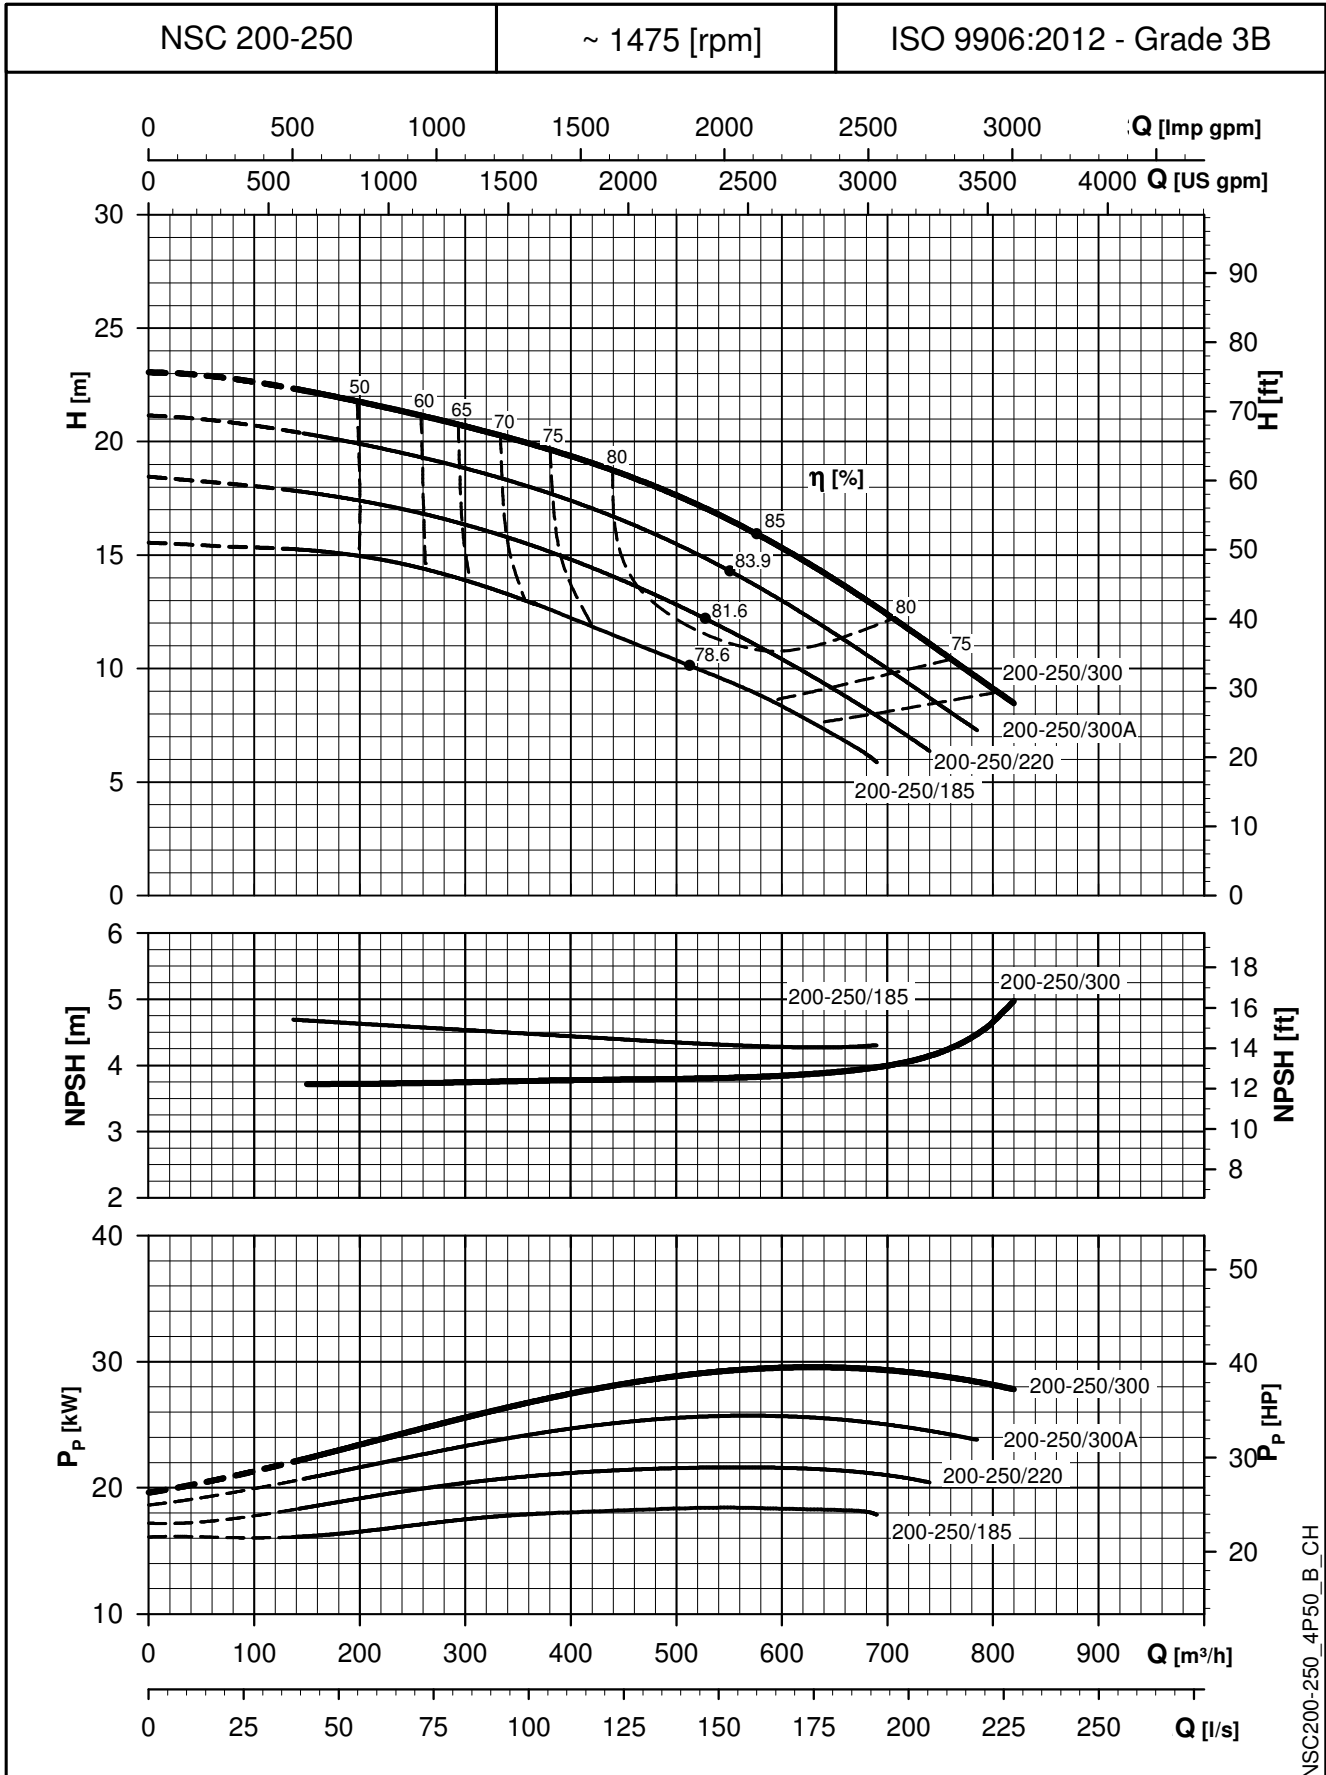


NSC200-250_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

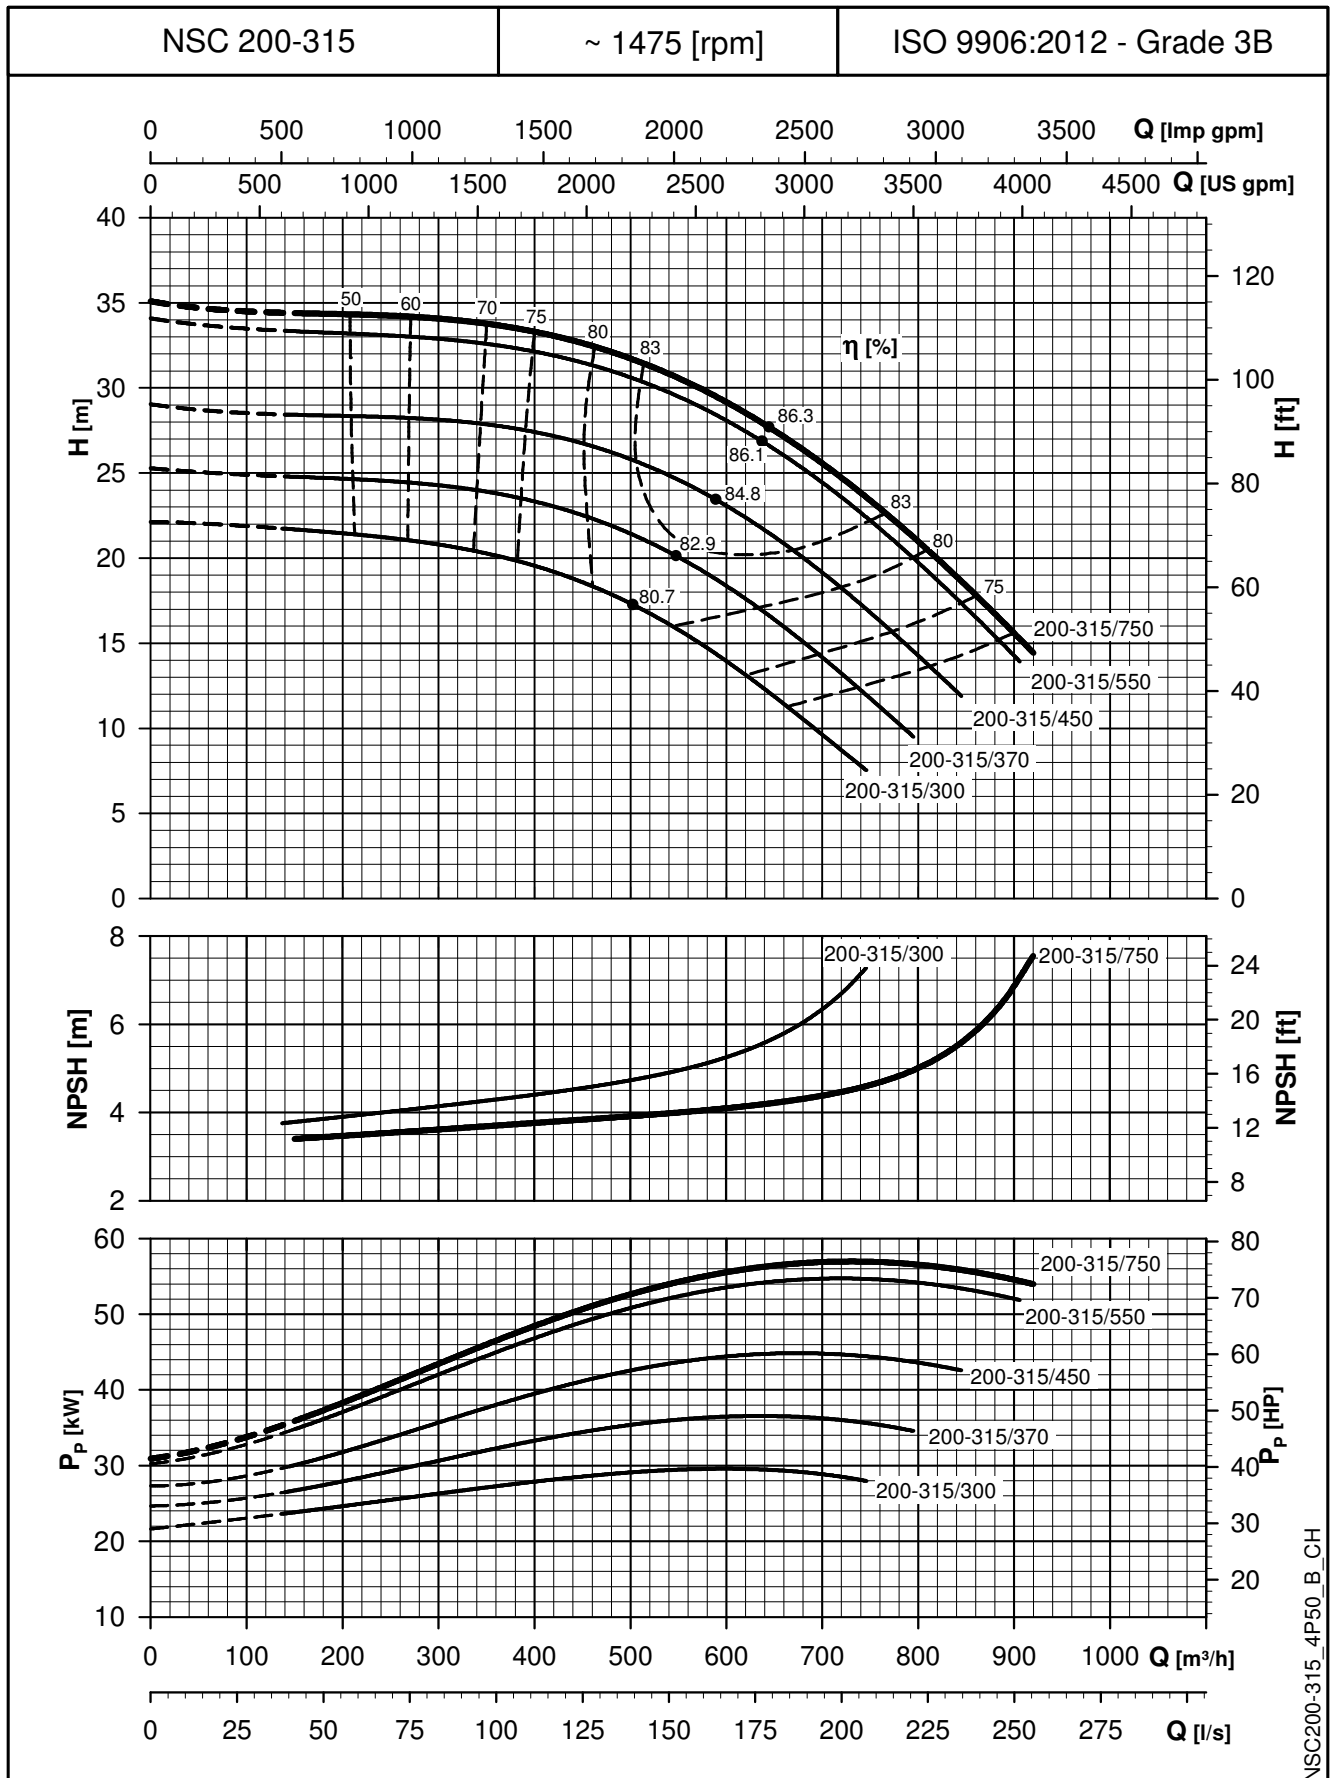


NSC200-315_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density ρ = 1,0 Kg/dm³ and kinematic viscosity ν = 1 mm²/sec.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

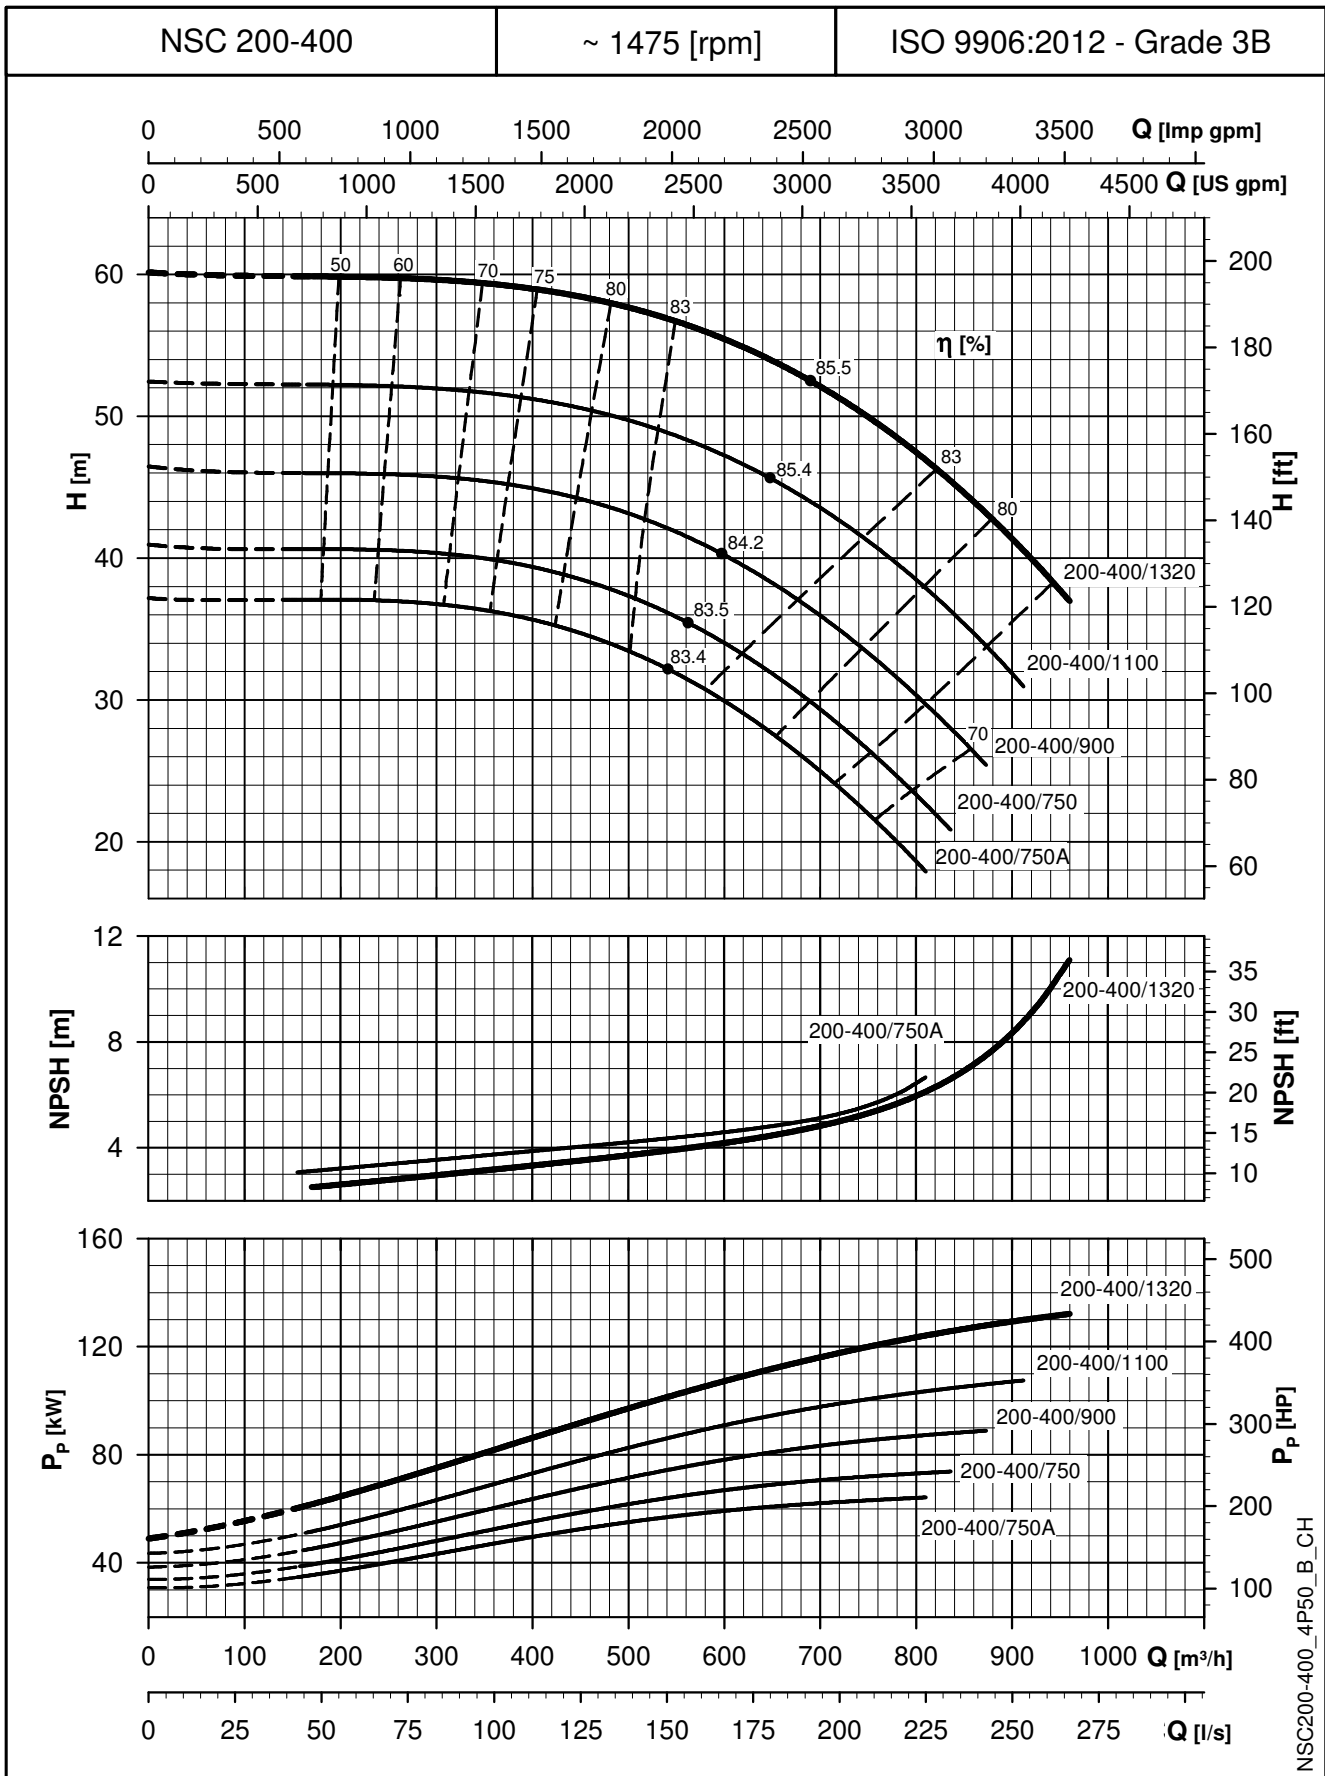


NSC200-400_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

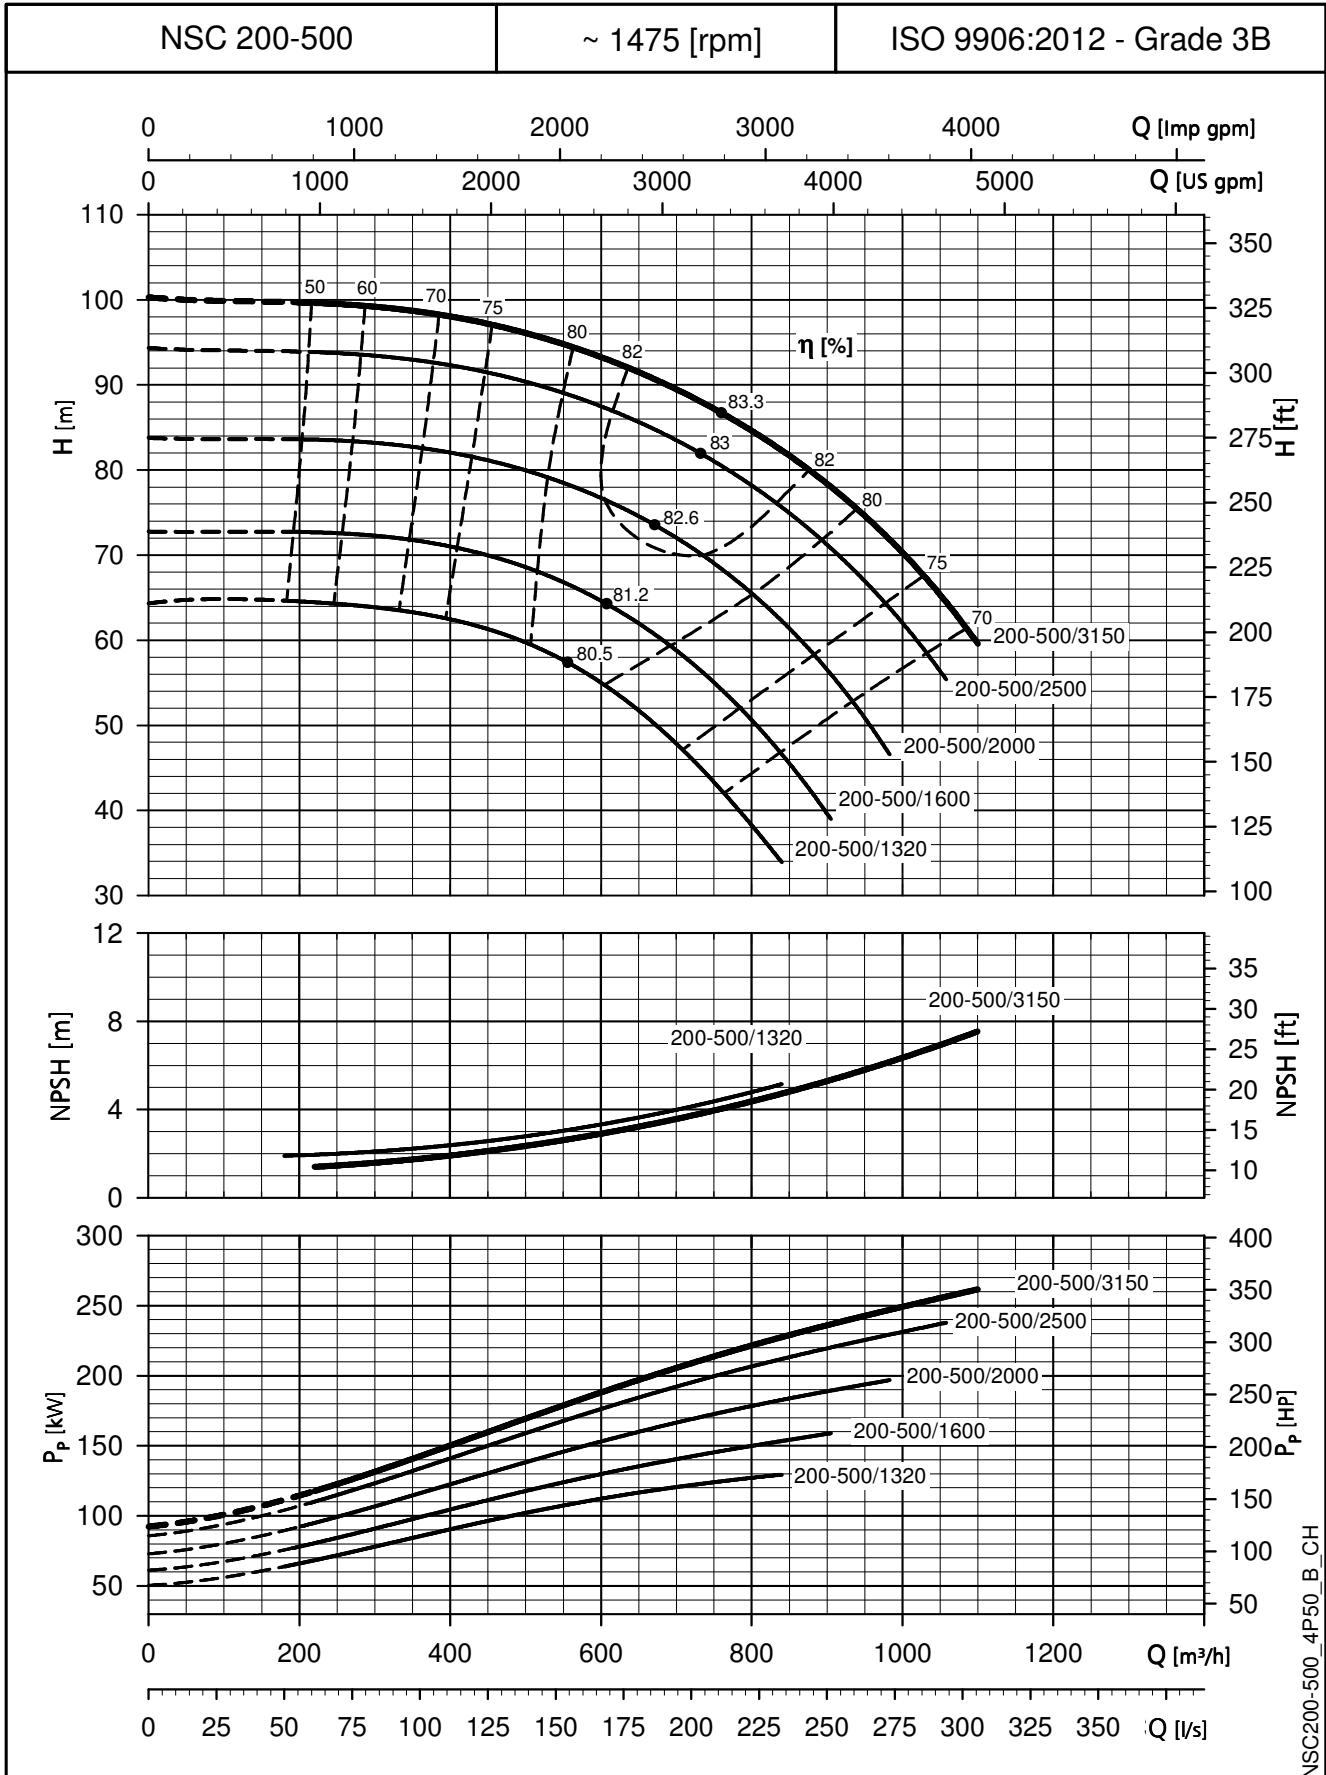


NSC200-500_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

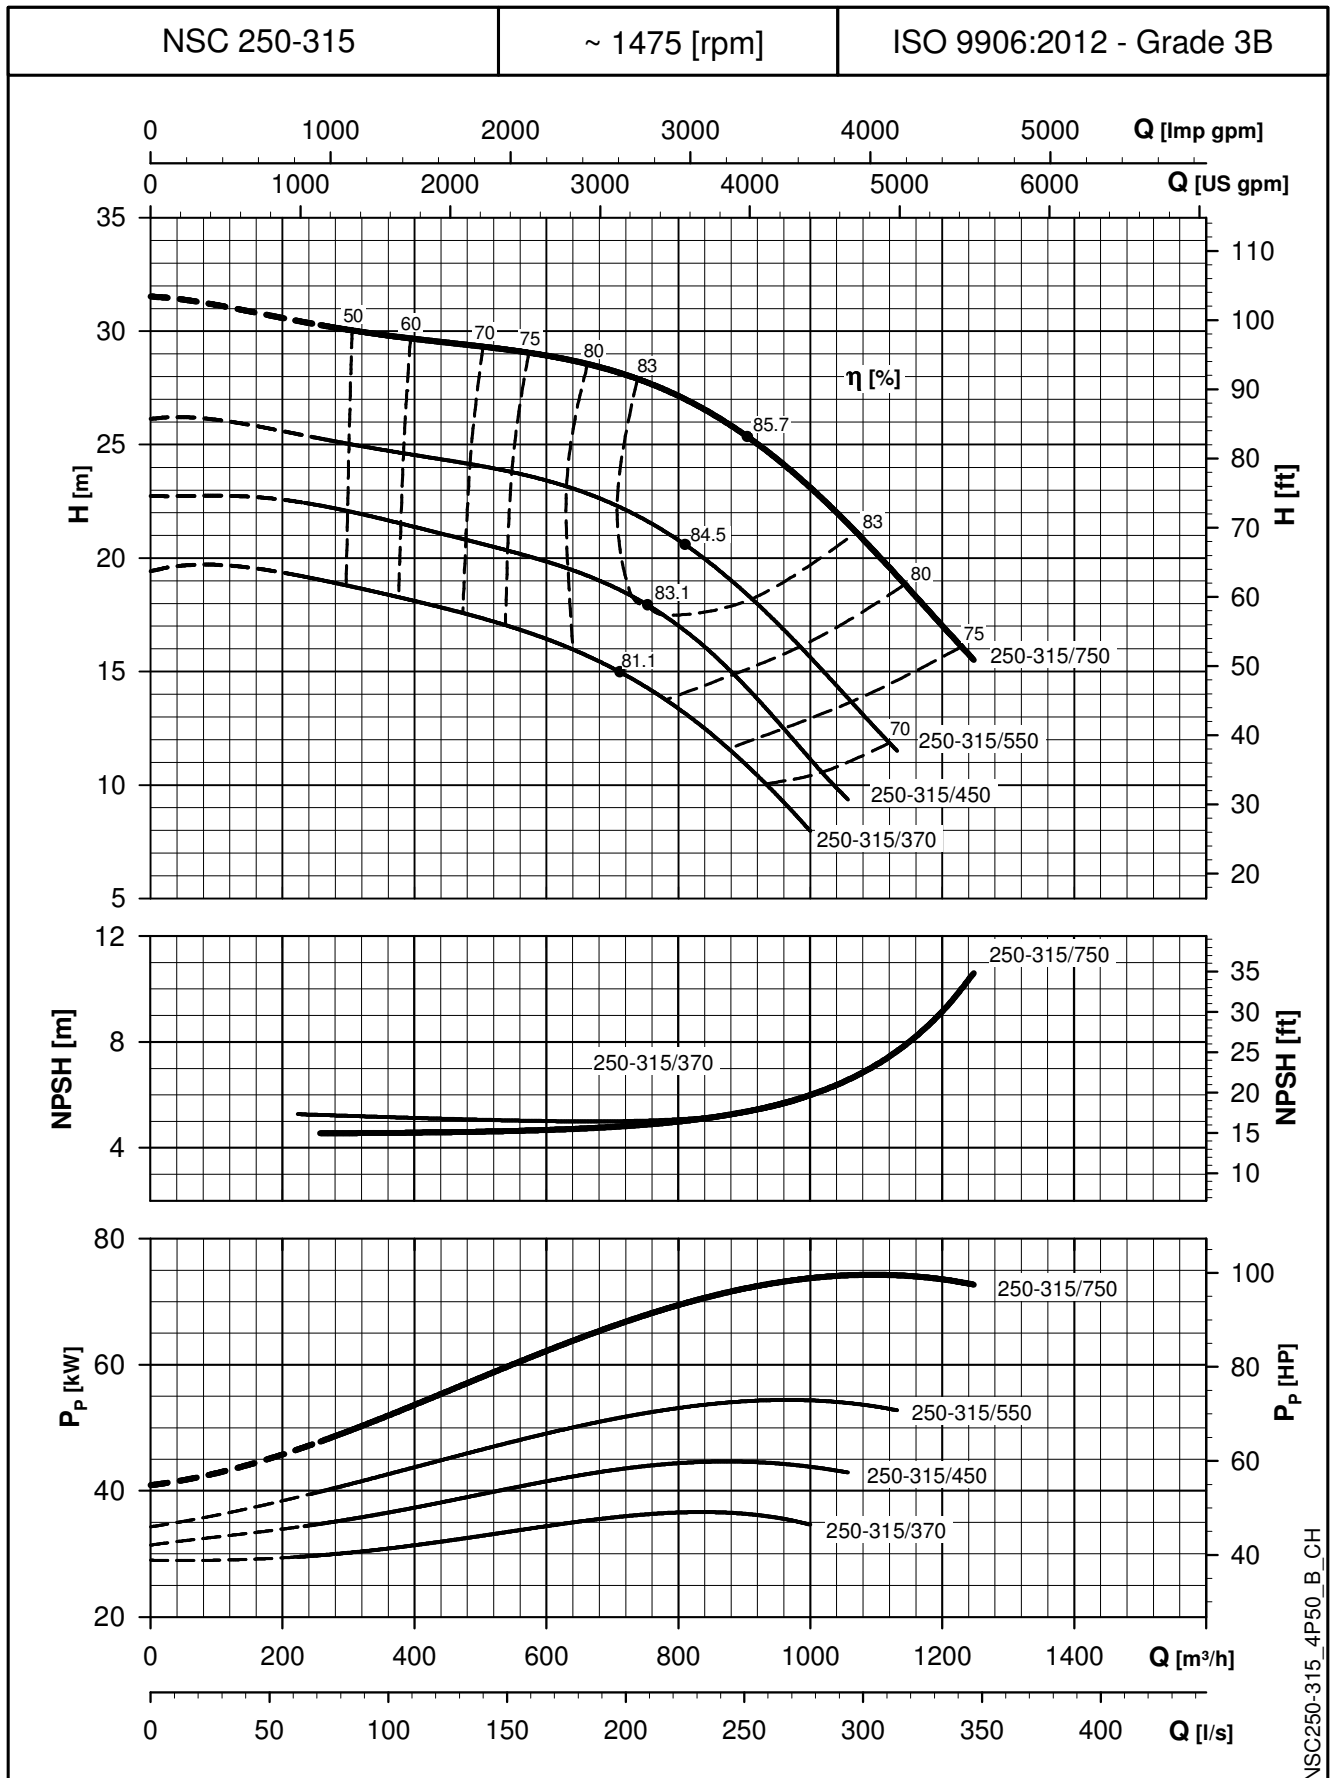

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

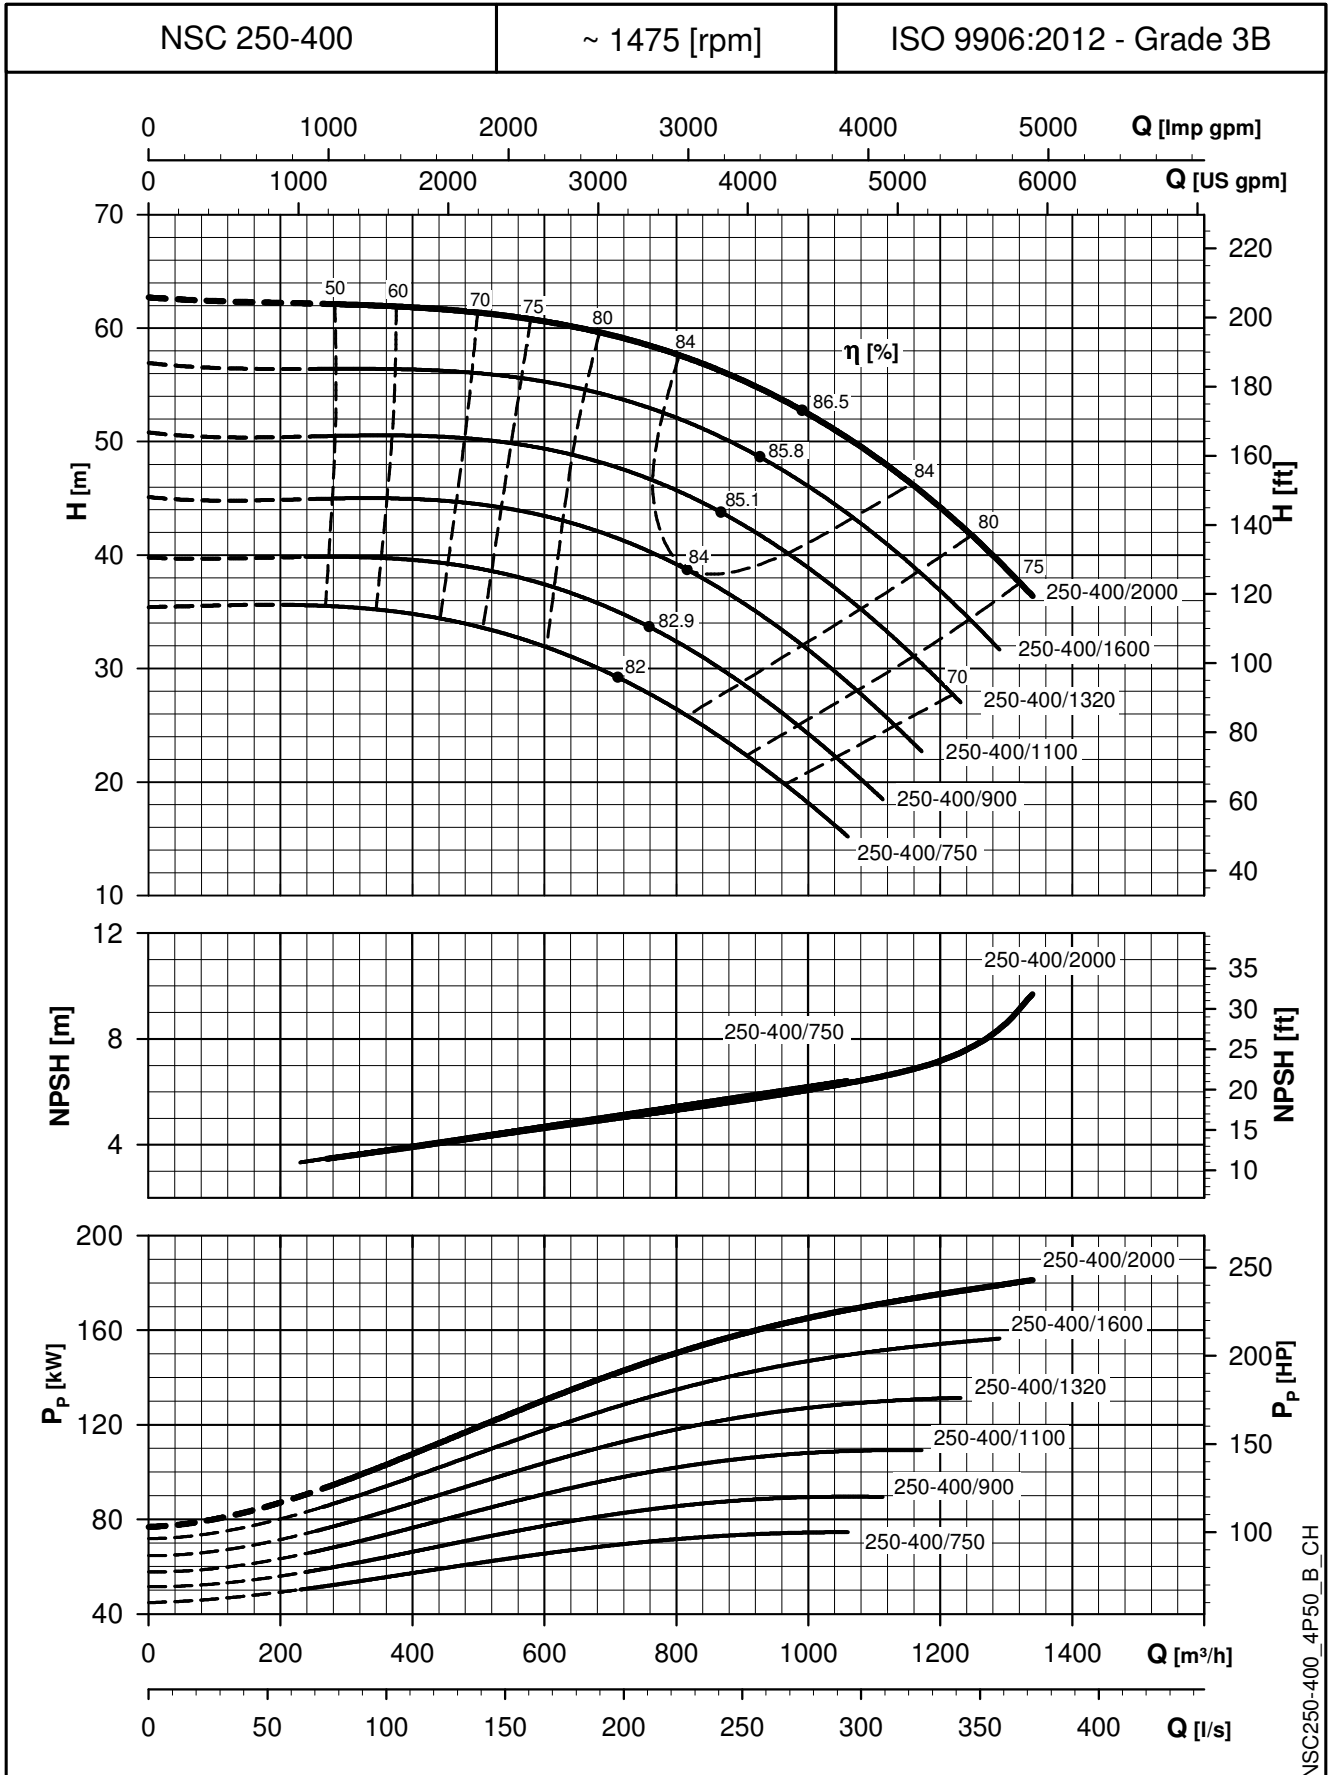


NSC250-400_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES


OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

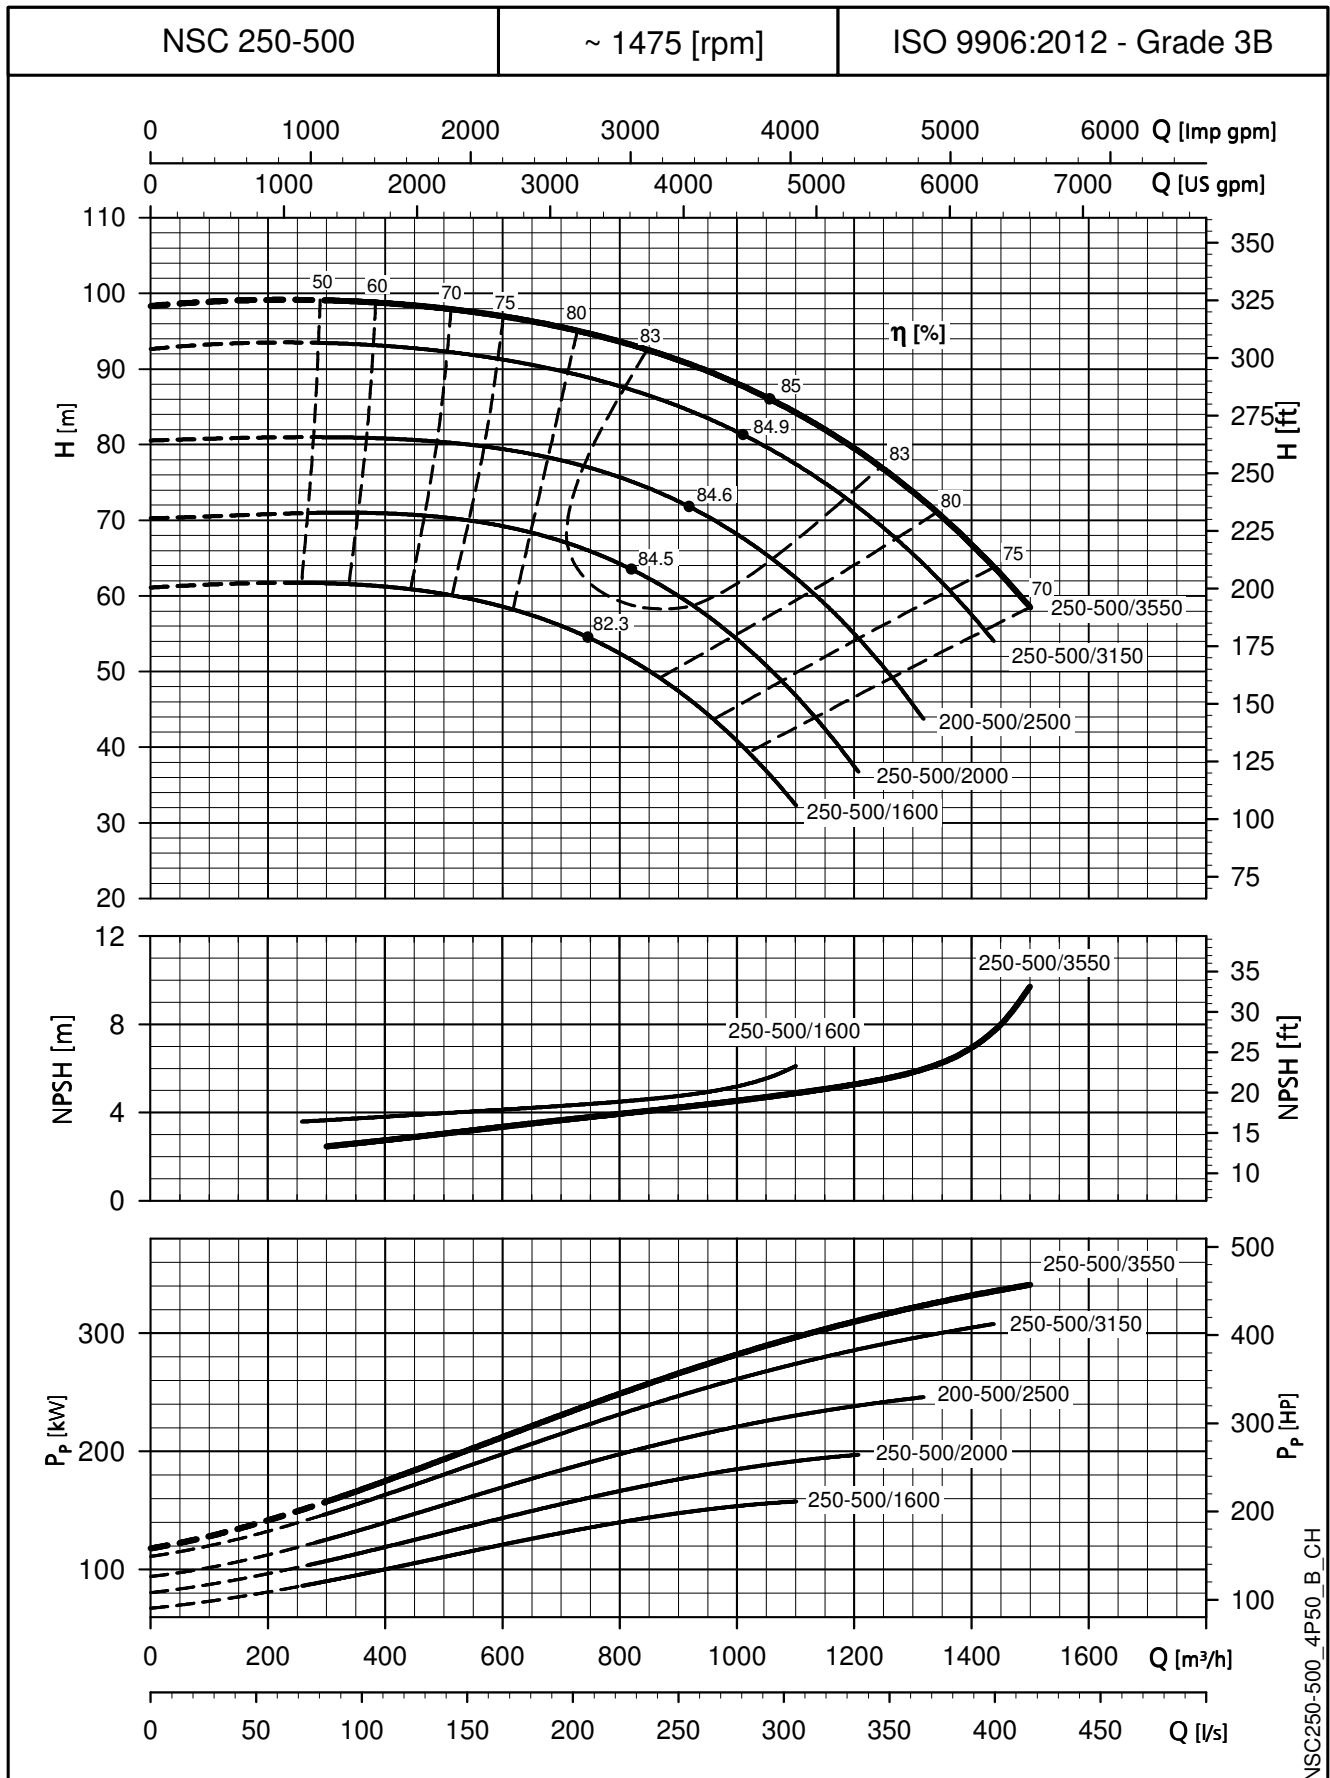

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

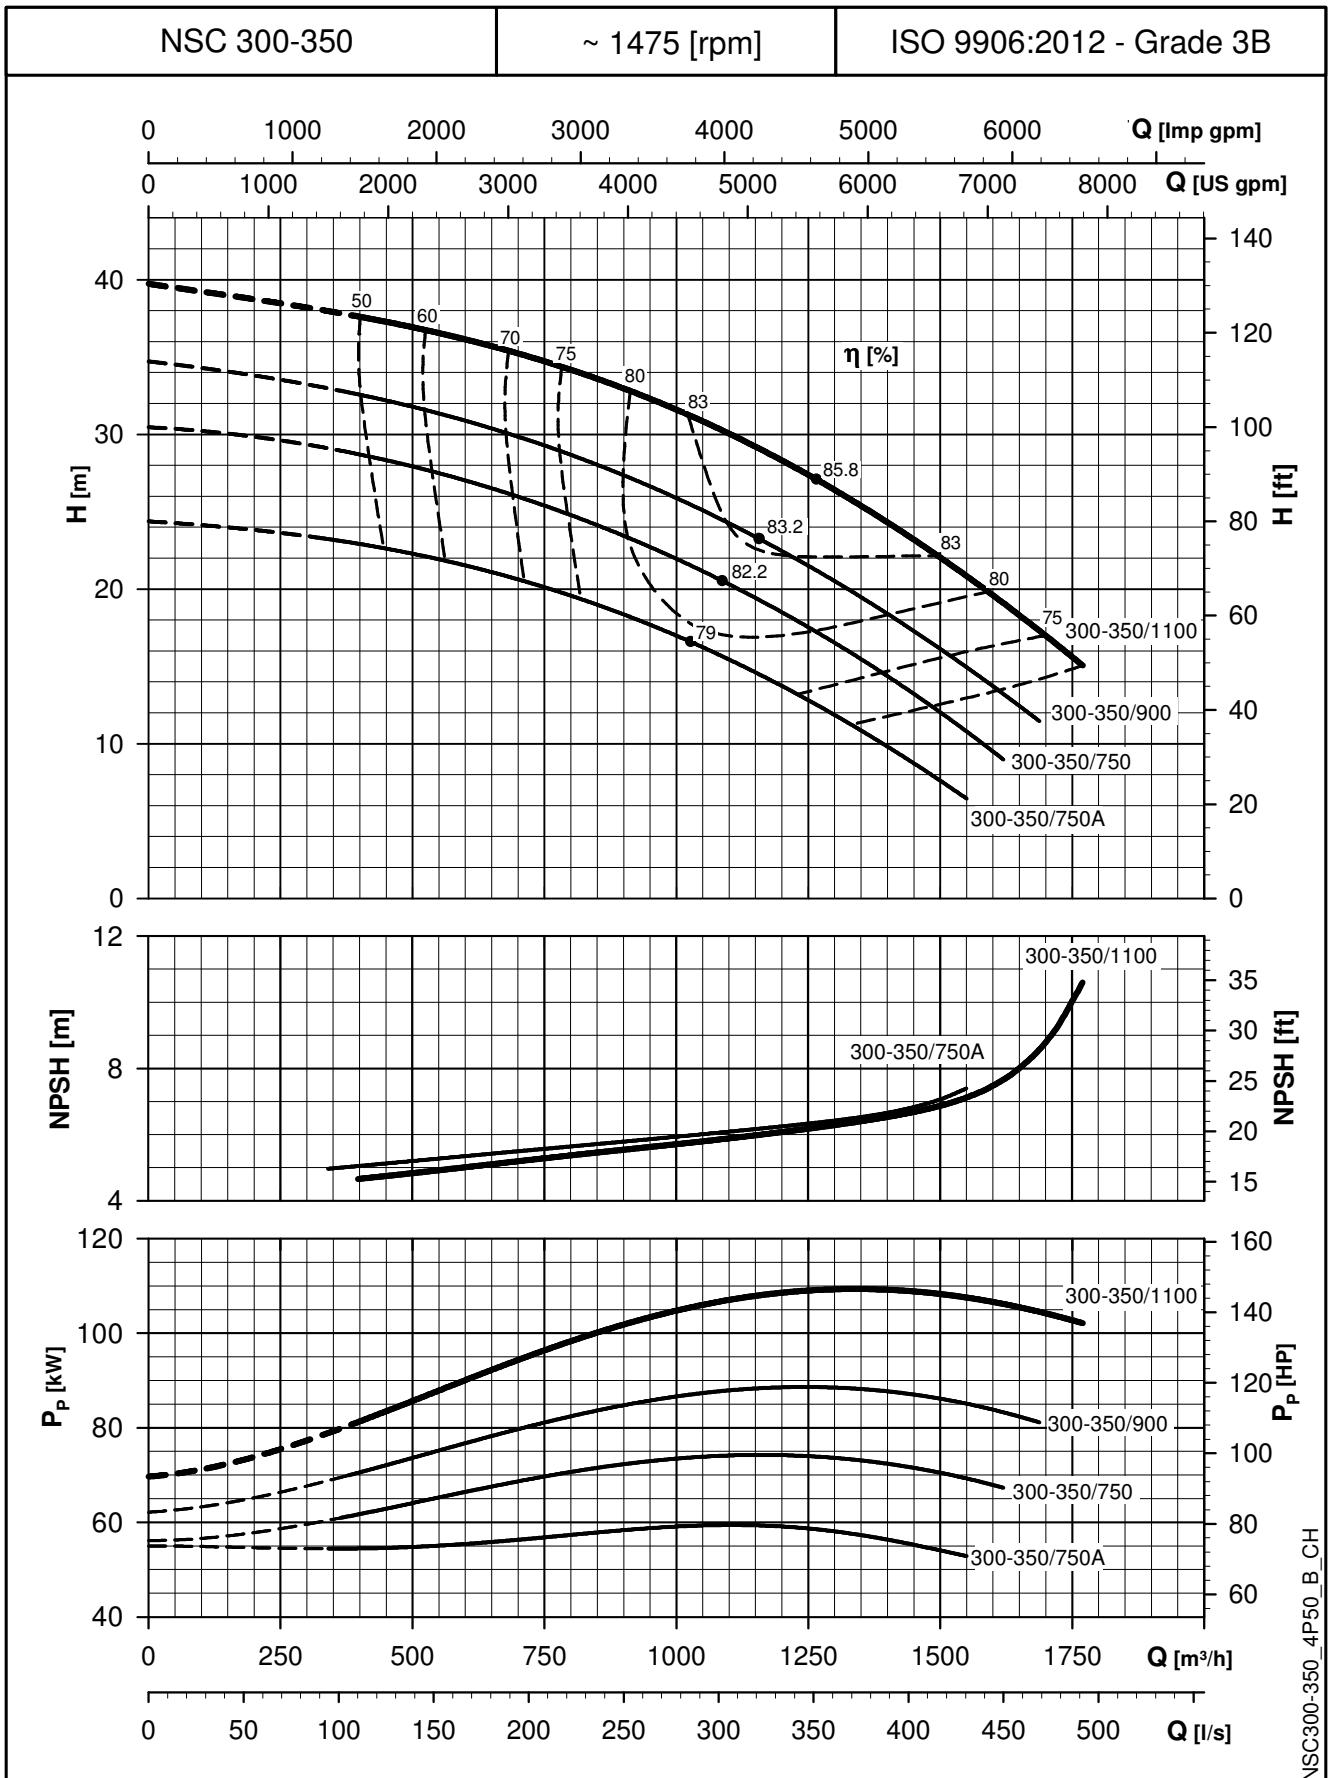


NSC300-350_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES

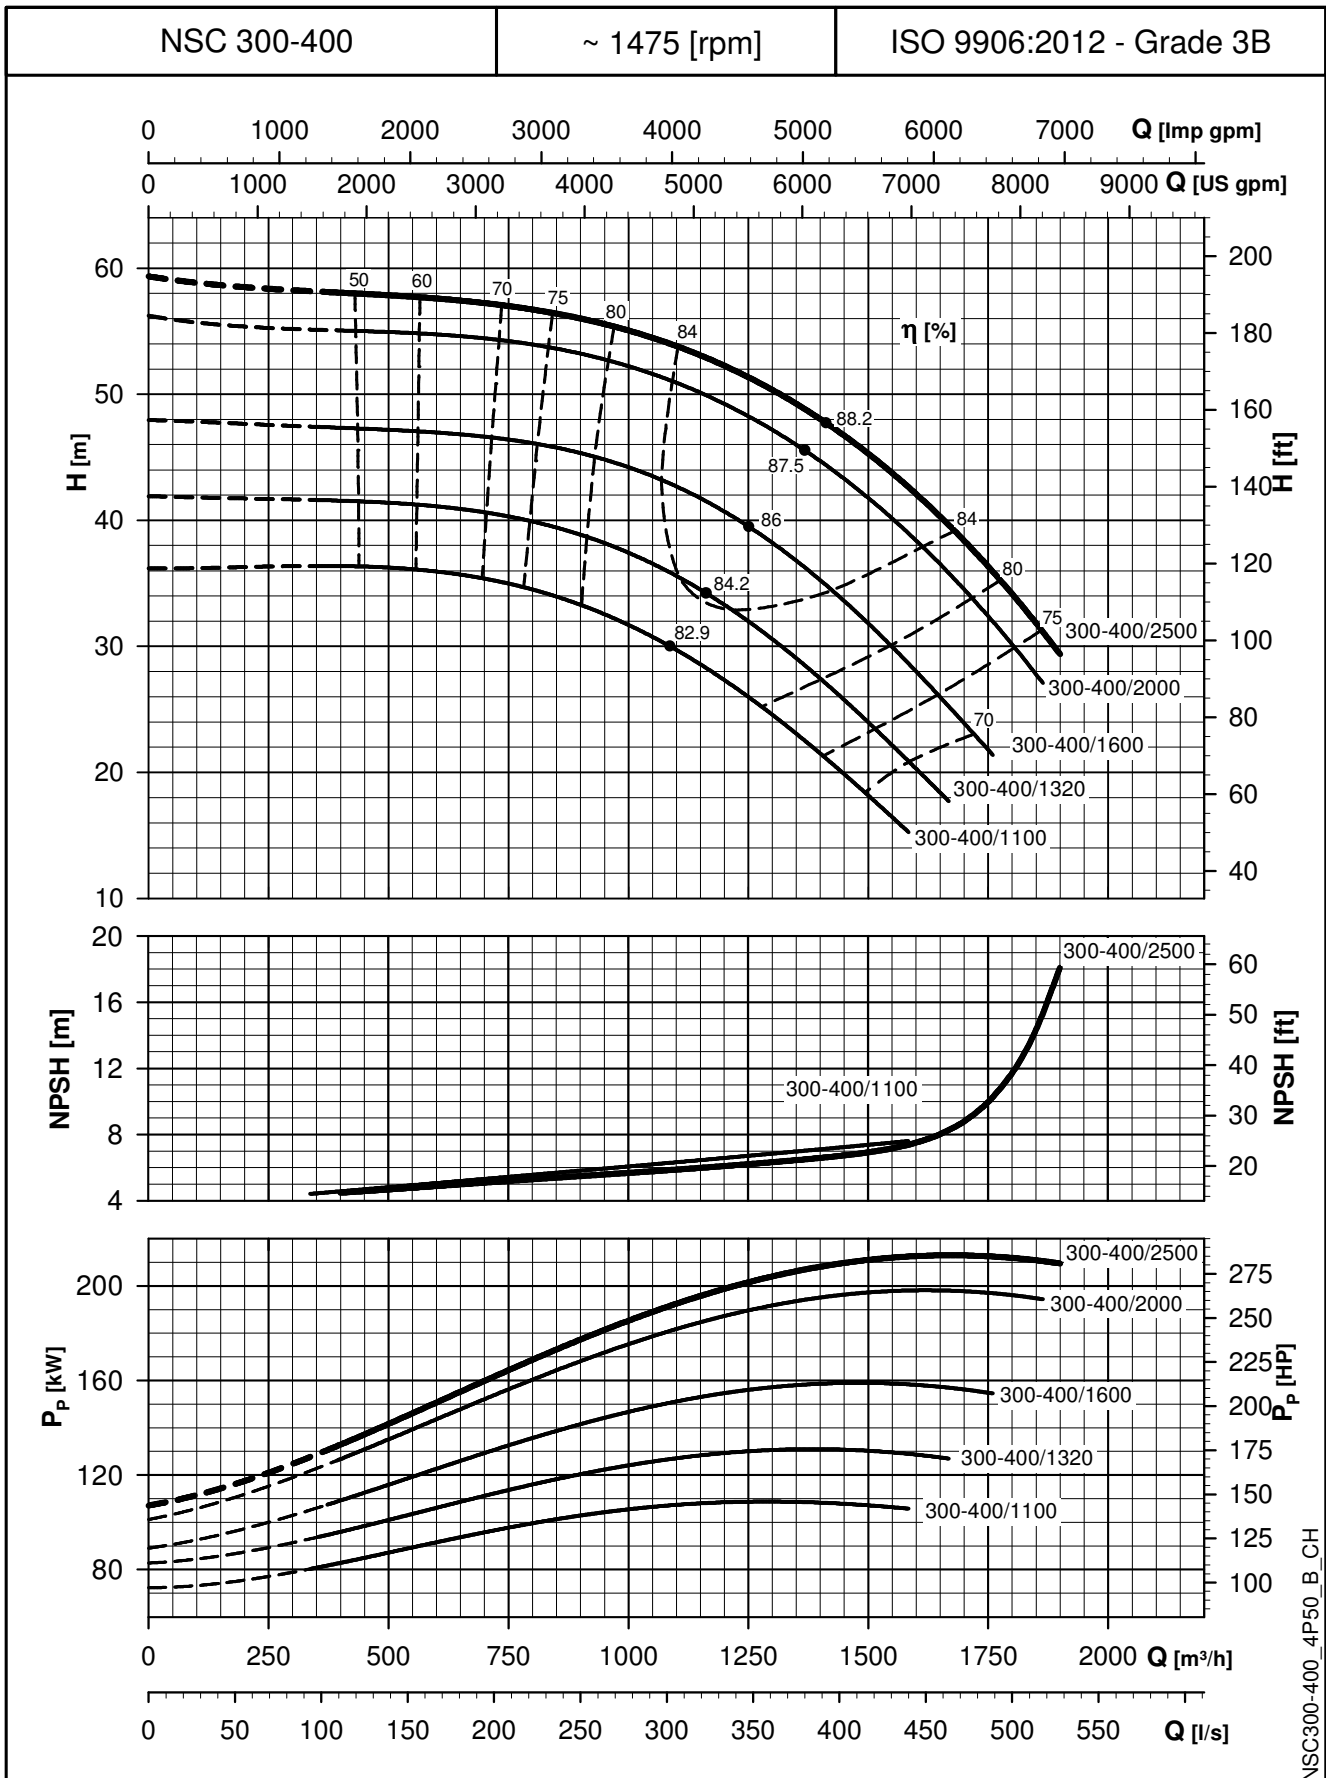


NSC300-400_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

e-NSC SERIES

OPERATING CHARACTERISTICS AT 50 Hz, 4 POLES



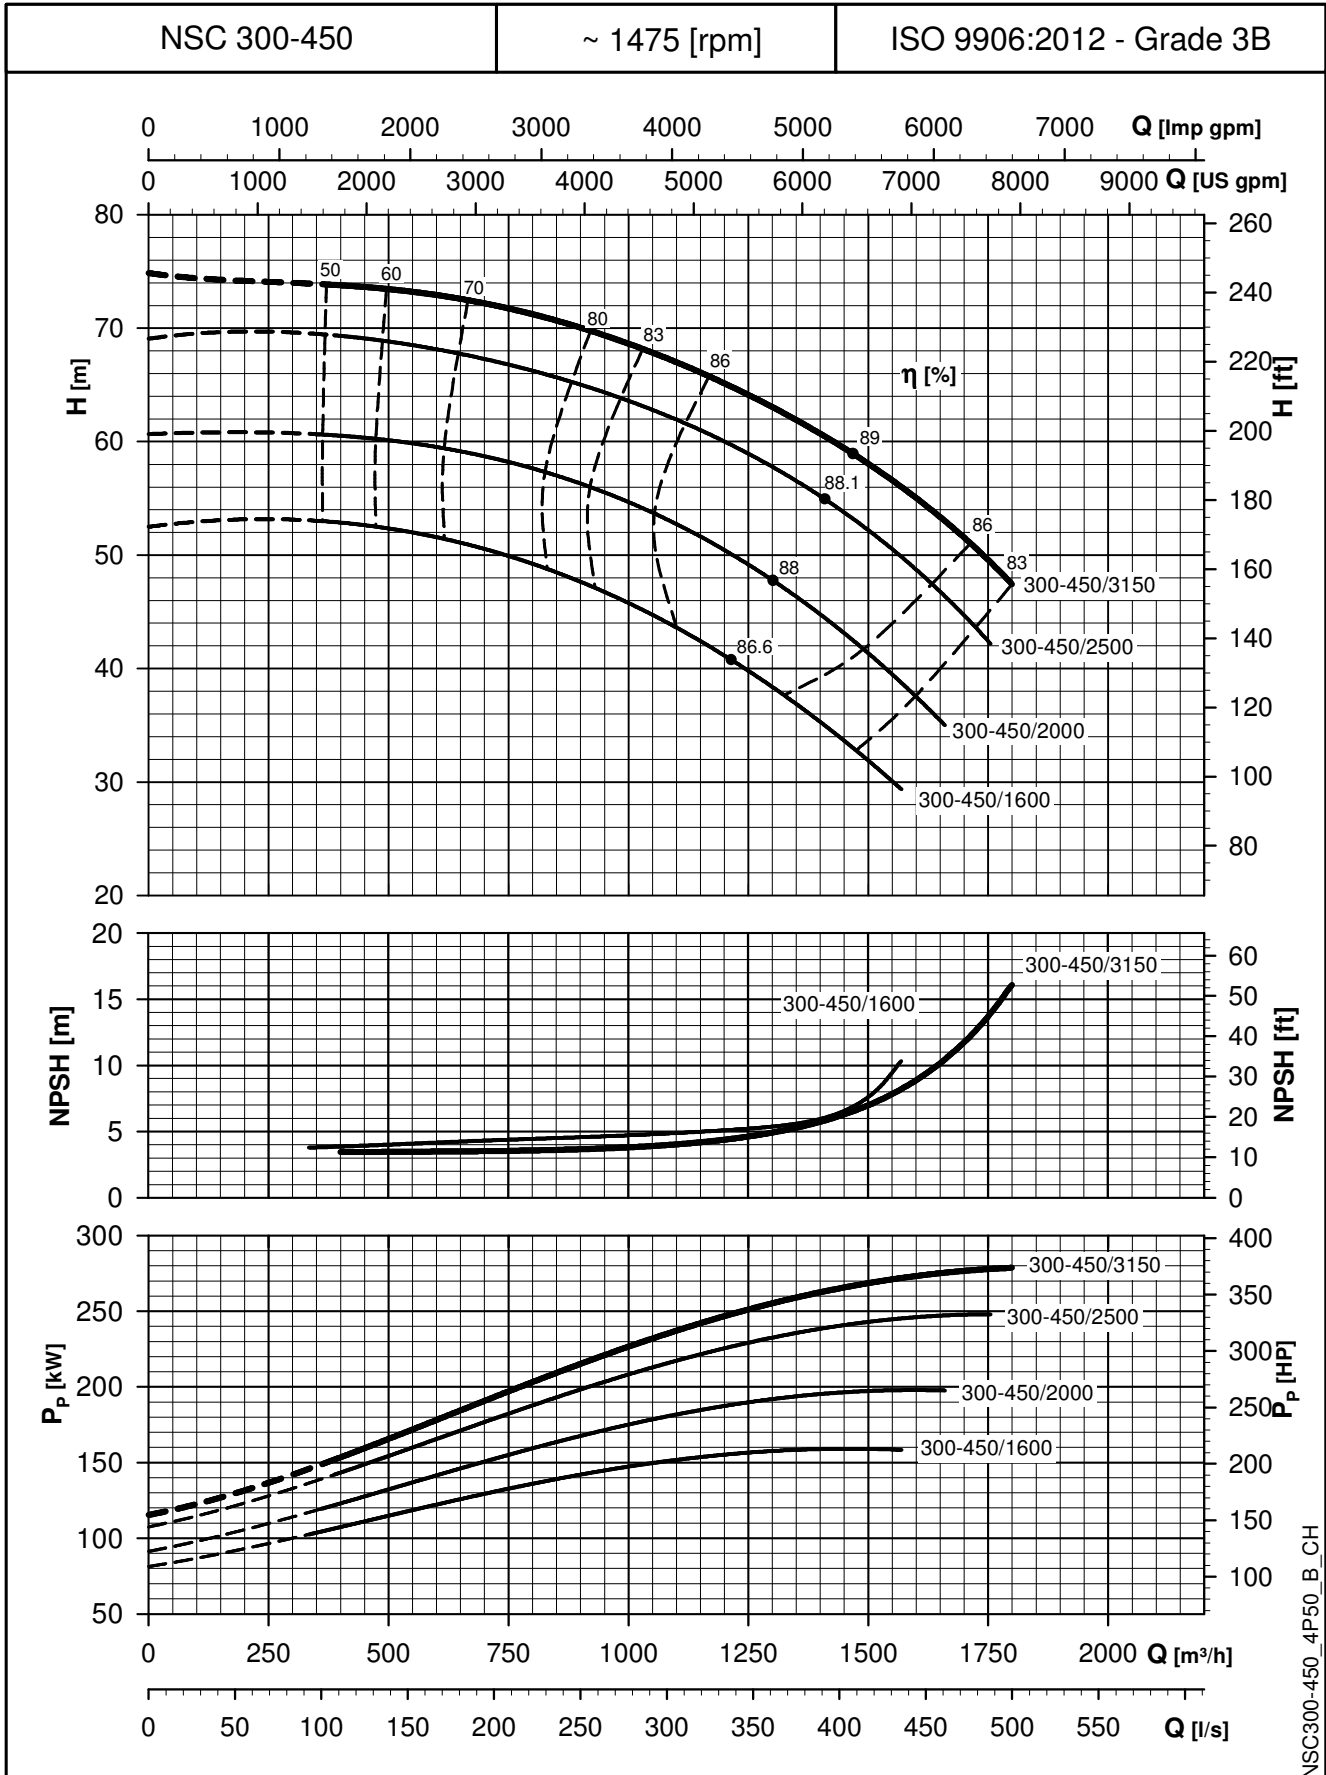


NSC300-450_4P50_B_CH

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1,0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

DIMENSIONS AND WEIGHTS

**NSCE 32, 40, 50 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES**

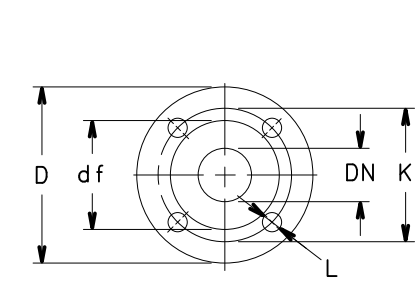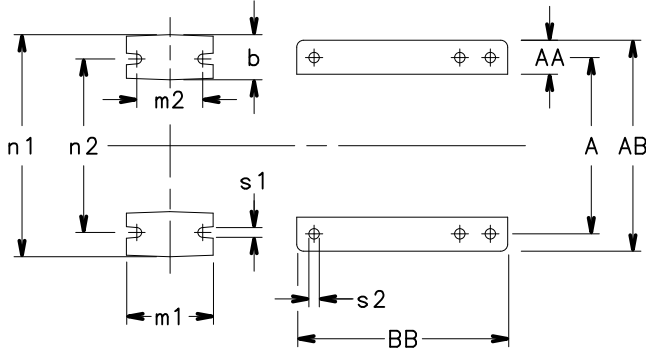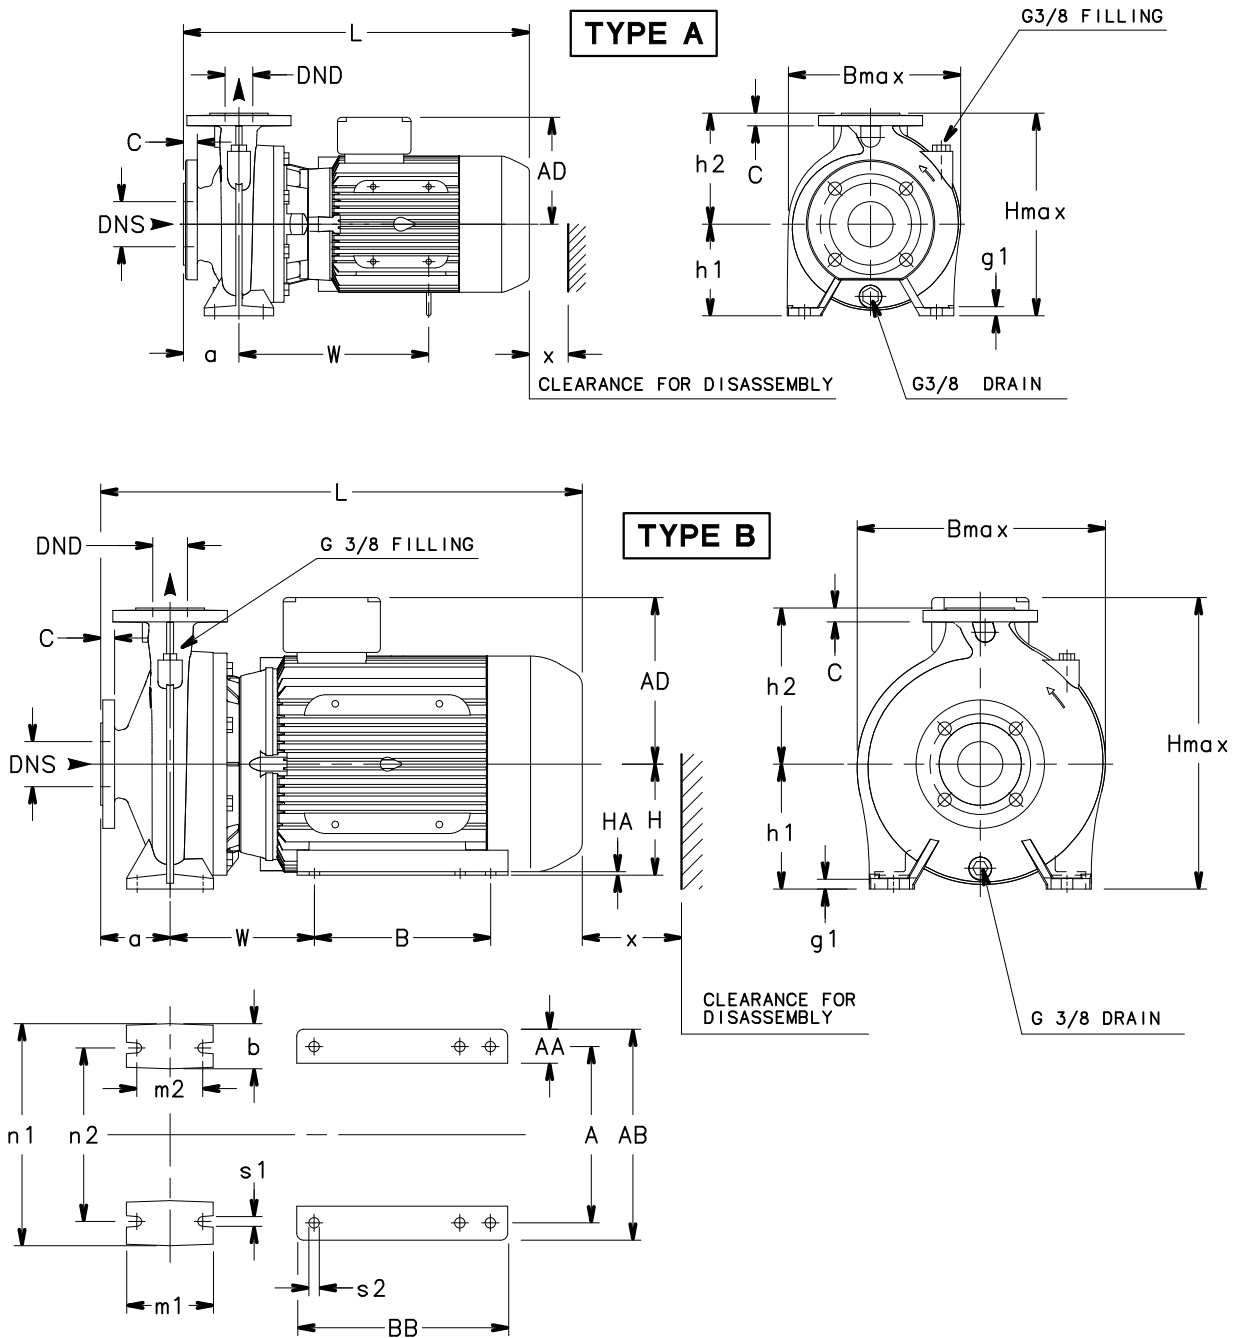

FLANGES

| EN1092-2, PN 16 *) | | | | | | ASME B16.5, Class 150 RF *) | | | | | |
|--------------------|-----|-----|----|-----|------|-----------------------------|-----|-------|----|------|------|
| DN | D | K | C | df | L | DN | D | K | C | df | L |
| 32 | 140 | 100 | 18 | 76 | 4x19 | 1 1/4 | 140 | 89 | 18 | 63.5 | 4x19 |
| 40 | 150 | 110 | 18 | 84 | 4x19 | 1 1/2 | 150 | 98.5 | 18 | 73 | 4x19 |
| 50 | 165 | 125 | 20 | 99 | 4x19 | 2 | 165 | 120.5 | 20 | 92 | 4x19 |
| 65 | 185 | 145 | 20 | 118 | 4x19 | 2 1/2 | 185 | 139.5 | 20 | 105 | 4x19 |

*)...VALUE "C" AND "D" MAY VARY FROM STANDARD.

NSCE 32, 40, 50 SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES


| PUMP TYPE NSCE...2 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | WEIGHT kg |
|-----------------------|------|-----------------|-----|-----|----|----|-----|-----|-----|----|-----|-----|----|-----|-----|-------|-----|-----|-----|-----|-----|----|----|----------|----------|-----|-----|-----|--|--------------|
| | | PUMP | | | | | | | | | | | | | | MOTOR | | | | | | | | | | | | | | |
| | | DNS | DND | a | b | g1 | h1 | h2 | m1 | m2 | n1 | n2 | s1 | W | A | AA | AB | AD | B | BB | H | HA | s2 | B max | H max | L | x | | | |
| 32-125/11/S | A | 50 | 32 | 80 | 50 | 14 | 112 | 140 | 100 | 70 | 190 | 140 | 14 | 235 | - | - | - | 129 | - | - | - | - | - | 242 | 252 | 443 | 86 | 29 | | |
| 32-125/15/S | A | 50 | 32 | 80 | 50 | 14 | 112 | 140 | 100 | 70 | 190 | 140 | 14 | 235 | - | - | - | 129 | - | - | - | - | - | 242 | 252 | 443 | 86 | 30 | | |
| 32-125/22/P | A | 50 | 32 | 80 | 50 | 14 | 112 | 140 | 100 | 70 | 190 | 140 | 14 | 245 | - | - | - | 134 | - | - | - | - | - | 242 | 252 | 478 | 86 | 34 | | |
| 32-125/30/P | A | 50 | 32 | 80 | 50 | 14 | 112 | 140 | 100 | 70 | 190 | 140 | 14 | 245 | - | - | - | 134 | - | - | - | - | - | 242 | 252 | 478 | 86 | 38 | | |
| 32-160/22/P | A | 50 | 32 | 80 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 245 | - | - | - | 134 | - | - | - | - | - | 248 | 292 | 478 | 86 | 36 | | |
| 32-160/30/P | A | 50 | 32 | 80 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 245 | - | - | - | 134 | - | - | - | - | - | 248 | 292 | 478 | 86 | 39 | | |
| 32-160/40/P | A | 50 | 32 | 80 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 273 | - | - | - | 154 | - | - | - | - | - | 248 | 292 | 499 | 86 | 42 | | |
| 32-160/55/P | A | 50 | 32 | 80 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 285 | - | - | - | 168 | - | - | - | - | - | 248 | 292 | 533 | 86 | 50 | | |
| 32-200/30/P | A | 50 | 32 | 80 | 50 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 14 | 245 | - | - | - | 134 | - | - | - | - | - | 286 | 340 | 478 | 86 | 45 | | |
| 32-200/40/P | A | 50 | 32 | 80 | 50 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 14 | 273 | - | - | - | 154 | - | - | - | - | - | 286 | 340 | 499 | 86 | 49 | | |
| 32-200/55/P | A | 50 | 32 | 80 | 50 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 14 | 285 | - | - | - | 168 | - | - | - | - | - | 286 | 340 | 533 | 86 | 56 | | |
| 32-200/75/P | A | 50 | 32 | 80 | 50 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 14 | 305 | - | - | - | 191 | - | - | - | - | - | 286 | 351 | 547 | 86 | 73 | | |
| 32-250/75/P | A | 50 | 32 | 100 | 65 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 305 | - | - | - | 191 | - | - | - | - | - | 334 | 405 | 567 | 95 | 80 | | |
| 32-250/92/P | A | 50 | 32 | 100 | 65 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 334 | 405 | 605 | 95 | 86 | | |
| 32-250/110/P | A | 50 | 32 | 100 | 65 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 334 | 405 | 605 | 95 | 91 | | |
| 32-250/150/P | B | 50 | 32 | 100 | 65 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 334 | 420 | 694 | 95 | 128 | | |
| 40-125/15/S | A | 65 | 40 | 80 | 50 | 14 | 112 | 140 | 100 | 70 | 210 | 160 | 14 | 235 | - | - | - | 129 | - | - | - | - | - | 237 | 252 | 443 | 96 | 31 | | |
| 40-125/22/P | A | 65 | 40 | 80 | 50 | 14 | 112 | 140 | 100 | 70 | 210 | 160 | 14 | 245 | - | - | - | 134 | - | - | - | - | - | 237 | 252 | 478 | 96 | 35 | | |
| 40-125/30/P | A | 65 | 40 | 80 | 50 | 14 | 112 | 140 | 100 | 70 | 210 | 160 | 14 | 245 | - | - | - | 134 | - | - | - | - | - | 237 | 252 | 478 | 96 | 39 | | |
| 40-125/40/P | A | 65 | 40 | 80 | 50 | 14 | 112 | 140 | 100 | 70 | 210 | 160 | 14 | 273 | - | - | - | 154 | - | - | - | - | - | 237 | 252 | 499 | 96 | 42 | | |
| 40-160/30/P | A | 65 | 40 | 80 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 245 | - | - | - | 134 | - | - | - | - | - | 250 | 292 | 478 | 92 | 41 | | |
| 40-160/40/P | A | 65 | 40 | 80 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 273 | - | - | - | 154 | - | - | - | - | - | 250 | 292 | 499 | 92 | 44 | | |
| 40-160/55/P | A | 65 | 40 | 80 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 285 | - | - | - | 168 | - | - | - | - | - | 250 | 300 | 533 | 92 | 54 | | |
| 40-160/75/P | A | 65 | 40 | 80 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 305 | - | - | - | 191 | - | - | - | - | - | 259 | 323 | 547 | 92 | 71 | | |
| 40-200/55/P | A | 65 | 40 | 100 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 285 | - | - | - | 168 | - | - | - | - | - | 290 | 340 | 553 | 90 | 57 | | |
| 40-200/75/P | A | 65 | 40 | 100 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 305 | - | - | - | 191 | - | - | - | - | - | 290 | 351 | 567 | 90 | 74 | | |
| 40-200/92/P | A | 65 | 40 | 100 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 290 | 351 | 605 | 90 | 80 | | |
| 40-200/110/P | A | 65 | 40 | 100 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 290 | 351 | 605 | 90 | 84 | | |
| 40-250/92/P | A | 65 | 40 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 338 | 405 | 605 | 104 | 91 | | |
| 40-250/110/P | A | 65 | 40 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 338 | 405 | 605 | 104 | 95 | | |
| 40-250/150/P | B | 65 | 40 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 338 | 420 | 694 | 104 | 131 | | |
| 40-250/185/P | B | 65 | 40 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 338 | 420 | 694 | 104 | 141 | | |
| 40-250/220/P | B | 65 | 40 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 338 | 420 | 694 | 104 | 150 | | |
| 50-125/30/P | A | 65 | 50 | 100 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 247 | - | - | - | 134 | - | - | - | - | - | 255 | 292 | 500 | 107 | 42 | | |
| 50-125/40/P | A | 65 | 50 | 100 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 275 | - | - | - | 154 | - | - | - | - | - | 255 | 292 | 521 | 107 | 45 | | |
| 50-125/55/P | A | 65 | 50 | 100 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 287 | - | - | - | 168 | - | - | - | - | - | 255 | 300 | 555 | 107 | 59 | | |
| 50-125/75/P | A | 65 | 50 | 100 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 307 | - | - | - | 191 | - | - | - | - | - | 263 | 323 | 569 | 107 | 76 | | |
| 50-160/55/P | A | 65 | 50 | 100 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 285 | - | - | - | 168 | - | - | - | - | - | 289 | 340 | 553 | 103 | 60 | | |
| 50-160/75/P | A | 65 | 50 | 100 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 305 | - | - | - | 191 | - | - | - | - | - | 289 | 351 | 567 | 103 | 77 | | |
| 50-160/92/P | A | 65 | 50 | 100 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 289 | 351 | 605 | 103 | 83 | | |
| 50-160/110/P | A | 65 | 50 | 100 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 289 | 351 | 605 | 103 | 87 | | |
| 50-200/92/P | A | 65 | 50 | 100 | 50 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 14 | 345 | - | - | - | 191 | - | - | - | - | - | 305 | 360 | 605 | 98 | 83 | | |
| 50-200/110/P | A | 65 | 50 | 100 | 50 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 14 | 345 | - | - | - | 191 | - | - | - | - | - | 305 | 360 | 605 | 98 | 87 | | |
| 50-200/150/P | B | 65 | 50 | 100 | 50 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 14 | 210 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 313 | 400 | 694 | 98 | 126 | | |
| 50-200/185/P | B | 65 | 50 | 100 | 50 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 14 | 210 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 313 | 400 | 694 | 98 | 136 | | |
| 50-250/150/P | B | 65 | 50 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 352 | 420 | 694 | 110 | 132 | | |
| 50-250/185/P | B | 65 | 50 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 352 | 420 | 694 | 110 | 142 | | |
| 50-250/220/P | B | 65 | 50 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 352 | 420 | 694 | 110 | 151 | | |

For shims and supports see accessories section.

nsce-32-40-50_2p50-en_d_td

NOTE: Pumps with flanges according to EN 1092-2 as standard; available ASME B16.5 version on request.

**NSCE 65, 80 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES**

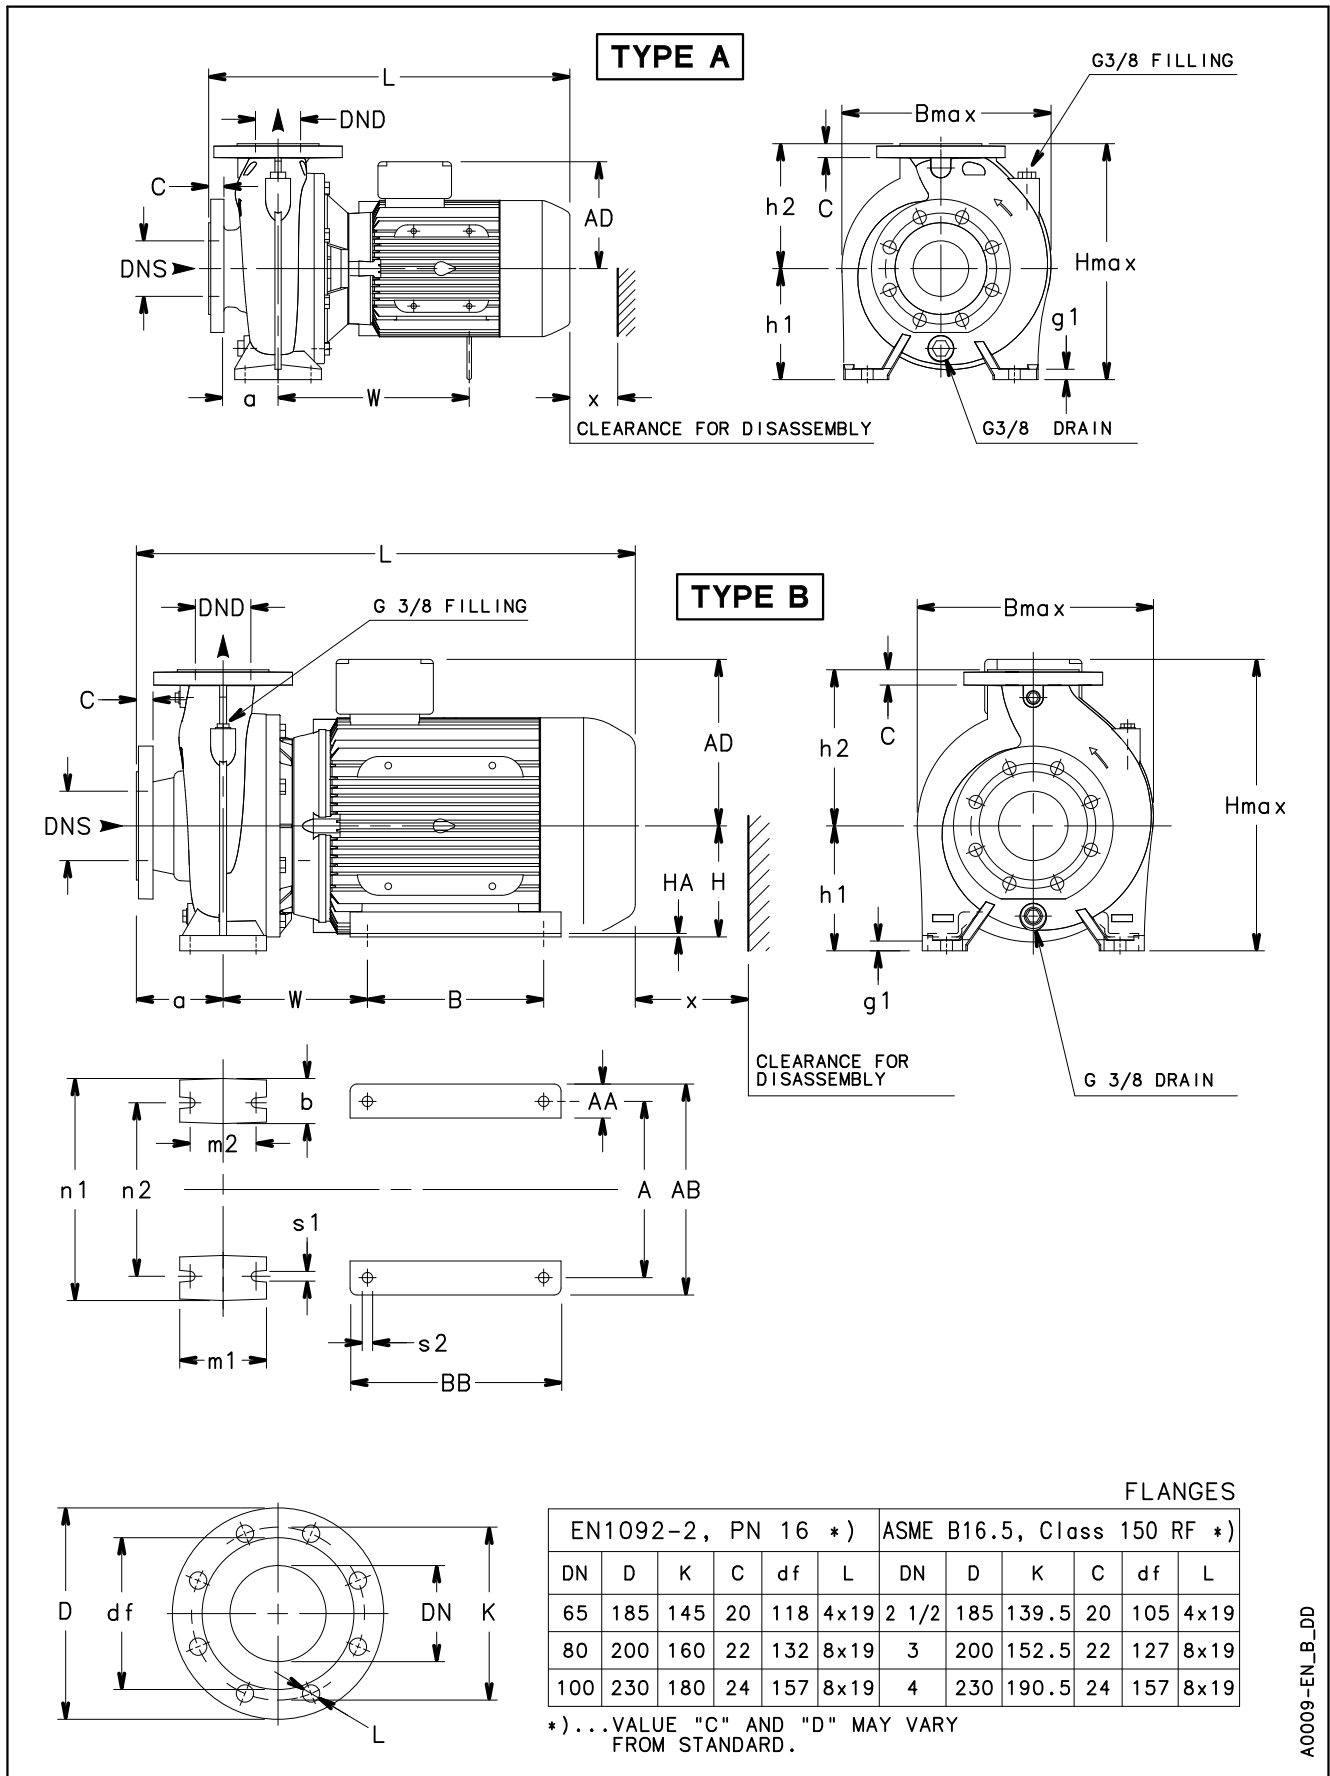

NSCE 65, 80 SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

| PUMP TYPE NSCE..2 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | | | | | | | | | WEIGHT kg | | | |
|----------------------|------|-----------------|-----|-----|----|----|-----|-----|-----|----|-----|-----|----|-----|-----|----|-----|-----|-----|-----|-----|----|----|----------|--------------|----------|-----|-----|
| | | DNS | DND | a | b | g1 | h1 | h2 | m1 | m2 | n1 | n2 | s1 | W | A | AA | AB | AD | B | BB | H | HA | s2 | B max | | H max | L | x |
| 65-125/40/P | A | 80 | 65 | 100 | 65 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 14 | 275 | - | - | - | 154 | - | - | - | - | - | 300 | 340 | 521 | 100 | 56 |
| 65-125/55/P | A | 80 | 65 | 100 | 65 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 14 | 287 | - | - | - | 168 | - | - | - | - | - | 300 | 340 | 555 | 100 | 65 |
| 65-125/75/P | A | 80 | 65 | 100 | 65 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 14 | 307 | - | - | - | 191 | - | - | - | - | - | 300 | 351 | 569 | 100 | 82 |
| 65-125/92/P | A | 80 | 65 | 100 | 65 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 14 | 345 | - | - | - | 191 | - | - | - | - | - | 300 | 351 | 607 | 100 | 88 |
| 65-125/110/P | A | 80 | 65 | 100 | 65 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 14 | 345 | - | - | - | 191 | - | - | - | - | - | 300 | 351 | 607 | 100 | 92 |
| 65-160/75/P | A | 80 | 65 | 100 | 65 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 14 | 305 | - | - | - | 191 | - | - | - | - | - | 335 | 360 | 567 | 108 | 85 |
| 65-160/92/P | A | 80 | 65 | 100 | 65 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 335 | 360 | 605 | 108 | 91 |
| 65-160/110/P | A | 80 | 65 | 100 | 65 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 335 | 360 | 605 | 108 | 96 |
| 65-160/150/P | B | 80 | 65 | 100 | 65 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 14 | 208 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 335 | 400 | 694 | 108 | 133 |
| 65-160/185/P | B | 80 | 65 | 100 | 65 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 14 | 208 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 335 | 400 | 694 | 108 | 143 |
| 65-200/110/P | A | 80 | 65 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 348 | 405 | 605 | 118 | 101 |
| 65-200/150/P | B | 80 | 65 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 348 | 420 | 694 | 118 | 138 |
| 65-200/185/P | B | 80 | 65 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 348 | 420 | 694 | 118 | 148 |
| 65-200/220/P | B | 80 | 65 | 100 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 348 | 420 | 694 | 118 | 157 |
| 80-160/110/P | A | 100 | 80 | 125 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 343 | - | - | - | 191 | - | - | - | - | - | 340 | 405 | 630 | 122 | 110 |
| 80-160/150/P | B | 100 | 80 | 125 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 340 | 420 | 719 | 122 | 147 |
| 80-160/185/P | B | 100 | 80 | 125 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 340 | 420 | 719 | 122 | 157 |
| 80-160/220/P | B | 100 | 80 | 125 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 208 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 340 | 420 | 719 | 122 | 166 |


For shims and supports see accessories section.

nsce-65-80_2p50-en_c_1d

NOTE: Pumps with flanges according to EN 1092-2 as standard; available ASME B16.5 version on request.

**NSCE 32, 40, 50 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES**


TYPE A

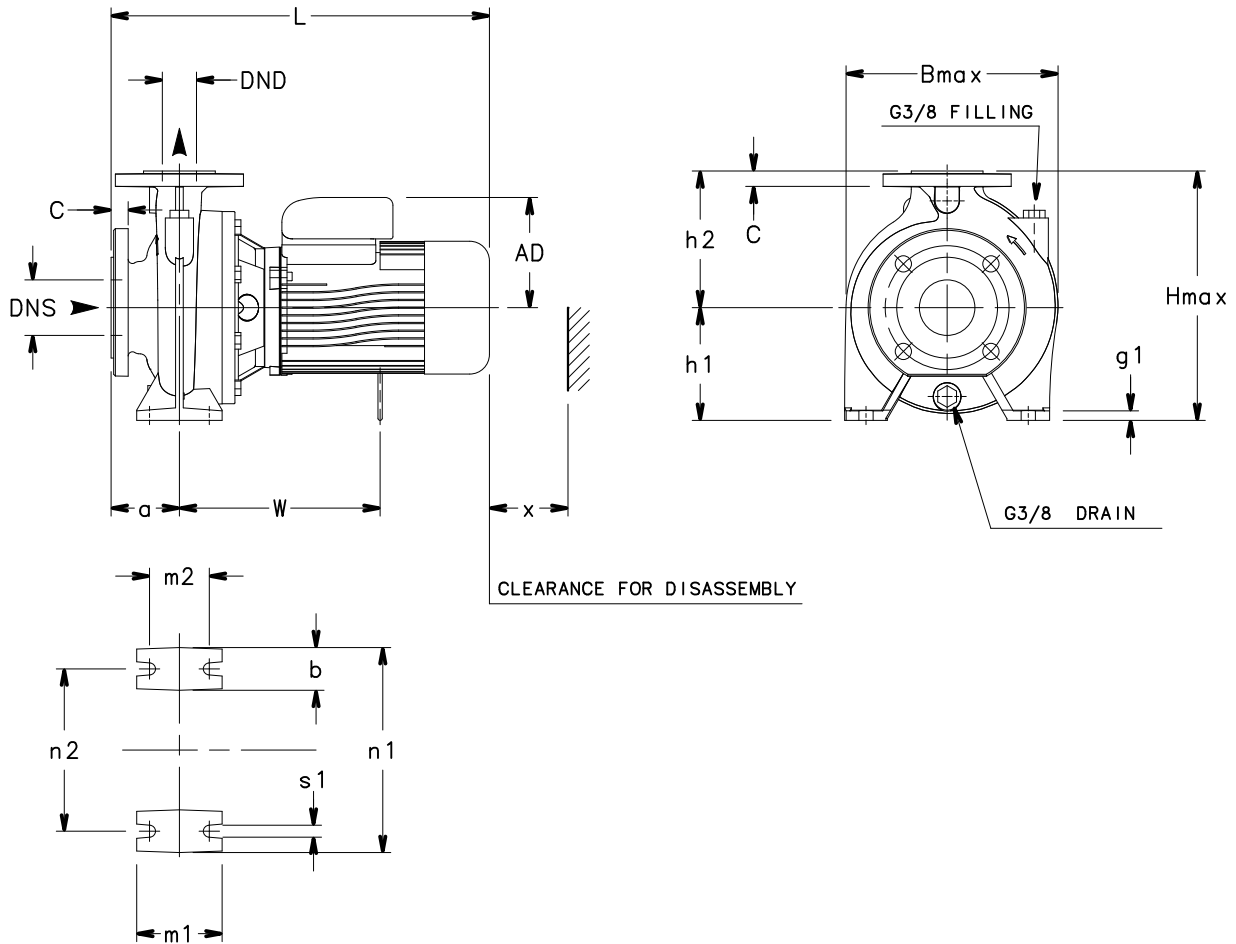

FLANGES

| EN1092-2, PN 16 *) | | | | | | ASME B16.5, Class 150 RF *) | | | | | |
|--------------------|-----|-----|----|-----|------|-----------------------------|-----|-------|----|------|------|
| DN | D | K | C | df | L | DN | D | K | C | df | L |
| 32 | 140 | 100 | 18 | 76 | 4x19 | 1 1/4 | 140 | 89 | 18 | 63.5 | 4x19 |
| 40 | 150 | 110 | 18 | 84 | 4x19 | 1 1/2 | 150 | 98.5 | 18 | 73 | 4x19 |
| 50 | 165 | 125 | 20 | 99 | 4x19 | 2 | 165 | 120.5 | 20 | 92 | 4x19 |
| 65 | 185 | 145 | 20 | 118 | 4x19 | 2 1/2 | 185 | 139.5 | 20 | 105 | 4x19 |

*)...VALUE "C" AND "D" MAY VARY FROM STANDARD.

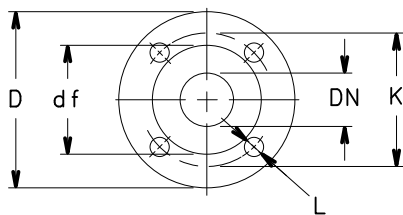

NSCE 32, 40, 50 SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES


| PUMP TYPE NSCE..4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | | | | WEIGHT kg |
|----------------------|------|-----------------|-----|-----|-----|----|----|-----|-----|-----|----|-----|-----|----|-----|----------|----------|-----|-----|--------------|
| | | DNS | DND | a | AD | b | g1 | h1 | h2 | m1 | m2 | n1 | n2 | s1 | W | B max | H max | L | x | |
| 32-125/02B/S | A | 50 | 32 | 80 | 121 | 50 | 14 | 112 | 140 | 100 | 70 | 190 | 140 | 14 | 215 | 242 | 252 | 411 | 86 | 25 |
| 32-125/02A/S | A | 50 | 32 | 80 | 121 | 50 | 14 | 112 | 140 | 100 | 70 | 190 | 140 | 14 | 215 | 242 | 252 | 411 | 86 | 25 |
| 32-125/02/S | A | 50 | 32 | 80 | 121 | 50 | 14 | 112 | 140 | 100 | 70 | 190 | 140 | 14 | 215 | 242 | 252 | 411 | 86 | 25 |
| 32-125/03/S | A | 50 | 32 | 80 | 121 | 50 | 14 | 112 | 140 | 100 | 70 | 190 | 140 | 14 | 215 | 242 | 252 | 411 | 86 | 25 |
| 32-160/02/S | A | 50 | 32 | 80 | 121 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 215 | 248 | 292 | 411 | 86 | 26 |
| 32-160/03/S | A | 50 | 32 | 80 | 121 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 215 | 248 | 292 | 411 | 86 | 26 |
| 32-160/05A/S | A | 50 | 32 | 80 | 129 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 235 | 248 | 292 | 443 | 86 | 28 |
| 32-160/05/S | A | 50 | 32 | 80 | 129 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 235 | 248 | 292 | 443 | 86 | 28 |
| 32-200/05A/S | A | 50 | 32 | 80 | 129 | 50 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 14 | 235 | 286 | 340 | 443 | 86 | 35 |
| 32-200/05/S | A | 50 | 32 | 80 | 129 | 50 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 14 | 235 | 286 | 340 | 443 | 86 | 35 |
| 32-200/07/X | A | 50 | 32 | 80 | 128 | 50 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 14 | - | 286 | 340 | 411 | 86 | 36 |
| 32-200/11/P | A | 50 | 32 | 80 | 134 | 50 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 14 | 245 | 286 | 340 | 478 | 86 | 42 |
| 32-250/15B/P | A | 50 | 32 | 100 | 134 | 65 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 245 | 334 | 405 | 498 | 95 | 51 |
| 32-250/15A/P | A | 50 | 32 | 100 | 134 | 65 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 245 | 334 | 405 | 498 | 95 | 51 |
| 32-250/15/P | A | 50 | 32 | 100 | 134 | 65 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 245 | 334 | 405 | 498 | 95 | 51 |
| 32-250/22/P | A | 50 | 32 | 100 | 168 | 65 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 334 | 405 | 522 | 95 | 61 |
| 40-125/02A/S | A | 65 | 40 | 80 | 121 | 50 | 14 | 112 | 140 | 100 | 70 | 210 | 160 | 14 | 215 | 237 | 252 | 411 | 96 | 26 |
| 40-125/02/S | A | 65 | 40 | 80 | 121 | 50 | 14 | 112 | 140 | 100 | 70 | 210 | 160 | 14 | 215 | 237 | 252 | 411 | 96 | 26 |
| 40-125/03/S | A | 65 | 40 | 80 | 121 | 50 | 14 | 112 | 140 | 100 | 70 | 210 | 160 | 14 | 215 | 237 | 252 | 411 | 96 | 26 |
| 40-125/05/S | A | 65 | 40 | 80 | 129 | 50 | 14 | 112 | 140 | 100 | 70 | 210 | 160 | 14 | 235 | 237 | 252 | 443 | 96 | 28 |
| 40-160/03/S | A | 65 | 40 | 80 | 121 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 215 | 250 | 292 | 411 | 92 | 28 |
| 40-160/05/S | A | 65 | 40 | 80 | 129 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 235 | 250 | 292 | 443 | 92 | 30 |
| 40-160/07/X | A | 65 | 40 | 80 | 128 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | - | 250 | 292 | 411 | 92 | 34 |
| 40-160/11/P | A | 65 | 40 | 80 | 134 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 245 | 250 | 292 | 478 | 92 | 40 |
| 40-200/07/X | A | 65 | 40 | 100 | 128 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | - | 290 | 340 | 431 | 90 | 36 |
| 40-200/11/P | A | 65 | 40 | 100 | 134 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 245 | 290 | 340 | 498 | 90 | 42 |
| 40-200/15A/P | A | 65 | 40 | 100 | 134 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 245 | 290 | 340 | 498 | 90 | 42 |
| 40-200/15/P | A | 65 | 40 | 100 | 134 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 245 | 290 | 340 | 498 | 90 | 45 |
| 40-250/15A/P | A | 65 | 40 | 100 | 134 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 245 | 338 | 405 | 498 | 104 | 54 |
| 40-250/15/P | A | 65 | 40 | 100 | 134 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 245 | 338 | 405 | 498 | 104 | 54 |
| 40-250/22A/P | A | 65 | 40 | 100 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 338 | 405 | 522 | 104 | 64 |
| 40-250/22/P | A | 65 | 40 | 100 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 338 | 405 | 522 | 104 | 64 |
| 40-250/30/P | A | 65 | 40 | 100 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 338 | 405 | 553 | 104 | 68 |
| 50-125/03/S | A | 65 | 50 | 100 | 121 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 217 | 255 | 292 | 433 | 107 | 29 |
| 50-125/05/S | A | 65 | 50 | 100 | 129 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 237 | 255 | 292 | 465 | 107 | 31 |
| 50-125/07/X | A | 65 | 50 | 100 | 128 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | - | 255 | 292 | 433 | 107 | 35 |
| 50-125/11/P | A | 65 | 50 | 100 | 134 | 50 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 14 | 247 | 255 | 292 | 500 | 107 | 41 |
| 50-160/07/X | A | 65 | 50 | 100 | 128 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | - | 289 | 340 | 431 | 103 | 39 |
| 50-160/11A/P | A | 65 | 50 | 100 | 134 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 245 | 289 | 340 | 498 | 103 | 45 |
| 50-160/11/P | A | 65 | 50 | 100 | 134 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 245 | 289 | 340 | 498 | 103 | 45 |
| 50-160/15/P | A | 65 | 50 | 100 | 134 | 50 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 14 | 245 | 289 | 340 | 498 | 103 | 48 |
| 50-200/15A/P | A | 65 | 50 | 100 | 134 | 50 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 14 | 247 | 305 | 360 | 498 | 98 | 48 |
| 50-200/15/P | A | 65 | 50 | 100 | 134 | 50 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 14 | 247 | 305 | 360 | 498 | 98 | 48 |
| 50-200/22A/P | A | 65 | 50 | 100 | 168 | 50 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 14 | 287 | 305 | 360 | 522 | 98 | 58 |
| 50-200/22/P | A | 65 | 50 | 100 | 168 | 50 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 14 | 287 | 305 | 360 | 522 | 98 | 58 |
| 50-250/22A/P | A | 65 | 50 | 100 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 352 | 405 | 522 | 110 | 65 |
| 50-250/22/P | A | 65 | 50 | 100 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 358 | 405 | 522 | 110 | 65 |
| 50-250/30/P | A | 65 | 50 | 100 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 358 | 405 | 553 | 110 | 69 |
| 50-250/40/P | A | 65 | 50 | 100 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 345 | 358 | 405 | 582 | 110 | 88 |

NOTE: Pumps with flanges according to EN 1092-2 as standard; available ASME B16.5 version on request.


nsce-32-40-50-4p50-en_d_td

**NSCE 65, 80 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES**

TYPE A

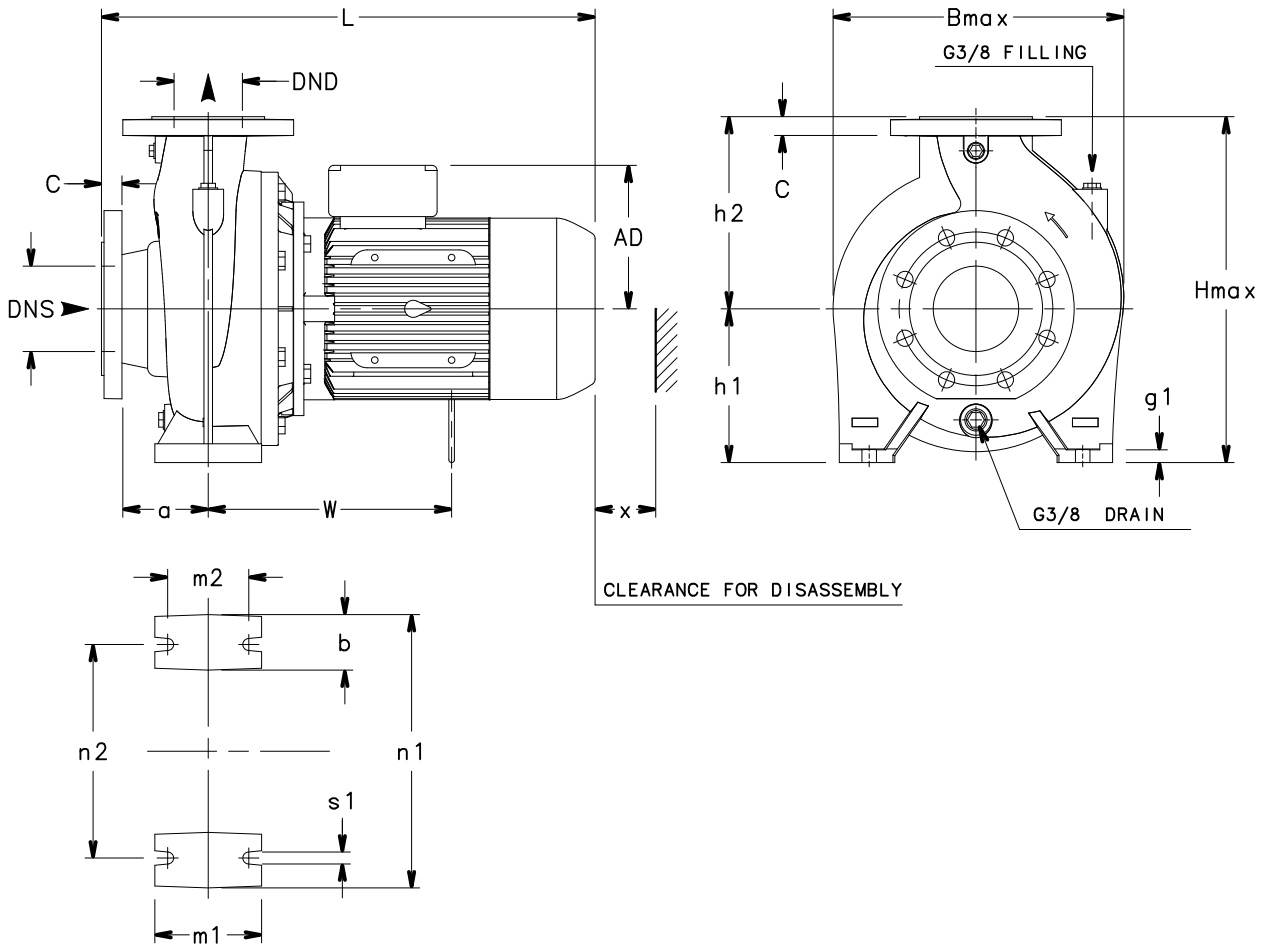

CLEARANCE FOR DISASSEMBLY

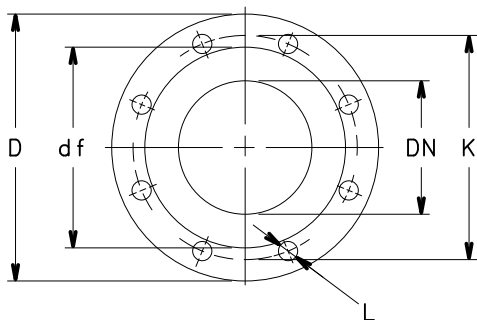

FLANGES

| EN1092-2, PN 16 *) | | | | | | ASME B16.5, Class 150 RF *) | | | | | |
|--------------------|-----|-----|----|-----|------|-----------------------------|-----|-------|----|-----|------|
| DN | D | K | C | df | L | DN | D | K | C | df | L |
| 65 | 185 | 145 | 20 | 118 | 4x19 | 2 1/2 | 185 | 139.5 | 20 | 105 | 4x19 |
| 80 | 200 | 160 | 22 | 132 | 8x19 | 3 | 200 | 152.5 | 22 | 127 | 8x19 |
| 100 | 230 | 180 | 24 | 157 | 8x19 | 4 | 230 | 190.5 | 24 | 157 | 8x19 |

*)...VALUE "C" AND "D" MAY VARY FROM STANDARD.


NSCE 65, 80 SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

| PUMP TYPE NSCE..4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | | | | WEIGHT kg |
|----------------------|------|-----------------|-----|-----|-----|----|----|-----|-----|-----|----|-----|-----|----|-----|----------|----------|-----|-----|--------------|
| | | DNS | DND | a | AD | b | g1 | h1 | h2 | m1 | m2 | n1 | n2 | s1 | W | B max | H max | L | x | |
| 65-125/05/S | A | 80 | 65 | 100 | 139 | 65 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 14 | 237 | 300 | 340 | 465 | 100 | 40 |
| 65-125/07/X | A | 80 | 65 | 100 | 128 | 65 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 14 | - | 300 | 340 | 433 | 100 | 44 |
| 65-125/11/P | A | 80 | 65 | 100 | 134 | 65 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 14 | 247 | 300 | 340 | 500 | 100 | 50 |
| 65-125/15/P | A | 80 | 65 | 100 | 134 | 65 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 14 | 247 | 300 | 340 | 500 | 100 | 53 |
| 65-160/15B/P | A | 80 | 65 | 100 | 134 | 65 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 14 | 245 | 335 | 360 | 498 | 108 | 55 |
| 65-160/15A/P | A | 80 | 65 | 100 | 134 | 65 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 14 | 245 | 335 | 360 | 498 | 108 | 55 |
| 65-160/15/P | A | 80 | 65 | 100 | 134 | 65 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 14 | 245 | 335 | 360 | 498 | 108 | 55 |
| 65-160/22A/P | A | 80 | 65 | 100 | 168 | 65 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 14 | 285 | 335 | 360 | 522 | 108 | 65 |
| 65-160/22/P | A | 80 | 65 | 100 | 168 | 65 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 14 | 285 | 335 | 360 | 522 | 108 | 65 |
| 65-200/15/P | A | 80 | 65 | 100 | 134 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 245 | 348 | 405 | 498 | 118 | 58 |
| 65-200/22A/P | A | 80 | 65 | 100 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 348 | 405 | 522 | 118 | 68 |
| 65-200/22/P | A | 80 | 65 | 100 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 348 | 405 | 522 | 118 | 68 |
| 65-200/30/P | A | 80 | 65 | 100 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 348 | 405 | 553 | 118 | 71 |
| 65-200/40/P | A | 80 | 65 | 100 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 345 | 348 | 405 | 582 | 118 | 90 |
| 80-160/15/P | A | 100 | 80 | 125 | 134 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 245 | 340 | 405 | 523 | 122 | 65 |
| 80-160/22A/P | A | 100 | 80 | 125 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 340 | 405 | 547 | 122 | 75 |
| 80-160/22/P | A | 100 | 80 | 125 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 340 | 405 | 547 | 122 | 75 |
| 80-160/30/P | A | 100 | 80 | 125 | 168 | 65 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 14 | 285 | 340 | 405 | 578 | 122 | 78 |

NOTE: Pumps with flanges according to EN 1092-2 as standard; available ASME B16.5 version on request.

nsce-65-80-4p50-en_d_td

**NSC2 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES**

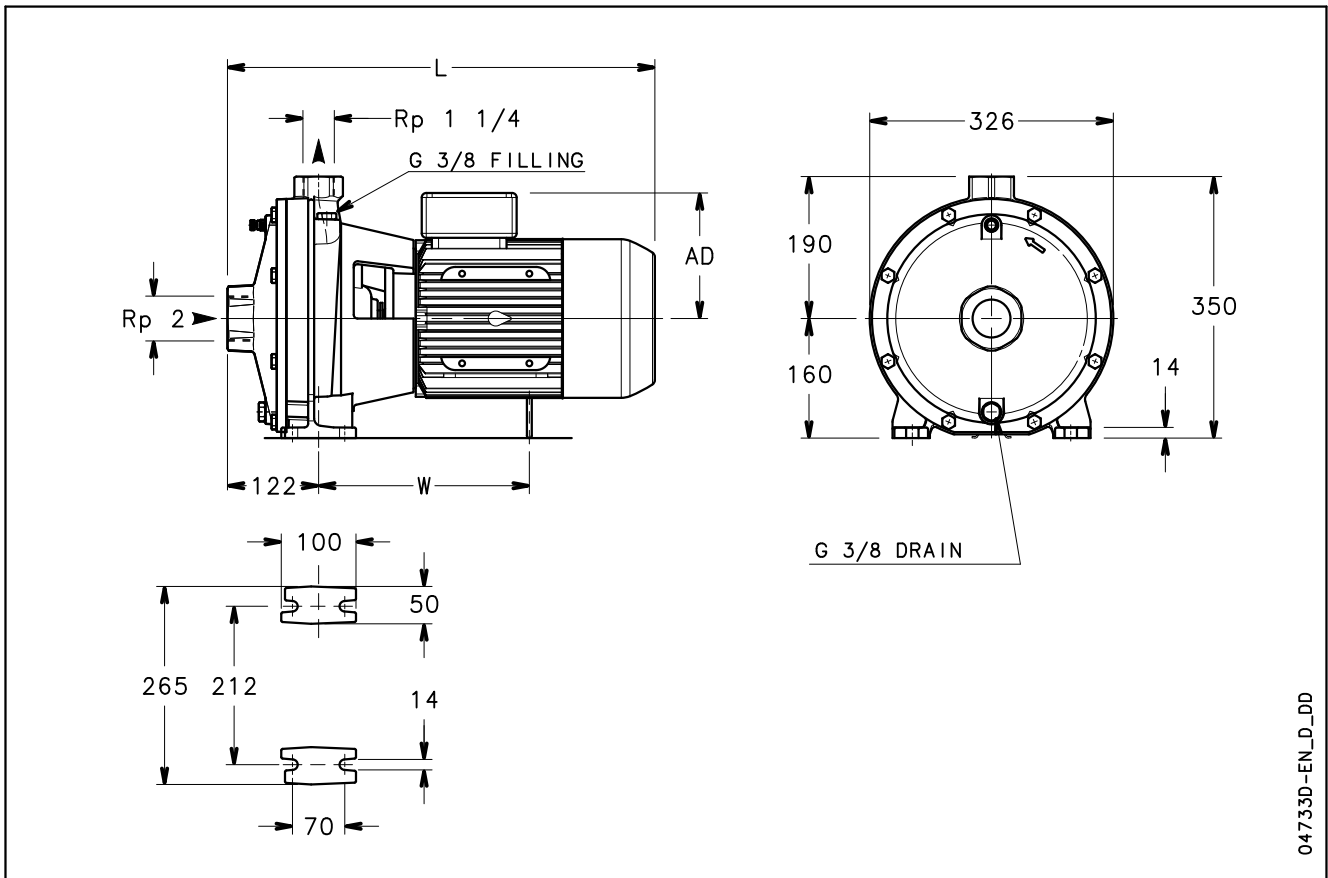


04733D-EN_D_DD

| PUMP TYPE | DIMENSIONS (mm) | | | WEIGHT |
|------------------|-----------------|-----|-----|--------|
| | L | W | AD | kg |
| NSC2 32-250/55/P | 572 | 282 | 168 | 74 |
| NSC2 32-250/75/P | 607 | 323 | 191 | 90 |

Nsc2-2p50-en_a_td

**NSC2 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES**

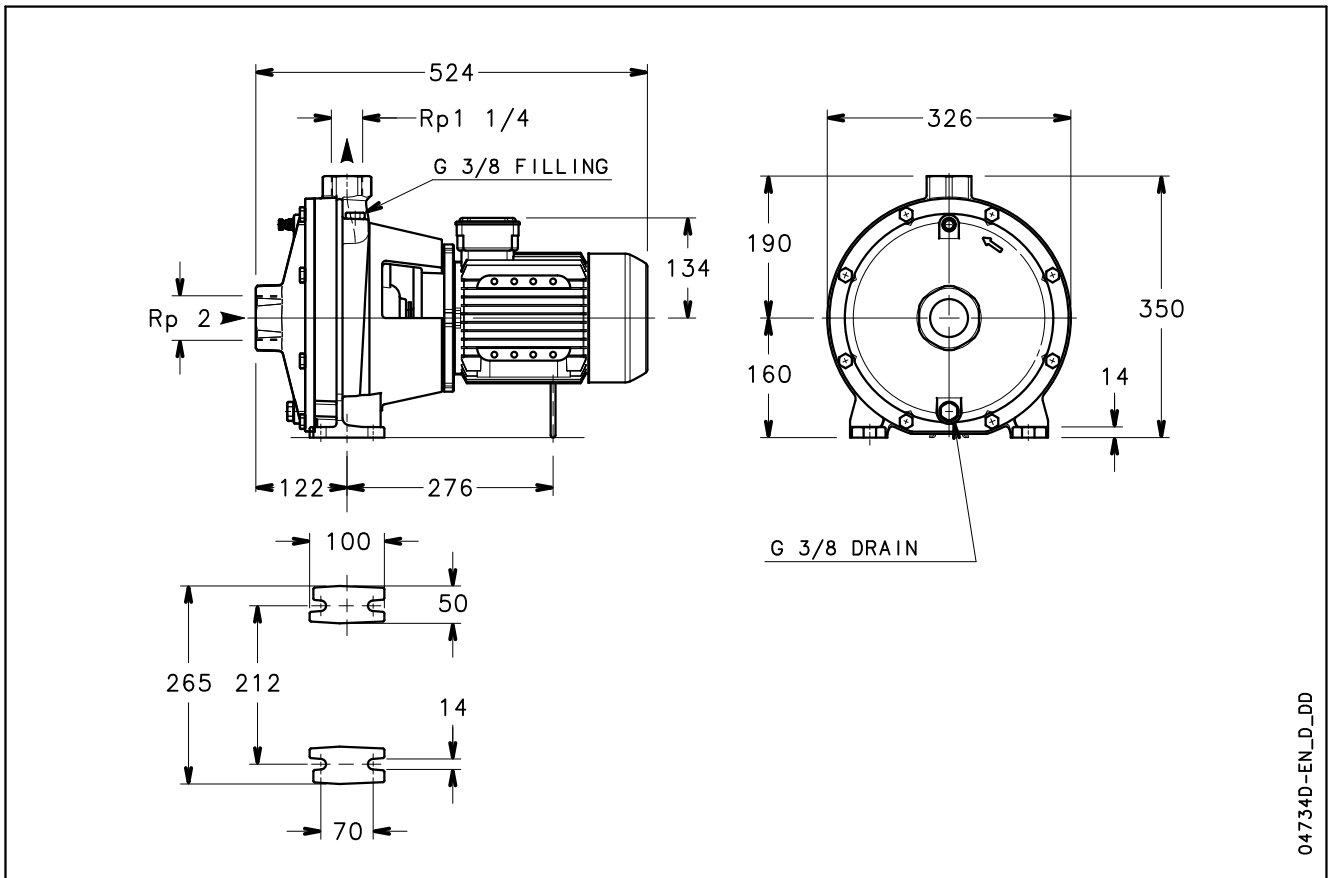


04734D-EN_DD


| PUMP TYPE | WEIGHT kg |
|-------------------|--------------|
| NSC2 32-250/11A/P | 53 |
| NSC2 32-250/11/P | 55 |

Nsc2-4p50-en_b_td

NSCS 32, 40, 50 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

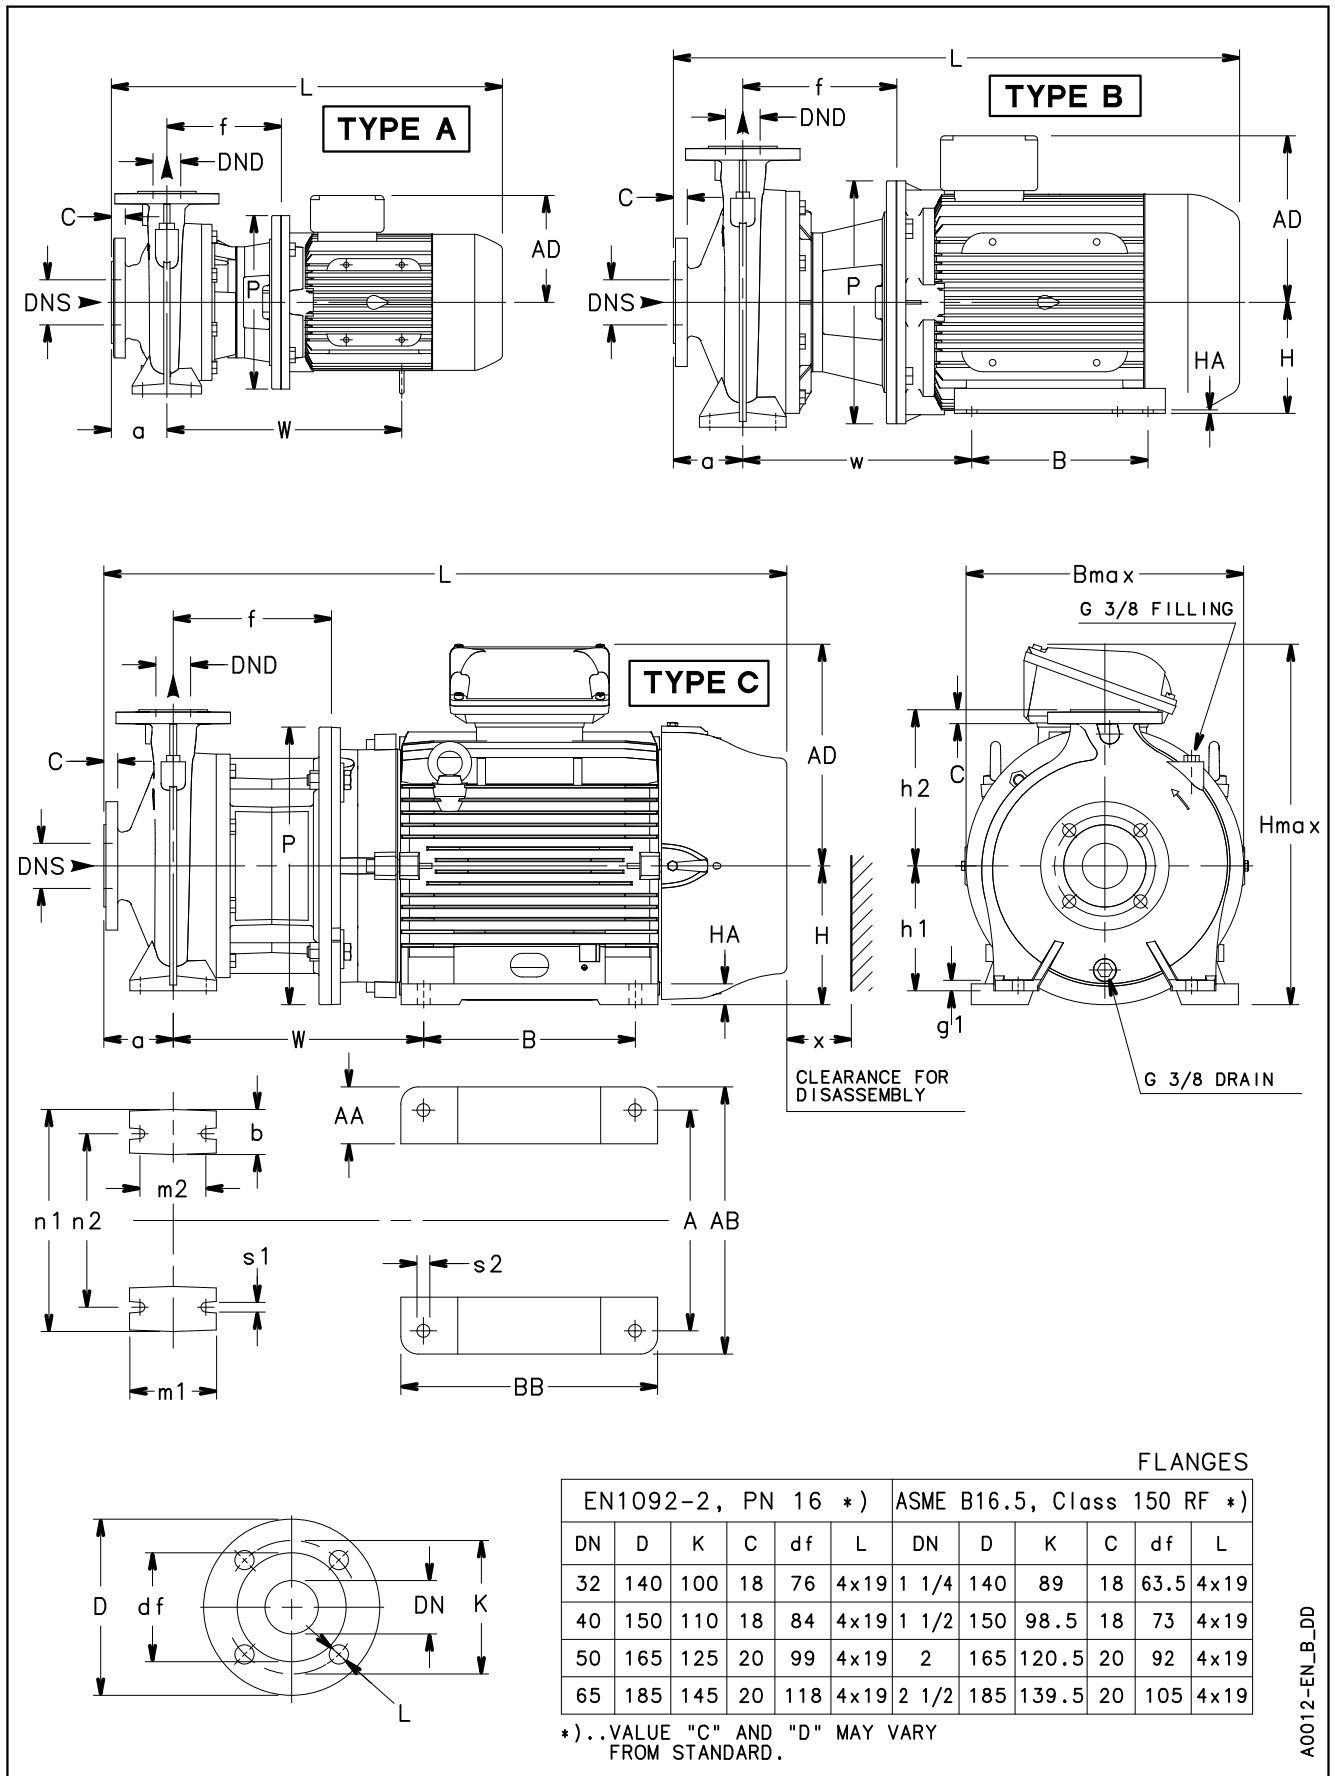

NSCS 65, 80 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

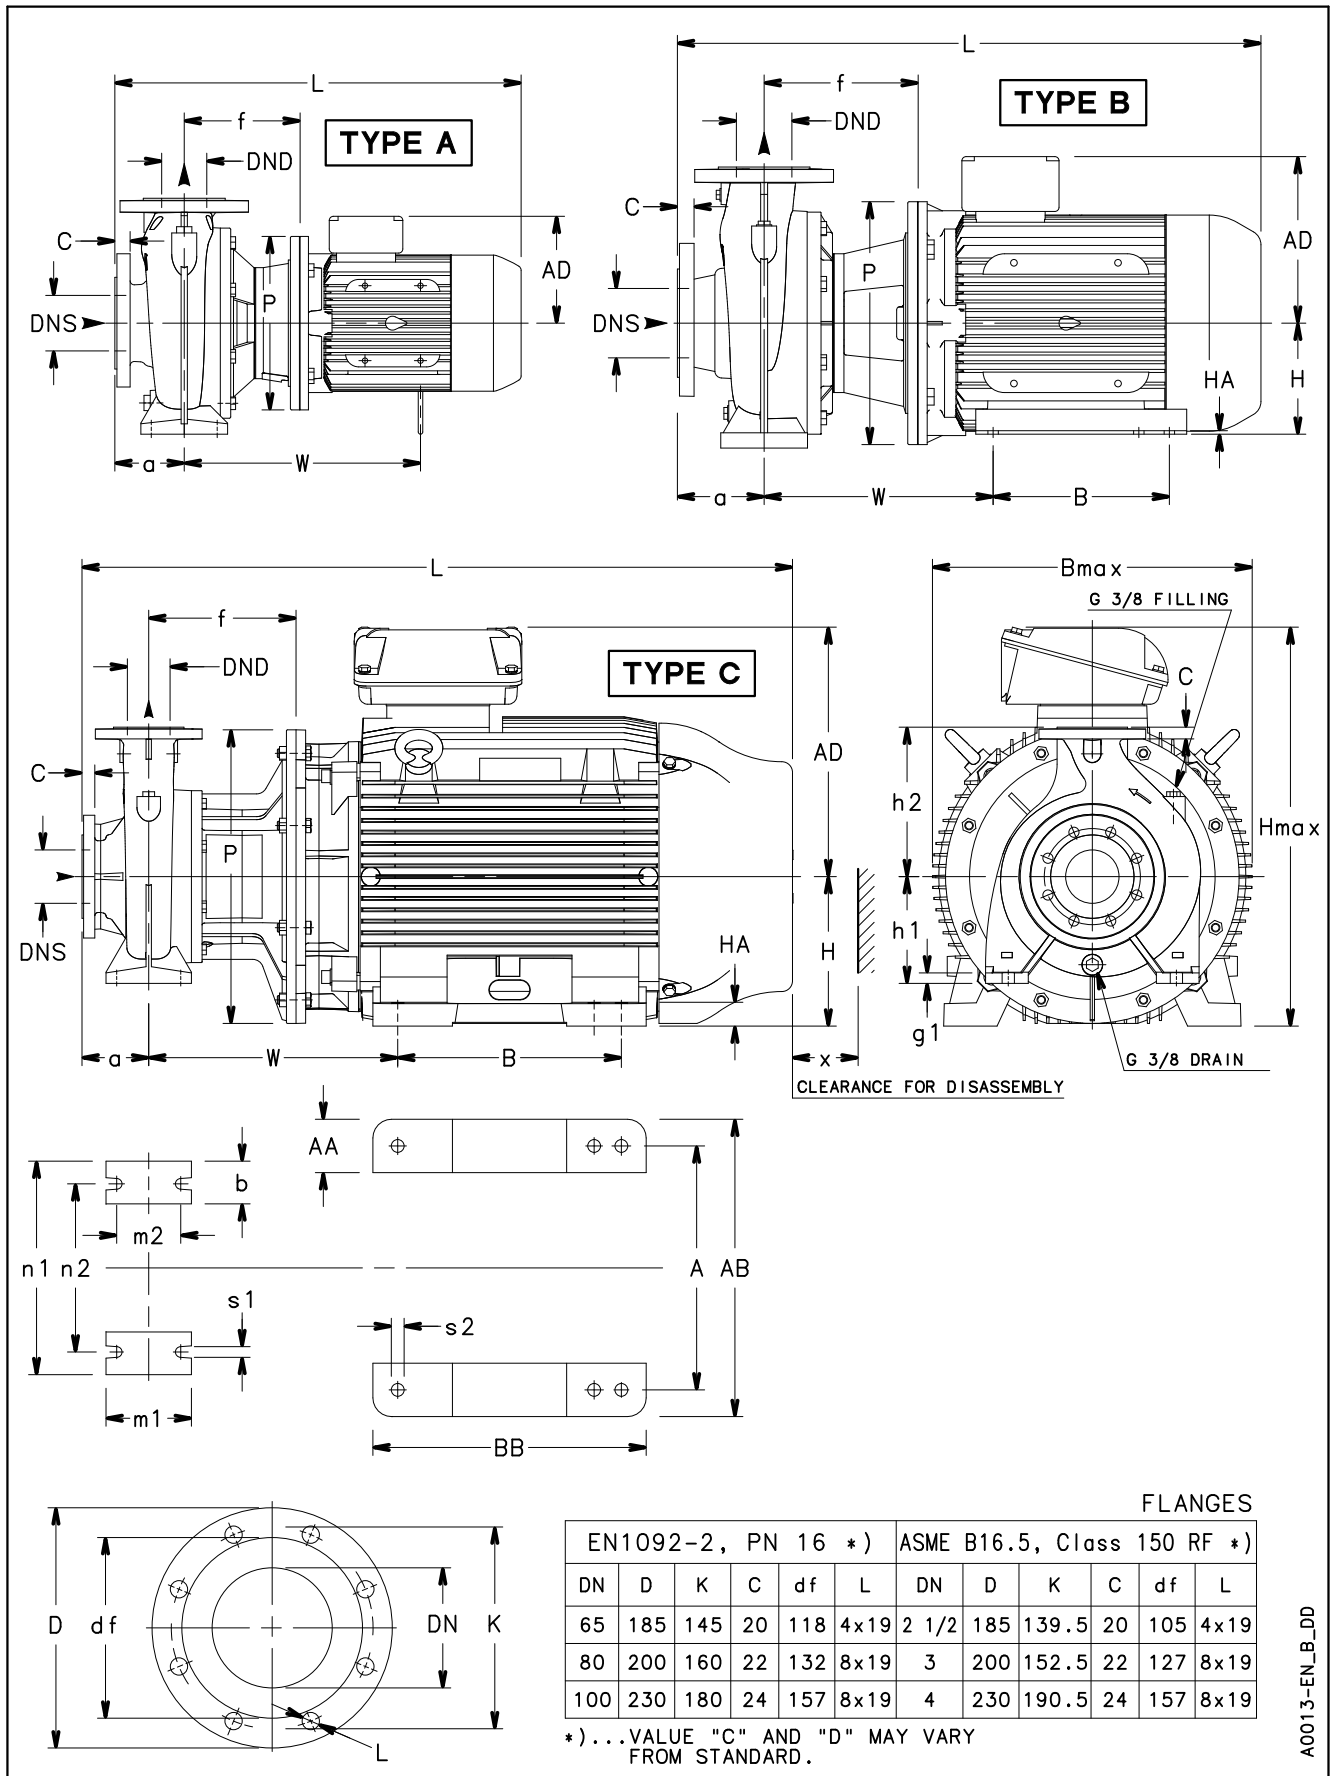

NSCS 65, 80 SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES


| PUMP TYPE NSCS..2 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | WEIGHT kg |
|----------------------|------|-----------------|-----|-----|----|-----|----|-----|-----|-----|-----|-----|-----|-----|----|-------|-----|-----|-----|-----|-----|-----|-----|----|----|-------|-------|------|-----|--------------|
| | | PUMP | | | | | | | | | | | | | | MOTOR | | | | | | | | | | | | | | |
| | | DNS | DND | a | b | f | g1 | h1 | h2 | m1 | m2 | n1 | n2 | P | s1 | W | A | AA | AB | AD | B | BB | H | HA | s2 | B max | H max | L | x | |
| 65-125/40/P | A | 80 | 65 | 100 | 65 | 167 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 250 | 14 | 340 | - | - | - | 154 | - | - | - | - | - | 300 | 340 | 586 | 100 | 62 |
| 65-125/55/P | A | 80 | 65 | 100 | 65 | 194 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 300 | 14 | 401 | - | - | - | 168 | - | - | - | - | - | 300 | 340 | 669 | 100 | 72 |
| 65-125/75/P | A | 80 | 65 | 100 | 65 | 194 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 300 | 14 | 401 | - | - | - | 191 | - | - | - | - | - | 300 | 351 | 661 | 100 | 90 |
| 65-125/110A/P | B | 80 | 65 | 100 | 65 | 224 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 350 | 14 | 332 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 350 | 420 | 818 | 100 | 95 |
| 65-125/110/P | B | 80 | 65 | 100 | 65 | 224 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 350 | 14 | 332 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 350 | 420 | 818 | 100 | 99 |
| 65-160/75/P | A | 80 | 65 | 100 | 65 | 192 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 300 | 14 | 399 | - | - | - | 191 | - | - | - | - | - | 335 | 360 | 659 | 108 | 93 |
| 65-160/110A/P | B | 80 | 65 | 100 | 65 | 222 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 350 | 14 | 330 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 350 | 420 | 816 | 108 | 126 |
| 65-160/110/P | B | 80 | 65 | 100 | 65 | 222 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 350 | 14 | 330 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 350 | 420 | 816 | 108 | 131 |
| 65-160/150/P | B | 80 | 65 | 100 | 65 | 222 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 350 | 14 | 330 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 350 | 420 | 816 | 108 | 146 |
| 65-160/185/P | B | 80 | 65 | 100 | 65 | 222 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 350 | 14 | 330 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 350 | 420 | 816 | 108 | 155 |
| 65-200/110/P | B | 80 | 65 | 100 | 65 | 222 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 350 | 14 | 330 | 254 | 49 | 304 | 191 | 210 | 304 | 160 | 5 | 15 | 350 | 405 | 816 | 118 | 136 |
| 65-200/150/P | B | 80 | 65 | 100 | 65 | 222 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 350 | 14 | 330 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 350 | 420 | 816 | 118 | 151 |
| 65-200/185/P | B | 80 | 65 | 100 | 65 | 222 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 350 | 14 | 330 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 350 | 420 | 816 | 118 | 161 |
| 65-200/220/P | B | 80 | 65 | 100 | 65 | 222 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 350 | 14 | 330 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 350 | 420 | 816 | 118 | 172 |
| 65-200/300/W | C | 80 | 65 | 100 | 65 | 228 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 400 | 14 | 361 | 318 | 82 | 385 | 317 | 305 | 370 | 200 | 30 | 18 | 400 | 517 | 985 | 118 | 290 |
| 65-250/220/P | B | 80 | 65 | 100 | 80 | 240 | 21 | 200 | 250 | 160 | 120 | 360 | 280 | 350 | 20 | 348 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 365 | 450 | 834 | 130 | 175 |
| 65-250/300/W | B | 80 | 65 | 100 | 80 | 246 | 21 | 200 | 250 | 160 | 120 | 360 | 280 | 400 | 20 | 379 | 318 | 82 | 385 | 317 | 305 | 370 | 200 | 30 | 18 | 402 | 517 | 1003 | 130 | 275 |
| 65-250/370/W | B | 80 | 65 | 100 | 80 | 246 | 21 | 200 | 250 | 160 | 120 | 360 | 280 | 400 | 20 | 379 | 318 | 82 | 385 | 317 | 305 | 370 | 200 | 30 | 18 | 402 | 517 | 1003 | 130 | 290 |
| 65-250/450/W | C | 80 | 65 | 100 | 80 | 246 | 21 | 200 | 250 | 160 | 120 | 360 | 280 | 450 | 20 | 395 | 356 | 80 | 436 | 384 | 311 | 412 | 225 | 34 | 18 | 455 | 609 | 1092 | 130 | 435 |
| 65-250/550/W | C | 80 | 65 | 100 | 80 | 276 | 21 | 200 | 250 | 160 | 120 | 360 | 280 | 550 | 20 | 444 | 406 | 100 | 506 | 402 | 349 | 467 | 250 | 43 | 24 | 550 | 682 | 1201 | 130 | 520 |
| 65-315/550/W | C | 80 | 65 | 125 | 80 | 276 | 20 | 225 | 280 | 160 | 120 | 400 | 315 | 550 | 19 | 444 | 406 | 100 | 506 | 402 | 349 | 467 | 250 | 43 | 24 | 550 | 682 | 1226 | 140 | 544 |
| 65-315/750/W | C | 80 | 65 | 125 | 80 | 276 | 20 | 225 | 280 | 160 | 120 | 400 | 315 | 550 | 19 | 466 | 457 | 100 | 557 | 472 | 368 | 517 | 280 | 42 | 24 | 550 | 752 | 1332 | 140 | 745 |
| 65-315/900/W | C | 80 | 65 | 125 | 80 | 276 | 20 | 225 | 280 | 160 | 120 | 400 | 315 | 550 | 19 | 466 | 457 | 100 | 557 | 472 | 419 | 517 | 280 | 42 | 24 | 550 | 752 | 1332 | 140 | 825 |
| 80-160/110/P | B | 100 | 80 | 125 | 65 | 222 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 350 | 14 | 330 | 254 | 49 | 304 | 191 | 210 | 304 | 160 | 5 | 15 | 350 | 405 | 841 | 122 | 145 |
| 80-160/150/P | B | 100 | 80 | 125 | 65 | 222 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 350 | 14 | 330 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 350 | 420 | 841 | 122 | 160 |
| 80-160/185/P | B | 100 | 80 | 125 | 65 | 222 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 350 | 14 | 330 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 350 | 420 | 841 | 122 | 170 |
| 80-160/220/P | B | 100 | 80 | 125 | 65 | 222 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 350 | 14 | 330 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 350 | 420 | 841 | 122 | 181 |
| 80-200/220/P | B | 100 | 80 | 125 | 65 | 240 | 16 | 180 | 250 | 125 | 95 | 345 | 280 | 350 | 14 | 348 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 358 | 430 | 859 | 151 | 180 |
| 80-200/300/W | C | 100 | 80 | 125 | 65 | 246 | 16 | 180 | 250 | 125 | 95 | 345 | 280 | 400 | 14 | 379 | 318 | 82 | 385 | 317 | 305 | 370 | 200 | 30 | 18 | 402 | 517 | 1028 | 151 | 280 |
| 80-200/370/W | C | 100 | 80 | 125 | 65 | 246 | 16 | 180 | 250 | 125 | 95 | 345 | 280 | 400 | 14 | 379 | 318 | 82 | 385 | 317 | 305 | 370 | 200 | 30 | 18 | 402 | 517 | 1028 | 151 | 295 |
| 80-200/450/W | C | 100 | 80 | 125 | 65 | 246 | 16 | 180 | 250 | 125 | 95 | 345 | 280 | 450 | 14 | 395 | 356 | 80 | 436 | 384 | 311 | 412 | 225 | 34 | 18 | 455 | 609 | 1117 | 151 | 440 |
| 80-250/370/W | B | 100 | 80 | 125 | 80 | 246 | 21 | 200 | 280 | 160 | 120 | 400 | 315 | 400 | 20 | 379 | 318 | 82 | 385 | 317 | 305 | 370 | 200 | 30 | 18 | 402 | 517 | 1028 | 152 | 310 |
| 80-250/450/W | C | 100 | 80 | 125 | 80 | 246 | 21 | 200 | 280 | 160 | 120 | 400 | 315 | 450 | 20 | 379 | 356 | 80 | 436 | 384 | 311 | 412 | 225 | 34 | 18 | 455 | 609 | 1117 | 152 | 450 |
| 80-250/550/W | C | 100 | 80 | 125 | 80 | 276 | 21 | 200 | 280 | 160 | 120 | 400 | 315 | 550 | 20 | 444 | 406 | 100 | 506 | 402 | 349 | 467 | 250 | 43 | 24 | 550 | 682 | 1226 | 152 | 535 |
| 80-250/750/W | C | 100 | 80 | 125 | 80 | 276 | 21 | 200 | 280 | 160 | 120 | 400 | 315 | 550 | 20 | 466 | 457 | 100 | 557 | 472 | 419 | 517 | 280 | 42 | 24 | 550 | 752 | 1332 | 152 | 849 |

For shims and supports see accessories section.

nscs-65-80_2p50-en_e_id

NOTE: Pumps with flanges according to EN 1092-2 as standard; available ASME B16.5 version on request.

**NSCS 100, 125 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES**

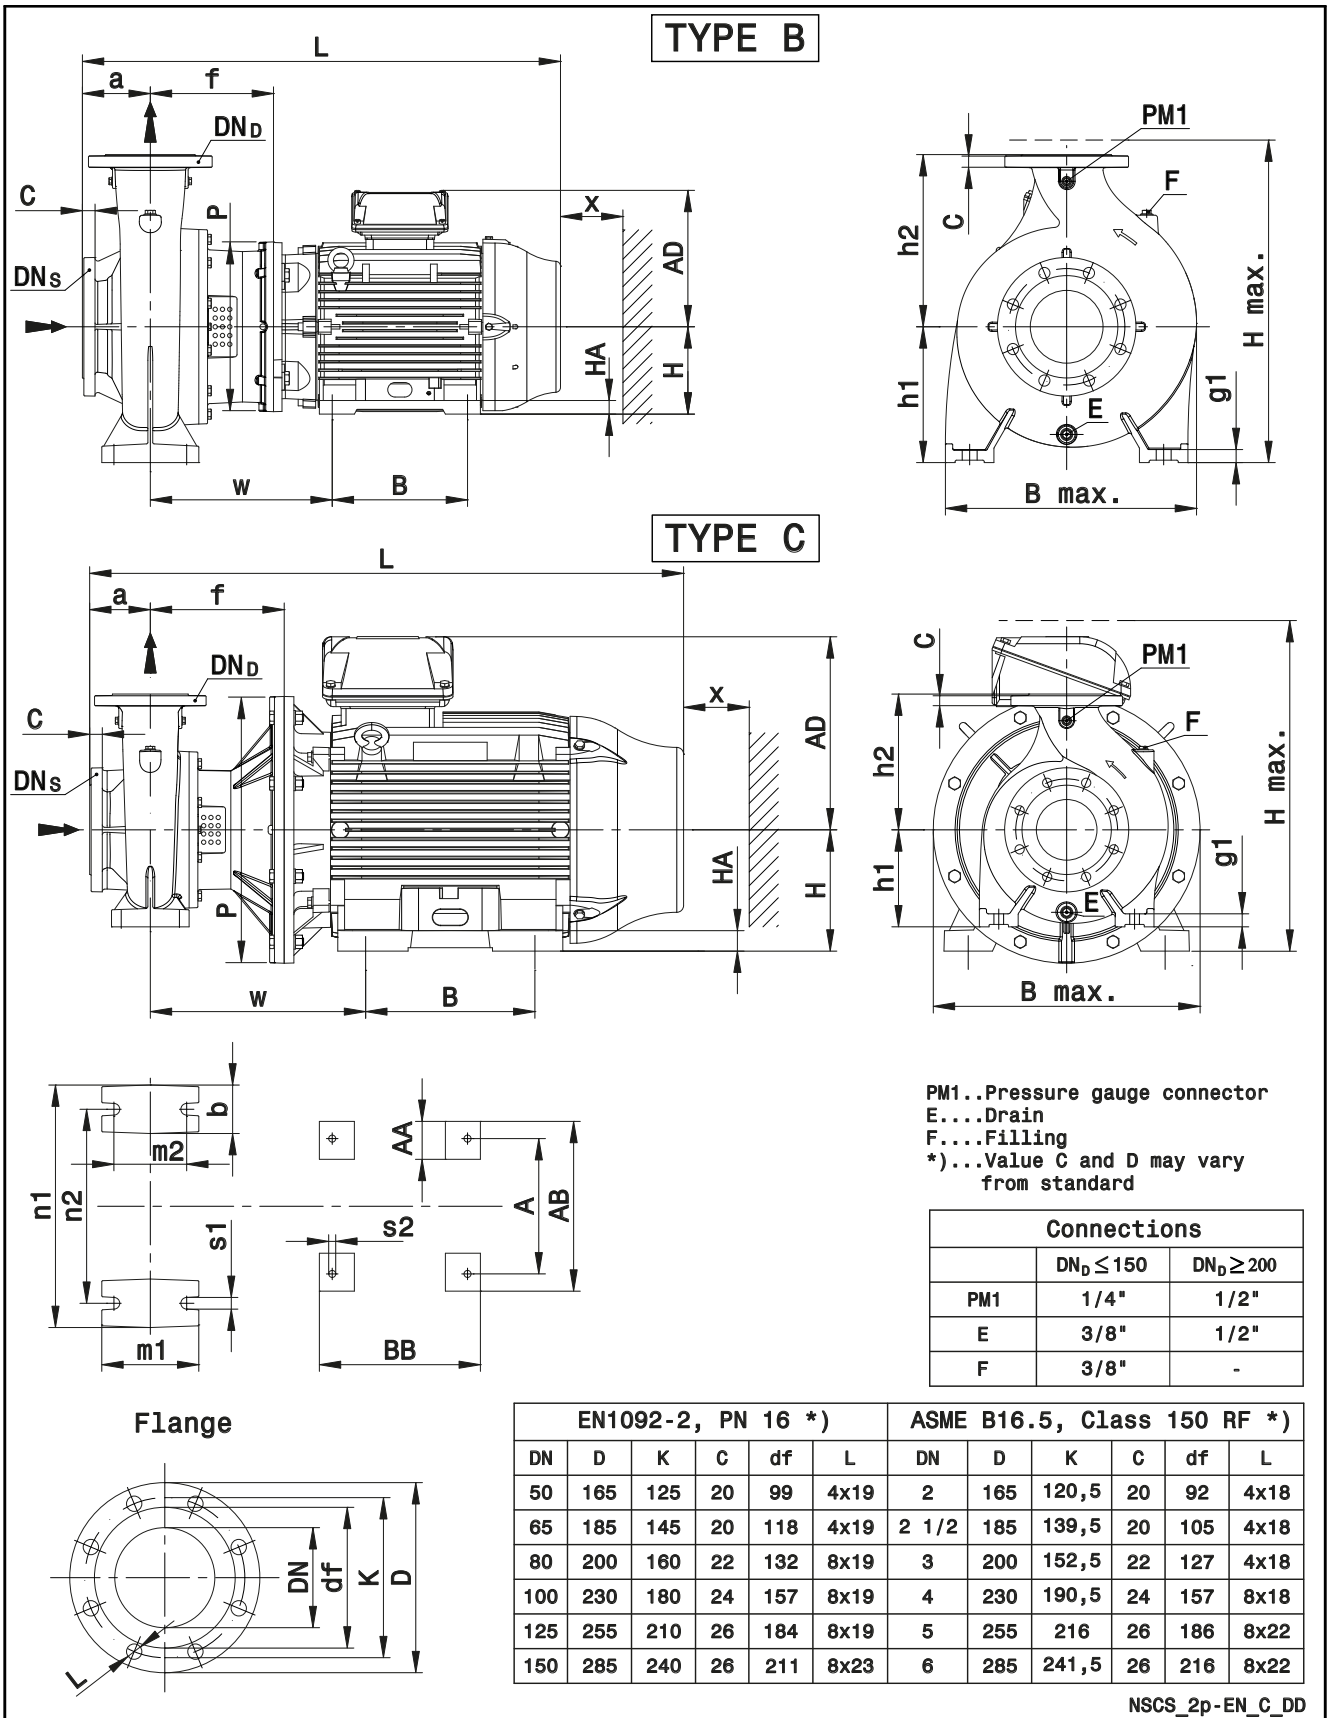

NSCS_2p-EN_C_DD

NSCS 100, 125 SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES


| PUMP TYPE NSCS..2 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | WEIGHT (kg) G |
|----------------------|------|-----------------|-----|-----|----|-----|----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----------|----------|------|---------------------|
| | | DNS | DND | a | b | f | g1 | h1 | h2 | m1 | m2 | n1 | n2 | P | s1 | W | x | A | AA | AB | AD | B | BB | H | HA | s2 | B max | H max | L | |
| 100-160/150/P | B | 125 | 100 | 125 | 80 | 240 | 26 | 200 | 280 | 160 | 120 | 360 | 280 | 350 | 19 | 348 | 140 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 388 | 480 | 859 | 182 |
| 100-160/185/P | B | 125 | 100 | 125 | 80 | 240 | 26 | 200 | 280 | 160 | 120 | 360 | 280 | 350 | 19 | 348 | 140 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 388 | 480 | 859 | 197 |
| 100-160/220/P | B | 125 | 100 | 125 | 80 | 240 | 26 | 200 | 280 | 160 | 120 | 360 | 280 | 350 | 19 | 348 | 140 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 388 | 480 | 859 | 201 |
| 100-160/300/W | B | 125 | 100 | 125 | 80 | 246 | 26 | 200 | 280 | 160 | 120 | 360 | 280 | 400 | 19 | 379 | 140 | 318 | 82 | 385 | 317 | 305 | 370 | 200 | 30 | 19 | 400 | 517 | 1028 | 310 |
| 100-200/300/W | B | 125 | 100 | 125 | 80 | 246 | 26 | 200 | 280 | 160 | 120 | 360 | 280 | 400 | 19 | 379 | 140 | 318 | 82 | 385 | 317 | 305 | 370 | 200 | 30 | 19 | 400 | 517 | 1028 | 308 |
| 100-200/370/W | B | 125 | 100 | 125 | 80 | 246 | 26 | 200 | 280 | 160 | 120 | 360 | 280 | 400 | 19 | 379 | 140 | 318 | 82 | 385 | 317 | 305 | 370 | 200 | 30 | 19 | 400 | 517 | 1028 | 333 |
| 100-200/450/W | C | 125 | 100 | 125 | 80 | 246 | 26 | 200 | 280 | 160 | 120 | 360 | 280 | 450 | 19 | 395 | 140 | 356 | 80 | 436 | 384 | 311 | 412 | 225 | 34 | 19 | 450 | 609 | 1117 | 468 |
| 100-200/550/W | C | 125 | 100 | 125 | 80 | 276 | 26 | 200 | 280 | 160 | 120 | 360 | 280 | 550 | 19 | 444 | 140 | 406 | 100 | 506 | 402 | 349 | 467 | 250 | 43 | 24 | 550 | 682 | 1226 | 531 |
| 100-250/750/W | C | 125 | 100 | 140 | 80 | 276 | 26 | 225 | 280 | 160 | 120 | 400 | 315 | 550 | 19 | 466 | 140 | 457 | 100 | 557 | 472 | 368 | 517 | 280 | 42 | 24 | 550 | 752 | 1347 | 742 |
| 100-250/900/W | C | 125 | 100 | 140 | 80 | 276 | 26 | 225 | 280 | 160 | 120 | 400 | 315 | 550 | 19 | 466 | 140 | 457 | 100 | 557 | 472 | 419 | 517 | 280 | 42 | 24 | 550 | 752 | 1347 | 822 |
| 125-200/450/W | B | 150 | 125 | 140 | 80 | 246 | 26 | 250 | 315 | 160 | 120 | 400 | 315 | 450 | 19 | 395 | 140 | 356 | 80 | 436 | 384 | 311 | 412 | 225 | 34 | 19 | 468 | 634 | 1132 | 495 |
| 125-200/550/W | C | 150 | 125 | 140 | 80 | 276 | 26 | 250 | 315 | 160 | 120 | 400 | 315 | 550 | 19 | 444 | 140 | 406 | 100 | 506 | 402 | 349 | 467 | 250 | 43 | 24 | 550 | 682 | 1241 | 557 |
| 125-200/750/W | C | 150 | 125 | 140 | 80 | 276 | 26 | 250 | 315 | 160 | 120 | 400 | 315 | 550 | 19 | 466 | 140 | 457 | 100 | 557 | 472 | 368 | 517 | 280 | 42 | 24 | 550 | 752 | 1347 | 758 |
| 125-200/900/W | C | 150 | 125 | 140 | 80 | 276 | 26 | 250 | 315 | 160 | 120 | 400 | 315 | 550 | 19 | 466 | 140 | 457 | 100 | 557 | 472 | 419 | 517 | 280 | 42 | 24 | 550 | 752 | 1347 | 838 |

For shims and supports see accessories section.

Nscs-100-125_2p50-en_e_td

NOTE: Pumps with flanges according to EN 1092-2 as standard; available ASME B16.5 version on request.

NSCS 32, 40, 50 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

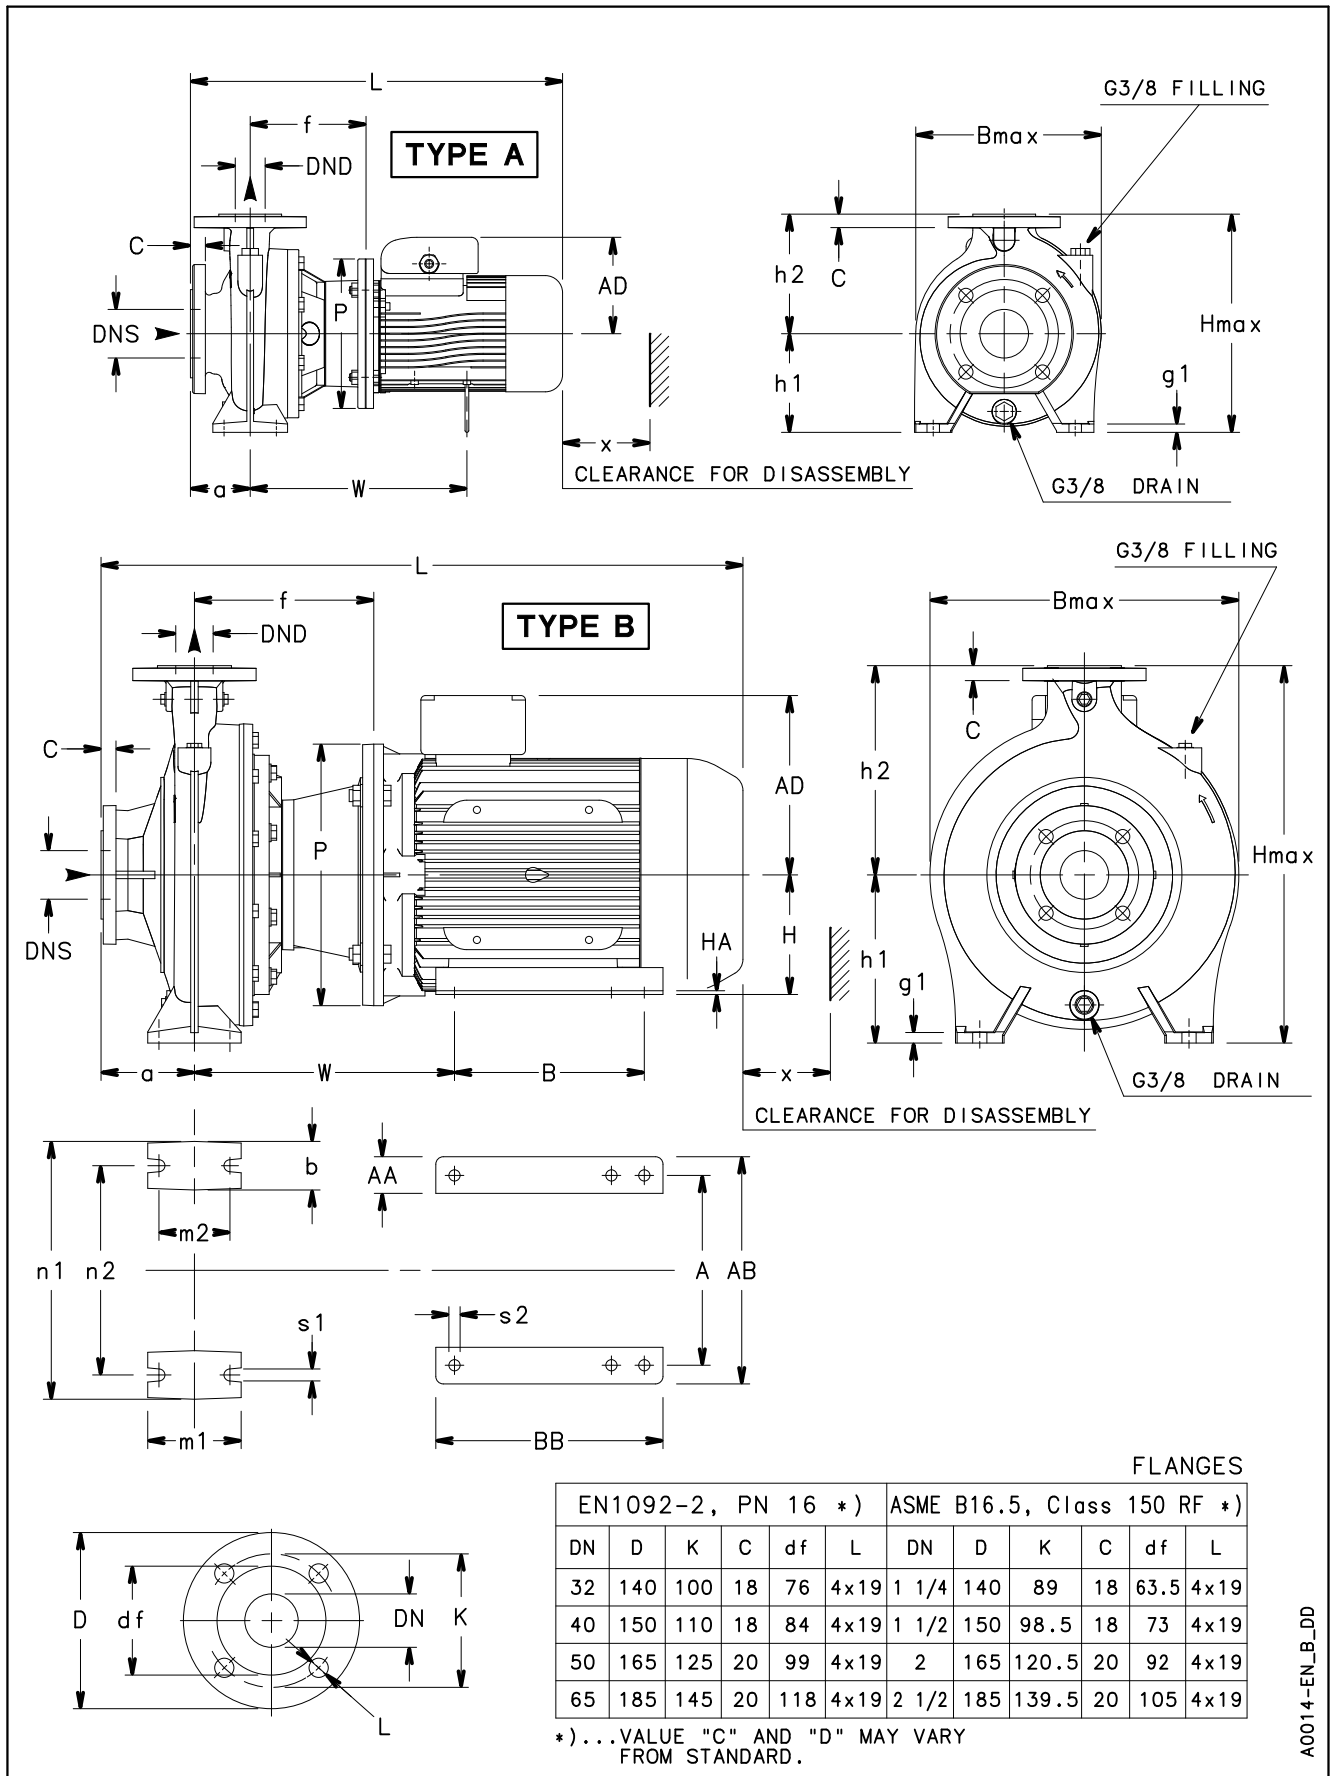

A0014-EN_B_DD

NSCS 32, 40, 50 SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES


| PUMP TYPE NSCS..4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | WEIGHT kg | |
|----------------------|------|-----------------|-----|-----|----|-----|----|-----|-----|-----|----|-----|-----|-----|----|-----|-----|----|-----|-----|-----|-----|-----|----|----|----------|----------|-----|-----|--------------|-----|
| | | DNS | DND | a | b | f | g1 | h1 | h2 | m1 | m2 | n1 | n2 | P | s1 | W | A | AA | AB | AD | B | BB | H | HA | s2 | B max | H max | L | x | | |
| 32-160/05A/S | A | 50 | 32 | 80 | 50 | 155 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 200 | 14 | 290 | - | - | - | 129 | - | - | - | - | - | - | 248 | 292 | 498 | 86 | 32 |
| 32-160/05/S | A | 50 | 32 | 80 | 50 | 155 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 200 | 14 | 290 | - | - | - | 129 | - | - | - | - | - | - | 248 | 292 | 498 | 86 | 32 |
| 32-200/05A/S | A | 50 | 32 | 80 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 200 | 14 | 290 | - | - | - | 129 | - | - | - | - | - | - | 286 | 340 | 498 | 86 | 42 |
| 32-200/05/S | A | 50 | 32 | 80 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 200 | 14 | 290 | - | - | - | 129 | - | - | - | - | - | - | 286 | 340 | 498 | 86 | 42 |
| 32-200/07/X | A | 50 | 32 | 80 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 200 | 14 | - | - | - | - | 128 | - | - | - | - | - | - | 286 | 340 | 466 | 86 | 43 |
| 32-200/11/P | A | 50 | 32 | 80 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 240 | 190 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | - | 286 | 340 | 533 | 86 | 50 |
| 32-250/11A/P | A | 50 | 32 | 100 | 65 | 155 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 200 | 14 | 245 | - | - | - | 134 | - | - | - | - | - | - | 334 | 405 | 553 | 95 | 48 |
| 32-250/11/P | A | 50 | 32 | 100 | 65 | 155 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 200 | 14 | 245 | - | - | - | 134 | - | - | - | - | - | - | 334 | 405 | 553 | 95 | 48 |
| 32-250/15/P | A | 50 | 32 | 100 | 65 | 155 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 200 | 14 | 245 | - | - | - | 134 | - | - | - | - | - | - | 334 | 405 | 553 | 95 | 51 |
| 32-250/22/P | A | 50 | 32 | 100 | 65 | 165 | 21 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 285 | - | - | - | 168 | - | - | - | - | - | - | 334 | 405 | 587 | 95 | 61 |
| 40-125/05/S | A | 65 | 40 | 80 | 50 | 155 | 14 | 112 | 140 | 100 | 70 | 210 | 160 | 200 | 14 | 290 | - | - | - | 129 | - | - | - | - | - | - | 237 | 252 | 498 | 96 | 32 |
| 40-160/05/S | A | 65 | 40 | 80 | 50 | 155 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 200 | 14 | 290 | - | - | - | 129 | - | - | - | - | - | - | 250 | 292 | 498 | 92 | 34 |
| 40-160/07/X | A | 65 | 40 | 80 | 50 | 155 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 200 | 14 | - | - | - | - | 128 | - | - | - | - | - | - | 250 | 292 | 466 | 92 | 38 |
| 40-160/11/P | A | 65 | 40 | 80 | 50 | 155 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | - | 250 | 292 | 533 | 92 | 44 |
| 40-200/07/X | A | 65 | 40 | 100 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 200 | 14 | - | - | - | - | 128 | - | - | - | - | - | - | 290 | 340 | 486 | 90 | 43 |
| 40-200/11/P | A | 65 | 40 | 100 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | - | 290 | 340 | 553 | 90 | 49 |
| 40-200/15A/P | A | 65 | 40 | 100 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | - | 290 | 340 | 553 | 90 | 49 |
| 40-200/15/P | A | 65 | 40 | 100 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | - | 290 | 340 | 553 | 90 | 52 |
| 40-250/11/P | A | 65 | 40 | 100 | 65 | 155 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | - | 338 | 405 | 553 | 104 | 58 |
| 40-250/15/P | A | 65 | 40 | 100 | 65 | 155 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | - | 338 | 405 | 553 | 104 | 63 |
| 40-250/22A/P | A | 65 | 40 | 100 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 350 | - | - | - | 168 | - | - | - | - | - | - | 338 | 405 | 587 | 104 | 71 |
| 40-250/22/P | A | 65 | 40 | 100 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 350 | - | - | - | 168 | - | - | - | - | - | - | 338 | 405 | 587 | 104 | 71 |
| 40-250/30/P | A | 65 | 40 | 100 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 350 | - | - | - | 168 | - | - | - | - | - | - | 338 | 405 | 618 | 104 | 75 |
| 50-125/05/S | A | 65 | 50 | 100 | 50 | 157 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 200 | 14 | 292 | - | - | - | 129 | - | - | - | - | - | - | 255 | 292 | 520 | 107 | 35 |
| 50-125/07/X | A | 65 | 50 | 100 | 50 | 157 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 200 | 14 | - | - | - | - | 128 | - | - | - | - | - | - | 255 | 292 | 488 | 107 | 39 |
| 50-125/11/P | A | 65 | 50 | 100 | 50 | 157 | 14 | 132 | 160 | 100 | 70 | 240 | 190 | 200 | 14 | 302 | - | - | - | 134 | - | - | - | - | - | - | 255 | 292 | 555 | 107 | 45 |
| 50-160/07/X | A | 65 | 50 | 100 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 200 | 14 | - | - | - | - | 128 | - | - | - | - | - | - | 289 | 340 | 486 | 103 | 46 |
| 50-160/11A/P | A | 65 | 50 | 100 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | - | 289 | 340 | 553 | 103 | 52 |
| 50-160/11/P | A | 65 | 50 | 100 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | - | 289 | 340 | 553 | 103 | 52 |
| 50-160/15/P | A | 65 | 50 | 100 | 50 | 155 | 14 | 160 | 180 | 100 | 70 | 265 | 212 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | - | 289 | 340 | 553 | 103 | 55 |
| 50-200/11/P | A | 65 | 50 | 100 | 50 | 155 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 200 | 14 | 247 | - | - | - | 134 | - | - | - | - | - | - | 305 | 360 | 553 | 98 | 52 |
| 50-200/15/P | A | 65 | 50 | 100 | 50 | 155 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 200 | 14 | 247 | - | - | - | 134 | - | - | - | - | - | - | 305 | 360 | 553 | 98 | 55 |
| 50-200/22A/P | A | 65 | 50 | 100 | 50 | 165 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 250 | 14 | 287 | - | - | - | 168 | - | - | - | - | - | - | 305 | 360 | 587 | 98 | 65 |
| 50-200/22/P | A | 65 | 50 | 100 | 50 | 165 | 14 | 160 | 200 | 100 | 70 | 265 | 212 | 250 | 14 | 287 | - | - | - | 168 | - | - | - | - | - | - | 305 | 360 | 587 | 98 | 65 |
| 50-250/22A/P | A | 65 | 50 | 100 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 285 | - | - | - | 168 | - | - | - | - | - | - | 352 | 405 | 587 | 110 | 72 |
| 50-250/22/P | A | 65 | 50 | 100 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 285 | - | - | - | 168 | - | - | - | - | - | - | 358 | 405 | 587 | 110 | 72 |
| 50-250/30/P | A | 65 | 50 | 100 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 285 | - | - | - | 168 | - | - | - | - | - | - | 358 | 405 | 618 | 110 | 76 |
| 50-250/40/P | A | 65 | 50 | 100 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 410 | - | - | - | 168 | - | - | - | - | - | - | 358 | 405 | 647 | 110 | 95 |
| 50-315/40/P | A | 65 | 50 | 125 | 65 | 183 | 14 | 225 | 280 | 125 | 95 | 345 | 280 | 250 | 15 | 428 | - | - | - | 168 | - | - | - | - | - | - | 413 | 505 | 706 | 140 | 136 |
| 50-315/55/P | A | 65 | 50 | 125 | 65 | 210 | 14 | 225 | 280 | 125 | 95 | 345 | 280 | 300 | 15 | 452 | - | - | - | 191 | - | - | - | - | - | - | 413 | 505 | 740 | 140 | 141 |
| 50-315/75/P | A | 65 | 50 | 125 | 65 | 210 | 14 | 225 | 280 | 125 | 95 | 345 | 280 | 300 | 15 | 452 | - | - | - | 191 | - | - | - | - | - | - | 413 | 505 | 740 | 140 | 146 |
| 50-315/110/P | B | 65 | 50 | 125 | 65 | 240 | 14 | 225 | 280 | 125 | 95 | 345 | 280 | 350 | 15 | 348 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 413 | 505 | 859 | 140 | 210 | |

For shims and supports see accessories section.

ns-cs-32-40-50-4p50-en_e_id

NOTE: Pumps with flanges according to EN 1092-2 as standard; available ASME B16.5 version on request.

NSCS 65, 80 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

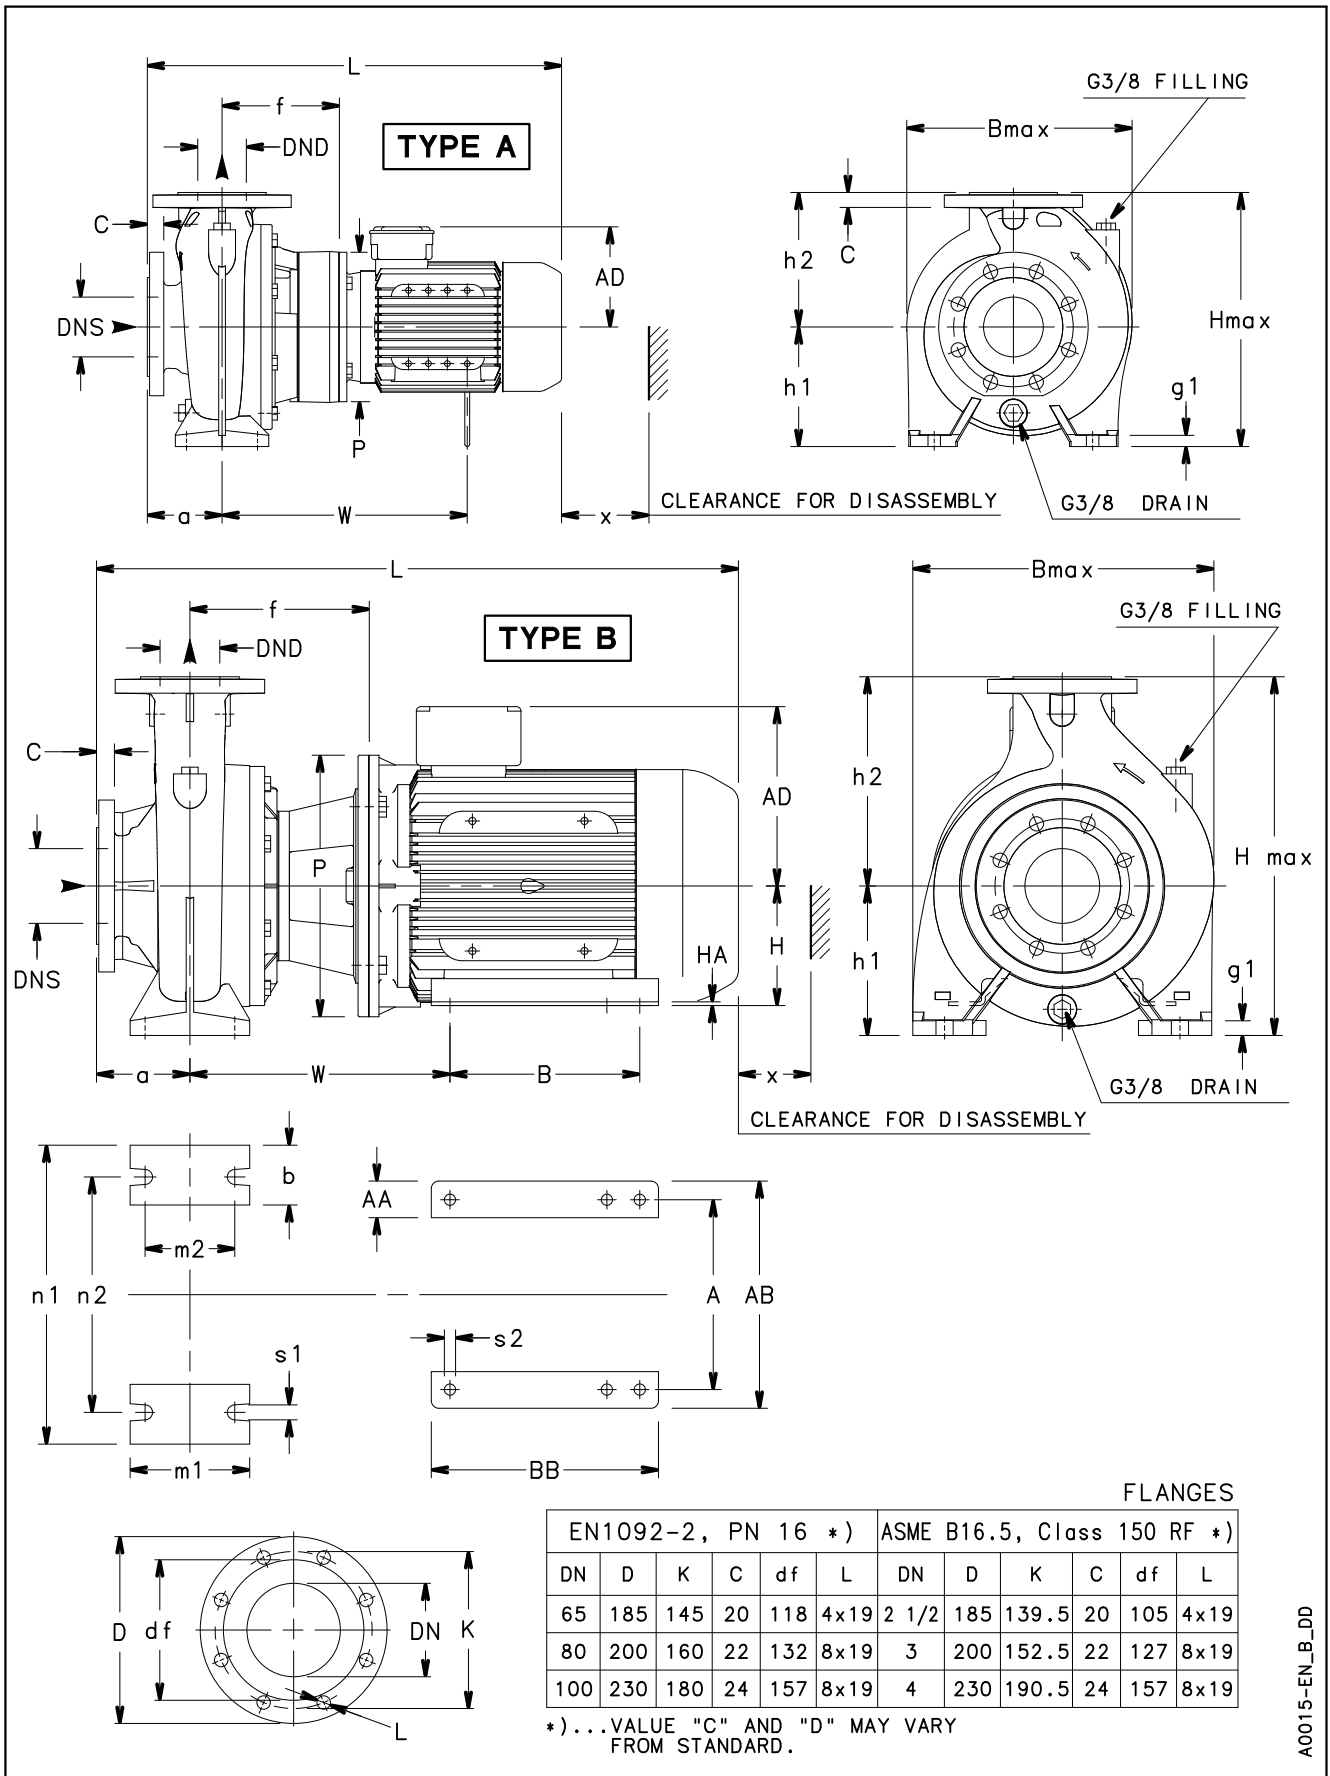

NSCS 65, 80 SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES


| POMPA TIPO NSCS..4 | TIPO | DIMENSIONI (mm) | | | | | | | | | | | | | | | | | | | | | | | PESO kg | | | | | |
|-----------------------|------|-----------------|-----|-----|----|-----|----|-----|-----|-----|-----|-----|-----|-----|--------|-----|-----|----|-----|-----|-----|-----|-----|----|------------|-----|-------|-------|-----|-----|
| | | POMPA | | | | | | | | | | | | | MOTORE | | | | | | | | | | | | | | | |
| | | DNS | DND | a | b | f | g1 | h1 | h2 | m1 | m2 | n1 | n2 | P | s1 | W | A | AA | AB | AD | B | BB | H | HA | | s2 | B max | H max | L | x |
| 65-125/05/S | A | 80 | 65 | 100 | 65 | 157 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 200 | 14 | 292 | - | - | - | 139 | - | - | - | - | - | 300 | 340 | 520 | 100 | 44 |
| 65-125/07/X | A | 80 | 65 | 100 | 65 | 157 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 200 | 14 | - | - | - | - | 128 | - | - | - | - | - | 300 | 340 | 488 | 100 | 48 |
| 65-125/11/P | A | 80 | 65 | 100 | 65 | 157 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 200 | 14 | 302 | - | - | - | 134 | - | - | - | - | - | 300 | 340 | 555 | 100 | 55 |
| 65-125/15/P | A | 80 | 65 | 100 | 65 | 157 | 16 | 160 | 180 | 125 | 95 | 280 | 212 | 200 | 14 | 302 | - | - | - | 134 | - | - | - | - | - | 300 | 340 | 555 | 100 | 58 |
| 65-160/11A/P | A | 80 | 65 | 100 | 65 | 155 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | 335 | 360 | 553 | 108 | 59 |
| 65-160/11/P | A | 80 | 65 | 100 | 65 | 155 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | 335 | 360 | 553 | 108 | 59 |
| 65-160/15/P | A | 80 | 65 | 100 | 65 | 155 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | 335 | 360 | 553 | 108 | 62 |
| 65-160/22A/P | A | 80 | 65 | 100 | 65 | 165 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 250 | 14 | 350 | - | - | - | 168 | - | - | - | - | - | 335 | 360 | 587 | 108 | 72 |
| 65-160/22/P | A | 80 | 65 | 100 | 65 | 165 | 16 | 160 | 200 | 125 | 95 | 280 | 212 | 250 | 14 | 350 | - | - | - | 168 | - | - | - | - | - | 335 | 360 | 587 | 108 | 72 |
| 65-200/15/P | A | 80 | 65 | 100 | 65 | 155 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | 348 | 405 | 553 | 118 | 65 |
| 65-200/22A/P | A | 80 | 65 | 100 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 350 | - | - | - | 168 | - | - | - | - | - | 348 | 405 | 587 | 118 | 75 |
| 65-200/22/P | A | 80 | 65 | 100 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 350 | - | - | - | 168 | - | - | - | - | - | 348 | 405 | 587 | 118 | 75 |
| 65-200/30/P | A | 80 | 65 | 100 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 350 | - | - | - | 168 | - | - | - | - | - | 348 | 405 | 618 | 118 | 78 |
| 65-200/40/P | A | 80 | 65 | 100 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 410 | - | - | - | 168 | - | - | - | - | - | 348 | 405 | 647 | 118 | 97 |
| 65-250/30/P | A | 80 | 65 | 100 | 80 | 183 | 21 | 200 | 250 | 160 | 120 | 360 | 280 | 250 | 20 | 368 | - | - | - | 168 | - | - | - | - | - | 367 | 450 | 636 | 130 | 85 |
| 65-250/40/P | A | 80 | 65 | 100 | 80 | 183 | 21 | 200 | 250 | 160 | 120 | 360 | 280 | 250 | 20 | 428 | - | - | - | 168 | - | - | - | - | - | 367 | 450 | 665 | 130 | 107 |
| 65-250/55A/P | A | 80 | 65 | 100 | 80 | 210 | 21 | 200 | 250 | 160 | 120 | 360 | 280 | 300 | 20 | 453 | - | - | - | 191 | - | - | - | - | - | 367 | 450 | 715 | 130 | 112 |
| 65-250/55/P | A | 80 | 65 | 100 | 80 | 210 | 21 | 200 | 250 | 160 | 120 | 360 | 280 | 300 | 20 | 453 | - | - | - | 191 | - | - | - | - | - | 367 | 450 | 715 | 130 | 112 |
| 65-250/75/P | A | 80 | 65 | 100 | 80 | 210 | 21 | 200 | 250 | 160 | 120 | 360 | 280 | 300 | 20 | 453 | - | - | - | 191 | - | - | - | - | - | 367 | 450 | 715 | 130 | 116 |
| 65-315/55/P | A | 80 | 65 | 125 | 80 | 210 | 20 | 225 | 280 | 160 | 120 | 400 | 315 | 300 | 19 | 452 | - | - | - | 218 | - | - | - | - | - | 437 | 505 | 707 | 140 | 153 |
| 65-315/75/P | A | 80 | 65 | 125 | 80 | 210 | 20 | 225 | 280 | 160 | 120 | 400 | 315 | 300 | 19 | 452 | - | - | - | 218 | - | - | - | - | - | 437 | 505 | 745 | 140 | 164 |
| 65-315/110/P | B | 80 | 65 | 125 | 80 | 240 | 20 | 225 | 280 | 160 | 120 | 400 | 315 | 350 | 19 | 348 | 254 | 64 | 308 | 264 | 210 | 254 | 160 | 22 | 15 | 437 | 505 | 853 | 140 | 205 |
| 65-315/150/P | B | 80 | 65 | 125 | 80 | 240 | 20 | 225 | 280 | 160 | 120 | 400 | 315 | 350 | 19 | 348 | 254 | 64 | 308 | 264 | 210 | 298 | 160 | 22 | 15 | 437 | 505 | 897 | 140 | 227 |
| 80-160/15/P | A | 100 | 80 | 125 | 65 | 155 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 200 | 14 | 300 | - | - | - | 134 | - | - | - | - | - | 340 | 405 | 578 | 122 | 72 |
| 80-160/22A/P | A | 100 | 80 | 125 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 350 | - | - | - | 168 | - | - | - | - | - | 340 | 405 | 612 | 122 | 82 |
| 80-160/22/P | A | 100 | 80 | 125 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 350 | - | - | - | 168 | - | - | - | - | - | 340 | 405 | 612 | 122 | 82 |
| 80-160/30/P | A | 100 | 80 | 125 | 65 | 165 | 16 | 180 | 225 | 125 | 95 | 320 | 250 | 250 | 14 | 350 | - | - | - | 168 | - | - | - | - | - | 340 | 405 | 643 | 122 | 85 |
| 80-200/30/P | A | 100 | 80 | 125 | 65 | 183 | 16 | 180 | 250 | 125 | 95 | 345 | 280 | 250 | 14 | 368 | - | - | - | 168 | - | - | - | - | - | 358 | 430 | 661 | 151 | 87 |
| 80-200/40/P | A | 100 | 80 | 125 | 65 | 183 | 16 | 180 | 250 | 125 | 95 | 345 | 280 | 250 | 14 | 428 | - | - | - | 168 | - | - | - | - | - | 358 | 430 | 690 | 151 | 109 |
| 80-200/55A/P | A | 100 | 80 | 125 | 65 | 210 | 16 | 180 | 250 | 125 | 95 | 345 | 280 | 300 | 14 | 453 | - | - | - | 191 | - | - | - | - | - | 358 | 430 | 740 | 151 | 115 |
| 80-200/55/P | A | 100 | 80 | 125 | 65 | 210 | 16 | 180 | 250 | 125 | 95 | 345 | 280 | 300 | 14 | 453 | - | - | - | 191 | - | - | - | - | - | 358 | 430 | 740 | 151 | 115 |
| 80-250/55A/P | A | 100 | 80 | 125 | 80 | 210 | 21 | 200 | 280 | 160 | 120 | 400 | 315 | 300 | 20 | 453 | - | - | - | 191 | - | - | - | - | - | 400 | 480 | 740 | 152 | 118 |
| 80-250/55/P | A | 100 | 80 | 125 | 80 | 210 | 21 | 200 | 280 | 160 | 120 | 400 | 315 | 300 | 20 | 453 | - | - | - | 191 | - | - | - | - | - | 400 | 480 | 740 | 152 | 118 |
| 80-250/75/P | A | 100 | 80 | 125 | 80 | 210 | 21 | 200 | 280 | 160 | 120 | 400 | 315 | 300 | 20 | 453 | - | - | - | 191 | - | - | - | - | - | 400 | 480 | 740 | 152 | 122 |
| 80-250/110/P | B | 100 | 80 | 125 | 80 | 240 | 21 | 200 | 280 | 160 | 120 | 400 | 315 | 350 | 20 | 348 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 400 | 480 | 859 | 152 | 185 |
| 80-315/110A/P | B | 100 | 80 | 125 | 80 | 240 | 26 | 250 | 315 | 160 | 120 | 400 | 315 | 350 | 19 | 348 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 477 | 565 | 859 | 140 | 230 |
| 80-315/110/P | B | 100 | 80 | 125 | 80 | 240 | 26 | 250 | 315 | 160 | 120 | 400 | 315 | 350 | 19 | 348 | 254 | 49 | 304 | 240 | 210 | 304 | 160 | 5 | 15 | 477 | 565 | 859 | 140 | 230 |
| 80-315/150/P | B | 100 | 80 | 125 | 80 | 240 | 26 | 250 | 315 | 160 | 120 | 400 | 315 | 350 | 19 | 348 | 254 | 49 | 304 | 240 | 254 | 304 | 160 | 5 | 15 | 477 | 565 | 859 | 140 | 234 |
| 80-315/185/W | B | 100 | 80 | 125 | 80 | 240 | 26 | 250 | 315 | 160 | 120 | 400 | 315 | 350 | 19 | 361 | 279 | 78 | 350 | 279 | 241 | 294 | 180 | 28 | 15 | 477 | 565 | 919 | 140 | 273 |
| 80-315/220/W | B | 100 | 80 | 125 | 80 | 240 | 26 | 250 | 315 | 160 | 120 | 400 | 315 | 350 | 19 | 361 | 279 | 78 | 350 | 279 | 279 | 332 | 180 | 28 | 15 | 477 | 565 | 957 | 140 | 290 |
| 80-400/185/W | B | 100 | 80 | 125 | 80 | 254 | 26 | 280 | 355 | 160 | 120 | 435 | 355 | 350 | 19 | 375 | 279 | 78 | 350 | 279 | 241 | 294 | 180 | 28 | 15 | 539 | 635 | 933 | 140 | 313 |
| 80-400/220/W | B | 100 | 80 | 125 | 80 | 254 | 26 | 280 | 355 | 160 | 120 | 435 | 355 | 350 | 19 | 375 | 279 | 78 | 350 | 279 | 279 | 332 | 180 | 28 | 15 | 539 | 635 | 971 | 140 | 330 |
| 80-400/300/W | B | 100 | 80 | 125 | 80 | 254 | 26 | 280 | 355 | 160 | 120 | 435 | 355 | 400 | 19 | 387 | 318 | 82 | 385 | 317 | 305 | 370 | 200 | 30 | 19 | 539 | 635 | 1036 | 140 | 374 |
| 80-400/370/W | B | 100 | 80 | 125 | 80 | 284 | 26 | 280 | 355 | 160 | 120 | 435 | 355 | 450 | 19 | 433 | 356 | 80 | 436 | 384 | 286 | 412 | 225 | 34 | 19 | 539 | 664 | 1155 | 140 | 520 |

Per spessori e supporti vedere sezione accessori.


nscs-65-80-4p50_e_td

NOTA: Pompe con flange in accordo alle norme EN 1092-2; disponibile la versione ASME B16.5 su richiesta.

**NSCS 100, 125, 150, 200, 250 SERIES
DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES**

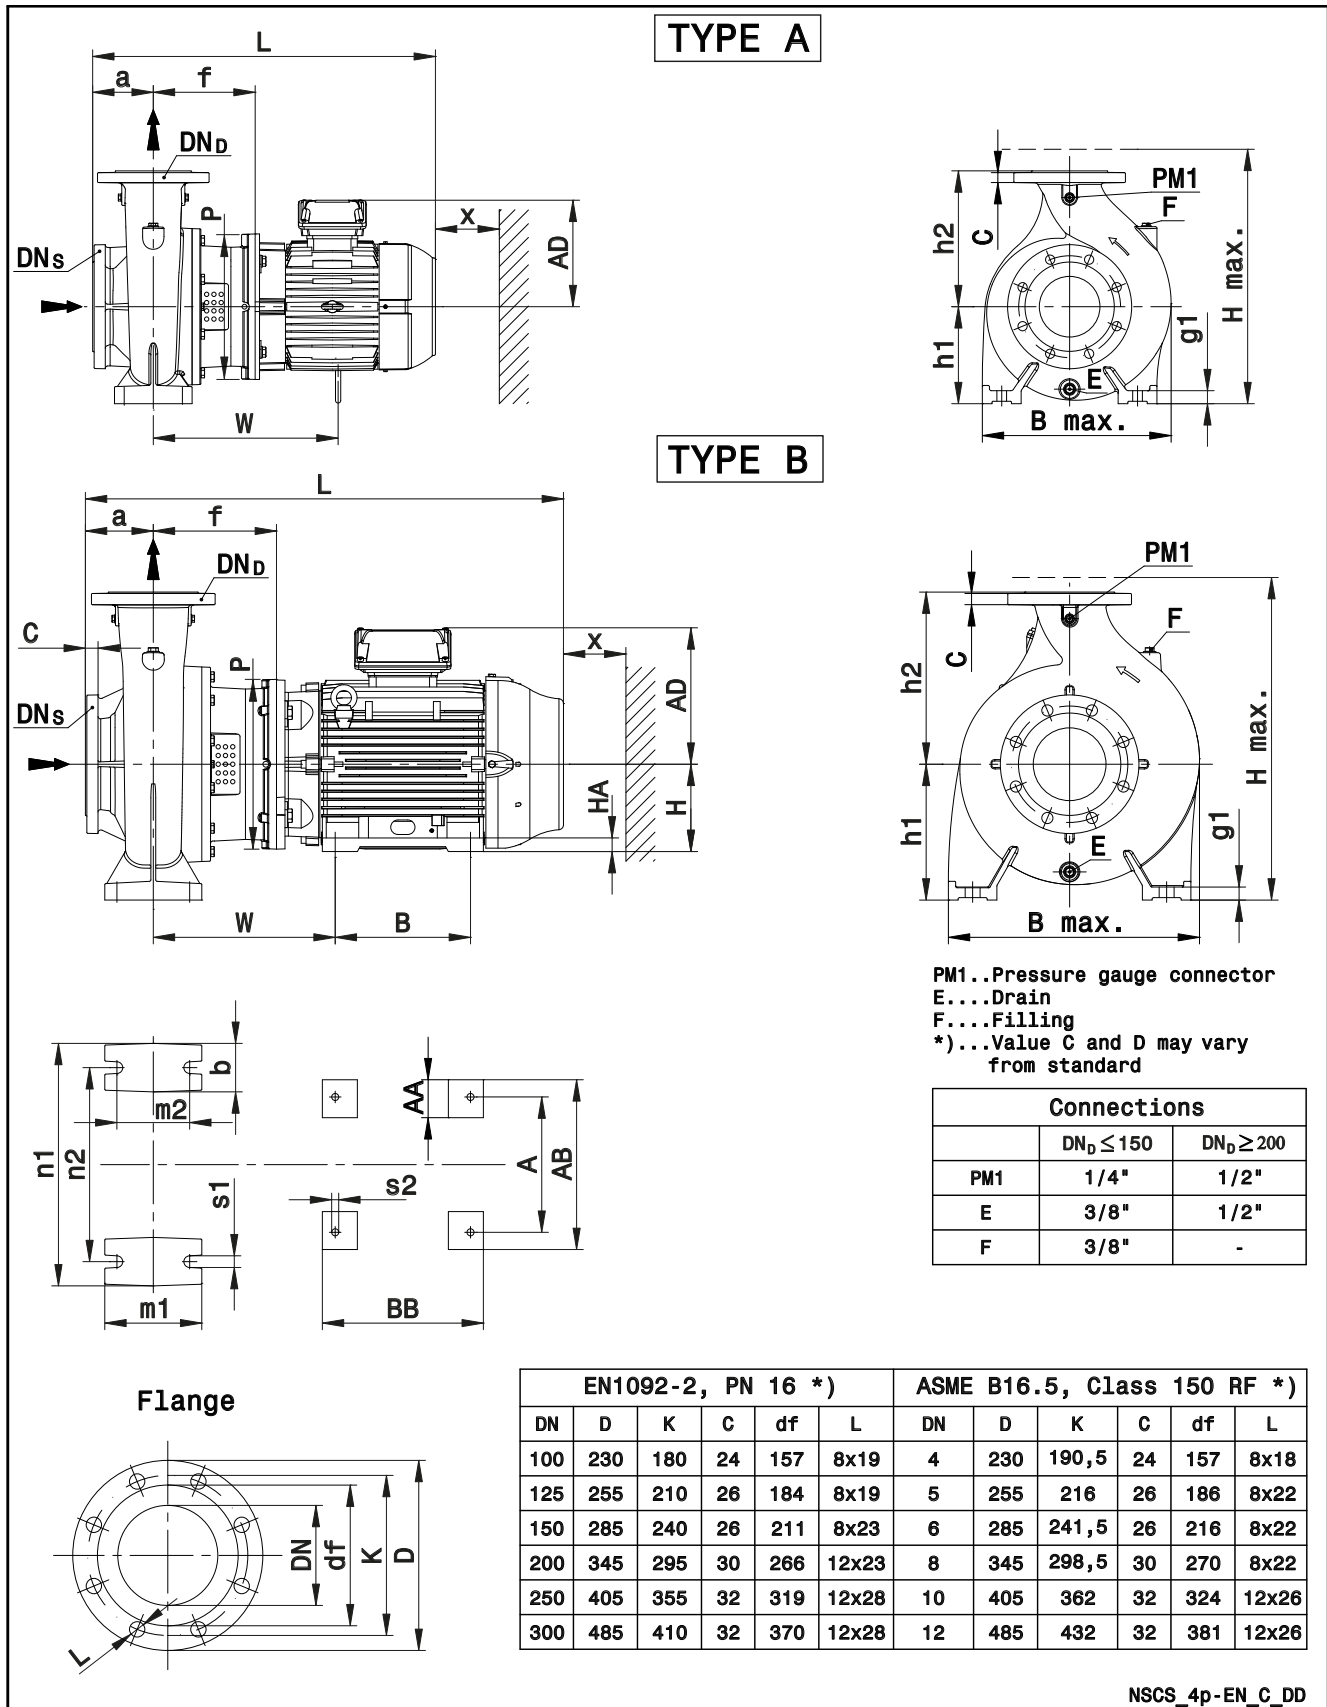

NSC 32, 40, 50, 65, 80 SERIES DIMENSIONS AND WEIGHTS (BARE SHAFT)

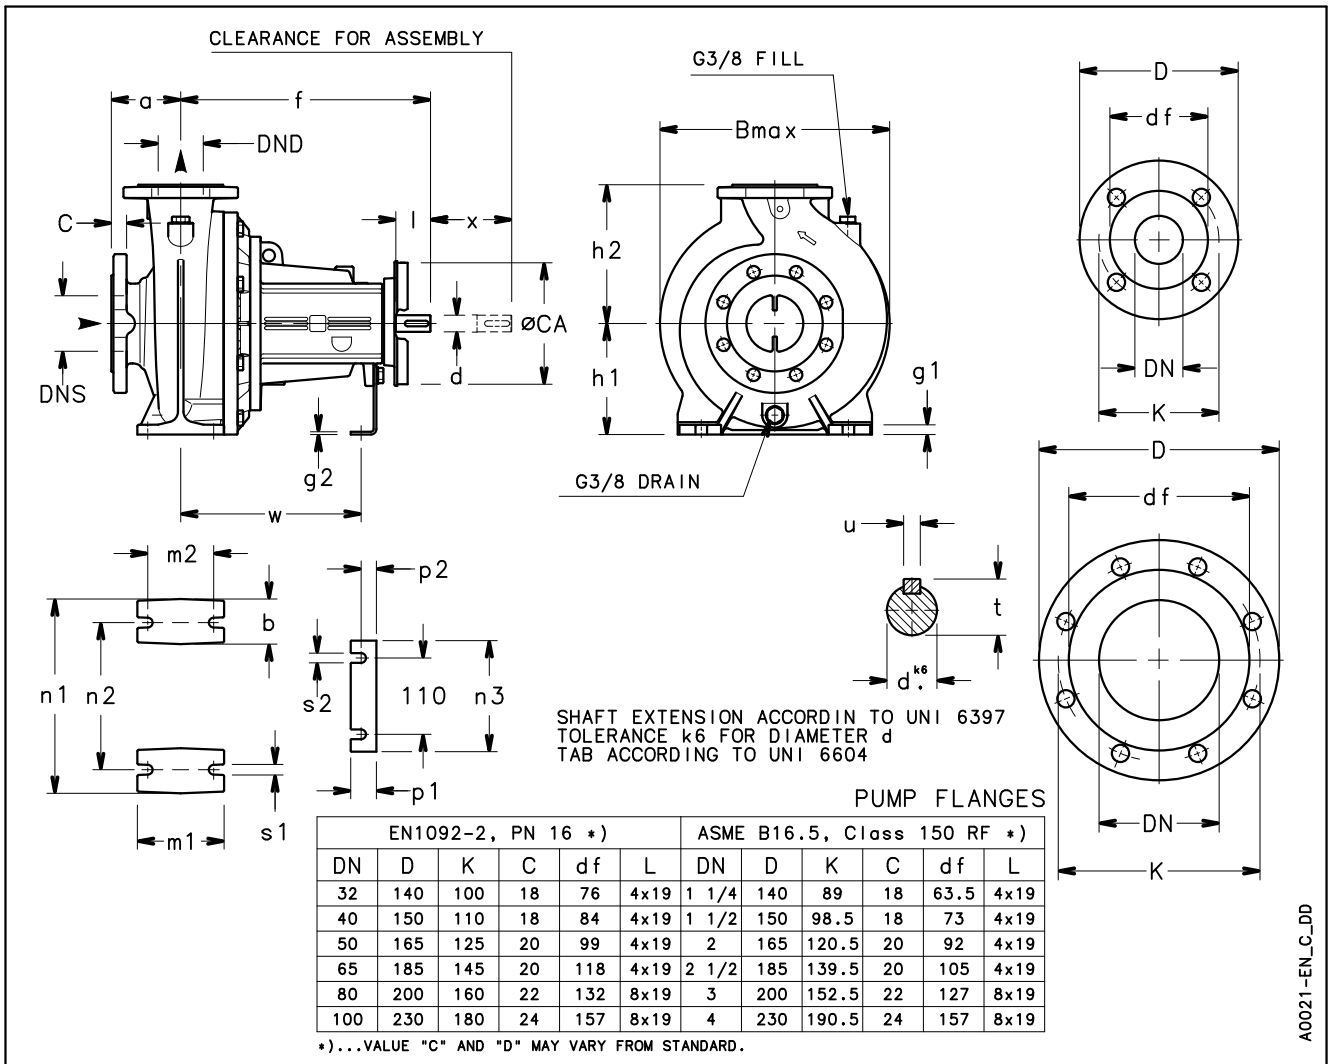


NSC 32, 40, 50, 65, 80 SERIES DIMENSIONS AND WEIGHTS (BARE SHAFT)

| PUMP TYPE NSC (BARE SHAFT) | DIMENSIONS (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | WEIGHT kg |
|----------------------------------|-----------------|-----|-----|----|-----|----|----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|-----|-------|----|-----|----|----|-----|-----|-----|--|--------------|
| | PUMP | | | | | | | | | | | | | | | | | | | SHAFT | | | | B | | x | | | |
| | DNS | DND | a | b | f | g1 | g2 | h1 | h2 | m1 | m2 | n1 | n2 | n3 | p1 | p2 | s1 | s2 | W | ØCA | d | l | t | u | max | | | | |
| 32-125 | 50 | 32 | 80 | 50 | 360 | 12 | 4 | 112 | 140 | 100 | 70 | 190 | 140 | 160 | 37 | 22 | 14 | 14 | 260 | 160 | 24 | 50 | 27 | 8 | 239 | 100 | 30 | | |
| 32-160 | 50 | 32 | 80 | 50 | 360 | 12 | 4 | 132 | 160 | 100 | 70 | 240 | 190 | 160 | 37 | 22 | 14 | 14 | 260 | 160 | 24 | 50 | 27 | 8 | 250 | 100 | 31 | | |
| 32-200 | 50 | 32 | 80 | 50 | 360 | 12 | 4 | 160 | 180 | 100 | 70 | 240 | 190 | 160 | 37 | 22 | 14 | 14 | 260 | 160 | 24 | 50 | 27 | 8 | 286 | 100 | 38 | | |
| 32-250 | 50 | 32 | 100 | 65 | 360 | 16 | 4 | 180 | 225 | 125 | 95 | 320 | 250 | 160 | 37 | 22 | 14 | 14 | 260 | 175 | 24 | 50 | 27 | 8 | 343 | 100 | 59 | | |
| 40-125 | 65 | 40 | 80 | 50 | 360 | 12 | 4 | 112 | 140 | 100 | 70 | 210 | 160 | 160 | 37 | 22 | 14 | 14 | 260 | 160 | 24 | 50 | 27 | 8 | 240 | 100 | 31 | | |
| 40-160 | 65 | 40 | 80 | 50 | 360 | 12 | 4 | 132 | 160 | 100 | 70 | 240 | 190 | 160 | 37 | 22 | 14 | 14 | 260 | 160 | 24 | 50 | 27 | 8 | 253 | 100 | 32 | | |
| 40-200 | 65 | 40 | 100 | 50 | 360 | 12 | 4 | 160 | 180 | 100 | 70 | 265 | 212 | 160 | 37 | 22 | 14 | 14 | 260 | 160 | 24 | 50 | 27 | 8 | 294 | 100 | 40 | | |
| 40-250 | 65 | 40 | 100 | 65 | 360 | 16 | 4 | 180 | 225 | 125 | 95 | 320 | 250 | 160 | 37 | 22 | 14 | 14 | 260 | 175 | 24 | 50 | 27 | 8 | 343 | 100 | 60 | | |
| 50-125 | 65 | 50 | 100 | 50 | 360 | 12 | 4 | 132 | 160 | 100 | 70 | 240 | 190 | 160 | 37 | 22 | 14 | 14 | 260 | 160 | 24 | 50 | 27 | 8 | 258 | 100 | 34 | | |
| 50-160 | 65 | 50 | 100 | 50 | 360 | 12 | 4 | 160 | 180 | 100 | 70 | 265 | 212 | 160 | 37 | 22 | 14 | 14 | 260 | 160 | 24 | 50 | 27 | 8 | 290 | 100 | 41 | | |
| 50-200 | 65 | 50 | 100 | 50 | 360 | 12 | 4 | 160 | 200 | 100 | 70 | 265 | 212 | 160 | 37 | 22 | 14 | 14 | 260 | 160 | 24 | 50 | 27 | 8 | 303 | 100 | 42 | | |
| 50-250 | 65 | 50 | 100 | 65 | 360 | 16 | 4 | 180 | 225 | 125 | 95 | 320 | 250 | 160 | 37 | 22 | 14 | 14 | 260 | 175 | 24 | 50 | 27 | 8 | 361 | 100 | 61 | | |
| 50-315 | 65 | 50 | 125 | 65 | 470 | 14 | 5 | 225 | 280 | 125 | 95 | 345 | 280 | 156 | 41 | 24 | 15 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 414 | 140 | 94 | | |
| 65-125 | 80 | 65 | 100 | 65 | 360 | 16 | 4 | 160 | 180 | 125 | 95 | 280 | 212 | 160 | 37 | 22 | 14 | 14 | 260 | 160 | 24 | 50 | 27 | 8 | 305 | 100 | 45 | | |
| 65-160 | 80 | 65 | 100 | 65 | 360 | 16 | 4 | 160 | 200 | 125 | 95 | 280 | 212 | 160 | 37 | 22 | 14 | 14 | 260 | 175 | 24 | 50 | 27 | 8 | 338 | 100 | 60 | | |
| 65-200 | 80 | 65 | 100 | 65 | 360 | 16 | 4 | 180 | 225 | 125 | 95 | 320 | 250 | 160 | 37 | 22 | 14 | 14 | 260 | 175 | 24 | 50 | 27 | 8 | 350 | 140 | 63 | | |
| 65-250 | 80 | 65 | 100 | 80 | 470 | 21 | 4 | 200 | 250 | 160 | 120 | 360 | 280 | 160 | 37 | 22 | 20 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 375 | 140 | 81 | | |
| 65-315 | 80 | 65 | 125 | 80 | 470 | 20 | 5 | 225 | 280 | 160 | 120 | 400 | 315 | 156 | 41 | 24 | 19 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 437 | 140 | 102 | | |
| 80-160 | 100 | 80 | 125 | 65 | 360 | 16 | 4 | 180 | 225 | 125 | 95 | 320 | 250 | 160 | 37 | 22 | 14 | 14 | 260 | 160 | 24 | 50 | 27 | 8 | 343 | 140 | 66 | | |
| 80-200 | 100 | 80 | 125 | 65 | 470 | 16 | 4 | 180 | 250 | 125 | 95 | 345 | 280 | 160 | 37 | 22 | 14 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 365 | 140 | 83 | | |
| 80-250 | 100 | 80 | 125 | 80 | 470 | 21 | 4 | 200 | 280 | 160 | 120 | 400 | 315 | 160 | 37 | 22 | 20 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 405 | 140 | 86 | | |
| 80-315 | 100 | 80 | 125 | 80 | 470 | 26 | 5 | 250 | 315 | 160 | 120 | 400 | 315 | 156 | 41 | 24 | 19 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 478 | 140 | 118 | | |
| 80-316 | 100 | 80 | 125 | 80 | 530 | 26 | 5 | 250 | 315 | 160 | 120 | 400 | 315 | 156 | 41 | 24 | 19 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 478 | 140 | 140 | | |
| 80-400 | 100 | 80 | 125 | 80 | 530 | 26 | 5 | 280 | 355 | 160 | 120 | 435 | 355 | 156 | 41 | 24 | 19 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 540 | 140 | 154 | | |

NOTE: Pumps with flanges according to EN 1092-2 as standard; available ASME B16.5 version on request.

Nsc32-80bs-en_b_id

**NSC 100, 125, 150, 200, 250, 300 SERIES
DIMENSIONS AND WEIGHTS (BARE SHAFT)**

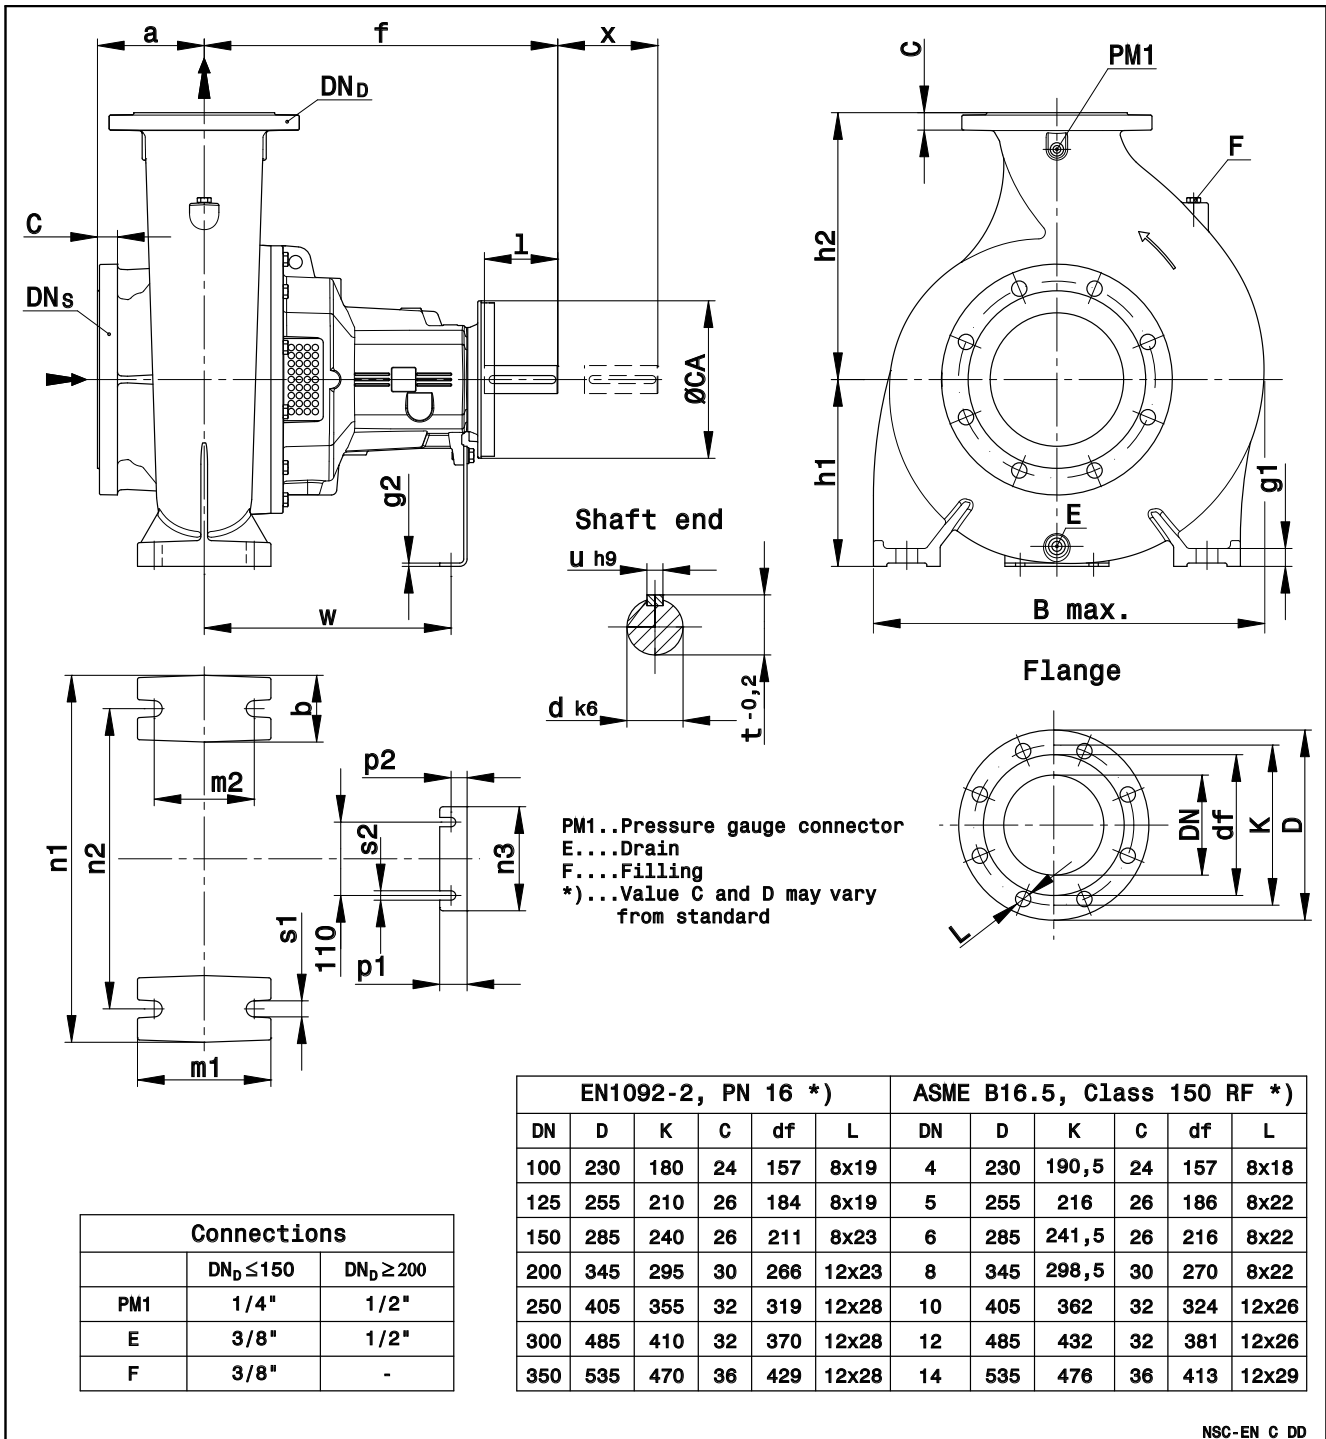

NSC-EN_C_DD



NSC 100, 125, 150, 200, 250, 300 SERIES DIMENSIONS AND WEIGHTS (BARE SHAFT)

| PUMP TYPE NSC (BARE SHAFT) | DIMENSIONS (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | WEIGHT (kg) G |
|----------------------------------|-----------------|-----|-----|-----|-----|----|----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|-----|-----|----|-----|----|----|----------|-----|---------------------|
| | DNS | DND | a | b | f | g1 | g2 | h1 | h2 | m1 | m2 | n1 | n2 | n3 | p1 | p2 | s1 | s2 | W | ØCA | d | l | t | u | B max | x | |
| 100-160 | 125 | 100 | 125 | 80 | 470 | 26 | 5 | 200 | 280 | 160 | 120 | 360 | 280 | 156 | 41 | 24 | 19 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 388 | 140 | 82 |
| 100-200 | 125 | 100 | 125 | 80 | 470 | 26 | 5 | 200 | 280 | 160 | 120 | 360 | 280 | 156 | 41 | 24 | 19 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 390 | 140 | 90 |
| 100-250 | 125 | 100 | 140 | 80 | 470 | 26 | 5 | 225 | 280 | 160 | 120 | 400 | 315 | 156 | 41 | 24 | 19 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 431 | 140 | 100 |
| 100-315 | 125 | 100 | 140 | 80 | 470 | 26 | 5 | 250 | 315 | 160 | 120 | 400 | 315 | 156 | 41 | 24 | 19 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 482 | 140 | 116 |
| 100-316 | 125 | 100 | 140 | 80 | 530 | 26 | 5 | 250 | 315 | 160 | 120 | 400 | 315 | 156 | 41 | 24 | 19 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 482 | 140 | 143 |
| 100-400 | 125 | 100 | 140 | 100 | 530 | 26 | 5 | 280 | 355 | 200 | 150 | 500 | 400 | 156 | 41 | 24 | 23 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 569 | 140 | 178 |
| 125-200 | 150 | 125 | 140 | 80 | 470 | 26 | 5 | 250 | 315 | 160 | 120 | 400 | 315 | 156 | 41 | 24 | 19 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 468 | 140 | 112 |
| 125-250 | 150 | 125 | 140 | 80 | 470 | 26 | 5 | 250 | 355 | 160 | 120 | 400 | 315 | 156 | 41 | 24 | 19 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 470 | 140 | 112 |
| 125-315 | 150 | 125 | 140 | 100 | 530 | 26 | 5 | 280 | 355 | 200 | 150 | 500 | 400 | 156 | 41 | 24 | 23 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 518 | 140 | 152 |
| 125-400 | 150 | 125 | 140 | 100 | 530 | 26 | 5 | 315 | 400 | 200 | 150 | 500 | 400 | 156 | 41 | 24 | 23 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 607 | 140 | 200 |
| 150-200 | 200 | 150 | 160 | 100 | 470 | 26 | 5 | 280 | 400 | 200 | 150 | 550 | 450 | 156 | 41 | 24 | 23 | 14 | 340 | 190 | 32 | 80 | 35 | 10 | 603 | 140 | 166 |
| 150-250 | 200 | 150 | 160 | 100 | 530 | 26 | 5 | 280 | 400 | 200 | 150 | 500 | 400 | 156 | 41 | 24 | 23 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 569 | 140 | 180 |
| 150-315 | 200 | 150 | 160 | 100 | 530 | 26 | 5 | 280 | 400 | 200 | 150 | 550 | 450 | 156 | 41 | 24 | 23 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 586 | 140 | 186 |
| 150-400 | 200 | 150 | 160 | 100 | 530 | 26 | 5 | 315 | 450 | 200 | 150 | 550 | 450 | 156 | 41 | 24 | 23 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 621 | 140 | 228 |
| 150-500 | 200 | 150 | 180 | 110 | 770 | 35 | 8 | 400 | 500 | 300 | 250 | 710 | 600 | 170 | 58 | 33 | 28 | 18 | 525 | 310 | 60 | 140 | 64 | 18 | 751 | 250 | 408 |
| 200-250 | 250 | 200 | 180 | 100 | 530 | 26 | 5 | 355 | 475 | 200 | 150 | 550 | 450 | 156 | 41 | 24 | 23 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 655 | 200 | 230 |
| 200-315 | 250 | 200 | 180 | 100 | 530 | 26 | 5 | 355 | 450 | 200 | 150 | 550 | 450 | 156 | 41 | 24 | 23 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 645 | 200 | 234 |
| 200-400 | 250 | 200 | 180 | 110 | 770 | 35 | 8 | 400 | 500 | 300 | 250 | 710 | 600 | 170 | 58 | 33 | 28 | 18 | 525 | 310 | 60 | 140 | 64 | 18 | 735 | 250 | 363 |
| 200-500 | 250 | 200 | 200 | 110 | 770 | 35 | 8 | 450 | 560 | 300 | 250 | 710 | 600 | 170 | 58 | 33 | 28 | 18 | 525 | 310 | 60 | 140 | 64 | 18 | 761 | 250 | 400 |
| 250-315 | 300 | 250 | 250 | 110 | 530 | 35 | 5 | 400 | 500 | 300 | 250 | 710 | 600 | 156 | 41 | 24 | 28 | 14 | 370 | 230 | 42 | 110 | 45 | 12 | 767 | 200 | 316 |
| 250-400 | 300 | 250 | 200 | 110 | 770 | 35 | 8 | 400 | 560 | 300 | 250 | 710 | 600 | 170 | 58 | 33 | 28 | 18 | 525 | 310 | 60 | 140 | 64 | 18 | 754 | 250 | 400 |
| 250-500 | 300 | 250 | 200 | 110 | 770 | 35 | 8 | 450 | 670 | 300 | 250 | 710 | 600 | 170 | 58 | 33 | 28 | 18 | 525 | 310 | 60 | 140 | 64 | 18 | 776 | 250 | 451 |
| 300-350 | 350 | 300 | 250 | 130 | 800 | 41 | 8 | 450 | 600 | 350 | 290 | 800 | 670 | 170 | 58 | 33 | 32 | 18 | 555 | 310 | 60 | 140 | 64 | 18 | 895 | 300 | 544 |
| 300-400 | 350 | 300 | 250 | 130 | 800 | 41 | 8 | 450 | 600 | 350 | 290 | 800 | 670 | 170 | 58 | 33 | 32 | 18 | 555 | 310 | 60 | 140 | 64 | 18 | 854 | 300 | 548 |
| 300-450 | 350 | 300 | 250 | 130 | 800 | 41 | 8 | 475 | 630 | 350 | 290 | 800 | 670 | 170 | 58 | 33 | 32 | 18 | 555 | 310 | 60 | 140 | 64 | 18 | 873 | 300 | 578 |

NOTE: Pumps with flanges according to EN 1092-2 as standard; available ASME B16.5 version on request.

Nsc100-300bs-en_b_td

NSCF 32 SERIES (MOUNTED ON BASE) DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

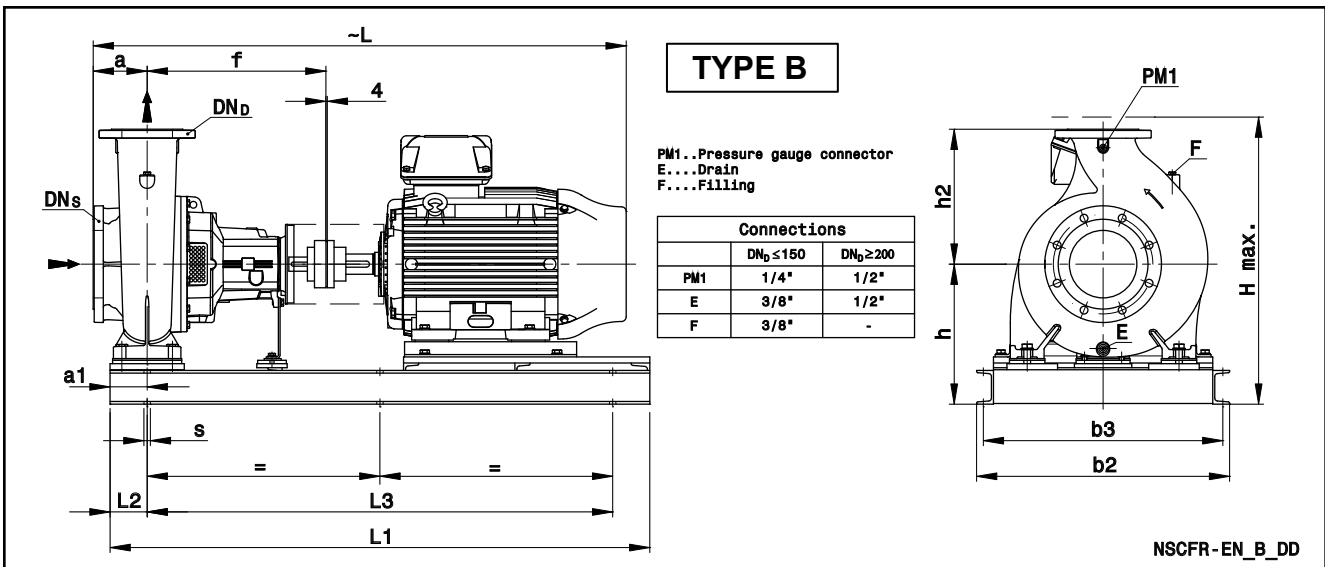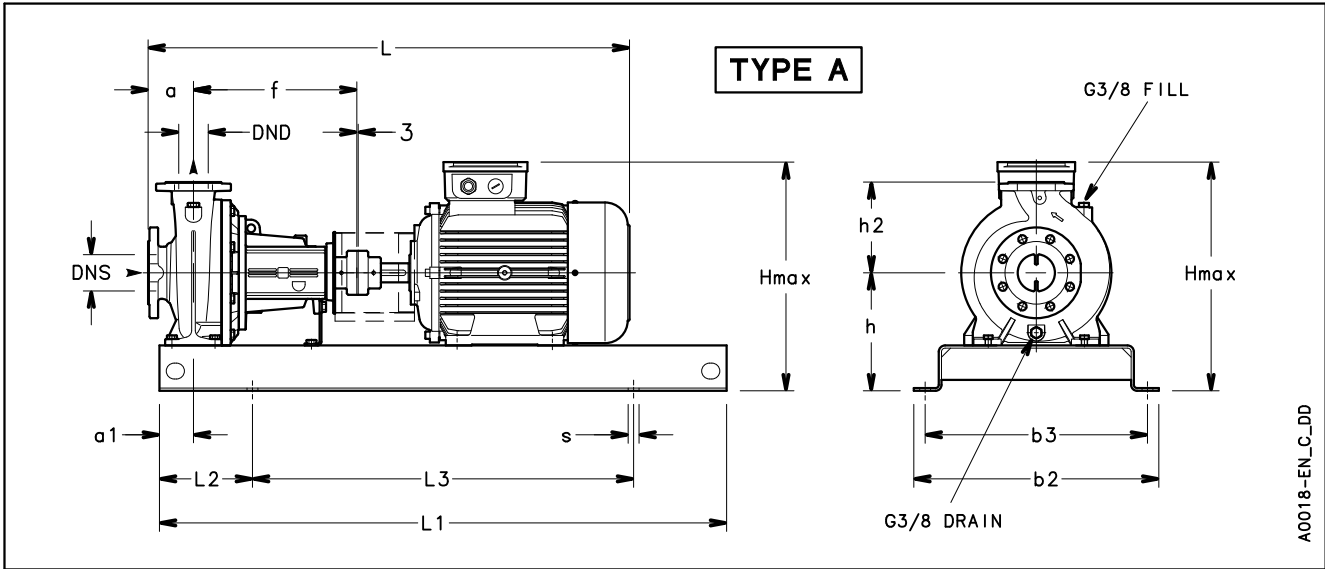

| PUMP TYPE NSCF..2 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | H max | s FOR SCREWS | WEIGHT kg | COUPLING TYPE |
|----------------------|------|-----------------|-----|-----|----|-----|-----|-----|-----|-----|------|------|-----|-----|----------|-----------------|--------------|------------------|
| | | DNS | DND | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | | | | |
| 32-125/11/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 746 | 800 | 130 | 540 | 352 | 4xØ19 (M16) | 65 | B68B |
| 32-125/15/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 791 | 900 | 150 | 600 | 352 | 4xØ19 (M16) | 75 | B68C |
| 32-125/22/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 791 | 900 | 150 | 600 | 352 | 4xØ19 (M16) | 77 | B68C |
| 32-125/30/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 822 | 900 | 150 | 600 | 366 | 4xØ19 (M16) | 84 | B80A |
| 32-160/22/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 791 | 900 | 150 | 600 | 392 | 4xØ19 (M16) | 78 | B68C |
| 32-160/30/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 822 | 900 | 150 | 600 | 392 | 4xØ19 (M16) | 85 | B80A |
| 32-160/40/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 825 | 900 | 150 | 600 | 400 | 4xØ19 (M16) | 90 | B80A |
| 32-160/55/P | A | 50 | 32 | 80 | 60 | 450 | 400 | 360 | 232 | 160 | 890 | 1000 | 170 | 660 | 423 | 4xØ24 (M20) | 119 | B95A |
| 32-200/30/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 260 | 180 | 822 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 92 | B80A |
| 32-200/40/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 260 | 180 | 825 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 97 | B80A |
| 32-200/55/P | A | 50 | 32 | 80 | 60 | 450 | 400 | 360 | 260 | 180 | 890 | 1000 | 170 | 660 | 451 | 4xØ24 (M20) | 126 | B95A |
| 32-200/75/P | A | 50 | 32 | 80 | 60 | 450 | 400 | 360 | 260 | 180 | 890 | 1000 | 170 | 660 | 451 | 4xØ24 (M20) | 130 | B95A |
| 32-250/75/P | A | 50 | 32 | 100 | 75 | 490 | 440 | 360 | 280 | 225 | 910 | 1120 | 190 | 740 | 505 | 4xØ24 (M20) | 157 | B95A |
| 32-250/110A/P | A | 50 | 32 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 187 | B95B |
| 32-250/110/P | A | 50 | 32 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 187 | B95B |
| 32-250/150/P | A | 50 | 32 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 204 | B95B |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscf32_2p50-en_d_td

Available ASME B16.5 version on request. For flanges dimensions see drawing.

NSCF 40, 50, 65 SERIES (MOUNTED ON BASE) DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES



| PUMP TYPE NSCF..2 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | WEIGHT kg | COUPLING TYPE | |
|----------------------|------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|-----|------|----------|--------------|------------------|-----------------|
| | | DNS | DND | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | H max | | | s FOR SCREWS |
| 40-125/15/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 791 | 900 | 150 | 600 | 352 | 4xØ19 (M16) | 76 | B68C |
| 40-125/22/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 791 | 900 | 150 | 600 | 352 | 4xØ19 (M16) | 78 | B68C |
| 40-125/30/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 822 | 900 | 150 | 600 | 366 | 4xØ19 (M16) | 85 | B80A |
| 40-125/40/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 825 | 900 | 150 | 600 | 380 | 4xØ19 (M16) | 90 | B80A |
| 40-160/30/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 822 | 900 | 150 | 600 | 392 | 4xØ19 (M16) | 86 | B80A |
| 40-160/40/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 825 | 900 | 150 | 600 | 400 | 4xØ19 (M16) | 91 | B80A |
| 40-160/55/P | A | 65 | 40 | 80 | 60 | 450 | 400 | 360 | 232 | 160 | 890 | 1000 | 170 | 660 | 423 | 4xØ24 (M20) | 120 | B95A |
| 40-160/75/P | A | 65 | 40 | 80 | 60 | 450 | 400 | 360 | 232 | 160 | 890 | 1000 | 170 | 660 | 423 | 4xØ24 (M20) | 124 | B95A |
| 40-200/55/P | A | 65 | 40 | 100 | 60 | 450 | 400 | 360 | 260 | 180 | 910 | 1000 | 170 | 660 | 451 | 4xØ24 (M20) | 128 | B95A |
| 40-200/75/P | A | 65 | 40 | 100 | 60 | 450 | 400 | 360 | 260 | 180 | 910 | 1000 | 170 | 660 | 451 | 4xØ24 (M20) | 132 | B95A |
| 40-200/110A/P | A | 65 | 40 | 100 | 60 | 490 | 440 | 360 | 260 | 180 | 1067 | 1120 | 190 | 740 | 500 | 4xØ24 (M20) | 161 | B95B |
| 40-200/110/P | A | 65 | 40 | 100 | 60 | 490 | 440 | 360 | 260 | 180 | 1067 | 1120 | 190 | 740 | 500 | 4xØ24 (M20) | 161 | B95B |
| 40-250/110A/P | A | 65 | 40 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 188 | B95B |
| 40-250/110/P | A | 65 | 40 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 188 | B95B |
| 40-250/150/P | A | 65 | 40 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 205 | B95B |
| 40-250/185/P | A | 65 | 40 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 218 | B95B |
| 40-250/220/W | A | 65 | 40 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1127 | 1250 | 205 | 840 | 559 | 4xØ24 (M20) | 285 | B110A |
| 50-125/30/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 232 | 160 | 842 | 900 | 150 | 600 | 392 | 4xØ19 (M16) | 88 | B80A |
| 50-125/40/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 232 | 160 | 845 | 900 | 150 | 600 | 400 | 4xØ19 (M16) | 93 | B80A |
| 50-125/55/P | A | 65 | 50 | 100 | 60 | 450 | 400 | 360 | 232 | 160 | 910 | 1000 | 170 | 660 | 423 | 4xØ24 (M20) | 122 | B95A |
| 50-125/75/P | A | 65 | 50 | 100 | 60 | 450 | 400 | 360 | 232 | 160 | 910 | 1000 | 170 | 660 | 423 | 4xØ24 (M20) | 126 | B95A |
| 50-160/55/P | A | 65 | 50 | 100 | 60 | 450 | 400 | 360 | 260 | 180 | 910 | 1000 | 170 | 660 | 451 | 4xØ24 (M20) | 129 | B95A |
| 50-160/75/P | A | 65 | 50 | 100 | 60 | 450 | 400 | 360 | 260 | 180 | 910 | 1000 | 170 | 660 | 451 | 4xØ24 (M20) | 133 | B95A |
| 50-160/110A/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 180 | 1067 | 1120 | 190 | 740 | 500 | 4xØ24 (M20) | 162 | B95B |
| 50-160/110/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 180 | 1067 | 1120 | 190 | 740 | 500 | 4xØ24 (M20) | 162 | B95B |
| 50-200/110A/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 200 | 1067 | 1120 | 190 | 740 | 500 | 4xØ24 (M20) | 163 | B95B |
| 50-200/110/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 200 | 1067 | 1120 | 190 | 740 | 500 | 4xØ24 (M20) | 163 | B95B |
| 50-200/150/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 200 | 1067 | 1120 | 190 | 740 | 500 | 4xØ24 (M20) | 180 | B95B |
| 50-200/185/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 200 | 1067 | 1120 | 190 | 740 | 500 | 4xØ24 (M20) | 193 | B95B |
| 50-250/150/P | A | 65 | 50 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 206 | B95B |
| 50-250/185/P | A | 65 | 50 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 219 | B95B |
| 50-250/220/W | A | 65 | 50 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1127 | 1250 | 205 | 840 | 559 | 4xØ24 (M20) | 286 | B110A |
| 50-250/300/W | A | 65 | 50 | 100 | 75 | 610 | 550 | 360 | 310 | 225 | 1230 | 1400 | 230 | 940 | 627 | 4xØ28 (M24) | 368 | B125D |
| 50-315/370/W | B | 65 | 50 | 125 | 110 | 560 | 520 | 470 | 355 | 280 | 1366 | 1350 | 110 | 1130 | 672 | 6xØ19 (M16) | 462 | B125B |
| 50-315/450/W | B | 65 | 50 | 125 | 110 | 560 | 520 | 470 | 355 | 280 | 1455 | 1350 | 110 | 1130 | 739 | 6xØ19 (M16) | 607 | B125B |
| 50-315/550/W | B | 65 | 50 | 125 | 110 | 750 | 710 | 470 | 405 | 280 | 1564 | 1550 | 110 | 1330 | 807 | 6xØ19 (M16) | 733 | B140A |
| 50-315/750/W | B | 65 | 50 | 125 | 110 | 750 | 710 | 470 | 405 | 280 | 1670 | 1550 | 110 | 1330 | 877 | 6xØ19 (M16) | 960 | B160A |
| 65-125/40/P | A | 80 | 65 | 100 | 75 | 390 | 350 | 360 | 260 | 180 | 845 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 104 | B80A |
| 65-125/55/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 180 | 910 | 1000 | 170 | 660 | 451 | 4xØ24 (M20) | 133 | B95A |
| 65-125/75/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 180 | 910 | 1000 | 170 | 660 | 451 | 4xØ24 (M20) | 137 | B95A |
| 65-125/110A/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 260 | 180 | 1067 | 1120 | 190 | 740 | 500 | 4xØ24 (M20) | 167 | B95B |
| 65-125/110/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 260 | 180 | 1067 | 1120 | 190 | 740 | 500 | 4xØ24 (M20) | 167 | B95B |
| 65-160/75/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 200 | 910 | 1000 | 170 | 660 | 460 | 4xØ24 (M20) | 158 | B95A |
| 65-160/110A/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 260 | 200 | 1067 | 1250 | 205 | 840 | 500 | 4xØ24 (M20) | 188 | B95B |
| 65-160/110/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 260 | 200 | 1067 | 1250 | 205 | 840 | 500 | 4xØ24 (M20) | 188 | B95B |
| 65-160/150/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 260 | 200 | 1067 | 1250 | 205 | 840 | 500 | 4xØ24 (M20) | 205 | B95B |
| 65-160/185/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 260 | 200 | 1067 | 1250 | 205 | 840 | 500 | 4xØ24 (M20) | 218 | B95B |
| 65-200/110/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 191 | B95B |
| 65-200/150/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 208 | B95B |
| 65-200/185/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1067 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 221 | B95B |
| 65-200/220/W | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1127 | 1250 | 205 | 840 | 559 | 4xØ24 (M20) | 288 | B110A |
| 65-200/300/W | A | 80 | 65 | 100 | 75 | 610 | 550 | 360 | 310 | 225 | 1230 | 1400 | 230 | 940 | 627 | 4xØ28 (M24) | 370 | B125D |
| 65-250/220/W | A | 80 | 65 | 100 | 90 | 540 | 490 | 470 | 310 | 250 | 1237 | 1250 | 205 | 840 | 589 | 4xØ24 (M20) | 306 | B110B |
| 65-250/300/W | A | 80 | 65 | 100 | 90 | 610 | 550 | 470 | 310 | 250 | 1340 | 1400 | 230 | 940 | 627 | 4xØ28 (M24) | 388 | B125B |
| 65-250/370/W | A | 80 | 65 | 100 | 90 | 610 | 550 | 470 | 310 | 250 | 1340 | 1400 | 230 | 940 | 627 | 4xØ28 (M24) | 409 | B125B |
| 65-250/450/W | A | 80 | 65 | 100 | 90 | 610 | 550 | 470 | 365 | 250 | 1429 | 1400 | 230 | 940 | 749 | 4xØ28 (M24) | 560 | B125B |
| 65-250/550/W | A | 80 | 65 | 100 | 90 | 660 | 600 | 470 | 390 | 250 | 1538 | 1600 | 270 | 1060 | 792 | 4xØ28 (M24) | 669 | B140A |
| 65-315/550/W | B | 80 | 65 | 125 | 110 | 750 | 710 | 470 | 405 | 280 | 1564 | 1550 | 110 | 1330 | 807 | 6xØ19 (M16) | 740 | B140A |
| 65-315/750/W | B | 80 | 65 | 125 | 110 | 750 | 710 | 470 | 390 | 280 | 1670 | 1550 | 110 | 1330 | 862 | 6xØ19 (M16) | 958 | B160A |
| 65-315/900/W | B | 80 | 65 | 125 | 110 | 750 | 710 | 470 | 390 | 280 | 1670 | 1550 | 110 | 1330 | 862 | 6xØ19 (M16) | 993 | B160A |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscf40-65-2p50-en_d_td

Available ASME B16.5 version on request. For flanges dimensions see drawing.

**NSCF 80, 100, 125 SERIES (MOUNTED ON BASE)
DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES**

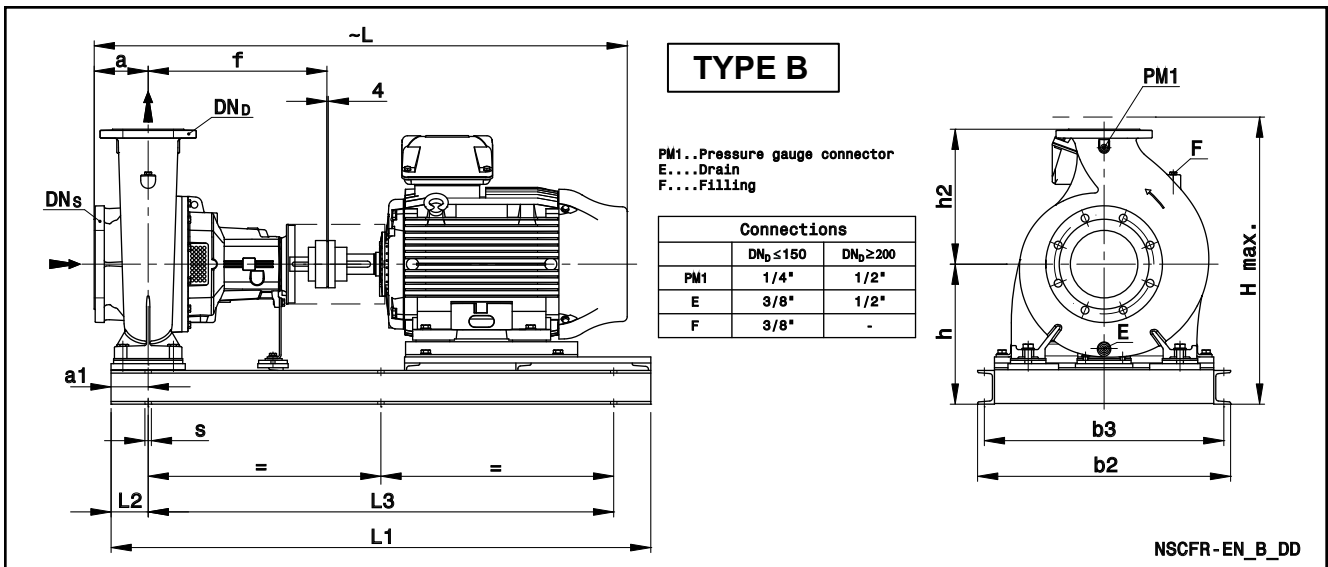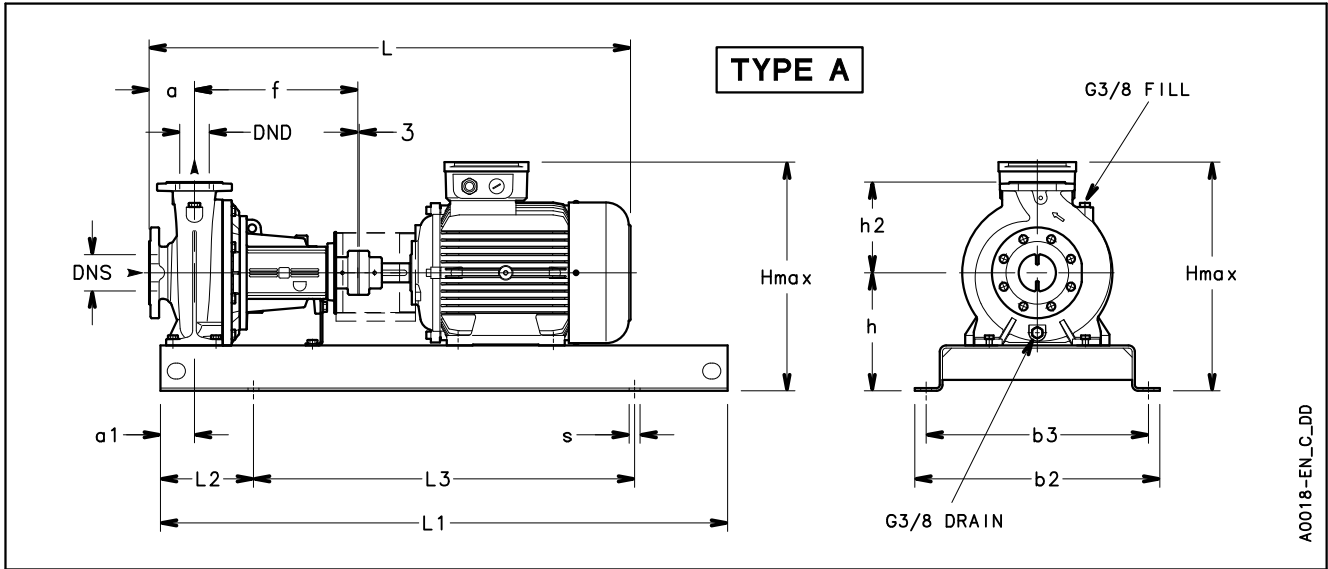

NSCF 80, 100, 125 SERIES (MOUNTED ON BASE) DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES



| PUMP TYPE NSCF..2 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | H max | s FOR SCREWS | WEIGHT (kg) G | COUPLING TYPE |
|----------------------|------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|-----|------|------|-------------|-----------------|---------------------|------------------|
| | | DNS | DND | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | | | | | |
| 80-160/110/P | A | 100 | 80 | 125 | 75 | 540 | 490 | 360 | 280 | 225 | 1092 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 194 | B95B | |
| 80-160/150/P | A | 100 | 80 | 125 | 75 | 540 | 490 | 360 | 280 | 225 | 1092 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 211 | B95B | |
| 80-160/185/P | A | 100 | 80 | 125 | 75 | 540 | 490 | 360 | 280 | 225 | 1092 | 1250 | 205 | 840 | 520 | 4xØ24 (M20) | 224 | B95B | |
| 80-160/220/W | A | 100 | 80 | 125 | 75 | 540 | 490 | 360 | 280 | 225 | 1152 | 1250 | 205 | 840 | 559 | 4xØ24 (M20) | 291 | B110A | |
| 80-200/220/W | A | 100 | 80 | 125 | 75 | 540 | 490 | 470 | 280 | 250 | 1262 | 1250 | 205 | 840 | 559 | 4xØ24 (M20) | 308 | B110B | |
| 80-200/300/W | A | 100 | 80 | 125 | 75 | 610 | 550 | 470 | 310 | 250 | 1365 | 1400 | 230 | 940 | 627 | 4xØ28 (M24) | 390 | B125B | |
| 80-200/370/W | A | 100 | 80 | 125 | 75 | 610 | 550 | 470 | 310 | 250 | 1365 | 1400 | 230 | 940 | 627 | 4xØ28 (M24) | 411 | B125B | |
| 80-200/450/W | A | 100 | 80 | 125 | 75 | 610 | 550 | 470 | 365 | 250 | 1454 | 1400 | 230 | 940 | 749 | 4xØ28 (M24) | 562 | B125B | |
| 80-250/370/W | A | 100 | 80 | 125 | 90 | 610 | 550 | 470 | 310 | 280 | 1365 | 1400 | 230 | 940 | 627 | 4xØ28 (M24) | 414 | B125B | |
| 80-250/450/W | A | 100 | 80 | 125 | 90 | 610 | 550 | 470 | 365 | 280 | 1454 | 1400 | 230 | 940 | 749 | 4xØ28 (M24) | 565 | B125B | |
| 80-250/550/W | A | 100 | 80 | 125 | 90 | 660 | 600 | 470 | 390 | 280 | 1563 | 1600 | 270 | 1060 | 792 | 4xØ28 (M24) | 674 | B140A | |
| 80-250/750/W | A | 100 | 80 | 125 | 90 | 730 | 670 | 470 | 420 | 280 | 1669 | 1800 | 300 | 1200 | 892 | 4xØ28 (M24) | 942 | B160A | |
| 80-316/900/W | B | 100 | 80 | 125 | 110 | 750 | 710 | 530 | 440 | 315 | 1730 | 1600 | 110 | 1380 | 912 | 6xØ19 (M16) | 1061 | B160B | |
| 80-316/1100/W | B | 100 | 80 | 125 | 110 | 860 | 810 | 530 | 505 | 315 | 1903 | 1850 | 110 | 1630 | 1035 | 6xØ26 (M20) | 1340 | B160B | |
| 80-316/1320/W | B | 100 | 80 | 125 | 110 | 860 | 810 | 530 | 505 | 315 | 1903 | 1850 | 110 | 1630 | 1035 | 6xØ26 (M20) | 1426 | B160B | |
| 80-316/1600/W | B | 100 | 80 | 125 | 110 | 860 | 810 | 530 | 505 | 315 | 1903 | 1850 | 110 | 1630 | 1035 | 6xØ26 (M20) | 1507 | B160B | |
| 100-160/150/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1203 | 1330 | 110 | 1110 | 645 | 6xØ19 (M16) | 304 | B95E | |
| 100-160/185/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1203 | 1330 | 110 | 1110 | 645 | 6xØ19 (M16) | 312 | B95E | |
| 100-160/220/W | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1263 | 1330 | 110 | 1110 | 665 | 6xØ19 (M16) | 385 | B110B | |
| 100-160/300/W | B | 125 | 100 | 125 | 110 | 560 | 520 | 470 | 330 | 280 | 1366 | 1350 | 110 | 1130 | 647 | 6xØ19 (M16) | 422 | B125B | |
| 100-200/300/W | B | 125 | 100 | 125 | 110 | 560 | 520 | 470 | 330 | 280 | 1366 | 1350 | 110 | 1130 | 647 | 6xØ19 (M16) | 430 | B125B | |
| 100-200/370/W | B | 125 | 100 | 125 | 110 | 560 | 520 | 470 | 330 | 280 | 1366 | 1350 | 110 | 1130 | 647 | 6xØ19 (M16) | 451 | B125B | |
| 100-200/450/W | B | 125 | 100 | 125 | 110 | 560 | 520 | 470 | 355 | 280 | 1455 | 1350 | 110 | 1130 | 739 | 6xØ19 (M16) | 610 | B125B | |
| 100-200/550/W | B | 125 | 100 | 125 | 110 | 750 | 710 | 470 | 405 | 280 | 1564 | 1550 | 110 | 1330 | 807 | 6xØ19 (M16) | 735 | B140A | |
| 100-250/450/W | B | 125 | 100 | 140 | 110 | 560 | 520 | 470 | 355 | 280 | 1470 | 1350 | 110 | 1130 | 739 | 6xØ19 (M16) | 612 | B125B | |
| 100-250/550/W | B | 125 | 100 | 140 | 110 | 750 | 710 | 470 | 405 | 280 | 1579 | 1550 | 110 | 1330 | 807 | 6xØ19 (M16) | 738 | B140A | |
| 100-250/750/W | B | 125 | 100 | 140 | 110 | 750 | 710 | 470 | 390 | 280 | 1685 | 1550 | 110 | 1330 | 862 | 6xØ19 (M16) | 956 | B160A | |
| 100-250/900/W | B | 125 | 100 | 140 | 110 | 750 | 710 | 470 | 390 | 280 | 1685 | 1550 | 110 | 1330 | 862 | 6xØ19 (M16) | 991 | B160A | |
| 100-316/1100/W | B | 125 | 100 | 140 | 110 | 860 | 810 | 530 | 505 | 315 | 1918 | 1850 | 110 | 1630 | 1035 | 6xØ26 (M20) | 1343 | B160B | |
| 100-316/1320/W | B | 125 | 100 | 140 | 110 | 860 | 810 | 530 | 505 | 315 | 1918 | 1850 | 110 | 1630 | 1035 | 6xØ26 (M20) | 1429 | B160B | |
| 100-316/1600/W | B | 125 | 100 | 140 | 110 | 860 | 810 | 530 | 505 | 315 | 1918 | 1850 | 110 | 1630 | 1035 | 6xØ26 (M20) | 1510 | B160B | |
| 125-200/450/W | B | 150 | 125 | 140 | 110 | 560 | 520 | 470 | 355 | 315 | 1470 | 1350 | 110 | 1130 | 739 | 6xØ19 (M16) | 617 | B125B | |
| 125-200/550/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 470 | 405 | 315 | 1579 | 1550 | 110 | 1330 | 807 | 6xØ19 (M16) | 743 | B140A | |
| 125-200/750/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 470 | 405 | 315 | 1685 | 1550 | 110 | 1330 | 877 | 6xØ19 (M16) | 970 | B160A | |
| 125-200/900/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 470 | 405 | 315 | 1685 | 1550 | 110 | 1330 | 877 | 6xØ19 (M16) | 1005 | B160A | |
| 125-315/1100/W | B | 150 | 125 | 140 | 110 | 860 | 810 | 530 | 505 | 355 | 1918 | 1850 | 110 | 1630 | 1035 | 6xØ26 (M20) | 1344 | B160B | |
| 125-315/1320/W | B | 150 | 125 | 140 | 110 | 860 | 810 | 530 | 505 | 355 | 1918 | 1850 | 110 | 1630 | 1035 | 6xØ26 (M20) | 1430 | B160B | |
| 125-315/1600/W | B | 150 | 125 | 140 | 110 | 860 | 810 | 530 | 505 | 355 | 1918 | 1850 | 110 | 1630 | 1035 | 6xØ26 (M20) | 1511 | B160B | |
| 125-315/2000/W | B | 150 | 125 | 140 | 110 | 860 | 810 | 530 | 505 | 355 | 2027 | 1850 | 110 | 1630 | 1080 | 6xØ26 (M20) | 1692 | B180A | |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscf80-125-2p50-en_c_td

Available ASME B16.5 version on request. For flanges dimensions see drawing.

NSCF 32 SERIES (MOUNTED ON BASE) DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

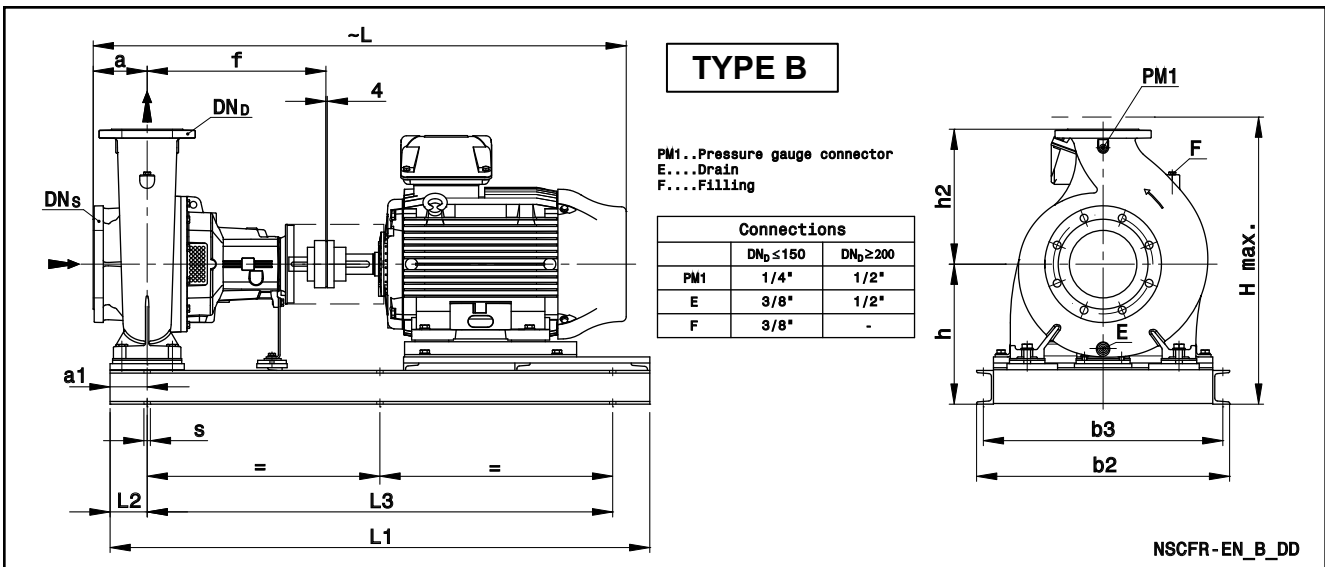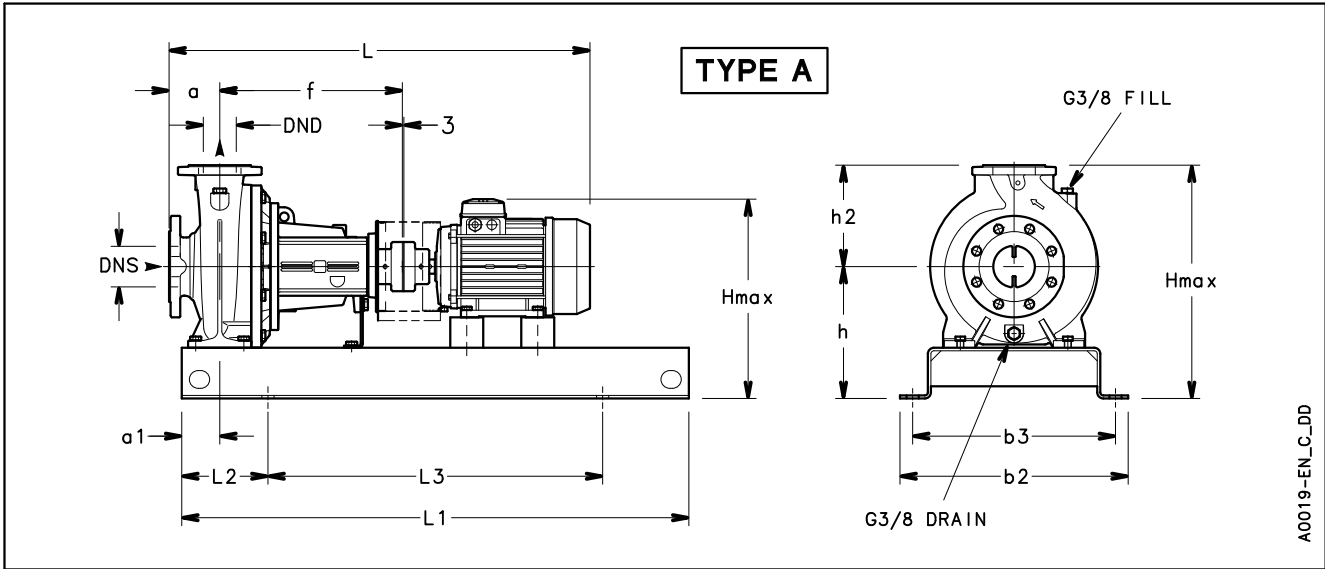

| PUMP TYPE NSCF..4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | H max | s FOR SCREWS | WEIGHT kg | COUPLING TYPE |
|----------------------|------|-----------------|-----------------|-----|----|-----|-----|-----|-----|-----|-----|------|-----|-----|-----|-------------|-----------------|--------------|------------------|
| | | DN _S | DN _D | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | | | | | |
| 32-125/02B/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 704 | 800 | 130 | 540 | 352 | 4xØ19 (M16) | 61 | B68A | |
| 32-125/02A/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 704 | 800 | 130 | 540 | 352 | 4xØ19 (M16) | 61 | B68A | |
| 32-125/02/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 704 | 800 | 130 | 540 | 352 | 4xØ19 (M16) | 61 | B68A | |
| 32-125/03/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 704 | 800 | 130 | 540 | 352 | 4xØ19 (M16) | 62 | B68A | |
| 32-160/02/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 704 | 800 | 130 | 540 | 392 | 4xØ19 (M16) | 62 | B68A | |
| 32-160/03/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 704 | 800 | 130 | 540 | 392 | 4xØ19 (M16) | 63 | B68A | |
| 32-160/05A/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 746 | 800 | 130 | 540 | 392 | 4xØ19 (M16) | 66 | B68B | |
| 32-160/05/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 746 | 800 | 130 | 540 | 392 | 4xØ19 (M16) | 66 | B68B | |
| 32-200/05A/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 260 | 180 | 746 | 800 | 130 | 540 | 440 | 4xØ19 (M16) | 73 | B68B | |
| 32-200/05/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 260 | 180 | 746 | 800 | 130 | 540 | 440 | 4xØ19 (M16) | 73 | B68B | |
| 32-200/07/X | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 260 | 180 | 714 | 800 | 130 | 540 | 440 | 4xØ19 (M16) | 76 | B68B | |
| 32-200/11/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 260 | 180 | 791 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 85 | B68C | |
| 32-250/11A/P | A | 50 | 32 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 811 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 112 | B68C | |
| 32-250/11/P | A | 50 | 32 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 811 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 112 | B68C | |
| 32-250/15/P | A | 50 | 32 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 811 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 117 | B68C | |
| 32-250/22/P | A | 50 | 32 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 888 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 127 | B80A | |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscf32_4p50-en_c_td

Available ASME B16.5 version on request. For flanges dimensions see drawing.

NSCF 40, 50, 65 SERIES (MOUNTED ON BASE) DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES



| PUMP TYPE NSCF..4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | H max | s FOR SCREWS | WEIGHT kg | COUPLING TYPE |
|----------------------|------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|-----|------|----------|-----------------|--------------|------------------|
| | | DNS | DND | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | | | | |
| 40-125/02A/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 704 | 800 | 130 | 540 | 352 | 4xØ19 (M16) | 62 | B68A |
| 40-125/02/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 704 | 800 | 130 | 540 | 352 | 4xØ19 (M16) | 62 | B68A |
| 40-125/03/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 704 | 800 | 130 | 540 | 352 | 4xØ19 (M16) | 63 | B68A |
| 40-125/05/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 746 | 800 | 130 | 540 | 352 | 4xØ19 (M16) | 66 | B68B |
| 40-160/03/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 704 | 800 | 130 | 540 | 392 | 4xØ19 (M16) | 64 | B68A |
| 40-160/05/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 746 | 800 | 130 | 540 | 392 | 4xØ19 (M16) | 67 | B68B |
| 40-160/07/X | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 714 | 800 | 130 | 540 | 392 | 4xØ19 (M16) | 70 | B68B |
| 40-160/11/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 791 | 900 | 150 | 600 | 392 | 4xØ19 (M16) | 79 | B68C |
| 40-200/07/X | A | 65 | 40 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 734 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 81 | B68B |
| 40-200/11/P | A | 65 | 40 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 811 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 87 | B68C |
| 40-200/15A/P | A | 65 | 40 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 811 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 92 | B68C |
| 40-200/15/P | A | 65 | 40 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 811 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 92 | B68C |
| 40-250/11/P | A | 65 | 40 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 811 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 113 | B68C |
| 40-250/15/P | A | 65 | 40 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 811 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 118 | B68C |
| 40-250/22A/P | A | 65 | 40 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 888 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 128 | B80A |
| 40-250/22/P | A | 65 | 40 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 888 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 128 | B80A |
| 40-250/30/P | A | 65 | 40 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 906 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 133 | B80A |
| 50-125/03/S | A | 65 | 50 | 100 | 60 | 360 | 320 | 360 | 232 | 160 | 724 | 800 | 130 | 540 | 392 | 4xØ19 (M16) | 66 | B68A |
| 50-125/05/S | A | 65 | 50 | 100 | 60 | 360 | 320 | 360 | 232 | 160 | 766 | 800 | 130 | 540 | 392 | 4xØ19 (M16) | 69 | B68B |
| 50-125/07/X | A | 65 | 50 | 100 | 60 | 360 | 320 | 360 | 232 | 160 | 734 | 800 | 130 | 540 | 392 | 4xØ19 (M16) | 72 | B68B |
| 50-125/11/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 232 | 160 | 811 | 900 | 150 | 600 | 392 | 4xØ19 (M16) | 81 | B68C |
| 50-160/07/X | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 734 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 82 | B68B |
| 50-160/11A/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 811 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 88 | B68C |
| 50-160/11/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 811 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 88 | B68C |
| 50-160/15/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 811 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 93 | B68C |
| 50-200/11/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 200 | 811 | 900 | 150 | 600 | 460 | 4xØ19 (M16) | 89 | B68C |
| 50-200/15/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 200 | 811 | 900 | 150 | 600 | 460 | 4xØ19 (M16) | 94 | B68C |
| 50-200/22A/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 200 | 888 | 900 | 150 | 600 | 460 | 4xØ19 (M16) | 104 | B80A |
| 50-200/22/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 200 | 888 | 900 | 150 | 600 | 460 | 4xØ19 (M16) | 104 | B80A |
| 50-250/22A/P | A | 65 | 50 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 888 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 129 | B80A |
| 50-250/22/P | A | 65 | 50 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 888 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 129 | B80A |
| 50-250/30/P | A | 65 | 50 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 906 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 134 | B80A |
| 50-250/40/P | A | 65 | 50 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 906 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 153 | B80A |
| 50-315/40/P | B | 65 | 50 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1041 | 1100 | 110 | 880 | 645 | 6xØ19 (M16) | 246,6 | B95C |
| 50-315/55/P | B | 65 | 50 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1084 | 1100 | 110 | 880 | 665 | 6xØ19 (M16) | 258 | B95D |
| 50-315/75/P | B | 65 | 50 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1084 | 1100 | 110 | 880 | 665 | 6xØ19 (M16) | 258 | B95D |
| 50-315/110/P | B | 65 | 50 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1198 | 1330 | 110 | 1110 | 645 | 6xØ19 (M16) | 290,3 | B95E |
| 65-125/05/S | A | 80 | 65 | 100 | 75 | 390 | 350 | 360 | 260 | 180 | 766 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 83 | B68B |
| 65-125/07/X | A | 80 | 65 | 100 | 75 | 390 | 350 | 360 | 260 | 180 | 734 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 86 | B68B |
| 65-125/11/P | A | 80 | 65 | 100 | 75 | 390 | 350 | 360 | 260 | 180 | 811 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 92 | B68C |
| 65-125/15/P | A | 80 | 65 | 100 | 75 | 390 | 350 | 360 | 260 | 180 | 811 | 900 | 150 | 600 | 440 | 4xØ19 (M16) | 97 | B68C |
| 65-160/11A/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 200 | 811 | 1000 | 170 | 660 | 460 | 4xØ24 (M20) | 113 | B68C |
| 65-160/11/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 200 | 811 | 1000 | 170 | 660 | 460 | 4xØ24 (M20) | 113 | B68C |
| 65-160/15/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 200 | 811 | 1000 | 170 | 660 | 460 | 4xØ24 (M20) | 118 | B68C |
| 65-160/22A/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 200 | 888 | 1000 | 170 | 660 | 460 | 4xØ24 (M20) | 128 | B80A |
| 65-160/22/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 200 | 888 | 1000 | 170 | 660 | 460 | 4xØ24 (M20) | 128 | B80A |
| 65-200/15/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 811 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 121 | B68C |
| 65-200/22A/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 280 | 225 | 888 | 1120 | 190 | 740 | 505 | 4xØ24 (M20) | 137 | B80A |
| 65-200/22/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 280 | 225 | 888 | 1120 | 190 | 740 | 505 | 4xØ24 (M20) | 137 | B80A |
| 65-200/30/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 280 | 225 | 906 | 1120 | 190 | 740 | 505 | 4xØ24 (M20) | 142 | B80A |
| 65-200/40/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 280 | 225 | 906 | 1120 | 190 | 740 | 505 | 4xØ24 (M20) | 161 | B80A |
| 65-250/30/P | A | 80 | 65 | 100 | 90 | 490 | 440 | 470 | 310 | 250 | 1016 | 1120 | 190 | 740 | 560 | 4xØ24 (M20) | 161 | B95C |
| 65-250/40/P | A | 80 | 65 | 100 | 90 | 490 | 440 | 470 | 310 | 250 | 1016 | 1120 | 190 | 740 | 560 | 4xØ24 (M20) | 180 | B95C |
| 65-250/55A/P | A | 80 | 65 | 100 | 90 | 490 | 440 | 470 | 310 | 250 | 1058 | 1120 | 190 | 740 | 560 | 4xØ24 (M20) | 189 | B95D |
| 65-250/55/P | A | 80 | 65 | 100 | 90 | 490 | 440 | 470 | 310 | 250 | 1058 | 1120 | 190 | 740 | 560 | 4xØ24 (M20) | 189 | B95D |
| 65-250/75/P | A | 80 | 65 | 100 | 90 | 490 | 440 | 470 | 310 | 250 | 1058 | 1120 | 190 | 740 | 560 | 4xØ24 (M20) | 193 | B95D |
| 65-315/55/P | B | 80 | 65 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1084 | 1100 | 110 | 880 | 665 | 6xØ19 (M16) | 265,3 | B95D |
| 65-315/75/P | B | 80 | 65 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1084 | 1100 | 110 | 880 | 665 | 6xØ19 (M16) | 265,3 | B95D |
| 65-315/110/P | B | 80 | 65 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1203 | 1330 | 110 | 1110 | 645 | 6xØ19 (M16) | 297,5 | B95E |
| 65-315/150/P | B | 80 | 65 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1203 | 1330 | 110 | 1110 | 645 | 6xØ19 (M16) | 342,4 | B110E |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscf40-65_4p50-en_d_td

Available ASME B16.5 version on request. For flanges dimensions see drawing.

**NSCF 80, 100, 125 SERIES (MOUNTED ON BASE)
DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES**

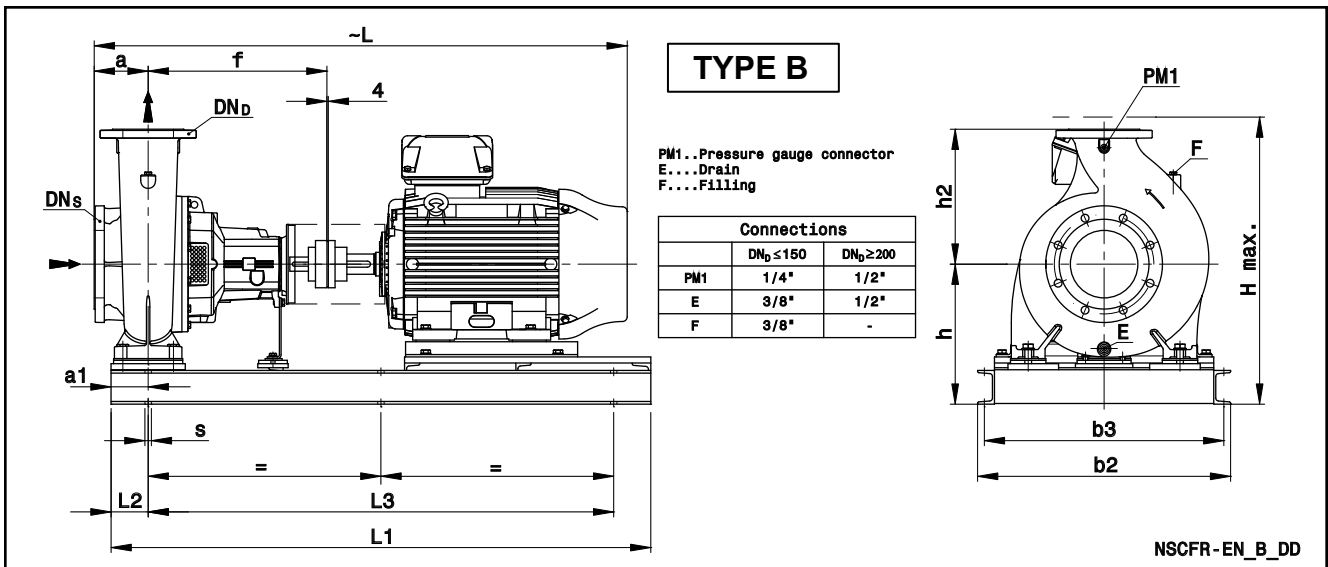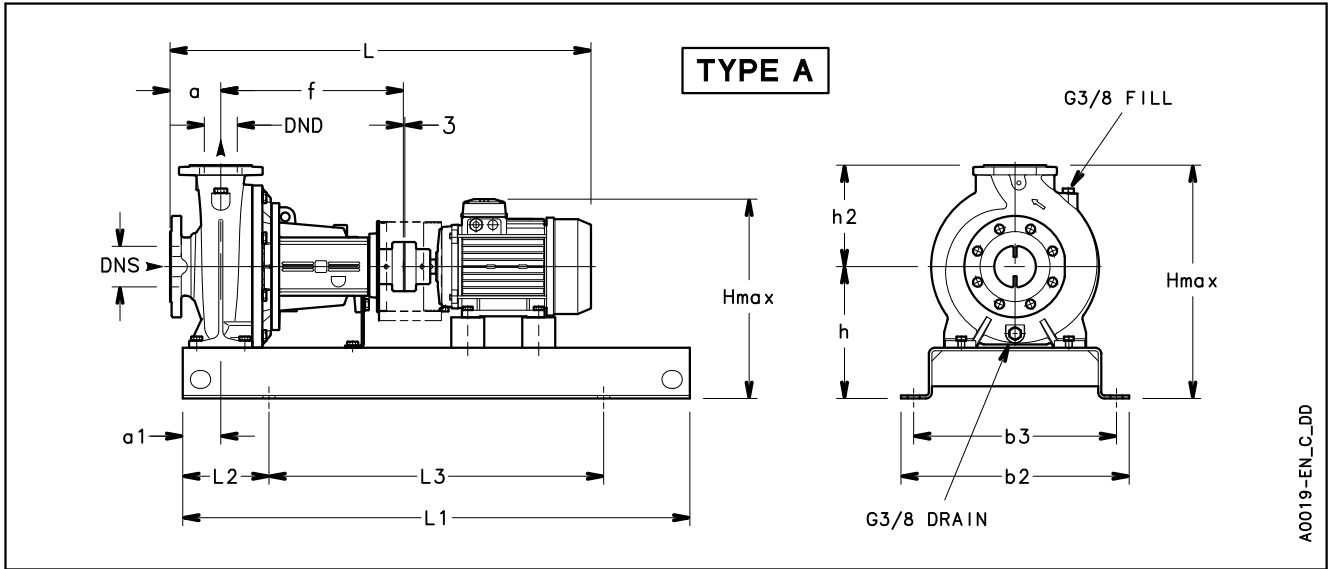

NSCF 80, 100, 125 SERIES (MOUNTED ON BASE) DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES


| PUMP TYPE NSCF..4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | H max | s FOR SCREWS | WEIGHT (kg) G | COUPLING TYPE |
|----------------------|------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|-----|-----|-------------|----------|-----------------|---------------------|------------------|
| | | DNS | DND | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L3 | L2 | | | | | | |
| 80-160/15/P | A | 100 | 80 | 125 | 75 | 450 | 400 | 360 | 280 | 225 | 836 | 1000 | 170 | 660 | 505 | 4xØ24 (M20) | 124 | B68C | | |
| 80-160/22A/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 360 | 280 | 225 | 913 | 1120 | 190 | 740 | 505 | 4xØ24 (M20) | 140 | B80A | | |
| 80-160/22/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 360 | 280 | 225 | 913 | 1120 | 190 | 740 | 505 | 4xØ24 (M20) | 140 | B80A | | |
| 80-160/30/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 360 | 280 | 225 | 931 | 1120 | 190 | 740 | 505 | 4xØ24 (M20) | 145 | B80A | | |
| 80-200/30/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 470 | 280 | 250 | 1041 | 1120 | 190 | 740 | 530 | 4xØ24 (M20) | 162 | B95C | | |
| 80-200/40/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 470 | 280 | 250 | 1041 | 1120 | 190 | 740 | 530 | 4xØ24 (M20) | 182 | B95C | | |
| 80-200/55A/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 470 | 280 | 250 | 1083 | 1120 | 190 | 740 | 530 | 4xØ24 (M20) | 191 | B95D | | |
| 80-200/55/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 470 | 280 | 250 | 1083 | 1120 | 190 | 740 | 530 | 4xØ24 (M20) | 191 | B95D | | |
| 80-250/55A/P | A | 100 | 80 | 125 | 90 | 540 | 490 | 470 | 310 | 280 | 1083 | 1250 | 205 | 840 | 590 | 4xØ24 (M20) | 200 | B95D | | |
| 80-250/55/P | A | 100 | 80 | 125 | 90 | 540 | 490 | 470 | 310 | 280 | 1083 | 1250 | 205 | 840 | 590 | 4xØ24 (M20) | 200 | B95D | | |
| 80-250/75/P | A | 100 | 80 | 125 | 90 | 540 | 490 | 470 | 310 | 280 | 1083 | 1250 | 205 | 840 | 590 | 4xØ24 (M20) | 204 | B95D | | |
| 80-250/110/P | A | 100 | 80 | 125 | 90 | 540 | 490 | 470 | 310 | 280 | 1202 | 1250 | 205 | 840 | 590 | 4xØ24 (M20) | 259 | B95E | | |
| 80-315/110A/P | B | 100 | 80 | 125 | 110 | 670 | 630 | 470 | 365 | 315 | 1203 | 1330 | 1110 | 110 | 680 | 6xØ19 (M16) | 306 | B95E | | |
| 80-315/110/P | B | 100 | 80 | 125 | 110 | 670 | 630 | 470 | 365 | 315 | 1203 | 1330 | 1110 | 110 | 680 | 6xØ19 (M16) | 306 | B95E | | |
| 80-315/150/P | B | 100 | 80 | 125 | 110 | 670 | 630 | 470 | 365 | 315 | 1203 | 1330 | 1110 | 110 | 680 | 6xØ19 (M16) | 351 | B110E | | |
| 80-315/185/W | B | 100 | 80 | 125 | 110 | 670 | 630 | 470 | 385 | 315 | 1263 | 1330 | 1110 | 110 | 700 | 6xØ19 (M16) | 410 | B110B | | |
| 80-315/220/W | B | 100 | 80 | 125 | 110 | 670 | 630 | 470 | 385 | 315 | 1301 | 1330 | 1110 | 110 | 700 | 6xØ19 (M16) | 428 | B110B | | |
| 80-400/185/W | B | 100 | 80 | 125 | 110 | 670 | 630 | 530 | 400 | 355 | 1323 | 1430 | 1210 | 110 | 755 | 6xØ19 (M16) | 443 | B110D | | |
| 80-400/220/W | B | 100 | 80 | 125 | 110 | 670 | 630 | 530 | 400 | 355 | 1361 | 1430 | 1210 | 110 | 755 | 6xØ19 (M16) | 461 | B110D | | |
| 80-400/300/W | B | 100 | 80 | 125 | 110 | 670 | 630 | 530 | 420 | 355 | 1426 | 1430 | 1210 | 110 | 775 | 6xØ19 (M16) | 514 | B125C | | |
| 80-400/370/W | B | 100 | 80 | 125 | 110 | 750 | 710 | 530 | 415 | 355 | 1545 | 1600 | 1380 | 110 | 799 | 6xØ19 (M16) | 703 | B140B | | |
| 100-160/22A/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 355 | 280 | 1024 | 1100 | 880 | 110 | 635 | 6xØ19 (M16) | 217 | B95C | | |
| 100-160/22/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 355 | 280 | 1024 | 1100 | 880 | 110 | 635 | 6xØ19 (M16) | 217 | B95C | | |
| 100-160/30/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 355 | 280 | 1041 | 1100 | 880 | 110 | 635 | 6xØ19 (M16) | 220 | B95C | | |
| 100-160/40/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1041 | 1100 | 880 | 110 | 645 | 6xØ19 (M16) | 241 | B95C | | |
| 100-200/40/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1041 | 1100 | 880 | 110 | 645 | 6xØ19 (M16) | 249 | B95C | | |
| 100-200/55/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1084 | 1100 | 880 | 110 | 665 | 6xØ19 (M16) | 261 | B95D | | |
| 100-200/75/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1084 | 1100 | 880 | 110 | 665 | 6xØ19 (M16) | 261 | B95D | | |
| 100-250/55/P | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 385 | 280 | 1099 | 1100 | 880 | 110 | 665 | 6xØ19 (M16) | 263 | B95D | | |
| 100-250/75/P | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 385 | 280 | 1099 | 1100 | 880 | 110 | 665 | 6xØ19 (M16) | 263 | B95D | | |
| 100-250/110/P | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 365 | 280 | 1218 | 1330 | 1110 | 110 | 645 | 6xØ19 (M16) | 296 | B95E | | |
| 100-315/110/P | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 365 | 315 | 1218 | 1330 | 1110 | 110 | 680 | 6xØ19 (M16) | 304 | B95E | | |
| 100-315/150/P | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 365 | 315 | 1218 | 1330 | 1110 | 110 | 680 | 6xØ19 (M16) | 349 | B110E | | |
| 100-315/185/W | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 385 | 315 | 1278 | 1330 | 1110 | 110 | 700 | 6xØ19 (M16) | 408 | B110B | | |
| 100-315/220/W | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 385 | 315 | 1316 | 1330 | 1110 | 110 | 700 | 6xØ19 (M16) | 426 | B110B | | |
| 100-315/300/W | B | 125 | 100 | 140 | 110 | 560 | 520 | 470 | 355 | 315 | 1381 | 1350 | 1130 | 110 | 672 | 6xØ19 (M16) | 454 | B125B | | |
| 100-400/300/W | B | 125 | 100 | 140 | 110 | 670 | 630 | 530 | 420 | 355 | 1441 | 1430 | 1210 | 110 | 775 | 6xØ19 (M16) | 543 | B125C | | |
| 100-400/370/W | B | 125 | 100 | 140 | 110 | 750 | 710 | 530 | 415 | 355 | 1560 | 1600 | 1380 | 110 | 799 | 6xØ19 (M16) | 729 | B140B | | |
| 100-400/450/W | B | 125 | 100 | 140 | 110 | 750 | 710 | 530 | 415 | 355 | 1560 | 1600 | 1380 | 110 | 799 | 6xØ19 (M16) | 757 | B140B | | |
| 125-200/55/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 385 | 315 | 1099 | 1100 | 880 | 110 | 700 | 6xØ19 (M16) | 268 | B95D | | |
| 125-200/75/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 385 | 315 | 1099 | 1100 | 880 | 110 | 700 | 6xØ19 (M16) | 268 | B95D | | |
| 125-200/110/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 365 | 315 | 1218 | 1330 | 1110 | 110 | 680 | 6xØ19 (M16) | 300 | B95E | | |
| 125-250/75/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 385 | 355 | 1099 | 1100 | 880 | 110 | 740 | 6xØ19 (M16) | 268 | B95D | | |
| 125-250/110/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 365 | 355 | 1218 | 1330 | 1110 | 110 | 720 | 6xØ19 (M16) | 300 | B95E | | |
| 125-250/150/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 365 | 355 | 1218 | 1330 | 1110 | 110 | 720 | 6xØ19 (M16) | 345 | B110E | | |
| 125-315/185/W | B | 150 | 125 | 140 | 110 | 670 | 630 | 530 | 400 | 355 | 1338 | 1430 | 1210 | 110 | 755 | 6xØ19 (M16) | 444 | B110D | | |
| 125-315/220/W | B | 150 | 125 | 140 | 110 | 670 | 630 | 530 | 400 | 355 | 1376 | 1430 | 1210 | 110 | 755 | 6xØ19 (M16) | 462 | B110D | | |
| 125-315/300/W | B | 150 | 125 | 140 | 110 | 670 | 630 | 530 | 420 | 355 | 1441 | 1430 | 1210 | 110 | 775 | 6xØ19 (M16) | 517 | B125C | | |
| 125-315/370/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 530 | 415 | 355 | 1560 | 1600 | 1380 | 110 | 799 | 6xØ19 (M16) | 703 | B140B | | |
| 125-400/370/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 530 | 440 | 400 | 1560 | 1600 | 1380 | 110 | 840 | 6xØ19 (M16) | 753 | B140B | | |
| 125-400/450/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 530 | 440 | 400 | 1560 | 1600 | 1380 | 110 | 840 | 6xØ19 (M16) | 781 | B140B | | |
| 125-400/550/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 530 | 440 | 400 | 1639 | 1600 | 1380 | 110 | 842 | 6xØ19 (M16) | 865 | B160B | | |
| 125-400/750/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 530 | 440 | 400 | 1745 | 1600 | 1380 | 110 | 912 | 6xØ19 (M16) | 1075 | B180B | | |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscf80-125_4p50-en_c_td

Available ASME B16.5 version on request. For flanges dimensions see drawing.

NSCF 150 SERIES (MOUNTED ON BASE) DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

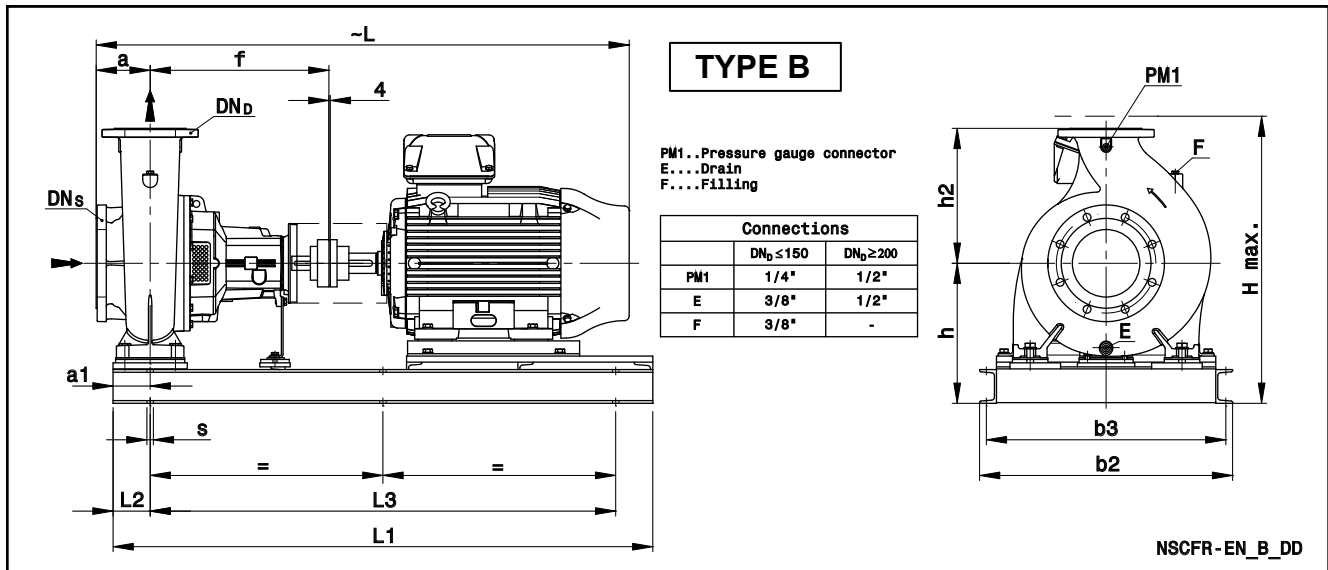

| PUMP TYPE NSCF..4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | H max | s FOR SCREWS | WEIGHT (kg) G | COUPLING TYPE |
|----------------------|------|-----------------|-----------------|-----|-----|-----|-----|-----|-----|-----|------|------|-----|------|------|-------------|-----------------|---------------------|------------------|
| | | DN _S | DN _D | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | | | | | |
| 150-200/110A/P | B | 200 | 150 | 160 | 110 | 670 | 630 | 470 | 385 | 400 | 1238 | 1330 | 110 | 1110 | 785 | 6xØ19 (M16) | 357 | B95E | |
| 150-200/110/P | B | 200 | 150 | 160 | 110 | 670 | 630 | 470 | 385 | 400 | 1238 | 1330 | 110 | 1110 | 785 | 6xØ19 (M16) | 357 | B95E | |
| 150-200/150A/P | B | 200 | 150 | 160 | 110 | 670 | 630 | 470 | 385 | 400 | 1238 | 1330 | 110 | 1110 | 785 | 6xØ19 (M16) | 402 | B110E | |
| 150-200/150/P | B | 200 | 150 | 160 | 110 | 670 | 630 | 470 | 385 | 400 | 1238 | 1330 | 110 | 1110 | 785 | 6xØ19 (M16) | 402 | B110E | |
| 150-250/150/P | B | 200 | 150 | 160 | 110 | 670 | 630 | 530 | 385 | 400 | 1298 | 1430 | 110 | 1210 | 785 | 6xØ19 (M16) | 413 | B110C | |
| 150-250/185/W | B | 200 | 150 | 160 | 110 | 670 | 630 | 530 | 400 | 400 | 1358 | 1430 | 110 | 1210 | 800 | 6xØ19 (M16) | 472 | B110D | |
| 150-250/220/W | B | 200 | 150 | 160 | 110 | 670 | 630 | 530 | 400 | 400 | 1396 | 1430 | 110 | 1210 | 800 | 6xØ19 (M16) | 490 | B110D | |
| 150-250/300/W | B | 200 | 150 | 160 | 110 | 670 | 630 | 530 | 420 | 400 | 1461 | 1430 | 110 | 1210 | 820 | 6xØ19 (M16) | 545 | B125C | |
| 150-315/300/W | B | 200 | 150 | 160 | 110 | 670 | 630 | 530 | 420 | 400 | 1461 | 1430 | 110 | 1210 | 820 | 6xØ19 (M16) | 551 | B125C | |
| 150-315/370/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 415 | 400 | 1580 | 1600 | 110 | 1380 | 815 | 6xØ19 (M16) | 737 | B140B | |
| 150-315/450/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 415 | 400 | 1580 | 1600 | 110 | 1380 | 815 | 6xØ19 (M16) | 765 | B140B | |
| 150-400/450/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 440 | 450 | 1580 | 1600 | 110 | 1380 | 890 | 6xØ19 (M16) | 809 | B140B | |
| 150-400/550/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 440 | 450 | 1659 | 1600 | 110 | 1380 | 890 | 6xØ19 (M16) | 893 | B160B | |
| 150-400/750/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 440 | 450 | 1765 | 1600 | 110 | 1380 | 912 | 6xØ19 (M16) | 1103 | B180B | |
| 150-400/900/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 440 | 450 | 1765 | 1600 | 110 | 1380 | 912 | 6xØ19 (M16) | 1151 | B180B | |
| 150-400/1100/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 440 | 450 | 1765 | 1600 | 110 | 1380 | 912 | 6xØ19 (M16) | 1258 | B180B | |
| 150-500/900/W | B | 200 | 150 | 180 | 165 | 860 | 810 | 770 | 565 | 500 | 2025 | 1750 | 165 | 1420 | 1065 | 6xØ26 (M20) | 1384 | B180C | |
| 150-500/1100/W | B | 200 | 150 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2228 | 2000 | 165 | 1670 | 1115 | 6xØ26 (M20) | 1678 | B200A | |
| 150-500/1320/W | B | 200 | 150 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2228 | 2000 | 165 | 1670 | 1115 | 6xØ26 (M20) | 1763 | B200A | |
| 150-500/1600/W | B | 200 | 150 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2228 | 2000 | 165 | 1670 | 1115 | 6xØ26 (M20) | 1820 | B200A | |
| 150-500/2000/W | B | 200 | 150 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2337 | 2000 | 165 | 1670 | 1160 | 6xØ26 (M20) | 2005 | B225A | |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscf150_4p50-en_d_td

Available ASME B16.5 version on request. For flanges dimensions see drawing.

NSCF 200, 250, 300 SERIES (MOUNTED ON BASE) DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES



| PUMP TYPE NSCF..4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | WEIGHT (kg) G | COUPLING TYPE |
|----------------------|------|-----------------|-----|-----|-----|------|-----|-----|-----|-----|------|------|-----|------|----------|-----------------|---------------------|------------------|
| | | DNS | DND | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | H max | s FOR SCREWS | | |
| 200-250/185/W | B | 250 | 200 | 180 | 110 | 670 | 630 | 530 | 460 | 475 | 1378 | 1450 | 110 | 1230 | 935 | 6xØ19 (M16) | 527 | B110D |
| 200-250/220/W | B | 250 | 200 | 180 | 110 | 670 | 630 | 530 | 460 | 475 | 1416 | 1450 | 110 | 1230 | 935 | 6xØ19 (M16) | 545 | B110D |
| 200-250/300A/W | B | 250 | 200 | 180 | 110 | 670 | 630 | 530 | 460 | 475 | 1481 | 1450 | 110 | 1230 | 935 | 6xØ19 (M16) | 588 | B125C |
| 200-250/300/W | B | 250 | 200 | 180 | 110 | 670 | 630 | 530 | 460 | 475 | 1481 | 1450 | 110 | 1230 | 935 | 6xØ19 (M16) | 588 | B125C |
| 200-315/300/W | B | 250 | 200 | 180 | 110 | 670 | 630 | 530 | 460 | 450 | 1481 | 1450 | 110 | 1230 | 910 | 6xØ19 (M16) | 592 | B125C |
| 200-315/370/W | B | 250 | 200 | 180 | 110 | 750 | 710 | 530 | 480 | 450 | 1600 | 1660 | 110 | 1440 | 930 | 6xØ19 (M16) | 791 | B140B |
| 200-315/450/W | B | 250 | 200 | 180 | 110 | 750 | 710 | 530 | 480 | 450 | 1600 | 1660 | 110 | 1440 | 930 | 6xØ19 (M16) | 819 | B140B |
| 200-315/550/W | B | 250 | 200 | 180 | 110 | 750 | 710 | 530 | 480 | 450 | 1679 | 1660 | 110 | 1440 | 930 | 6xØ19 (M16) | 904 | B160B |
| 200-315/750/W | B | 250 | 200 | 180 | 110 | 750 | 710 | 530 | 480 | 450 | 1785 | 1660 | 110 | 1440 | 952 | 6xØ19 (M16) | 1113 | B180B |
| 200-400/750A/W | B | 250 | 200 | 180 | 165 | 860 | 810 | 770 | 565 | 500 | 2025 | 1750 | 165 | 1420 | 1065 | 6xØ26 (M20) | 1291 | B180C |
| 200-400/750/W | B | 250 | 200 | 180 | 165 | 860 | 810 | 770 | 565 | 500 | 2025 | 1750 | 165 | 1420 | 1065 | 6xØ26 (M20) | 1291 | B180C |
| 200-400/900/W | B | 250 | 200 | 180 | 165 | 860 | 810 | 770 | 565 | 500 | 2025 | 1750 | 165 | 1420 | 1065 | 6xØ26 (M20) | 1339 | B180C |
| 200-400/1100/W | B | 250 | 200 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2228 | 2000 | 165 | 1670 | 1115 | 6xØ26 (M20) | 1633 | B200A |
| 200-400/1320/W | B | 250 | 200 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2228 | 2000 | 165 | 1670 | 1115 | 6xØ26 (M20) | 1718 | B200A |
| 200-500/1320/W | B | 250 | 200 | 200 | 165 | 860 | 810 | 770 | 635 | 560 | 2248 | 2000 | 165 | 1670 | 1195 | 6xØ26 (M20) | 1778 | B200A |
| 200-500/1600/W | B | 250 | 200 | 200 | 165 | 860 | 810 | 770 | 635 | 560 | 2248 | 2000 | 165 | 1670 | 1195 | 6xØ26 (M20) | 1835 | B200A |
| 200-500/2000/W | B | 250 | 200 | 200 | 165 | 860 | 810 | 770 | 635 | 560 | 2357 | 2000 | 165 | 1670 | 1210 | 6xØ26 (M20) | 2019 | B225A |
| 200-500/2500/W | B | 250 | 200 | 200 | 165 | 860 | 810 | 770 | 635 | 560 | 2357 | 2000 | 165 | 1670 | 1210 | 6xØ26 (M20) | 2214 | B225A |
| 200-500/3150/W | B | 250 | 200 | 200 | 165 | 1000 | 930 | 770 | 675 | 560 | 2456 | 2200 | 165 | 1870 | 1300 | 6xØ29 (M24) | 2553 | B250A |
| 250-315/370/W | B | 300 | 250 | 250 | 165 | 850 | 810 | 530 | 525 | 500 | 1670 | 1700 | 165 | 1370 | 1025 | 6xØ19 (M16) | 905 | B140B |
| 250-315/450/W | B | 300 | 250 | 250 | 165 | 850 | 810 | 530 | 525 | 500 | 1670 | 1700 | 165 | 1370 | 1025 | 6xØ19 (M16) | 933 | B140B |
| 250-315/550/W | B | 300 | 250 | 250 | 165 | 850 | 810 | 530 | 525 | 500 | 1749 | 1700 | 165 | 1370 | 1025 | 6xØ19 (M16) | 1017 | B160B |
| 250-315/750/W | B | 300 | 250 | 250 | 165 | 850 | 810 | 530 | 525 | 500 | 1855 | 1700 | 165 | 1370 | 1025 | 6xØ19 (M16) | 1227 | B180B |
| 250-400/750/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 565 | 560 | 2045 | 1750 | 165 | 1420 | 1125 | 6xØ26 (M20) | 1328 | B180C |
| 250-400/900/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 565 | 560 | 2045 | 1750 | 165 | 1420 | 1125 | 6xØ26 (M20) | 1376 | B180C |
| 250-400/1100/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 585 | 560 | 2248 | 2000 | 165 | 1670 | 1145 | 6xØ26 (M20) | 1670 | B200A |
| 250-400/1320/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 585 | 560 | 2248 | 2000 | 165 | 1670 | 1145 | 6xØ26 (M20) | 1755 | B200A |
| 250-400/1600/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 585 | 560 | 2248 | 2000 | 165 | 1670 | 1145 | 6xØ26 (M20) | 1812 | B200A |
| 250-400/2000/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 585 | 560 | 2357 | 2000 | 165 | 1670 | 1160 | 6xØ26 (M20) | 1997 | B225A |
| 250-500/1600/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 635 | 670 | 2248 | 2000 | 165 | 1670 | 1305 | 6xØ26 (M20) | 1886 | B200A |
| 250-500/2000/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 635 | 670 | 2357 | 2000 | 165 | 1670 | 1305 | 6xØ26 (M20) | 2070 | B225A |
| 250-500/2500/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 635 | 670 | 2357 | 2000 | 165 | 1670 | 1305 | 6xØ26 (M20) | 2265 | B225A |
| 250-500/3150/W | B | 300 | 250 | 200 | 165 | 1000 | 930 | 770 | 675 | 670 | 2456 | 2200 | 165 | 1870 | 1345 | 6xØ29 (M24) | 2604 | B250A |
| 250-500/3550/W | B | 300 | 250 | 200 | 165 | 1000 | 930 | 770 | 675 | 670 | 2456 | 2200 | 165 | 1870 | 1345 | 6xØ29 (M24) | 2710 | B250A |
| 300-350/750A/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 620 | 600 | 2125 | 1850 | 200 | 1450 | 1220 | 6xØ26 (M20) | 1514 | B180C |
| 300-350/750/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 620 | 600 | 2125 | 1850 | 200 | 1450 | 1220 | 6xØ26 (M20) | 1514 | B180C |
| 300-350/900/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 620 | 600 | 2125 | 1850 | 200 | 1450 | 1220 | 6xØ26 (M20) | 1562 | B180C |
| 300-350/1100/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2328 | 2100 | 200 | 1700 | 1240 | 6xØ26 (M20) | 1871 | B200A |
| 300-400/1100/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2328 | 2100 | 200 | 1700 | 1240 | 6xØ26 (M20) | 1875 | B200A |
| 300-400/1320/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2328 | 2100 | 200 | 1700 | 1240 | 6xØ26 (M20) | 1960 | B200A |
| 300-400/1600/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2328 | 2100 | 200 | 1700 | 1240 | 6xØ26 (M20) | 2017 | B200A |
| 300-400/2000/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2437 | 2100 | 200 | 1700 | 1240 | 6xØ26 (M20) | 2201 | B225A |
| 300-400/2500/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2437 | 2100 | 200 | 1700 | 1240 | 6xØ26 (M20) | 2396 | B225A |
| 300-450/1600/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 665 | 630 | 2328 | 2100 | 200 | 1700 | 1295 | 6xØ26 (M20) | 2058 | B200A |
| 300-450/2000/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 665 | 630 | 2437 | 2100 | 200 | 1700 | 1295 | 6xØ26 (M20) | 2243 | B225A |
| 300-450/2500/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 665 | 630 | 2437 | 2100 | 200 | 1700 | 1295 | 6xØ26 (M20) | 2438 | B225A |
| 300-450/3150/W | B | 350 | 300 | 250 | 200 | 1000 | 930 | 800 | 705 | 630 | 2536 | 2250 | 200 | 1850 | 1335 | 6xØ29 (M24) | 2754 | B250A |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscf200-300_4p50-en_d_td

Available ASME B16.5 version on request. For flanges dimensions see drawing.

NSCC 32 SERIES (SPACER COUPLING) DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

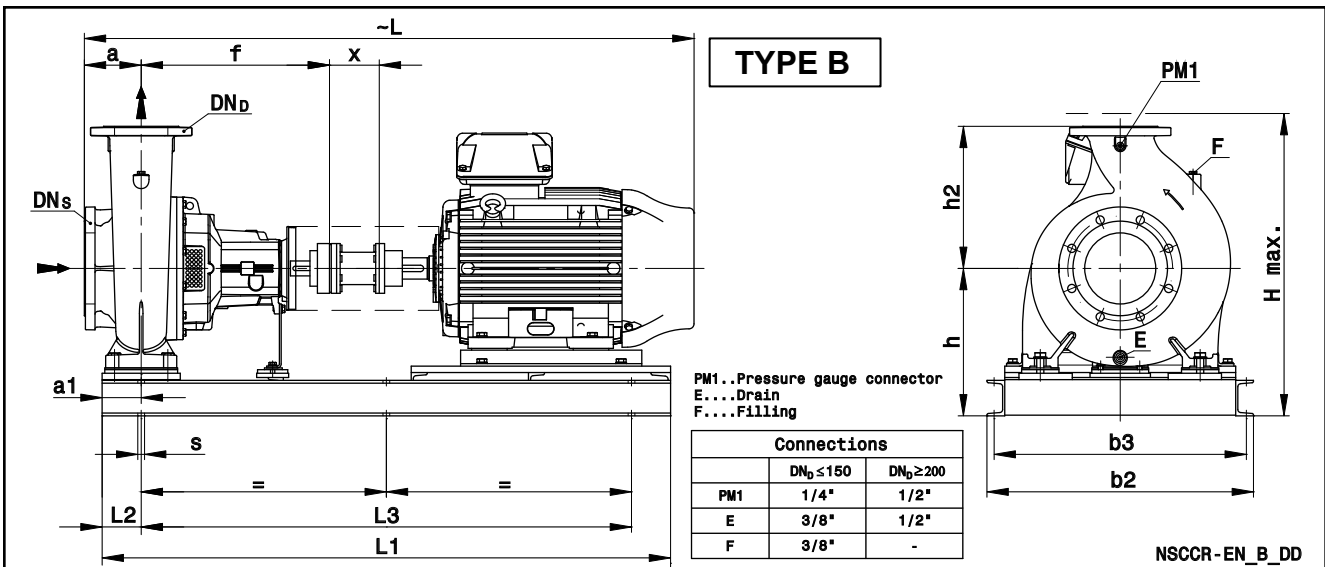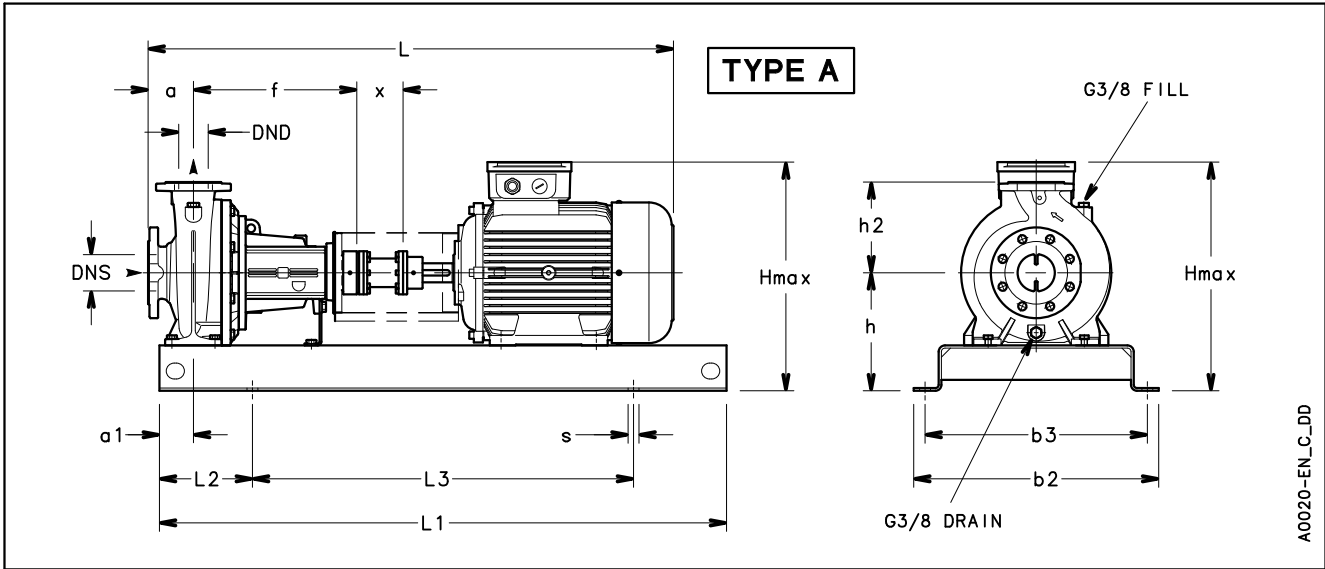

| PUMP TYPE NSCC..2 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | WEIGHT kg | COUPLING TYPE | |
|----------------------|------|-----------------|-----------------|-----|----|-----|-----|-----|-----|-----|------|------|-----|-----|-----|----------|--------------|------------------|-----------------|
| | | DN _S | DN _D | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | x | H max | | | s FOR SCREWS |
| 32-125/11/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 843 | 800 | 130 | 540 | 100 | 352 | 4xØ19 (M16) | 68 | H80A |
| 32-125/15/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 888 | 900 | 150 | 600 | 100 | 352 | 4xØ19 (M16) | 78 | H80B |
| 32-125/22/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 888 | 900 | 150 | 600 | 100 | 352 | 4xØ19 (M16) | 80 | H80B |
| 32-125/30/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 919 | 900 | 150 | 600 | 100 | 366 | 4xØ19 (M16) | 87 | H80C |
| 32-160/22/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 888 | 900 | 150 | 600 | 100 | 392 | 4xØ19 (M16) | 81 | H80B |
| 32-160/30/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 919 | 900 | 150 | 600 | 100 | 392 | 4xØ19 (M16) | 88 | H80C |
| 32-160/40/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 922 | 900 | 150 | 600 | 100 | 400 | 4xØ19 (M16) | 93 | H80C |
| 32-160/55/P | A | 50 | 32 | 80 | 60 | 450 | 400 | 360 | 232 | 160 | 987 | 1000 | 170 | 660 | 100 | 423 | 4xØ24 (M20) | 122 | H95A |
| 32-200/30/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 260 | 180 | 919 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 95 | H80C |
| 32-200/40/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 260 | 180 | 922 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 100 | H80C |
| 32-200/55/P | A | 50 | 32 | 80 | 60 | 450 | 400 | 360 | 260 | 180 | 987 | 1000 | 170 | 660 | 100 | 451 | 4xØ24 (M20) | 129 | H95A |
| 32-200/75/P | A | 50 | 32 | 80 | 60 | 450 | 400 | 360 | 260 | 180 | 987 | 1000 | 170 | 660 | 100 | 451 | 4xØ24 (M20) | 133 | H95A |
| 32-250/75/P | A | 50 | 32 | 100 | 75 | 490 | 440 | 360 | 280 | 225 | 1007 | 1120 | 190 | 740 | 100 | 505 | 4xØ24 (M20) | 160 | H95A |
| 32-250/110A/P | A | 50 | 32 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1164 | 1250 | 205 | 840 | 100 | 520 | 4xØ24 (M20) | 190 | H95B |
| 32-250/110/P | A | 50 | 32 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1164 | 1250 | 205 | 840 | 100 | 520 | 4xØ24 (M20) | 190 | H95B |
| 32-250/150/P | A | 50 | 32 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1164 | 1250 | 205 | 840 | 100 | 520 | 4xØ24 (M20) | 207 | H95B |

NOTA: Pompe con flange in accordo alle norme EN 1092-2.

Disponibile la versione ASME B16.5 su richiesta. Per dimensioni flange vedere disegno.

Nscc32_2p50-en_c_td

NSCC 40, 50, 65 SERIES (SPACER COUPLING) DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES



| PUMP TYPE NSCC...2 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | WEIGHT kg | COUPLING TYPE | |
|-----------------------|------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|-----|------|-----|----------|--------------|------------------|-----------------|
| | | DNS | DND | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | x | H max | | | s FOR SCREWS |
| 40-125/15/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 888 | 900 | 150 | 600 | 100 | 352 | 4xØ19 (M16) | 79 | H80B |
| 40-125/22/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 888 | 900 | 150 | 600 | 100 | 352 | 4xØ19 (M16) | 81 | H80B |
| 40-125/30/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 919 | 900 | 150 | 600 | 100 | 366 | 4xØ19 (M16) | 88 | H80C |
| 40-125/40/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 212 | 140 | 922 | 900 | 150 | 600 | 100 | 380 | 4xØ19 (M16) | 93 | H80C |
| 40-160/30/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 919 | 900 | 150 | 600 | 100 | 392 | 4xØ19 (M16) | 89 | H80C |
| 40-160/40/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 922 | 900 | 150 | 600 | 100 | 400 | 4xØ19 (M16) | 94 | H80C |
| 40-160/55/P | A | 65 | 40 | 80 | 60 | 450 | 400 | 360 | 232 | 160 | 987 | 1000 | 170 | 660 | 100 | 423 | 4xØ24 (M20) | 123 | H95A |
| 40-160/75/P | A | 65 | 40 | 80 | 60 | 450 | 400 | 360 | 232 | 160 | 987 | 1000 | 170 | 660 | 100 | 423 | 4xØ24 (M20) | 127 | H95A |
| 40-200/55/P | A | 65 | 40 | 100 | 60 | 450 | 400 | 360 | 260 | 180 | 1007 | 1000 | 170 | 660 | 100 | 451 | 4xØ24 (M20) | 131 | H95A |
| 40-200/75/P | A | 65 | 40 | 100 | 60 | 450 | 400 | 360 | 260 | 180 | 1007 | 1000 | 170 | 660 | 100 | 451 | 4xØ24 (M20) | 135 | H95A |
| 40-200/110A/P | A | 65 | 40 | 100 | 60 | 490 | 440 | 360 | 260 | 180 | 1164 | 1120 | 190 | 740 | 100 | 500 | 4xØ24 (M20) | 164 | H95B |
| 40-200/110/P | A | 65 | 40 | 100 | 60 | 490 | 440 | 360 | 260 | 180 | 1164 | 1120 | 190 | 740 | 100 | 500 | 4xØ24 (M20) | 164 | H95B |
| 40-250/110A/P | A | 65 | 40 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1164 | 1250 | 205 | 840 | 100 | 520 | 4xØ24 (M20) | 191 | H95B |
| 40-250/110/P | A | 65 | 40 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1164 | 1250 | 205 | 840 | 100 | 520 | 4xØ24 (M20) | 191 | H95B |
| 40-250/150/P | A | 65 | 40 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1164 | 1250 | 205 | 840 | 100 | 520 | 4xØ24 (M20) | 208 | H95B |
| 40-250/185/P | A | 65 | 40 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1164 | 1250 | 205 | 840 | 100 | 520 | 4xØ24 (M20) | 221 | H95B |
| 40-250/220/W | A | 65 | 40 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1224 | 1250 | 205 | 840 | 100 | 559 | 4xØ24 (M20) | 288 | H110A |
| 50-125/30/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 232 | 160 | 939 | 900 | 150 | 600 | 100 | 392 | 4xØ19 (M16) | 91 | H80C |
| 50-125/40/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 232 | 160 | 942 | 900 | 150 | 600 | 100 | 400 | 4xØ19 (M16) | 96 | H80C |
| 50-125/55/P | A | 65 | 50 | 100 | 60 | 450 | 400 | 360 | 232 | 160 | 1007 | 1000 | 170 | 660 | 100 | 423 | 4xØ24 (M20) | 125 | H95A |
| 50-125/75/P | A | 65 | 50 | 100 | 60 | 450 | 400 | 360 | 232 | 160 | 1007 | 1000 | 170 | 660 | 100 | 423 | 4xØ24 (M20) | 129 | H95A |
| 50-160/55/P | A | 65 | 50 | 100 | 60 | 450 | 400 | 360 | 260 | 180 | 1007 | 1000 | 170 | 660 | 100 | 451 | 4xØ24 (M20) | 132 | H95A |
| 50-160/75/P | A | 65 | 50 | 100 | 60 | 450 | 400 | 360 | 260 | 180 | 1007 | 1000 | 170 | 660 | 100 | 451 | 4xØ24 (M20) | 136 | H95A |
| 50-160/110A/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 180 | 1164 | 1120 | 190 | 740 | 100 | 500 | 4xØ24 (M20) | 165 | H95B |
| 50-160/110/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 180 | 1164 | 1120 | 190 | 740 | 100 | 500 | 4xØ24 (M20) | 165 | H95B |
| 50-200/110A/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 200 | 1164 | 1120 | 190 | 740 | 100 | 500 | 4xØ24 (M20) | 166 | H95B |
| 50-200/110/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 200 | 1164 | 1120 | 190 | 740 | 100 | 500 | 4xØ24 (M20) | 166 | H95B |
| 50-200/150/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 200 | 1164 | 1120 | 190 | 740 | 100 | 500 | 4xØ24 (M20) | 183 | H95B |
| 50-200/185/P | A | 65 | 50 | 100 | 60 | 490 | 440 | 360 | 260 | 200 | 1164 | 1120 | 190 | 740 | 100 | 500 | 4xØ24 (M20) | 196 | H95B |
| 50-250/150/P | A | 65 | 50 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1164 | 1250 | 205 | 840 | 100 | 520 | 4xØ24 (M20) | 209 | H95B |
| 50-250/185/P | A | 65 | 50 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1164 | 1250 | 205 | 840 | 100 | 520 | 4xØ24 (M20) | 222 | H95B |
| 50-250/220/W | A | 65 | 50 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1124 | 1250 | 205 | 840 | 100 | 559 | 4xØ24 (M20) | 289 | H110A |
| 50-250/300/W | A | 65 | 50 | 100 | 75 | 610 | 550 | 360 | 310 | 225 | 1327 | 1400 | 230 | 940 | 100 | 627 | 4xØ28 (M24) | 371 | H125A |
| 50-315/370/W | B | 65 | 50 | 125 | 110 | 560 | 520 | 470 | 355 | 280 | 1502 | 1350 | 110 | 1130 | 140 | 672 | 6xØ19 (M16) | 466 | H125C |
| 50-315/450/W | B | 65 | 50 | 125 | 110 | 560 | 520 | 470 | 355 | 280 | 1591 | 1350 | 110 | 1130 | 140 | 739 | 6xØ19 (M16) | 611 | H125C |
| 50-315/550/W | B | 65 | 50 | 125 | 110 | 750 | 710 | 470 | 405 | 280 | 1700 | 1550 | 110 | 1330 | 140 | 807 | 6xØ19 (M16) | 738 | H140A |
| 50-315/750/W | B | 65 | 50 | 125 | 110 | 750 | 710 | 470 | 405 | 280 | 1806 | 1550 | 110 | 1330 | 140 | 877 | 6xØ19 (M16) | 967 | H160A |
| 65-125/40/P | A | 80 | 65 | 100 | 75 | 390 | 350 | 360 | 260 | 180 | 942 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 107 | H80C |
| 65-125/55/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 180 | 1007 | 1000 | 170 | 660 | 100 | 451 | 4xØ24 (M20) | 136 | H95A |
| 65-125/75/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 180 | 1007 | 1000 | 170 | 660 | 100 | 451 | 4xØ24 (M20) | 140 | H95A |
| 65-125/110A/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 260 | 180 | 1164 | 1120 | 190 | 740 | 100 | 500 | 4xØ24 (M20) | 170 | H95B |
| 65-125/110/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 260 | 180 | 1164 | 1120 | 190 | 740 | 100 | 500 | 4xØ24 (M20) | 170 | H95B |
| 65-160/75/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 260 | 200 | 1007 | 1120 | 190 | 740 | 100 | 460 | 4xØ24 (M20) | 161 | H95A |
| 65-160/110A/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 260 | 200 | 1164 | 1250 | 205 | 840 | 100 | 500 | 4xØ24 (M20) | 191 | H95B |
| 65-160/110/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 260 | 200 | 1164 | 1250 | 205 | 840 | 100 | 500 | 4xØ24 (M20) | 191 | H95B |
| 65-160/150/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 260 | 200 | 1164 | 1250 | 205 | 840 | 100 | 500 | 4xØ24 (M20) | 208 | H95B |
| 65-160/185/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 260 | 200 | 1164 | 1250 | 205 | 840 | 100 | 500 | 4xØ24 (M20) | 221 | H95B |
| 65-200/110/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1204 | 1250 | 205 | 840 | 140 | 520 | 4xØ24 (M20) | 194 | H95G |
| 65-200/150/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1204 | 1250 | 205 | 840 | 140 | 520 | 4xØ24 (M20) | 211 | H95G |
| 65-200/185/P | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1204 | 1250 | 205 | 840 | 140 | 520 | 4xØ24 (M20) | 224 | H95G |
| 65-200/220/W | A | 80 | 65 | 100 | 75 | 540 | 490 | 360 | 280 | 225 | 1264 | 1250 | 205 | 840 | 140 | 559 | 4xØ24 (M20) | 291 | H110E |
| 65-200/300/W | A | 80 | 65 | 100 | 75 | 610 | 550 | 360 | 310 | 225 | 1367 | 1400 | 230 | 940 | 140 | 627 | 4xØ28 (M24) | 373 | H125H |
| 65-250/220/W | A | 80 | 65 | 100 | 90 | 540 | 490 | 470 | 310 | 250 | 1374 | 1250 | 205 | 840 | 140 | 588 | 4xØ24 (M20) | 309 | H110B |
| 65-250/300/W | A | 80 | 65 | 100 | 90 | 610 | 550 | 470 | 310 | 250 | 1477 | 1400 | 230 | 940 | 140 | 627 | 4xØ28 (M24) | 391 | H125C |
| 65-250/370/W | A | 80 | 65 | 100 | 90 | 610 | 550 | 470 | 310 | 250 | 1477 | 1400 | 230 | 940 | 140 | 627 | 4xØ28 (M24) | 412 | H125C |
| 65-250/450/W | A | 80 | 65 | 100 | 90 | 610 | 550 | 470 | 365 | 250 | 1566 | 1400 | 230 | 940 | 140 | 719 | 4xØ28 (M24) | 563 | H125C |
| 65-250/550/W | A | 80 | 65 | 100 | 90 | 660 | 600 | 470 | 390 | 250 | 1675 | 1600 | 270 | 1060 | 140 | 792 | 4xØ28 (M24) | 672 | H140A |
| 65-315/550/W | B | 80 | 65 | 125 | 110 | 750 | 710 | 470 | 405 | 280 | 1700 | 1550 | 110 | 1330 | 140 | 807 | 6xØ19 (M16) | 746 | H140A |
| 65-315/750/W | B | 80 | 65 | 125 | 110 | 750 | 710 | 470 | 390 | 280 | 1806 | 1550 | 110 | 1330 | 140 | 862 | 6xØ19 (M16) | 964 | H160A |
| 65-315/900/W | B | 80 | 65 | 125 | 110 | 750 | 710 | 470 | 390 | 280 | 1806 | 1550 | 110 | 1330 | 140 | 862 | 6xØ19 (M16) | 999 | H160A |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nsc40-65-2p50-en_c_tit

Available ASME B16.5 version on request. For flanges dimensions see drawing.

**NSCC 80, 100, 125 SERIES (SPACER COUPLING)
DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES**

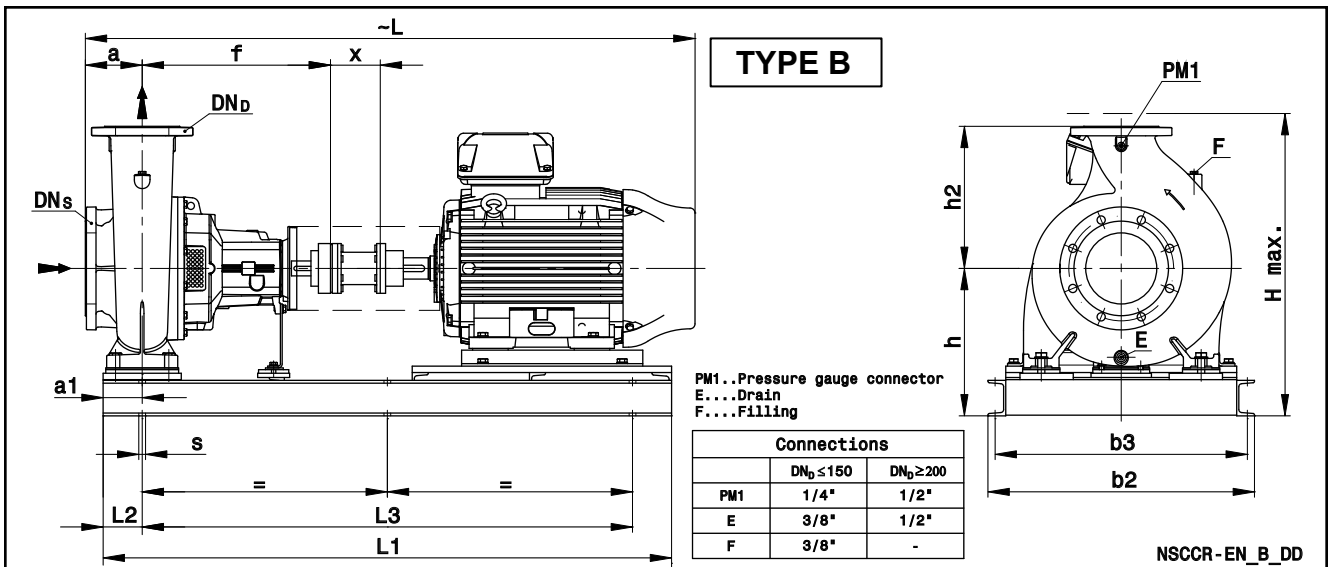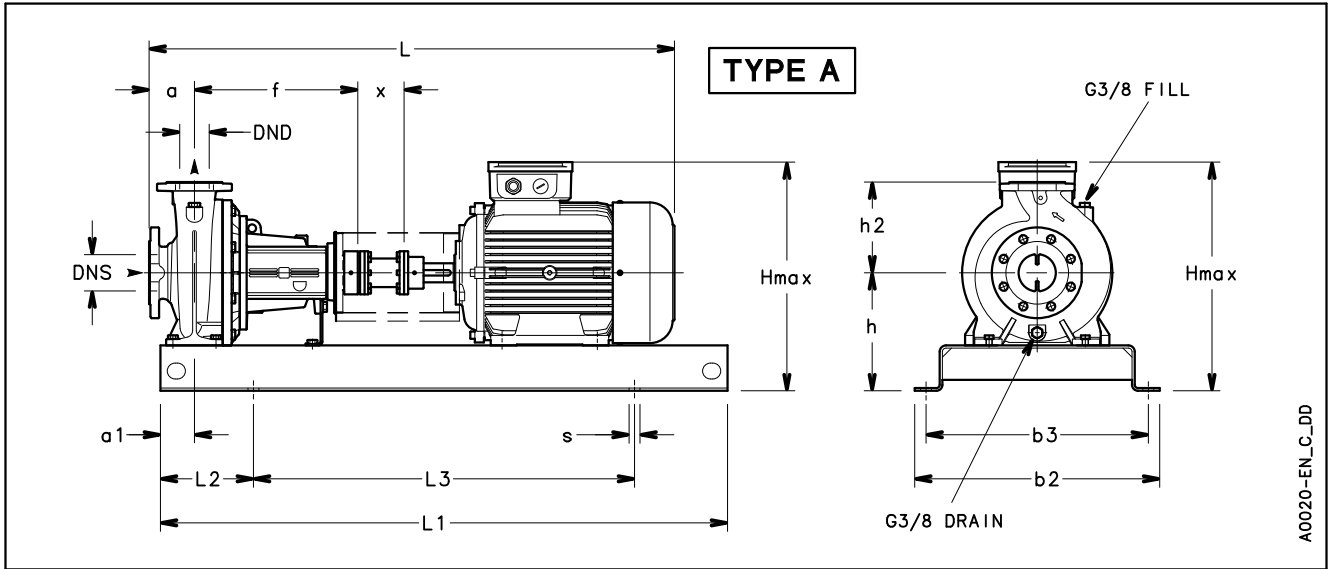

NSCC 80, 100, 125 SERIES (SPACER COUPLING) DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES



| PUMP TYPE NSCC...2 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | WEIGHT (kg) G | COUPLING TYPE | |
|-----------------------|------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|-----|------|-----|----------|---------------------|------------------|-----------------|
| | | DNS | DND | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | x | H max | | | s FOR SCREWS |
| 80-160/110/P | A | 100 | 80 | 125 | 75 | 540 | 490 | 360 | 280 | 225 | 1229 | 1250 | 205 | 840 | 140 | 520 | 4xØ24 (M20) | 197 | H95F |
| 80-160/150/P | A | 100 | 80 | 125 | 75 | 540 | 490 | 360 | 280 | 225 | 1229 | 1250 | 205 | 840 | 140 | 520 | 4xØ24 (M20) | 214 | H95F |
| 80-160/185/P | A | 100 | 80 | 125 | 75 | 540 | 490 | 360 | 280 | 225 | 1229 | 1250 | 205 | 840 | 140 | 520 | 4xØ24 (M20) | 227 | H95F |
| 80-160/220/W | A | 100 | 80 | 125 | 75 | 540 | 490 | 360 | 280 | 225 | 1289 | 1250 | 205 | 840 | 140 | 559 | 4xØ24 (M20) | 294 | H110E |
| 80-200/220/W | A | 100 | 80 | 125 | 75 | 540 | 490 | 470 | 280 | 250 | 1399 | 1250 | 205 | 840 | 140 | 559 | 4xØ24 (M20) | 311 | H110B |
| 80-200/300/W | A | 100 | 80 | 125 | 75 | 610 | 550 | 470 | 310 | 250 | 1502 | 1400 | 230 | 940 | 140 | 627 | 4xØ28 (M24) | 393 | H125C |
| 80-200/370/W | A | 100 | 80 | 125 | 75 | 610 | 550 | 470 | 310 | 250 | 1502 | 1400 | 230 | 940 | 140 | 627 | 4xØ28 (M24) | 414 | H125C |
| 80-200/450/W | A | 100 | 80 | 125 | 75 | 610 | 550 | 470 | 365 | 250 | 1591 | 1400 | 230 | 940 | 140 | 749 | 4xØ28 (M24) | 565 | H125C |
| 80-250/370/W | A | 100 | 80 | 125 | 90 | 610 | 550 | 470 | 310 | 280 | 1502 | 1400 | 230 | 940 | 140 | 627 | 4xØ28 (M24) | 417 | H125C |
| 80-250/450/W | A | 100 | 80 | 125 | 90 | 610 | 550 | 470 | 365 | 280 | 1591 | 1400 | 230 | 940 | 140 | 749 | 4xØ28 (M24) | 568 | H125C |
| 80-250/550/W | A | 100 | 80 | 125 | 90 | 660 | 600 | 470 | 390 | 280 | 1700 | 1600 | 270 | 1060 | 140 | 792 | 4xØ28 (M24) | 677 | H140A |
| 80-250/750/W | A | 100 | 80 | 125 | 90 | 730 | 670 | 470 | 420 | 280 | 1806 | 1800 | 300 | 1200 | 140 | 892 | 4xØ28 (M24) | 945 | H160A |
| 80-316/900/W | B | 100 | 80 | 125 | 110 | 750 | 710 | 530 | 440 | 315 | 1866 | 1600 | 110 | 1380 | 140 | 912 | 6xØ19 (M16) | 1068 | H160B |
| 80-316/1100/W | B | 100 | 80 | 125 | 110 | 860 | 810 | 530 | 505 | 315 | 2039 | 1850 | 110 | 1630 | 140 | 1035 | 6xØ26 (M20) | 1346 | H160B |
| 80-316/1320/W | B | 100 | 80 | 125 | 110 | 860 | 810 | 530 | 505 | 315 | 2039 | 1850 | 110 | 1630 | 140 | 1035 | 6xØ26 (M20) | 1432 | H160B |
| 80-316/1600/W | B | 100 | 80 | 125 | 110 | 860 | 810 | 530 | 505 | 315 | 2039 | 1850 | 110 | 1630 | 140 | 1035 | 6xØ26 (M20) | 1513 | H160B |
| 100-160/150/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1339 | 1330 | 110 | 1110 | 140 | 645 | 6xØ19 (M16) | 307 | H95E |
| 100-160/185/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1339 | 1330 | 110 | 1110 | 140 | 645 | 6xØ19 (M16) | 314 | H95E |
| 100-160/220/W | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1399 | 1330 | 110 | 1110 | 140 | 665 | 6xØ19 (M16) | 388 | H110B |
| 100-160/300/W | B | 125 | 100 | 125 | 110 | 560 | 520 | 470 | 330 | 280 | 1502 | 1350 | 110 | 1130 | 140 | 647 | 6xØ19 (M16) | 426 | H125C |
| 100-200/300/W | B | 125 | 100 | 125 | 110 | 560 | 520 | 470 | 330 | 280 | 1502 | 1350 | 110 | 1130 | 140 | 647 | 6xØ19 (M16) | 434 | H125C |
| 100-200/370/W | B | 125 | 100 | 125 | 110 | 560 | 520 | 470 | 330 | 280 | 1502 | 1350 | 110 | 1130 | 140 | 647 | 6xØ19 (M16) | 455 | H125C |
| 100-200/450/W | B | 125 | 100 | 125 | 110 | 560 | 520 | 470 | 355 | 280 | 1591 | 1350 | 110 | 1130 | 140 | 739 | 6xØ19 (M16) | 613 | H125C |
| 100-200/550/W | B | 125 | 100 | 125 | 110 | 750 | 710 | 470 | 405 | 280 | 1700 | 1550 | 110 | 1330 | 140 | 807 | 6xØ19 (M16) | 741 | H140A |
| 100-250/450/W | B | 125 | 100 | 140 | 110 | 560 | 520 | 470 | 355 | 280 | 1606 | 1350 | 110 | 1130 | 140 | 739 | 6xØ19 (M16) | 616 | H125C |
| 100-250/550/W | B | 125 | 100 | 140 | 110 | 750 | 710 | 470 | 405 | 280 | 1715 | 1550 | 110 | 1330 | 140 | 807 | 6xØ19 (M16) | 744 | H140A |
| 100-250/750/W | B | 125 | 100 | 140 | 110 | 750 | 710 | 470 | 390 | 280 | 1821 | 1550 | 110 | 1330 | 140 | 862 | 6xØ19 (M16) | 962 | H160A |
| 100-250/900/W | B | 125 | 100 | 140 | 110 | 750 | 710 | 470 | 390 | 280 | 1821 | 1550 | 110 | 1330 | 140 | 862 | 6xØ19 (M16) | 997 | H160A |
| 100-316/1100/W | B | 125 | 100 | 140 | 110 | 860 | 810 | 530 | 505 | 315 | 2054 | 1850 | 110 | 1630 | 140 | 1035 | 6xØ26 (M20) | 1349 | H160B |
| 100-316/1320/W | B | 125 | 100 | 140 | 110 | 860 | 810 | 530 | 505 | 315 | 2054 | 1850 | 110 | 1630 | 140 | 1035 | 6xØ26 (M20) | 1435 | H160B |
| 100-316/1600/W | B | 125 | 100 | 140 | 110 | 860 | 810 | 530 | 505 | 315 | 2054 | 1850 | 110 | 1630 | 140 | 1035 | 6xØ26 (M20) | 1516 | H160B |
| 125-200/450/W | B | 150 | 125 | 140 | 110 | 560 | 520 | 470 | 355 | 315 | 1606 | 1350 | 110 | 1130 | 140 | 739 | 6xØ19 (M16) | 621 | H125C |
| 125-200/550/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 470 | 405 | 315 | 1715 | 1550 | 110 | 1330 | 140 | 807 | 6xØ19 (M16) | 748 | H140A |
| 125-200/750/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 470 | 405 | 315 | 1821 | 1550 | 110 | 1330 | 140 | 877 | 6xØ19 (M16) | 977 | H160A |
| 125-200/900/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 470 | 405 | 315 | 1821 | 1550 | 110 | 1330 | 140 | 877 | 6xØ19 (M16) | 1012 | H160A |
| 125-315/1100/W | B | 150 | 125 | 140 | 110 | 860 | 810 | 530 | 505 | 355 | 2054 | 1850 | 110 | 1630 | 140 | 1035 | 6xØ26 (M20) | 1351 | H160B |
| 125-315/1320/W | B | 150 | 125 | 140 | 110 | 860 | 810 | 530 | 505 | 355 | 2054 | 1850 | 110 | 1630 | 140 | 1035 | 6xØ26 (M20) | 1437 | H160B |
| 125-315/1600/W | B | 150 | 125 | 140 | 110 | 860 | 810 | 530 | 505 | 355 | 2054 | 1850 | 110 | 1630 | 140 | 1035 | 6xØ26 (M20) | 1518 | H160B |
| 125-315/2000/W | B | 150 | 125 | 140 | 110 | 860 | 810 | 530 | 505 | 355 | 2163 | 1850 | 110 | 1630 | 140 | 1080 | 6xØ26 (M20) | 1699 | H180A |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscc80-125_2p50-en_c_td

Available ASME B16.5 version on request. For flanges dimensions see drawing.

NSCC 32 SERIES (SPACER COUPLING) DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

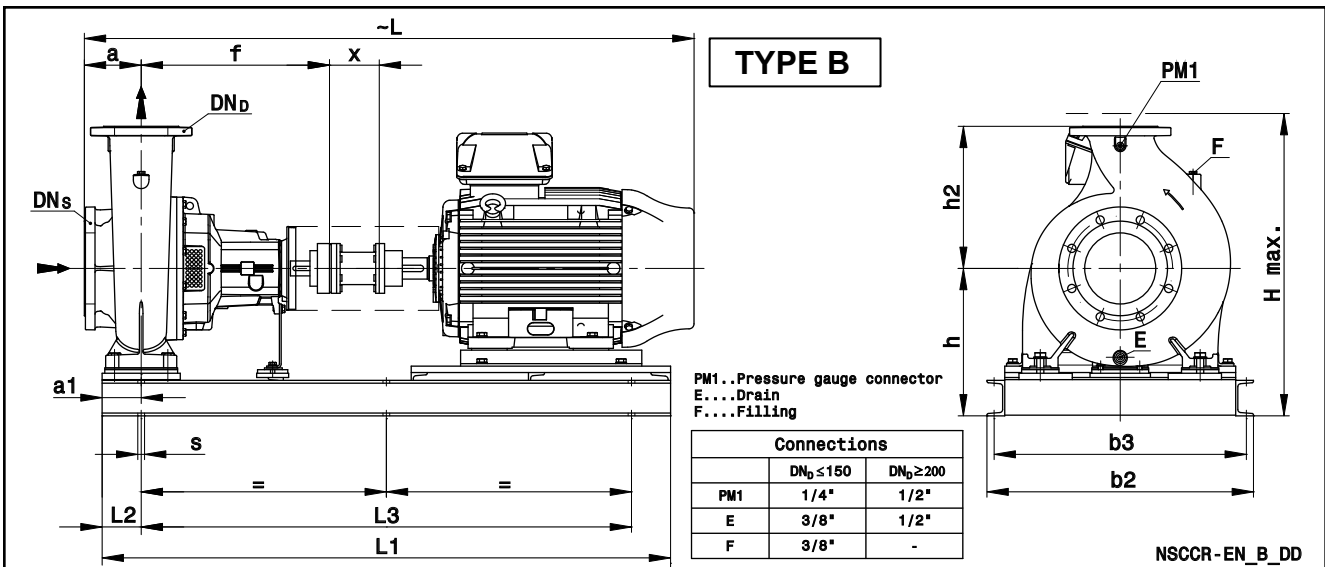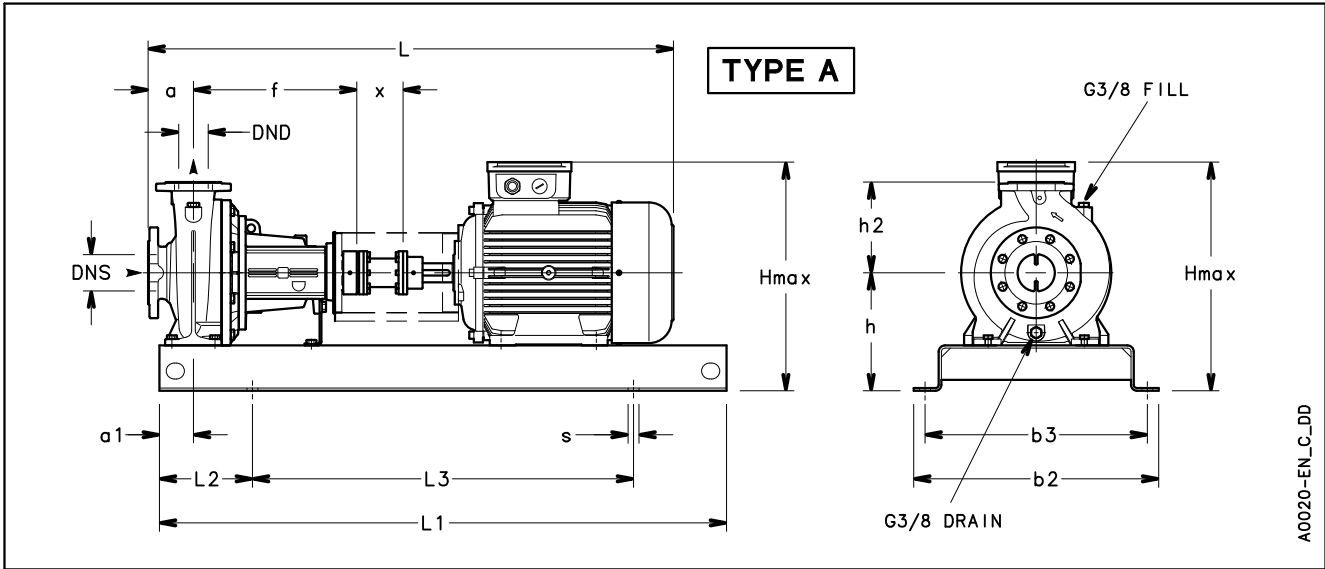

| PUMP TYPE NSCC..4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | WEIGHT kg | COUPLING TYPE | |
|----------------------|------|-----------------|-----------------|-----|----|-----|-----|-----|-----|-----|-----|------|-----|-----|-----|----------|--------------|------------------|-----------------|
| | | DN _S | DN _D | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | x | H max | | | s FOR SCREWS |
| 32-125/02B/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 801 | 800 | 130 | 540 | 100 | 352 | 4xØ19 (M16) | 64 | H80D |
| 32-125/02A/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 801 | 800 | 130 | 540 | 100 | 352 | 4xØ19 (M16) | 64 | H80D |
| 32-125/02/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 801 | 800 | 130 | 540 | 100 | 352 | 4xØ19 (M16) | 64 | H80D |
| 32-125/03/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 801 | 800 | 130 | 540 | 100 | 352 | 4xØ19 (M16) | 65 | H80D |
| 32-160/02/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 801 | 800 | 130 | 540 | 100 | 392 | 4xØ19 (M16) | 65 | H80D |
| 32-160/03/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 801 | 800 | 130 | 540 | 100 | 392 | 4xØ19 (M16) | 66 | H80D |
| 32-160/05A/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 843 | 800 | 130 | 540 | 100 | 392 | 4xØ19 (M16) | 69 | H80A |
| 32-160/05/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 843 | 800 | 130 | 540 | 100 | 392 | 4xØ19 (M16) | 69 | H80A |
| 32-200/05A/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 260 | 180 | 843 | 800 | 130 | 540 | 100 | 440 | 4xØ19 (M16) | 76 | H80A |
| 32-200/05/S | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 260 | 180 | 843 | 800 | 130 | 540 | 100 | 440 | 4xØ19 (M16) | 76 | H80A |
| 32-200/07/X | A | 50 | 32 | 80 | 60 | 360 | 320 | 360 | 260 | 180 | 811 | 800 | 130 | 540 | 100 | 440 | 4xØ19 (M16) | 79 | H80A |
| 32-200/11/P | A | 50 | 32 | 80 | 60 | 390 | 350 | 360 | 260 | 180 | 888 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 88 | H80B |
| 32-250/11A/P | A | 50 | 32 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 908 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 115 | H80B |
| 32-250/11/P | A | 50 | 32 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 908 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 115 | H80B |
| 32-250/15/P | A | 50 | 32 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 908 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 120 | H80B |
| 32-250/22/P | A | 50 | 32 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 985 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 130 | H80C |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscc32_4p50-en_c_ttd

Available ASME B16.5 version on request. For flanges dimensions see drawing.

NSCC 40, 50, 65 SERIES (SPACER COUPLING) DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES



| PUMP TYPE NSCC...4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | H max | s FOR SCREWS | WEIGHT kg | COUPLING TYPE |
|-----------------------|------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|-----|------|-----|-----|-------------|-----------------|--------------|------------------|
| | | DNS | DND | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L2 | L3 | x | | | | | |
| 40-125/02A/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 801 | 800 | 130 | 540 | 100 | 352 | 4xØ19 (M16) | 65 | H80D | |
| 40-125/02/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 801 | 800 | 130 | 540 | 100 | 352 | 4xØ19 (M16) | 65 | H80D | |
| 40-125/03/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 801 | 800 | 130 | 540 | 100 | 352 | 4xØ19 (M16) | 66 | H80D | |
| 40-125/05/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 212 | 140 | 843 | 800 | 130 | 540 | 100 | 352 | 4xØ19 (M16) | 69 | H80A | |
| 40-160/03/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 801 | 800 | 130 | 540 | 100 | 392 | 4xØ19 (M16) | 67 | H80D | |
| 40-160/05/S | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 843 | 800 | 130 | 540 | 100 | 392 | 4xØ19 (M16) | 70 | H80A | |
| 40-160/07/X | A | 65 | 40 | 80 | 60 | 360 | 320 | 360 | 232 | 160 | 811 | 800 | 130 | 540 | 100 | 392 | 4xØ19 (M16) | 73 | H80A | |
| 40-160/11/P | A | 65 | 40 | 80 | 60 | 390 | 350 | 360 | 232 | 160 | 888 | 900 | 150 | 600 | 100 | 392 | 4xØ19 (M16) | 82 | H80B | |
| 40-200/07/X | A | 65 | 40 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 831 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 84 | H80A | |
| 40-200/11/P | A | 65 | 40 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 908 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 90 | H80B | |
| 40-200/15A/P | A | 65 | 40 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 908 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 95 | H80B | |
| 40-200/15/P | A | 65 | 40 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 908 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 95 | H80B | |
| 40-250/11/P | A | 65 | 40 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 908 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 115 | H80E | |
| 40-250/15/P | A | 65 | 40 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 908 | 1000 | 170 | 660 | 100 | 505 | 4xØ19 (M16) | 121 | H80B | |
| 40-250/22A/P | A | 65 | 40 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 985 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 131 | H80C | |
| 40-250/22/P | A | 65 | 40 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 985 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 131 | H80C | |
| 40-250/30/P | A | 65 | 40 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 1002 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 136 | H80C | |
| 50-125/03/S | A | 65 | 50 | 100 | 60 | 360 | 320 | 360 | 232 | 160 | 821 | 800 | 130 | 540 | 100 | 392 | 4xØ19 (M16) | 69 | H80D | |
| 50-125/05/S | A | 65 | 50 | 100 | 60 | 360 | 320 | 360 | 232 | 160 | 863 | 800 | 130 | 540 | 100 | 392 | 4xØ19 (M16) | 72 | H80A | |
| 50-125/07/X | A | 65 | 50 | 100 | 60 | 360 | 320 | 360 | 232 | 160 | 831 | 800 | 130 | 540 | 100 | 392 | 4xØ19 (M16) | 75 | H80A | |
| 50-125/11/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 232 | 160 | 908 | 900 | 150 | 600 | 100 | 392 | 4xØ19 (M16) | 84 | H80B | |
| 50-160/07/X | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 831 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 85 | H80A | |
| 50-160/11A/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 908 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 91 | H80B | |
| 50-160/11/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 908 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 91 | H80B | |
| 50-160/15/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 180 | 908 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 96 | H80B | |
| 50-200/11/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 200 | 908 | 900 | 150 | 600 | 100 | 460 | 4xØ19 (M16) | 92 | H80B | |
| 50-200/15/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 200 | 908 | 900 | 150 | 600 | 100 | 460 | 4xØ19 (M16) | 97 | H80B | |
| 50-200/22A/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 200 | 985 | 900 | 150 | 600 | 100 | 460 | 4xØ19 (M16) | 107 | H80C | |
| 50-200/22/P | A | 65 | 50 | 100 | 60 | 390 | 350 | 360 | 260 | 200 | 985 | 900 | 150 | 600 | 100 | 460 | 4xØ19 (M16) | 107 | H80C | |
| 50-250/22A/P | A | 65 | 50 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 985 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 132 | H80C | |
| 50-250/22/P | A | 65 | 50 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 985 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 132 | H80C | |
| 50-250/30/P | A | 65 | 50 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 1002 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 137 | H80C | |
| 50-250/40/P | A | 65 | 50 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 1002 | 1000 | 170 | 660 | 100 | 505 | 4xØ24 (M20) | 156 | H80C | |
| 50-315/40/P | B | 65 | 50 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1177 | 1100 | 110 | 880 | 140 | 645 | 6xØ19 (M16) | 249 | H95C | |
| 50-315/55/P | B | 65 | 50 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1220 | 1100 | 110 | 880 | 140 | 665 | 6xØ19 (M16) | 260 | H95D | |
| 50-315/75/P | B | 65 | 50 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1220 | 1100 | 110 | 880 | 140 | 665 | 6xØ19 (M16) | 260 | H95D | |
| 50-315/110/P | B | 65 | 50 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1339 | 1330 | 110 | 1110 | 140 | 645 | 6xØ19 (M16) | 293 | H95E | |
| 65-125/05/S | A | 80 | 65 | 100 | 75 | 390 | 350 | 360 | 260 | 180 | 863 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 86 | H80A | |
| 65-125/07/X | A | 80 | 65 | 100 | 75 | 390 | 350 | 360 | 260 | 180 | 831 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 89 | H80A | |
| 65-125/11/P | A | 80 | 65 | 100 | 75 | 390 | 350 | 360 | 260 | 180 | 908 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 95 | H80B | |
| 65-125/15/P | A | 80 | 65 | 100 | 75 | 390 | 350 | 360 | 260 | 180 | 908 | 900 | 150 | 600 | 100 | 440 | 4xØ19 (M16) | 100 | H80B | |
| 65-160/11A/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 200 | 908 | 1000 | 170 | 660 | 100 | 460 | 4xØ24 (M20) | 116 | H80B | |
| 65-160/11/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 200 | 908 | 1000 | 170 | 660 | 100 | 460 | 4xØ24 (M20) | 116 | H80B | |
| 65-160/15/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 200 | 908 | 1000 | 170 | 660 | 100 | 460 | 4xØ24 (M20) | 121 | H80B | |
| 65-160/22A/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 200 | 985 | 1000 | 170 | 660 | 100 | 460 | 4xØ24 (M20) | 131 | H80C | |
| 65-160/22/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 260 | 200 | 985 | 1000 | 170 | 660 | 100 | 460 | 4xØ24 (M20) | 131 | H80C | |
| 65-200/15/P | A | 80 | 65 | 100 | 75 | 450 | 400 | 360 | 280 | 225 | 948 | 1000 | 170 | 660 | 140 | 505 | 4xØ24 (M20) | 124 | H80E | |
| 65-200/22A/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 280 | 225 | 1025 | 1120 | 190 | 740 | 140 | 505 | 4xØ24 (M20) | 140 | H80F | |
| 65-200/22/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 280 | 225 | 1025 | 1120 | 190 | 740 | 140 | 505 | 4xØ24 (M20) | 140 | H80F | |
| 65-200/30/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 280 | 225 | 1042 | 1120 | 190 | 740 | 140 | 505 | 4xØ24 (M20) | 145 | H80F | |
| 65-200/40/P | A | 80 | 65 | 100 | 75 | 490 | 440 | 360 | 280 | 225 | 1042 | 1120 | 190 | 740 | 140 | 505 | 4xØ24 (M20) | 164 | H80F | |
| 65-250/30/P | A | 80 | 65 | 100 | 90 | 490 | 440 | 470 | 310 | 250 | 1135 | 1120 | 190 | 740 | 140 | 560 | 4xØ24 (M20) | 164 | H95C | |
| 65-250/40/P | A | 80 | 65 | 100 | 90 | 490 | 440 | 470 | 310 | 250 | 1152 | 1120 | 190 | 740 | 140 | 560 | 4xØ24 (M20) | 183 | H95C | |
| 65-250/55A/P | A | 80 | 65 | 100 | 90 | 490 | 440 | 470 | 310 | 250 | 1195 | 1120 | 190 | 740 | 140 | 560 | 4xØ24 (M20) | 192 | H95C | |
| 65-250/55/P | A | 80 | 65 | 100 | 90 | 490 | 440 | 470 | 310 | 250 | 1195 | 1120 | 190 | 740 | 140 | 560 | 4xØ24 (M20) | 192 | H95C | |
| 65-250/75/P | A | 80 | 65 | 100 | 90 | 490 | 440 | 470 | 310 | 250 | 1195 | 1120 | 190 | 740 | 140 | 560 | 4xØ24 (M20) | 196 | H95C | |
| 65-315/55/P | B | 80 | 65 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1220 | 1100 | 110 | 880 | 140 | 665 | 6xØ19 (M16) | 267,2 | H95D | |
| 65-315/75/P | B | 80 | 65 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1220 | 1100 | 110 | 880 | 140 | 665 | 6xØ19 (M16) | 267,2 | H95D | |
| 65-315/110/P | B | 80 | 65 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1339 | 1330 | 110 | 1110 | 140 | 645 | 6xØ19 (M16) | 300 | H95E | |
| 65-315/150/P | B | 80 | 65 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1339 | 1330 | 110 | 1110 | 140 | 645 | 6xØ19 (M16) | 345,6 | H110E | |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscc40-65_4p50-en_c_1d

Available ASME B16.5 version on request. For flanges dimensions see drawing.

**NSCC 80, 100, 125 SERIES (SPACER COUPLING)
DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES**

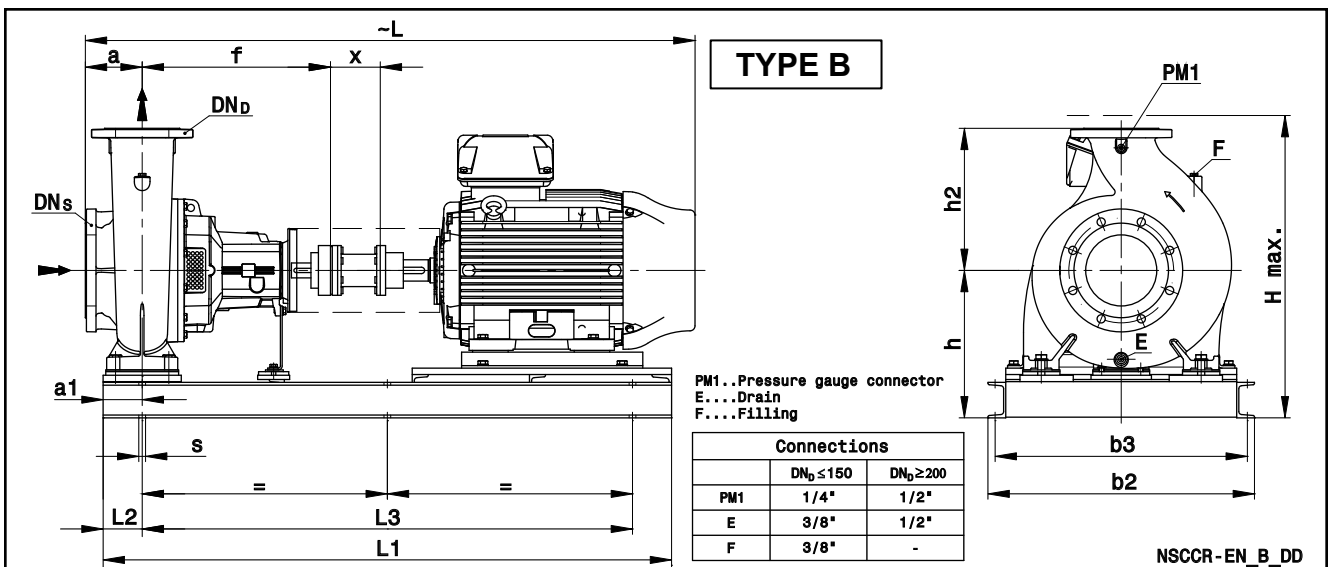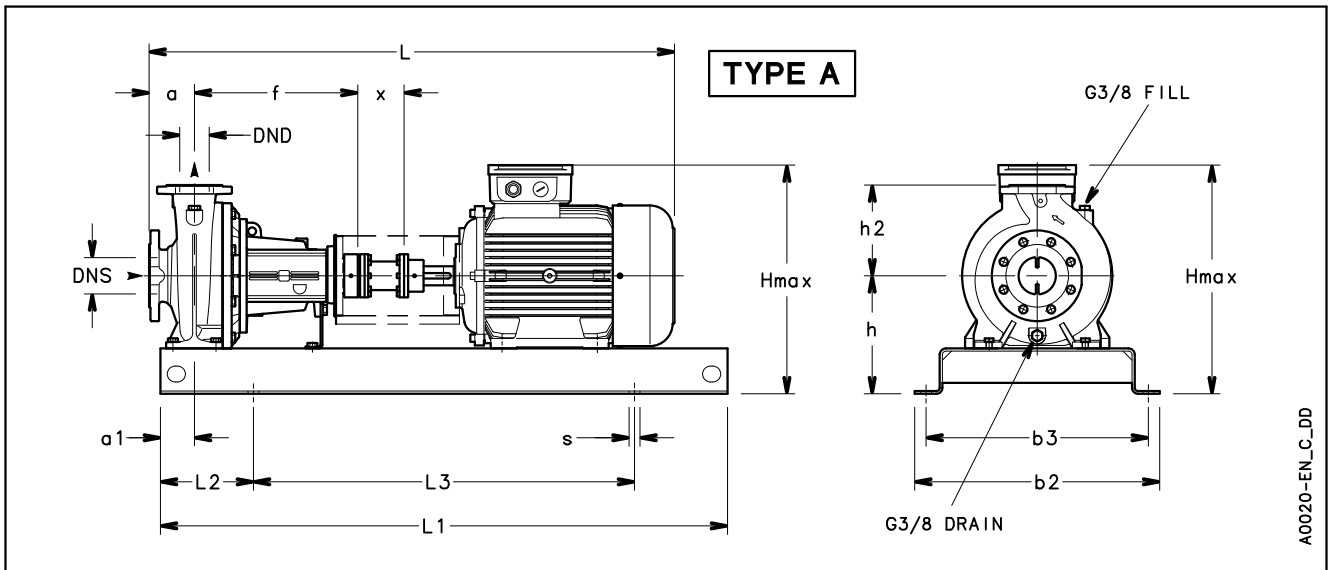

NSCC 80, 100, 125 SERIES (SPACER COUPLING) DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES


| PUMP TYPE NSCC...4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | WEIGHT (kg) G | COUPLING TYPE | |
|-----------------------|------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|-----|-----|----------|---------------------|------------------|-----------------|
| | | DNS | DND | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L3 | L2 | x | H max | | | s FOR SCREWS |
| 80-160/15/P | A | 100 | 80 | 125 | 75 | 450 | 400 | 360 | 280 | 225 | 973 | 1000 | 170 | 660 | 140 | 505 | 4xØ24 (M20) | 127 | H80E |
| 80-160/22A/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 360 | 280 | 225 | 1050 | 1120 | 190 | 740 | 140 | 505 | 4xØ24 (M20) | 143 | H80F |
| 80-160/22/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 360 | 280 | 225 | 1050 | 1120 | 190 | 740 | 140 | 505 | 4xØ24 (M20) | 143 | H80F |
| 80-160/30/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 360 | 280 | 225 | 1067 | 1120 | 190 | 740 | 140 | 505 | 4xØ24 (M20) | 148 | H80F |
| 80-200/30/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 470 | 280 | 250 | 1177 | 1120 | 190 | 740 | 140 | 530 | 4xØ24 (M20) | 165 | H80G |
| 80-200/40/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 470 | 280 | 250 | 1177 | 1120 | 190 | 740 | 140 | 530 | 4xØ24 (M20) | 185 | H80G |
| 80-200/55A/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 470 | 280 | 250 | 1220 | 1120 | 190 | 740 | 140 | 530 | 4xØ24 (M20) | 194 | H95C |
| 80-200/55/P | A | 100 | 80 | 125 | 75 | 490 | 440 | 470 | 280 | 250 | 1220 | 1120 | 190 | 740 | 140 | 530 | 4xØ24 (M20) | 194 | H95C |
| 80-250/55A/P | A | 100 | 80 | 125 | 90 | 540 | 490 | 470 | 310 | 280 | 1220 | 1250 | 205 | 840 | 140 | 590 | 4xØ24 (M20) | 203 | H95C |
| 80-250/55/P | A | 100 | 80 | 125 | 90 | 540 | 490 | 470 | 310 | 280 | 1220 | 1250 | 205 | 840 | 140 | 590 | 4xØ24 (M20) | 203 | H95C |
| 80-250/75/P | A | 100 | 80 | 125 | 90 | 540 | 490 | 470 | 310 | 280 | 1220 | 1250 | 205 | 840 | 140 | 590 | 4xØ24 (M20) | 207 | H95C |
| 80-250/110/P | A | 100 | 80 | 125 | 90 | 540 | 490 | 470 | 310 | 280 | 1339 | 1250 | 205 | 840 | 140 | 590 | 4xØ24 (M20) | 262 | H95E |
| 80-315/110A/P | B | 100 | 80 | 125 | 110 | 670 | 630 | 470 | 365 | 315 | 1339 | 1330 | 1110 | 110 | 140 | 680 | 6xØ19 (M16) | 308,8 | H95E |
| 80-315/110/P | B | 100 | 80 | 125 | 110 | 670 | 630 | 470 | 365 | 315 | 1339 | 1330 | 1110 | 110 | 140 | 680 | 6xØ19 (M16) | 308,8 | H95E |
| 80-315/150/P | B | 100 | 80 | 125 | 110 | 670 | 630 | 470 | 365 | 315 | 1339 | 1330 | 1110 | 110 | 140 | 680 | 6xØ19 (M16) | 354,4 | H110E |
| 80-315/185/W | B | 100 | 80 | 125 | 110 | 670 | 630 | 470 | 385 | 315 | 1399 | 1330 | 1110 | 110 | 140 | 700 | 6xØ19 (M16) | 413,3 | H110B |
| 80-315/220/W | B | 100 | 80 | 125 | 110 | 670 | 630 | 470 | 385 | 315 | 1437 | 1330 | 1110 | 110 | 140 | 700 | 6xØ19 (M16) | 431,3 | H110B |
| 80-400/185/W | B | 100 | 80 | 125 | 110 | 670 | 630 | 530 | 400 | 355 | 1459 | 1430 | 1210 | 110 | 140 | 755 | 6xØ19 (M16) | 445,9 | H110C |
| 80-400/220/W | B | 100 | 80 | 125 | 110 | 670 | 630 | 530 | 400 | 355 | 1497 | 1430 | 1210 | 110 | 140 | 755 | 6xØ19 (M16) | 463,9 | H110C |
| 80-400/300/W | B | 100 | 80 | 125 | 110 | 670 | 630 | 530 | 420 | 355 | 1562 | 1430 | 1210 | 110 | 140 | 775 | 6xØ19 (M16) | 517,5 | H125D |
| 80-400/370/W | B | 100 | 80 | 125 | 110 | 750 | 710 | 530 | 415 | 355 | 1681 | 1600 | 1380 | 110 | 140 | 799 | 6xØ19 (M16) | 708,4 | H140B |
| 100-160/22A/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 355 | 280 | 1160 | 1100 | 880 | 110 | 140 | 635 | 6xØ19 (M16) | 219 | H95C |
| 100-160/22/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 355 | 280 | 1160 | 1100 | 880 | 110 | 140 | 635 | 6xØ19 (M16) | 219 | H95C |
| 100-160/30/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 355 | 280 | 1177 | 1100 | 880 | 110 | 140 | 635 | 6xØ19 (M16) | 222 | H95C |
| 100-160/40/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1177 | 1100 | 880 | 110 | 140 | 645 | 6xØ19 (M16) | 243 | H95C |
| 100-200/40/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 365 | 280 | 1177 | 1100 | 880 | 110 | 140 | 645 | 6xØ19 (M16) | 251 | H95C |
| 100-200/55/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1220 | 1100 | 880 | 110 | 140 | 665 | 6xØ19 (M16) | 262 | H95D |
| 100-200/75/P | B | 125 | 100 | 125 | 110 | 670 | 630 | 470 | 385 | 280 | 1220 | 1100 | 880 | 110 | 140 | 665 | 6xØ19 (M16) | 262 | H95D |
| 100-250/55/P | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 385 | 280 | 1235 | 1100 | 880 | 110 | 140 | 665 | 6xØ19 (M16) | 265 | H95D |
| 100-250/75/P | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 385 | 280 | 1235 | 1100 | 880 | 110 | 140 | 665 | 6xØ19 (M16) | 265 | H95D |
| 100-250/110/P | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 365 | 280 | 1354 | 1330 | 1110 | 110 | 140 | 645 | 6xØ19 (M16) | 298 | H95E |
| 100-315/110/P | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 365 | 315 | 1354 | 1330 | 1110 | 110 | 140 | 680 | 6xØ19 (M16) | 307 | H95E |
| 100-315/150/P | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 365 | 315 | 1354 | 1330 | 1110 | 110 | 140 | 680 | 6xØ19 (M16) | 352 | H110E |
| 100-315/185/W | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 385 | 315 | 1414 | 1330 | 1110 | 110 | 140 | 700 | 6xØ19 (M16) | 411 | H110B |
| 100-315/220/W | B | 125 | 100 | 140 | 110 | 670 | 630 | 470 | 385 | 315 | 1452 | 1330 | 1110 | 110 | 140 | 700 | 6xØ19 (M16) | 429 | H110B |
| 100-315/300/W | B | 125 | 100 | 140 | 110 | 560 | 520 | 470 | 355 | 315 | 1517 | 1350 | 1130 | 110 | 140 | 672 | 6xØ19 (M16) | 458 | H125C |
| 100-400/300/W | B | 125 | 100 | 140 | 110 | 670 | 630 | 530 | 420 | 355 | 1577 | 1430 | 1210 | 110 | 140 | 775 | 6xØ19 (M16) | 547 | H125D |
| 100-400/370/W | B | 125 | 100 | 140 | 110 | 750 | 710 | 530 | 415 | 355 | 1696 | 1600 | 1380 | 110 | 140 | 799 | 6xØ19 (M16) | 734 | H140B |
| 100-400/450/W | B | 125 | 100 | 140 | 110 | 750 | 710 | 530 | 415 | 355 | 1696 | 1600 | 1380 | 110 | 140 | 799 | 6xØ19 (M16) | 762 | H140B |
| 125-200/55/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 385 | 315 | 1235 | 1100 | 880 | 110 | 140 | 700 | 6xØ19 (M16) | 270 | H95D |
| 125-200/75/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 385 | 315 | 1235 | 1100 | 880 | 110 | 140 | 700 | 6xØ19 (M16) | 270 | H95D |
| 125-200/110/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 365 | 315 | 1354 | 1330 | 1110 | 110 | 140 | 680 | 6xØ19 (M16) | 303 | H95E |
| 125-250/75/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 385 | 355 | 1235 | 1100 | 880 | 110 | 140 | 740 | 6xØ19 (M16) | 270 | H95D |
| 125-250/110/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 365 | 355 | 1354 | 1330 | 1110 | 110 | 140 | 720 | 6xØ19 (M16) | 303 | H95E |
| 125-250/150/P | B | 150 | 125 | 140 | 110 | 670 | 630 | 470 | 365 | 355 | 1354 | 1330 | 1110 | 110 | 140 | 720 | 6xØ19 (M16) | 348 | H110E |
| 125-315/185/W | B | 150 | 125 | 140 | 110 | 670 | 630 | 530 | 400 | 355 | 1474 | 1430 | 1210 | 110 | 140 | 755 | 6xØ19 (M16) | 447 | H110C |
| 125-315/220/W | B | 150 | 125 | 140 | 110 | 670 | 630 | 530 | 400 | 355 | 1512 | 1430 | 1210 | 110 | 140 | 755 | 6xØ19 (M16) | 465 | H110C |
| 125-315/300/W | B | 150 | 125 | 140 | 110 | 670 | 630 | 530 | 420 | 355 | 1577 | 1430 | 1210 | 110 | 140 | 775 | 6xØ19 (M16) | 521 | H125D |
| 125-315/370/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 530 | 415 | 355 | 1696 | 1600 | 1380 | 110 | 140 | 799 | 6xØ19 (M16) | 708 | H140B |
| 125-400/370/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 530 | 440 | 400 | 1696 | 1600 | 1380 | 110 | 140 | 840 | 6xØ19 (M16) | 759 | H140B |
| 125-400/450/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 530 | 440 | 400 | 1696 | 1600 | 1380 | 110 | 140 | 840 | 6xØ19 (M16) | 787 | H140B |
| 125-400/550/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 530 | 440 | 400 | 1775 | 1600 | 1380 | 110 | 140 | 842 | 6xØ19 (M16) | 872 | H160B |
| 125-400/750/W | B | 150 | 125 | 140 | 110 | 750 | 710 | 530 | 440 | 400 | 1881 | 1600 | 1380 | 110 | 140 | 912 | 6xØ19 (M16) | 1083 | H180B |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscc80-125_4p50-en_c_tit

Available ASME B16.5 version on request. For flanges dimensions see drawing.

NSCC 150 SERIES (SPACER COUPLING) DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES

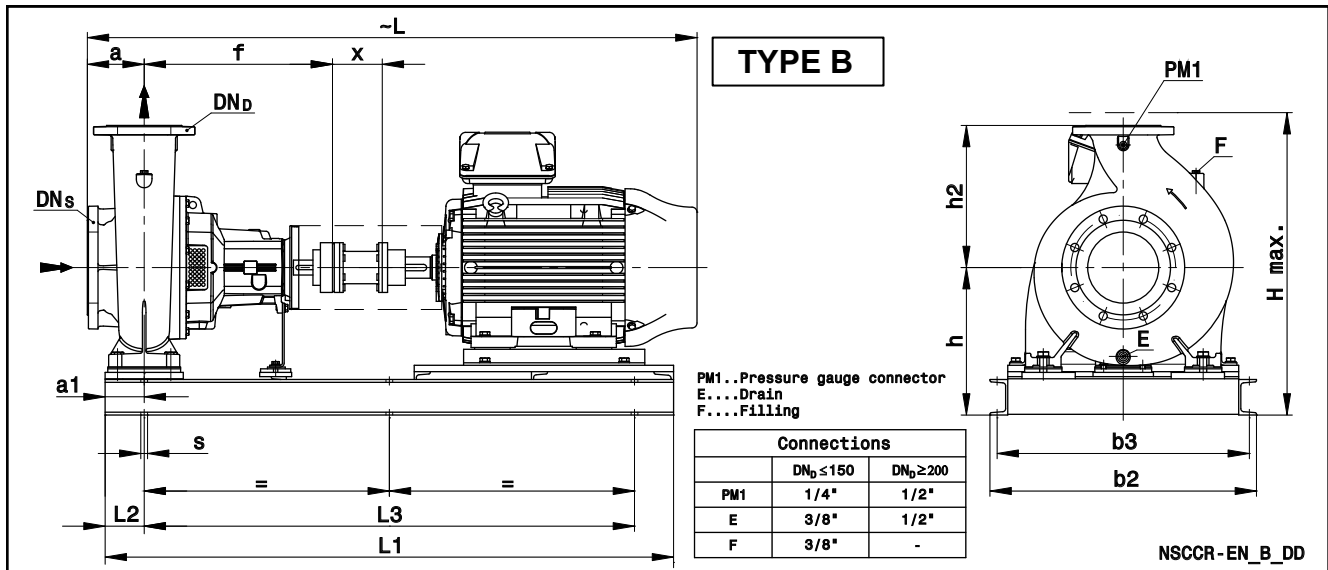

| PUMP TYPE NSCC..4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | H max | s FOR SCREWS | WEIGHT (kg) G | COUPLING TYPE |
|----------------------|------|-----------------|-----------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|-----|-----|------|-------------|-----------------|---------------------|------------------|
| | | DN _s | DN _D | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L3 | L2 | x | | | | | |
| 150-200/110A/P | B | 200 | 150 | 160 | 110 | 670 | 630 | 470 | 385 | 400 | 1374 | 1330 | 1110 | 110 | 140 | 785 | 6xØ19 (M16) | 360 | H95E | |
| 150-200/110/P | B | 200 | 150 | 160 | 110 | 670 | 630 | 470 | 385 | 400 | 1374 | 1330 | 1110 | 110 | 140 | 785 | 6xØ19 (M16) | 360 | H95E | |
| 150-200/150A/P | B | 200 | 150 | 160 | 110 | 670 | 630 | 470 | 385 | 400 | 1374 | 1330 | 1110 | 110 | 140 | 785 | 6xØ19 (M16) | 405 | H110E | |
| 150-200/150/P | B | 200 | 150 | 160 | 110 | 670 | 630 | 470 | 385 | 400 | 1374 | 1330 | 1110 | 110 | 140 | 785 | 6xØ19 (M16) | 405 | H110E | |
| 150-250/150/P | B | 200 | 150 | 160 | 110 | 670 | 630 | 530 | 385 | 400 | 1434 | 1430 | 1210 | 110 | 140 | 785 | 6xØ19 (M16) | 416 | H110F | |
| 150-250/185/W | B | 200 | 150 | 160 | 110 | 670 | 630 | 530 | 400 | 400 | 1494 | 1430 | 1210 | 110 | 140 | 800 | 6xØ19 (M16) | 475 | H110C | |
| 150-250/220/W | B | 200 | 150 | 160 | 110 | 670 | 630 | 530 | 400 | 400 | 1532 | 1430 | 1210 | 110 | 140 | 800 | 6xØ19 (M16) | 493 | H110C | |
| 150-250/300/W | B | 200 | 150 | 160 | 110 | 670 | 630 | 530 | 420 | 400 | 1597 | 1430 | 1210 | 110 | 140 | 820 | 6xØ19 (M16) | 549 | H125D | |
| 150-315/300/W | B | 200 | 150 | 160 | 110 | 670 | 630 | 530 | 420 | 400 | 1597 | 1430 | 1210 | 110 | 140 | 820 | 6xØ19 (M16) | 555 | H125D | |
| 150-315/370/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 415 | 400 | 1716 | 1600 | 1380 | 110 | 140 | 815 | 6xØ19 (M16) | 742 | H140B | |
| 150-315/450/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 415 | 400 | 1716 | 1600 | 1380 | 110 | 140 | 815 | 6xØ19 (M16) | 770 | H140B | |
| 150-400/450/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 440 | 450 | 1716 | 1600 | 1380 | 110 | 140 | 890 | 6xØ19 (M16) | 815 | H140B | |
| 150-400/550/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 440 | 450 | 1795 | 1600 | 1380 | 110 | 140 | 890 | 6xØ19 (M16) | 900 | H160B | |
| 150-400/750/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 440 | 450 | 1901 | 1600 | 1380 | 110 | 140 | 912 | 6xØ19 (M16) | 1111 | H180B | |
| 150-400/900/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 440 | 450 | 1901 | 1600 | 1380 | 110 | 140 | 912 | 6xØ19 (M16) | 1159 | H180B | |
| 150-400/1100/W | B | 200 | 150 | 160 | 110 | 750 | 710 | 530 | 440 | 450 | 1901 | 1600 | 1380 | 110 | 140 | 912 | 6xØ19 (M16) | 1266 | H180B | |
| 150-500/900/W | B | 200 | 150 | 180 | 165 | 860 | 810 | 770 | 565 | 500 | 2271 | 2000 | 1670 | 165 | 250 | 1065 | 6xØ26 (M20) | 1403 | H180D | |
| 150-500/1100/W | B | 200 | 150 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2474 | 2250 | 1920 | 165 | 250 | 1115 | 6xØ26 (M20) | 1702 | H200A | |
| 150-500/1320/W | B | 200 | 150 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2474 | 2250 | 1920 | 165 | 250 | 1115 | 6xØ26 (M20) | 1787 | H200A | |
| 150-500/1600/W | B | 200 | 150 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2474 | 2250 | 1920 | 165 | 250 | 1115 | 6xØ26 (M20) | 1844 | H200A | |
| 150-500/2000/W | B | 200 | 150 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2583 | 2250 | 1920 | 165 | 250 | 1160 | 6xØ26 (M20) | 2033 | H225A | |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscc150_4p50-en_d_td

Available ASME B16.5 version on request. For flanges dimensions see drawing.

NSCC 200, 250, 300 SERIES (SPACER COUPLING) DIMENSIONS AND WEIGHTS AT 50 Hz, 4 POLES


| PUMP TYPE NSCC..4 | TYPE | DIMENSIONS (mm) | | | | | | | | | | | | | | | | WEIGHT (kg) G | COUPLING TYPE |
|----------------------|------|-----------------|-----|-----|-----|------|-----|-----|-----|-----|------|------|------|-----|-----|----------|-----------------|---------------------|------------------|
| | | DNS | DND | a | a1 | b2 | b3 | f | h | h2 | L | L1 | L3 | L2 | x | H max | s FOR SCREWS | | |
| 200-250/185/W | B | 250 | 200 | 180 | 110 | 670 | 630 | 530 | 460 | 475 | 1574 | 1450 | 1230 | 110 | 200 | 935 | 6xØ19 (M16) | 534 | H125E |
| 200-250/220/W | B | 250 | 200 | 180 | 110 | 670 | 630 | 530 | 460 | 475 | 1612 | 1450 | 1230 | 110 | 200 | 935 | 6xØ19 (M16) | 552 | H125E |
| 200-250/300A/W | B | 250 | 200 | 180 | 110 | 670 | 630 | 530 | 460 | 475 | 1677 | 1450 | 1230 | 110 | 200 | 935 | 6xØ19 (M16) | 592 | H125F |
| 200-250/300/W | B | 250 | 200 | 180 | 110 | 670 | 630 | 530 | 460 | 475 | 1677 | 1450 | 1230 | 110 | 200 | 935 | 6xØ19 (M16) | 592 | H125F |
| 200-315/300/W | B | 250 | 200 | 180 | 110 | 670 | 630 | 530 | 460 | 450 | 1677 | 1450 | 1230 | 110 | 200 | 910 | 6xØ19 (M16) | 596 | H125F |
| 200-315/370/W | B | 250 | 200 | 180 | 110 | 750 | 710 | 530 | 480 | 450 | 1796 | 1660 | 1440 | 110 | 200 | 930 | 6xØ19 (M16) | 798 | H140C |
| 200-315/450/W | B | 250 | 200 | 180 | 110 | 750 | 710 | 530 | 480 | 450 | 1796 | 1660 | 1440 | 110 | 200 | 930 | 6xØ19 (M16) | 826 | H140C |
| 200-315/550/W | B | 250 | 200 | 180 | 110 | 750 | 710 | 530 | 480 | 450 | 1875 | 1660 | 1440 | 110 | 200 | 930 | 6xØ19 (M16) | 912 | H160C |
| 200-315/750/W | B | 250 | 200 | 180 | 110 | 750 | 710 | 530 | 480 | 450 | 1981 | 1660 | 1440 | 110 | 200 | 952 | 6xØ19 (M16) | 1123 | H180C |
| 200-400/750A/W | B | 250 | 200 | 180 | 165 | 860 | 810 | 770 | 565 | 500 | 2271 | 2000 | 1670 | 165 | 250 | 1065 | 6xØ26 (M20) | 1310 | H180D |
| 200-400/750/W | B | 250 | 200 | 180 | 165 | 860 | 810 | 770 | 565 | 500 | 2271 | 2000 | 1670 | 165 | 250 | 1065 | 6xØ26 (M20) | 1310 | H180D |
| 200-400/900/W | B | 250 | 200 | 180 | 165 | 860 | 810 | 770 | 565 | 500 | 2271 | 2000 | 1670 | 165 | 250 | 1065 | 6xØ26 (M20) | 1358 | H180D |
| 200-400/1100/W | B | 250 | 200 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2474 | 2250 | 1920 | 165 | 250 | 1115 | 6xØ26 (M20) | 1657 | H200A |
| 200-400/1320/W | B | 250 | 200 | 180 | 165 | 860 | 810 | 770 | 585 | 500 | 2474 | 2250 | 1920 | 165 | 250 | 1115 | 6xØ26 (M20) | 1742 | H200A |
| 200-500/1320/W | B | 250 | 200 | 200 | 165 | 860 | 810 | 770 | 635 | 560 | 2494 | 2250 | 1920 | 165 | 250 | 1195 | 6xØ26 (M20) | 1802 | H200A |
| 200-500/1600/W | B | 250 | 200 | 200 | 165 | 860 | 810 | 770 | 635 | 560 | 2494 | 2250 | 1920 | 165 | 250 | 1195 | 6xØ26 (M20) | 1859 | H200A |
| 200-500/2000/W | B | 250 | 200 | 200 | 165 | 860 | 810 | 770 | 635 | 560 | 2603 | 2250 | 1920 | 165 | 250 | 1210 | 6xØ26 (M20) | 2048 | H225A |
| 200-500/2500/W | B | 250 | 200 | 200 | 165 | 860 | 810 | 770 | 635 | 560 | 2603 | 2250 | 1920 | 165 | 250 | 1210 | 6xØ26 (M20) | 2243 | H225A |
| 200-500/3150/W | B | 250 | 200 | 200 | 165 | 1000 | 930 | 770 | 675 | 560 | 2702 | 2450 | 2120 | 165 | 250 | 1300 | 6xØ29 (M24) | 2590 | H250A |
| 250-315/370/W | B | 300 | 250 | 250 | 165 | 850 | 810 | 530 | 525 | 500 | 1866 | 1700 | 1370 | 165 | 200 | 1025 | 6xØ19 (M16) | 911 | H140C |
| 250-315/450/W | B | 300 | 250 | 250 | 165 | 850 | 810 | 530 | 525 | 500 | 1866 | 1700 | 1370 | 165 | 200 | 1025 | 6xØ19 (M16) | 939 | H140C |
| 250-315/550/W | B | 300 | 250 | 250 | 165 | 850 | 810 | 530 | 525 | 500 | 1945 | 1700 | 1370 | 165 | 200 | 1025 | 6xØ19 (M16) | 1025 | H160C |
| 250-315/750/W | B | 300 | 250 | 250 | 165 | 850 | 810 | 530 | 525 | 500 | 2051 | 1700 | 1370 | 165 | 200 | 1025 | 6xØ19 (M16) | 1236 | H180C |
| 250-400/750/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 565 | 560 | 2291 | 2000 | 1670 | 165 | 250 | 1125 | 6xØ26 (M20) | 1347 | H180D |
| 250-400/900/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 565 | 560 | 2291 | 2000 | 1670 | 165 | 250 | 1125 | 6xØ26 (M20) | 1395 | H180D |
| 250-400/1100/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 585 | 560 | 2494 | 2250 | 1920 | 165 | 250 | 1145 | 6xØ26 (M20) | 1694 | H200A |
| 250-400/1320/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 585 | 560 | 2494 | 2250 | 1920 | 165 | 250 | 1145 | 6xØ26 (M20) | 1779 | H200A |
| 250-400/1600/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 585 | 560 | 2494 | 2250 | 1920 | 165 | 250 | 1145 | 6xØ26 (M20) | 1836 | H200A |
| 250-400/2000/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 585 | 560 | 2603 | 2250 | 1920 | 165 | 250 | 1160 | 6xØ26 (M20) | 2025 | H225A |
| 250-500/1600/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 635 | 670 | 2494 | 2250 | 1920 | 165 | 250 | 1305 | 6xØ26 (M20) | 1910 | H200A |
| 250-500/2000/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 635 | 670 | 2603 | 2250 | 1920 | 165 | 250 | 1305 | 6xØ26 (M20) | 2099 | H225A |
| 250-500/2500/W | B | 300 | 250 | 200 | 165 | 860 | 810 | 770 | 635 | 670 | 2603 | 2250 | 1920 | 165 | 250 | 1305 | 6xØ26 (M20) | 2294 | H225A |
| 250-500/3150/W | B | 300 | 250 | 200 | 165 | 1000 | 930 | 770 | 675 | 670 | 2702 | 2450 | 2120 | 165 | 250 | 1345 | 6xØ29 (M24) | 2641 | H250A |
| 250-500/3550/W | B | 300 | 250 | 200 | 165 | 1000 | 930 | 770 | 675 | 670 | 2702 | 2450 | 2120 | 165 | 250 | 1345 | 6xØ29 (M24) | 2747 | H250A |
| 300-350/750A/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 620 | 600 | 2421 | 2150 | 1750 | 200 | 300 | 1220 | 6xØ26 (M20) | 1524 | N150A |
| 300-350/750/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 620 | 600 | 2421 | 2150 | 1750 | 200 | 300 | 1220 | 6xØ26 (M20) | 1524 | N150A |
| 300-350/900/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 620 | 600 | 2421 | 2150 | 1750 | 200 | 300 | 1220 | 6xØ26 (M20) | 1572 | N150A |
| 300-350/1100/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2624 | 2400 | 2000 | 200 | 300 | 1240 | 6xØ26 (M20) | 1877 | N176A |
| 300-400/1100/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2624 | 2400 | 2000 | 200 | 300 | 1240 | 6xØ26 (M20) | 1881 | N176A |
| 300-400/1320/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2624 | 2400 | 2000 | 200 | 300 | 1240 | 6xØ26 (M20) | 1966 | N176A |
| 300-400/1600/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2624 | 2400 | 2000 | 200 | 300 | 1240 | 6xØ26 (M20) | 2023 | N176A |
| 300-400/2000/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2733 | 2400 | 2000 | 200 | 300 | 1240 | 6xØ26 (M20) | 2206 | N185A |
| 300-400/2500/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 640 | 600 | 2733 | 2400 | 2000 | 200 | 300 | 1240 | 6xØ26 (M20) | 2401 | N185A |
| 300-450/1600/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 665 | 630 | 2624 | 2400 | 2000 | 200 | 300 | 1295 | 6xØ26 (M20) | 2065 | N176A |
| 300-450/2000/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 665 | 630 | 2733 | 2400 | 2000 | 200 | 300 | 1295 | 6xØ26 (M20) | 2247 | N185A |
| 300-450/2500/W | B | 350 | 300 | 250 | 200 | 960 | 910 | 800 | 665 | 630 | 2733 | 2400 | 2000 | 200 | 300 | 1295 | 6xØ26 (M20) | 2442 | N185A |
| 300-450/3150/W | B | 350 | 300 | 250 | 200 | 1000 | 930 | 800 | 705 | 630 | 2832 | 2550 | 2150 | 200 | 300 | 1335 | 6xØ29 (M24) | 2757 | N212A |

NOTE: Pumps with flanges according to EN 1092-2 as standard.

Nscc200-300_4p50-en_d_td

Available ASME B16.5 version on request. For flanges dimensions see drawing.

e-NSC SERIES FORCES AND MOMENTS AT PUMP FLANGES

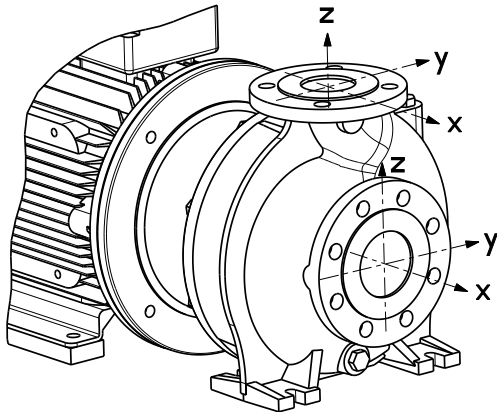

Forces at the pump flanges calculated according to EN ISO 5199:2002.

When the applied loads do not all attain the maximum values allowed, one of these loads may exceed the normal limit, provided that the following supplementary conditions are satisfied:

- any component of a force or of a moment shall be limited to 1,4 times the maximum allowable value;
- the actual forces and moments acting on each flange are governed by the following formula:

$$\left(\frac{\sum |F_{x,y,z}|}{\sum |F_{max}|}\right)^2 + \left(\frac{\sum |M_{x,y,z}|}{\sum |M_{max}|}\right)^2 \leq 2$$

Cast iron casing EN-GJL-250 / EN-GJS-400

| Size | Suction | | | | | | | | | Discharge | | | | | | | | |
|---------|---------|--------------------------|--------------------------|--------------------------|--------------------------|---------------------------|---------------------------|---------------------------|---------------------------|-----------|--------------------------|--------------------------|--------------------------|--------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| | DNS | F _{xmax} [N] | F _{ymax} [N] | F _{zmax} [N] | ΣF _{max} [N] | M _{xmax} [Nm] | M _{ymax} [Nm] | M _{zmax} [Nm] | ΣM _{max} [Nm] | DNS | F _{xmax} [N] | F _{ymax} [N] | F _{zmax} [N] | ΣF _{max} [N] | M _{xmax} [Nm] | M _{ymax} [Nm] | M _{zmax} [Nm] | ΣM _{max} [Nm] |
| 32-... | 50 | 580 | 530 | 480 | 925 | 490 | 350 | 405 | 730 | 32 | 320 | 300 | 370 | 575 | 385 | 265 | 300 | 560 |
| 40-... | 65 | 740 | 650 | 600 | 1155 | 525 | 385 | 420 | 775 | 40 | 390 | 350 | 440 | 685 | 455 | 315 | 370 | 670 |
| 50-... | 65 | 740 | 650 | 600 | 1155 | 525 | 385 | 420 | 775 | 50 | 530 | 480 | 580 | 925 | 490 | 350 | 405 | 730 |
| 65-... | 80 | 880 | 790 | 720 | 1385 | 560 | 405 | 455 | 830 | 65 | 650 | 600 | 740 | 1155 | 525 | 385 | 420 | 775 |
| 80-... | 100 | 1180 | 1050 | 950 | 1845 | 615 | 440 | 510 | 915 | 80 | 790 | 720 | 880 | 1385 | 560 | 405 | 455 | 830 |
| 100-... | 125 | 1390 | 1250 | 1120 | 2180 | 735 | 525 | 665 | 1125 | 100 | 1050 | 950 | 1180 | 1845 | 615 | 440 | 510 | 915 |
| 125-... | 150 | 1750 | 1580 | 1420 | 2755 | 875 | 615 | 720 | 1290 | 125 | 1250 | 1120 | 1390 | 2180 | 735 | 525 | 665 | 1125 |
| 150-... | 200 | 2350 | 2100 | 1890 | 3675 | 1140 | 805 | 930 | 1680 | 150 | 1580 | 1420 | 1750 | 2755 | 875 | 615 | 720 | 1290 |
| 200-... | 250 | 3340 | 2980 | 2700 | 5230 | 1780 | 1260 | 1460 | 2625 | 200 | 2100 | 1890 | 2350 | 3675 | 1140 | 805 | 930 | 1680 |
| 250-... | 300 | 4000 | 3580 | 3220 | 6260 | 2420 | 1720 | 1980 | 3570 | 250 | 2980 | 2700 | 3340 | 5230 | 1780 | 1260 | 1460 | 2625 |
| 300-... | 350 | 4660 | 4180 | 3760 | 7305 | 3100 | 2200 | 2540 | 4575 | 300 | 3580 | 3220 | 4000 | 6260 | 2420 | 1720 | 1980 | 3570 |

NSC_load-en_a_td

Stainless steel casing (1.4408) - Duplex (1.4517)

| Size | Suction | | | | | | | | | Discharge | | | | | | | | |
|---------|---------|--------------------------|--------------------------|--------------------------|--------------------------|---------------------------|---------------------------|---------------------------|---------------------------|-----------|--------------------------|--------------------------|--------------------------|--------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| | DNS | F _{xmax} [N] | F _{ymax} [N] | F _{zmax} [N] | ΣF _{max} [N] | M _{xmax} [Nm] | M _{ymax} [Nm] | M _{zmax} [Nm] | ΣM _{max} [Nm] | DNS | F _{xmax} [N] | F _{ymax} [N] | F _{zmax} [N] | ΣF _{max} [N] | M _{xmax} [Nm] | M _{ymax} [Nm] | M _{zmax} [Nm] | ΣM _{max} [Nm] |
| 50-315 | 65 | 1470 | 1300 | 1190 | 2295 | 1050 | 770 | 840 | 1550 | 50 | 1050 | 950 | 1160 | 1835 | 980 | 700 | 805 | 1450 |
| 65-... | 80 | 1750 | 1580 | 1440 | 2765 | 1120 | 805 | 910 | 1655 | 65 | 1300 | 1190 | 1470 | 2295 | 1050 | 770 | 840 | 1550 |
| 80-... | 100 | 2350 | 2100 | 1890 | 3675 | 1225 | 875 | 1015 | 1820 | 80 | 1580 | 1440 | 1750 | 2765 | 1120 | 805 | 910 | 1655 |
| 100-... | 125 | 2770 | 2490 | 2240 | 4350 | 1470 | 1050 | 1330 | 2245 | 100 | 2100 | 1890 | 2350 | 3675 | 1230 | 880 | 1020 | 1830 |
| 125-... | 150 | 3500 | 3150 | 2840 | 5500 | 1750 | 1225 | 1435 | 2575 | 125 | 2490 | 2240 | 2770 | 4350 | 1470 | 1050 | 1330 | 2245 |
| 150-... | 200 | 4690 | 4200 | 3780 | 7345 | 2275 | 1610 | 1855 | 3350 | 150 | 3150 | 2840 | 3500 | 5500 | 1750 | 1225 | 1435 | 2575 |
| 200-... | 250 | 5850 | 5220 | 4730 | 9160 | 3115 | 2205 | 2555 | 4595 | 200 | 4200 | 3780 | 4690 | 7345 | 2275 | 1610 | 1855 | 3350 |
| 250-... | 300 | 7000 | 6270 | 5640 | 10965 | 4235 | 3010 | 3465 | 6250 | 250 | 5220 | 4730 | 5850 | 9160 | 3115 | 2205 | 2555 | 4595 |
| 300-... | 350 | 8160 | 7320 | 6580 | 12790 | 5425 | 3850 | 4445 | 8005 | 300 | 6270 | 5640 | 7000 | 10965 | 4235 | 3010 | 3465 | 6250 |

NSC_load_ss-en_a_td

NSC with VARIABLE FREQUENCY DRIVE


ECODESIGN DIRECTIVE (ErP)

The Ecodesign directive was put in place in 2011 and introduced minimum requirements for the efficiency of **AC motors and pumps**. Over the last few years, these requirements have been gradually intensified.

In 2014, with the standard EN 50598, there was a switch in the definition of efficiency class from an individual component approach towards an overall system one; which is the basic point for the "Extended product approach" (EPA).

Taking this concept further, the EN50598-2 introduced IES efficiency classes for frequency converters + motor systems (known as power drive systems-PDS) with power rating **from 0.12 kW to 1000kW and from 100V to 1000V**. For Power Drive System (PDS) the defined efficiency classes are IES0, IES1, IES2. If a PDS has 20% greater losses than the reference value of IES1 then it is classified as IES0; if it has 20% lower losses than the reference value of IES1 then it is classified as IES2.

- **With the HYDROVAR connected to a Lowara IE3 motor, the system achieves the highest IES class – IES2.**



The e-NSC pump series is therefore already ready for the 2020 EU Ecodesign energy efficiency objectives.

NSC..H

(e-NSC WITH HYDROVAR)

NSC..H SERIES NSC WITH HYDROVAR

Background and context

For all pumping needs in commercial or residential building and in industry applications, the demand for intelligent pumping systems is constantly growing. Controlled systems offer many advantages: reduced operating costs for the lifetime of the pump, lower environmental impact, longer lifetime of piping systems and networks.

For this reason, Lowara has developed the NSC..H: an intelligent pumping system which assures high level performance with energy consumption tailored to the system's demand.

According to the EN 50598-2 standard the NSC..H is an IES2 power drive system, the highest efficiency class defined for this category.

Benefits of e-NSC with HYDROVAR

Saving: NSC..H transforms the NSC pumps into variable speed intelligent pumping systems. Thanks to the HYDROVAR, the speed of each pump varies so as to maintain a constant flow, a constant pressure, or a differential pressure. In doing so, at any point in time, the pump only receives the energy required. This in turns allows for considerable savings, especially for systems that have varying loads throughout the day.

Easy installation and space-saving: NSC..H saves time and space during installation. The Hydrovar is delivered already mounted on the motor (for models up to 22kW). The hydrovar is kept cool by the motor fan and does not require a control panel. In order to function, only fuses on the supply line are needed (Check your local electrical installation regulations).

Standard motors: NSC..H models are fitted with three-phase standard TEFC motors with insulation class 155 (F).

Identification code:

NSC..H models are identified by the letter "H" and the last two characters.

Examples:

NSCE**H**80-160/22/P45RCC4 /**2**

NSCE**H**50-250/22/P45RCS4 /**3**

NSCS**H**50-200/185/P25VCSZ /**4X**

H = with integrated HYDROVAR

/2 = HYDROVAR HVL**2**.022 1~ 208-240 V (50/60 Hz)

/3 = HYDROVAR HVL**3**.022 3~ 208-240 V (50/60 Hz)

/4 = HYDROVAR HVL**4**.022 3~ 380-460 V (50/60 Hz)

Other options:

X = Wi-fi Card included.

(Premium Card already included as standard).

Key Features of the HYDROVAR

- **No need for additional pressure sensors:**

The NSC..H is fitted with a pressure transmitter or differential pressure transmitters, depending on the application.

- **No need for special pumps or motors.**


- **NSC..H is already pre-wired.**

- **No need for bypass or safety systems:**

The NSC..H will immediately switch off when demand drops to zero or when it exceeds maximum pump capacity; thus making installation of additional safety devices unnecessary.

- **Anti-condensation device:**

The HYDROVAR is fitted with anti-condensation devices which switch on when the pump is in standby in order to prevent condensation forming in the unit.

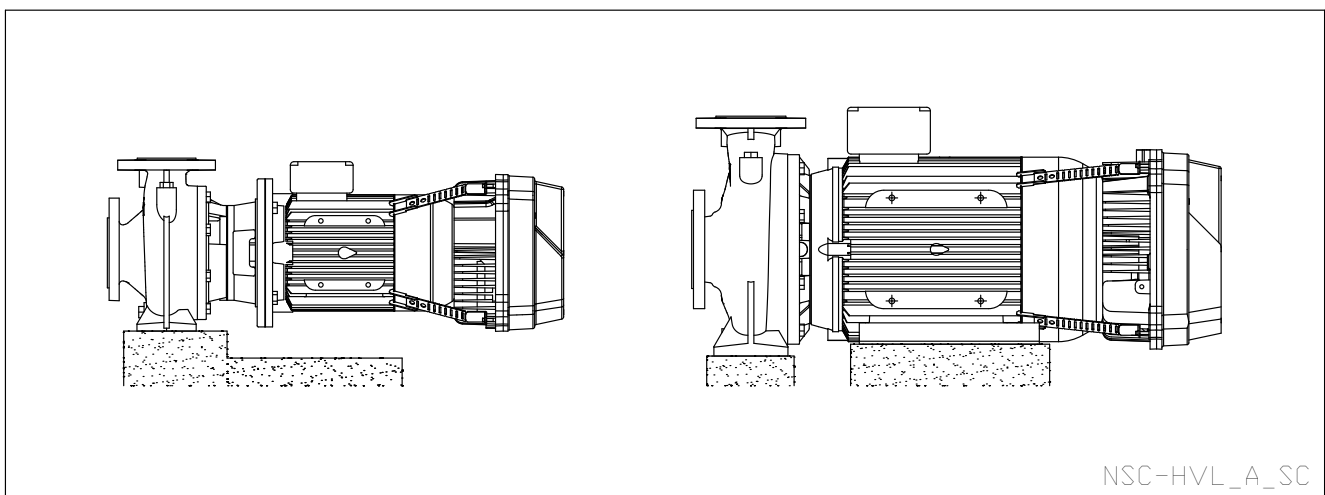

NSC..H SERIES (e-NSC WITH HYDROVAR)





The basic function of the HYDROVAR device is to control the pump to meet the system demands.

HYDROVAR performs these functions by:

- 1) Measuring the system pressure or flow via a transmitter mounted on the pump's delivery side.
- 2) Calculating the motor speed to maintain the correct flow or pressure.
- 3) Sending out a signal to the pump to start the motor, increase speed, decrease speed or stop.
- 4) In the case of multiple pump installations, HYDROVAR will automatically provide for the cyclic changeover of the pumps' starting sequence.


In addition to these basic functions, HYDROVAR can perform controls only manageable by the most advanced computerized control systems. Some examples are:

- Stop the pump(s) at zero demand.
- Stop the pump(s) in case of water failure on the suction side (protection against dry running).
- Stop the pump if the required delivery exceeds the pump's capacity (protection against cavitation caused by excessive demand), or automatically switch on the next pump in a multiple series.
- Protect the pump and motor from over-voltage, under-voltage, overload, and earth fault.
- Vary the pump speed: acceleration and deceleration time.
- Compensate for increased flow resistance at high flow rates.
- Conduct automatic tests at set intervals.
- Monitor the converter and motor operating hours.
- Display the energy consumption (kWh).
- Display all functions on an LCD in different languages (Italian, English, French, German, Spanish, Portuguese, Dutch, etc...).
- Send a signal to a remote control system which is proportional to the pressure and frequency.
- Communicate with external control system via Modbus (RS 485 interface) and Bacnet as standard.

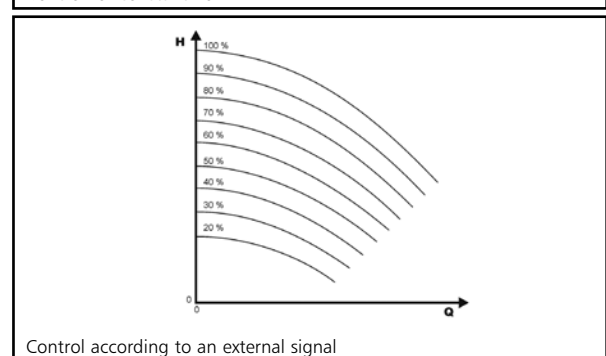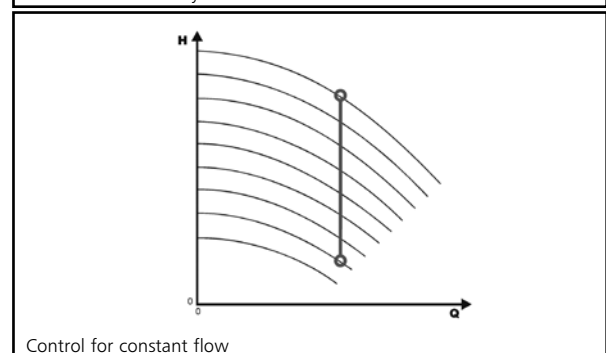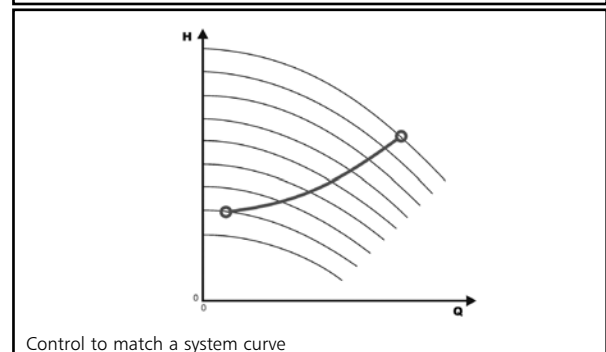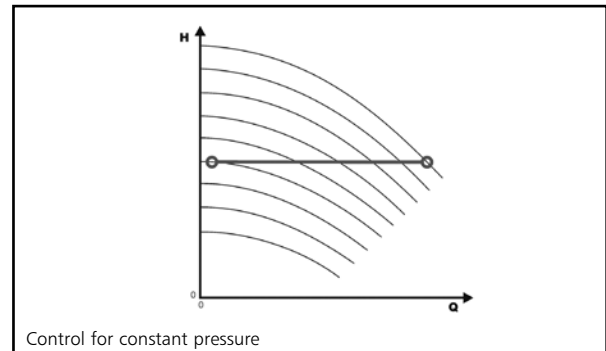

HYDROVAR HVL IDENTIFICATION CODE

H V L 4 . 0 7 5 - A 0 0 1 0

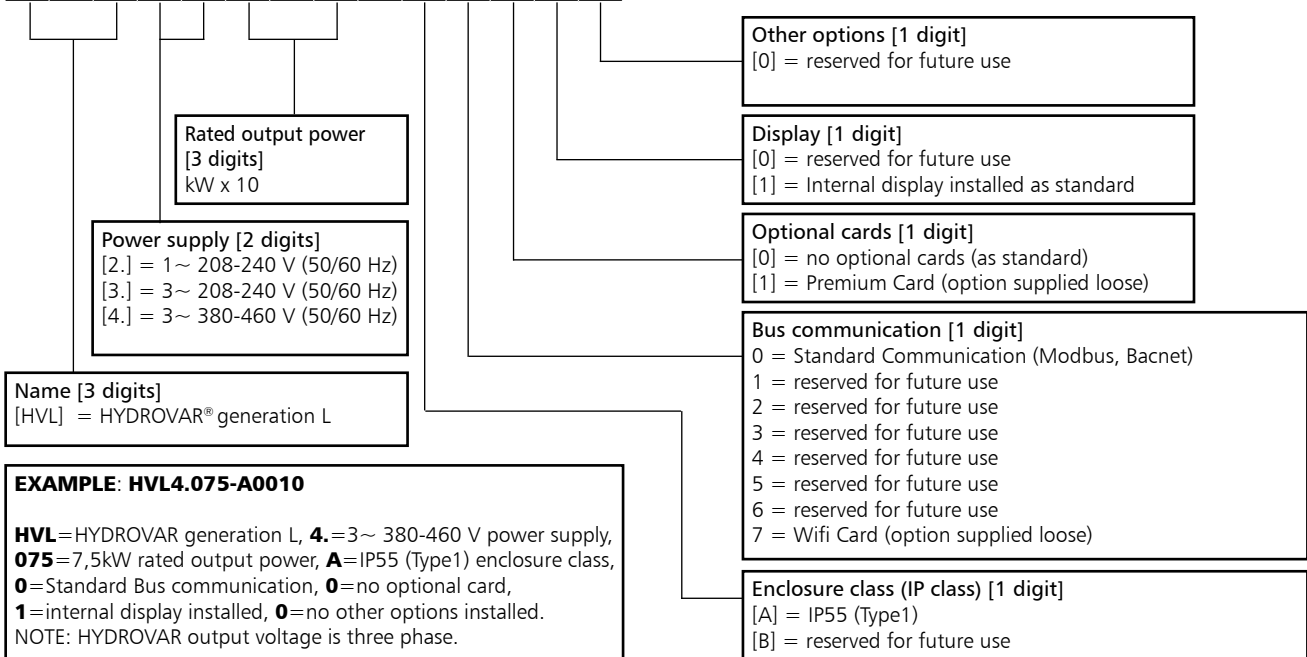

DIMENSIONS AND WEIGHTS



| TYPE | MODELS | | | DIMENSIONS (mm) | | | | WEIGHT Kg |
|--------|------------------|------------------|------------------|-----------------|-----|-----|-----|--------------|
| | /2 | /3 | /4 | L | B | H | X | |
| SIZE A | HVL2.015 ÷ 2.022 | HVL3.015 ÷ 3.022 | HVL4.015 ÷ 4.040 | 216 | 205 | 170 | 243 | 5,6 |
| SIZE B | HVL2.030 ÷ 2.040 | HVL3.030 ÷ 3.055 | HVL4.055 ÷ 4.110 | 276 | 265 | 185 | 305 | 10,5 |
| SIZE C | - | HVL3.075 ÷ 3.110 | HVL4.150 ÷ 4.220 | 366 | 337 | 200 | 407 | 15,6 |

HVL_dim-en_b_td

HYDROVAR HVL EMC COMPATIBILITY

EMC requirements

HYDROVAR fulfills the product standard EN61800-3:2004 + A1:2012, which defines categories (C1 to C4) for device application areas.

Depending on the motor cable length, a classification of HYDROVAR by category (based on EN61800-3) is reported in the following tables:

| HVL | HYDROVAR classification by categories based on EN61800-3 |
|---------------|--|
| 2.015 ÷ 2.040 | C1 (*) |
| 3.015 ÷ 3.110 | C2 (*) |
| 4.015 ÷ 4.220 | C2 (*) |

(*) 0,75 motor cable length; contact Xylem for further information

En-Rev_A

CARD


Premium Card HYDROVAR

For the NSC..H the Premium Card comes fitted as standard on the standalone HYDROVAR.

This allows to control up to five fix speed pumps via an external panel.


The Premium Card will allow additional features listed below:

- 2 additional Analog Inputs
- 2 Analog Outputs
- 1 additional digital input
- 5 relays.

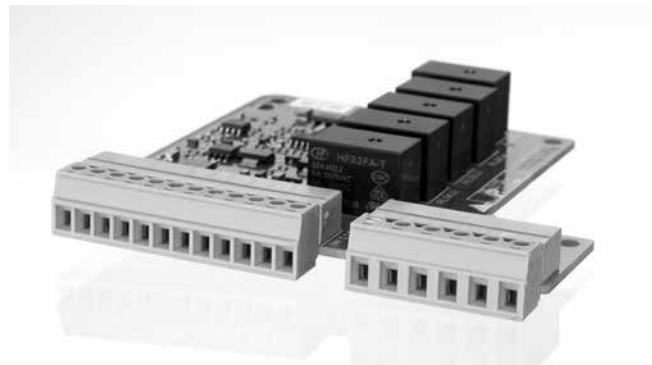

Wi-Fi Card HYDROVAR (optional)

With the WiFi card fitted in the Hydrovar, the unit can will allow you to be connected to a wireless network.

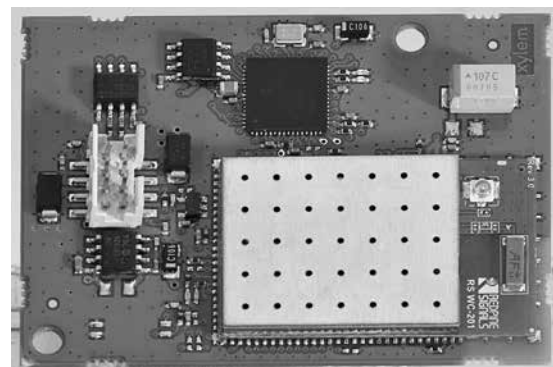

OPTIONAL COMPONENTS


Sensors

The following sensors are available for HYDROVAR:

- Pressure-transducer
- Differential pressure-transducer
- Temperature-sensor
- Flow indicator (orifice plate, inductive flow meter)
- Level-sensor.

HYDROVAR HVL (WALL MOUNTING KIT) DIMENSIONS AND WEIGHTS

As an option a HYDROVAR wall mounting kit is also available, this is used where mounting on the pump unit is impossible or where you would like the controls in another location, these are available for the new generation HYDROVAR HVL 2.015-4.220 (22 kW). The speed of the cooling fan modulates with the HYDROVAR usage which optimizes energy consumption and also reduces noise.

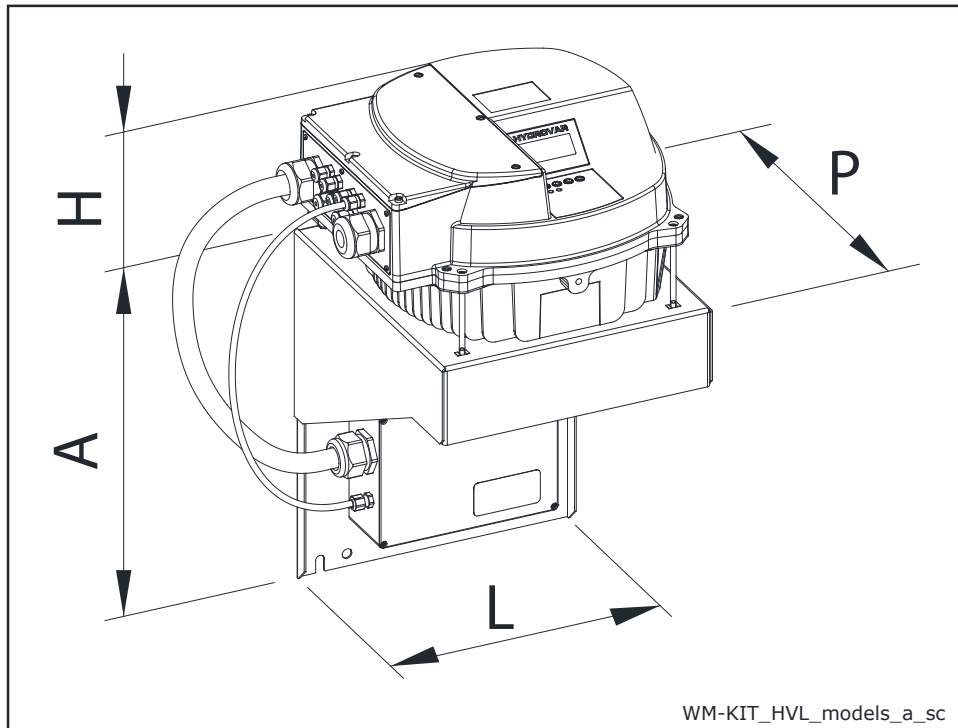


| WM KIT TYPE | kW | WM KIT POWER SUPPLY | HVL SIZE | DIMENSIONS (mm) | | | | WEIGHT (kg) | |
|------------------|------|---------------------|----------|-----------------|-----|-----|------|-------------|--------|
| | | | | A | H | L | P | HVL | WM KIT |
| WM KIT HVL 2.015 | 1,5 | 1~ 230V | A | 220 | 170 | 202 | 232 | 5,6 | 2,6 |
| WM KIT HVL 2.022 | 2,2 | | | 220 | 170 | 202 | 232 | 5,6 | 2,6 |
| WM KIT HVL 2.030 | 3 | | B | 240 | 175 | 258 | 290 | 10,5 | 8,2 |
| WM KIT HVL 2.040 | 4 | | | 320 | 175 | 288 | 305 | 10,5 | 5,4 |
| WM KIT HVL 3.015 | 1,5 | 3~ 230V | A | 220 | 170 | 202 | 232 | 5,6 | 2,6 |
| WM KIT HVL 3.022 | 2,2 | | | 220 | 170 | 202 | 232 | 5,6 | 2,6 |
| WM KIT HVL 3.030 | 3 | | B | 240 | 175 | 258 | 290 | 10,5 | 8,2 |
| WM KIT HVL 3.040 | 4 | | | 240 | 175 | 258 | 290 | 10,5 | 8,2 |
| WM KIT HVL 3.055 | 5,5 | | C | 240 | 175 | 258 | 290 | 10,5 | 8,2 |
| WM KIT HVL 3.075 | 7,5 | | | 400 | 200 | 325 | 365 | 15,6 | 11,6 |
| WM KIT HVL 3.110 | 11 | | 400 | 200 | 325 | 365 | 15,6 | 11,6 | |
| WM KIT HVL 4.015 | 1,5 | | 3~ 400V | A | 240 | 170 | 258 | 290 | 5,6 |
| WM KIT HVL 4.022 | 2,2 | 240 | | | 170 | 258 | 290 | 5,6 | 8,2 |
| WM KIT HVL 4.030 | 3 | 240 | | | 170 | 258 | 290 | 5,6 | 8,2 |
| WM KIT HVL 4.040 | 4 | 240 | | | 170 | 258 | 290 | 5,6 | 8,2 |
| WM KIT HVL 4.055 | 5,5 | B | | 240 | 175 | 258 | 290 | 10,5 | 8,2 |
| WM KIT HVL 4.075 | 7,5 | | | 240 | 175 | 258 | 290 | 10,5 | 8,2 |
| WM KIT HVL 4.110 | 11 | C | | 320 | 175 | 288 | 305 | 10,5 | 5,4 |
| WM KIT HVL 4.150 | 15 | | | 400 | 200 | 325 | 365 | 15,6 | 11,6 |
| WM KIT HVL 4.185 | 18,5 | | | 400 | 200 | 325 | 365 | 15,6 | 11,6 |
| WM KIT HVL 4.220 | 22 | | | 400 | 200 | 325 | 365 | 15,6 | 11,6 |

WM-KIT_HVL_models-EN_b_td


ACCESSORIES

FLEXIBLE COUPLING DIMENSIONS

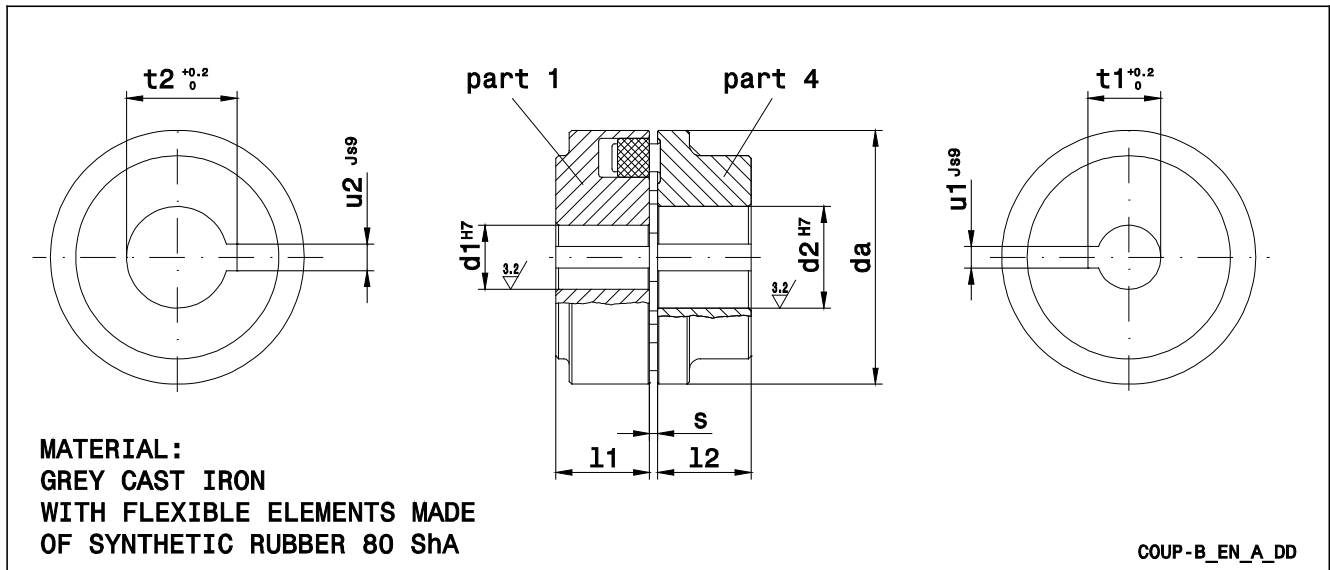


| REF. | DENOMINATION | DIMENSIONS (mm) | | | | | | | | | |
|--|------------------|-----------------|-----------------------------------|----------------|-------------------------------|----------------------------------|------------------------------------|------------------------------|----------------|-------------------------------|----------------------------------|
| | | d _a | PART 1 PUMP-SIDE HALF COUPLING | | | | PART 4 MOTOR-SIDE HALF COUPLING | | | | |
| | | | d ₁ ^{H7} | l ₁ | u ₁ ^{js9} | t _{1 0} ^{+0.2} | s | d ₂ ^{H7} | l ₂ | u ₂ ^{js9} | t _{2 0} ^{+0.2} |
| SIZE x d ₁ x d ₂ | | | | | | | | | | | |
| B68A | B 68 x 24 x 14 | 68 | 24 | 20 | 8 | 27,3 | 2÷4 | 14 | 20 | 5 | 16,3 |
| B68B | B 68 x 24 x 19 | 68 | 24 | 20 | 8 | 27,3 | 2÷4 | 19 | 20 | 6 | 21,8 |
| B68C | B 68 x 24 x 24 | 68 | 24 | 20 | 8 | 27,3 | 2÷4 | 24 | 20 | 8 | 27,3 |
| B80A | B 80 x 24 x 28 | 80 | 24 | 30 | 8 | 27,3 | 2÷4 | 28 | 30 | 8 | 31,3 |
| B95A | B 95 x 24 x 38 | 95 | 24 | 35 | 8 | 27,3 | 2÷4 | 38 | 35 | 10 | 41,3 |
| B95B | B 95 x 24 x 42 | 95 | 24 | 35 | 8 | 27,3 | 2÷4 | 42 | 35 | 12 | 45,3 |
| B95C | B 95 x 32 x 28 | 95 | 32 | 35 | 10 | 35,3 | 2÷4 | 28 | 35 | 8 | 31,3 |
| B95D | B 95 x 32 x 38 | 95 | 32 | 35 | 10 | 35,3 | 2÷4 | 38 | 35 | 10 | 41,3 |
| B95E | B 95 x 32 x 42 | 95 | 32 | 35 | 10 | 35,3 | 2÷4 | 42 | 35 | 12 | 45,3 |
| B95F | B 95 x 42 x 42 | 95 | 42 | 35 | 12 | 45,3 | 2÷4 | 42 | 35 | 12 | 45,3 |
| B110A | B 110 x 24 x 48 | 110 | 24 | 40 | 8 | 27,3 | 2÷4 | 48 | 40 | 14 | 51,8 |
| B110B | B 110 x 32 x 48 | 110 | 32 | 40 | 10 | 35,3 | 2÷4 | 48 | 40 | 14 | 51,8 |
| B110C | B 110 x 42 x 42 | 110 | 42 | 40 | 12 | 45,3 | 2÷4 | 42 | 40 | 12 | 45,3 |
| B110D | B 110 x 42 x 48 | 110 | 42 | 40 | 12 | 45,3 | 2÷4 | 48 | 40 | 14 | 51,8 |
| B110E | B 110 x 32 x 42 | 110 | 32 | 35 | 10 | 35,3 | 2÷4 | 42 | 35 | 12 | 45,3 |
| B125A | B 125 x 32 x 48 | 125 | 32 | 50 | 10 | 35,3 | 2÷4 | 48 | 50 | 14 | 51,8 |
| B125B | B 125 x 32 x 55 | 125 | 32 | 50 | 10 | 35,3 | 2÷4 | 55 | 50 | 16 | 59,3 |
| B125C | B 125 x 42 x 55 | 125 | 42 | 50 | 12 | 45,3 | 2÷4 | 55 | 50 | 16 | 59,3 |
| B125D | B 125 x 24 x 55 | 125 | 24 | 50 | 8 | 27,3 | 2÷4 | 55 | 50 | 16 | 59,3 |
| B140A | B 140 x 32 x 60 | 140 | 32 | 55 | 10 | 35,3 | 2÷4 | 60 | 55 | 18 | 64,4 |
| B140B | B 140 x 42 x 60 | 140 | 42 | 55 | 12 | 45,3 | 2÷4 | 60 | 55 | 18 | 64,4 |
| B140C | B 140 x 60 x 55 | 140 | 60 | 70 | 18 | 64,4 | 2÷4 | 55 | 50 | 16 | 59,3 |
| B140D | B 140 x 60 x 60 | 140 | 60 | 70 | 18 | 64,4 | 2÷4 | 60 | 55 | 18 | 64,4 |
| B160A | B 160 x 32 x 65 | 160 | 32 | 60 | 10 | 35,3 | 2÷6 | 65 | 60 | 18 | 69,4 |
| B160B | B 160 x 42 x 65 | 160 | 42 | 60 | 12 | 45,3 | 2÷6 | 65 | 60 | 18 | 69,4 |
| B160C | B 160 x 60 x 65 | 160 | 60 | 60 | 18 | 64,4 | 2÷6 | 65 | 60 | 18 | 69,4 |
| B180A | B 180 x 42 x 65 | 180 | 42 | 70 | 12 | 45,3 | 2÷6 | 65 | 60 | 18 | 69,4 |
| B180B | B 180 x 42 x 75 | 180 | 42 | 70 | 12 | 45,3 | 2÷6 | 75 | 70 | 20 | 79,9 |
| B180C | B 180 x 60 x 75 | 180 | 60 | 70 | 18 | 64,4 | 2÷6 | 75 | 70 | 20 | 79,9 |
| B200A | B 200 x 60 x 80 | 200 | 60 | 80 | 18 | 64,4 | 2÷6 | 80 | 80 | 22 | 85,4 |
| B225A | B 225 x 60 x 80 | 225 | 60 | 90 | 18 | 64,4 | 2÷6 | 80 | 90 | 22 | 85,4 |
| B250A | B 250 x 60 x 100 | 250 | 60 | 100 | 18 | 64,4 | 3÷8 | 100 | 100 | 28 | 106,4 |

SPACER COUPLING DIMENSIONS

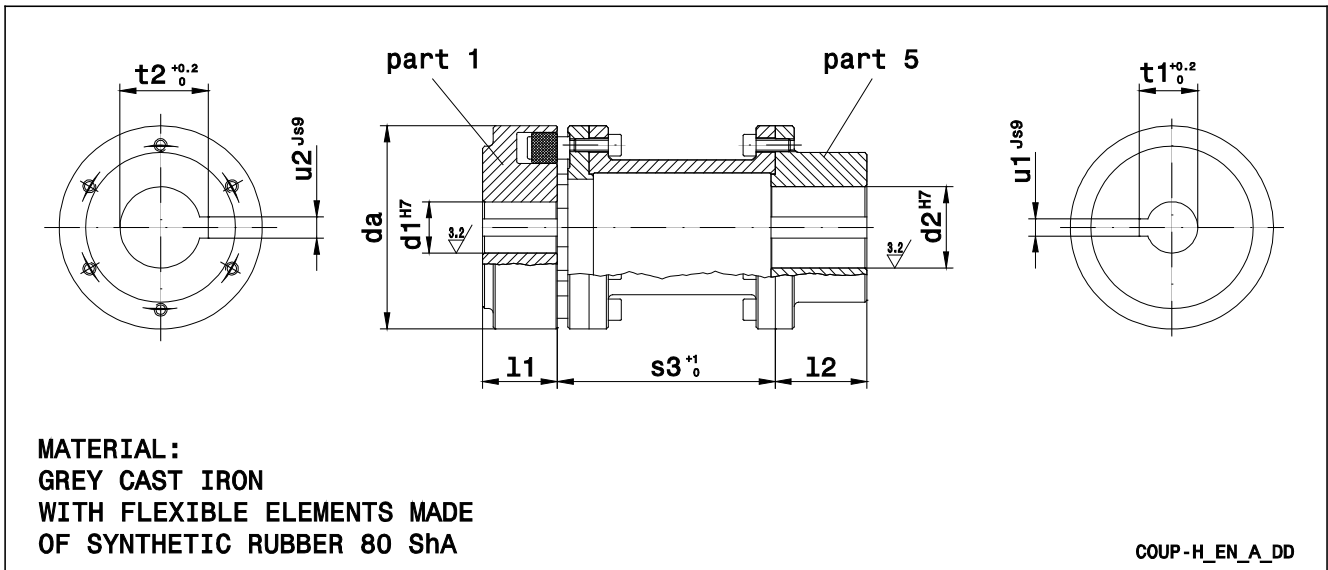

| REF. | DENOMINATION | DIMENSIONS (mm) | | | | | | | | | |
|--|----------------------|-----------------|--------------------------------|-----------------------------------|----------------|--------------------|----------------------------------|------------------------------------|----------------|--------------------|----------------------------------|
| | | da | s ₃ 0 ⁺¹ | PART 1 PUMP-SIDE HALF COUPLING | | | | PART 5 MOTOR-SIDE HALF COUPLING | | | |
| | | | | d ₁ H7 | l ₁ | u ₁ JS9 | t ₁ 0 ^{+0.2} | d ₂ H7 | l ₂ | u ₂ JS9 | t ₂ 0 ^{+0.2} |
| SIZE x l x d ₁ x d ₂ | | | | | | | | | | | |
| H80A | H 80-100 x 24 x 19 | 80 | 100 | 24 | 30 | 8 | 27,3 | 19 | 45 | 6 | 21,8 |
| H80B | H 80-100 x 24 x 24 | 80 | 100 | 24 | 30 | 8 | 27,3 | 24 | 45 | 8 | 27,3 |
| H80C | H 80-100 x 24 x 28 | 80 | 100 | 24 | 30 | 8 | 27,3 | 28 | 45 | 8 | 31,3 |
| H80D | H 80-100 x 24 x 14 | 80 | 100 | 24 | 30 | 8 | 27,3 | 14 | 45 | 5 | 16,3 |
| H80E | H 80-140 x 24 x 24 | 80 | 140 | 24 | 30 | 8 | 27,3 | 24 | 45 | 8 | 27,3 |
| H80F | H 80-140 x 24 x 28 | 80 | 140 | 24 | 30 | 8 | 27,3 | 28 | 45 | 8 | 31,3 |
| H80G | H 80-140 x 32 x 28 | 80 | 140 | 32 | 30 | 10 | 35,3 | 28 | 45 | 8 | 31,3 |
| H95A | H 95-100 x 24 x 38 | 95 | 100 | 24 | 35 | 8 | 27,3 | 38 | 45 | 10 | 41,3 |
| H95B | H 95-100 x 24 x 42 | 95 | 100 | 24 | 35 | 8 | 27,3 | 42 | 45 | 12 | 45,3 |
| H95C | H 95-140 x 32 x 28 | 95 | 140 | 32 | 35 | 10 | 35,3 | 28 | 45 | 8 | 31,3 |
| H95D | H 95-140 x 32 x 38 | 95 | 140 | 32 | 35 | 10 | 35,3 | 38 | 45 | 10 | 41,3 |
| H95E | H 95-140 x 32 x 42 | 95 | 140 | 32 | 35 | 10 | 35,3 | 42 | 45 | 12 | 45,3 |
| H95F | H 95-140 x 42 x 42 | 95 | 140 | 42 | 35 | 12 | 45,3 | 42 | 45 | 12 | 45,3 |
| H95G | H 95-140 x 24 x 42 | 95 | 140 | 24 | 35 | 8 | 27,3 | 42 | 45 | 12 | 45,3 |
| H95H | H 95-140 x 24 x 38 | 95 | 140 | 24 | 35 | 8 | 27,3 | 38 | 45 | 10 | 41,3 |
| H110A | H 110-100 x 24 x 48 | 110 | 100 | 24 | 40 | 8 | 27,3 | 48 | 50 | 14 | 51,8 |
| H110B | H 110-140 x 32 x 48 | 110 | 140 | 32 | 40 | 10 | 35,3 | 48 | 50 | 14 | 51,8 |
| H110C | H 110-140 x 42 x 48 | 110 | 140 | 42 | 40 | 12 | 45,3 | 48 | 50 | 14 | 51,8 |
| H110D | H 110-140 x 24 x 48 | 110 | 140 | 24 | 40 | 8 | 27,3 | 48 | 50 | 14 | 51,8 |
| H110E | H 110-140 x 32 x 42 | 110 | 140 | 32 | 40 | 10 | 35,3 | 42 | 45 | 12 | 45,3 |
| H110F | H 110-140 x 42 x 42 | 110 | 140 | 42 | 40 | 12 | 45,3 | 42 | 45 | 12 | 45,3 |
| H125A | H 125-100 x 24 x 55 | 125 | 100 | 24 | 50 | 8 | 27,3 | 55 | 50 | 16 | 59,3 |
| H125B | H 125-140 x 32 x 48 | 125 | 140 | 32 | 50 | 10 | 35,3 | 48 | 50 | 14 | 51,8 |
| H125C | H 125-140 x 32 x 55 | 125 | 140 | 32 | 50 | 10 | 35,3 | 55 | 50 | 16 | 59,3 |
| H125D | H 125-140 x 42 x 55 | 125 | 140 | 42 | 50 | 12 | 45,3 | 55 | 50 | 16 | 59,3 |
| H125E | H 125-200 x 42 x 48 | 125 | 200 | 42 | 50 | 12 | 45,3 | 48 | 70 | 14 | 51,8 |
| H125F | H 125-200 x 42 x 55 | 125 | 200 | 42 | 50 | 12 | 45,3 | 55 | 70 | 16 | 59,3 |
| H125G | H 125-140 x 24 x 55 | 125 | 140 | 24 | 50 | 8 | 27,3 | 55 | 50 | 16 | 59,3 |
| H125H | H 125-200 x 42 x 42 | 125 | 200 | 42 | 50 | 12 | 45,3 | 42 | 45 | 12 | 45,3 |
| H140A | H 140-140 x 32 x 60 | 140 | 140 | 32 | 55 | 10 | 35,3 | 60 | 65 | 18 | 64,4 |
| H140B | H 140-140 x 42 x 60 | 140 | 140 | 42 | 55 | 12 | 45,3 | 60 | 65 | 18 | 64,4 |
| H140C | H 140-200 x 42 x 60 | 140 | 200 | 42 | 55 | 12 | 45,3 | 60 | 65 | 18 | 64,4 |
| H140D | H 140-250 x 60 x 60 | 140 | 250 | 60 | 60 | 18 | 64,4 | 60 | 65 | 18 | 64,4 |
| H160A | H 160-140 x 32 x 65 | 160 | 140 | 32 | 60 | 10 | 35,3 | 65 | 70 | 18 | 69,4 |
| H160B | H 160-140 x 42 x 65 | 160 | 140 | 42 | 60 | 12 | 45,3 | 65 | 70 | 18 | 69,4 |
| H160C | H 160-200 x 42 x 65 | 160 | 200 | 42 | 60 | 12 | 45,3 | 65 | 70 | 18 | 69,4 |
| H160D | H 160-250 x 60 x 65 | 160 | 250 | 60 | 60 | 18 | 64,4 | 65 | 80 | 18 | 69,4 |
| H180A | H 180-140 x 42 x 65 | 180 | 140 | 42 | 70 | 12 | 45,3 | 65 | 80 | 18 | 69,4 |
| H180B | H 180-140 x 42 x 75 | 180 | 140 | 42 | 70 | 12 | 45,3 | 75 | 80 | 20 | 79,9 |
| H180C | H 180-200 x 42 x 75 | 180 | 200 | 42 | 70 | 12 | 45,3 | 75 | 80 | 20 | 79,9 |
| H180D | H 180-250 x 60 x 75 | 180 | 250 | 60 | 70 | 18 | 64,4 | 75 | 80 | 20 | 79,9 |
| H200A | H 200-250 x 60 x 80 | 200 | 250 | 60 | 80 | 18 | 64,4 | 80 | 90 | 22 | 85,4 |
| H225A | H 225-250 x 60 x 80 | 225 | 250 | 60 | 90 | 18 | 64,4 | 80 | 100 | 22 | 85,4 |
| H250A | H 250-250 x 60 x 100 | 250 | 250 | 60 | 100 | 18 | 64,4 | 100 | 110 | 28 | 106,4 |

SPACER COUPLING DIMENSIONS

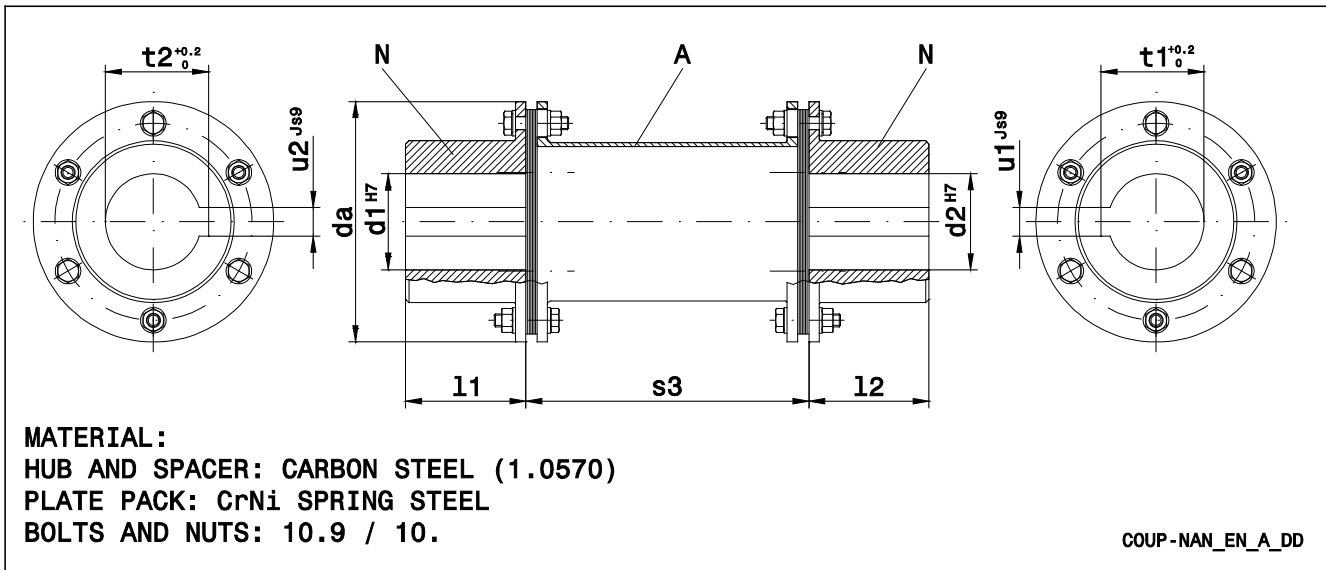


| REF. | DENOMINATION | DIMENSIONS (mm) | | | | | | | | | |
|--|----------------------------|-----------------|----------------|------------------------------|----------------|-------------------------------|----------------------------------|-------------------------------|----------------|-------------------------------|----------------------------------|
| | | da | s ₃ | N PUMP-SIDE HALF COUPLING | | | | N MOTOR-SIDE HALF COUPLING | | | |
| | | | | d ₁ ^{H7} | l ₁ | u ₁ ^{js9} | t _{1 0} ^{+0.2} | d ₂ ^{H7} | l ₂ | u ₂ ^{js9} | t _{2 0} ^{+0.2} |
| SIZE x l x d ₁ x d ₂ | | | | | | | | | | | |
| N135A | NAN 135-6 x 300 x 60 x 55 | 135 | 300 | 60 | 65 | 18 | 64,4 | 55 | 65 | 16 | 59,3 |
| N135B | NAN 135-6 x 300 x 60 x 60 | 135 | 300 | 60 | 65 | 18 | 64,4 | 60 | 65 | 18 | 64,4 |
| N135C | NAN 135-6 x 300 x 60 x 65 | 135 | 300 | 60 | 65 | 18 | 64,4 | 65 | 65 | 18 | 69,4 |
| N150A | NAN 150-6 x 300 x 60 x 75 | 150 | 300 | 60 | 75 | 18 | 64,4 | 75 | 75 | 20 | 79,9 |
| N176A | NAN 176-6 x 300 x 60 x 80 | 176 | 300 | 60 | 85 | 18 | 64,4 | 80 | 85 | 22 | 85,4 |
| N185A | NAN 185-6 x 300 x 60 x 80 | 185 | 300 | 60 | 90 | 18 | 64,4 | 80 | 90 | 22 | 85,4 |
| N212A | NAN 212-6 x 300 x 60 x 100 | 212 | 300 | 60 | 100 | 18 | 64,4 | 100 | 100 | 28 | 106,4 |

Coup-nan-en_b_td

e-NSC SERIES (DIMENSIONS OF ROUND THREADED COUNTERFLANGES ACCORDING TO EN 1092-1)

| DN | DIMENSIONS (mm) | | | | | HOLES | | PN |
|-----|-----------------|-----|----|-----|----|-------|----|----|
| | ø C | ø A | B | ø D | H | ø F | N° | |
| 32 | Rp 1 ¼ | 100 | 13 | 140 | 16 | 18 | 4 | 16 |
| 40 | Rp 1 ½ | 110 | 14 | 150 | 19 | 18 | 4 | 16 |
| 50 | Rp 2 | 125 | 16 | 165 | 24 | 18 | 4 | 16 |
| 65 | Rp 2 ½ | 145 | 16 | 185 | 23 | 18 | 4 | 16 |
| 80 | Rp 3 | 160 | 17 | 200 | 27 | 18 | 8 | 16 |
| 100 | Rp 4 | 180 | 18 | 220 | 31 | 18 | 8 | 16 |

Nsc-ctf-tonde-f-en_a_td

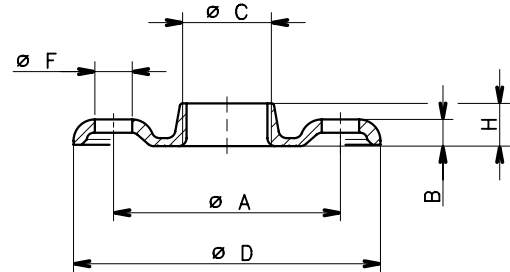


04430_B_DD

e-NSC SERIES (DIMENSIONS OF ROUND WELD COUNTERFLANGES ACCORDING TO EN 1092-1)


| DN | DIMENSIONS (mm) | | | | HOLES | | PN |
|-----|-----------------|-----|----|-----|-------|----|----|
| | ø C | ø A | B | ø D | ø F | N° | |
| 65 | 77,5 | 145 | 20 | 185 | 18 | 4 | 16 |
| 80 | 90,5 | 160 | 20 | 200 | 18 | 8 | 16 |
| 100 | 116 | 180 | 22 | 220 | 18 | 8 | 16 |
| 125 | 141,5 | 210 | 22 | 250 | 18 | 8 | 16 |
| 150 | 170,5 | 240 | 24 | 285 | 22 | 8 | 16 |
| 200 | 221,5 | 295 | 24 | 340 | 22 | 12 | 16 |
| 250 | 276,5 | 355 | 26 | 405 | 26 | 12 | 16 |
| 300 | 327,5 | 410 | 28 | 460 | 26 | 12 | 16 |
| 350 | 359,5 | 470 | 30 | 520 | 26 | 16 | 16 |

Nsc-ctf-tonde-s-en_b_td

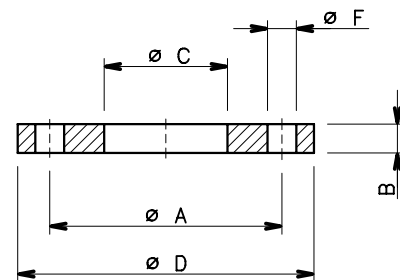

04431_A_DD

**NSCE 32 ÷ 80 SERIES, 2 POLES
SHIM FOR PUMP AND MOTOR FEET**

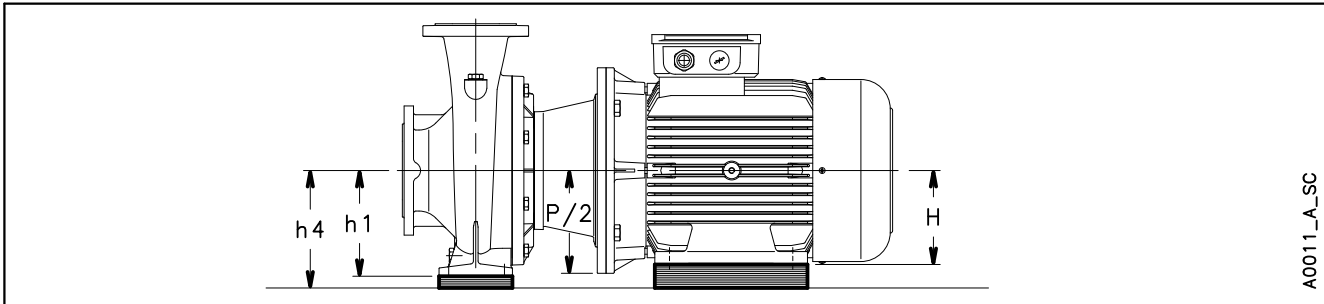


A0011_A_SC

| PUMP TYPE NSCE..2 | DIMENSIONS (mm) | | | | SHIM* CODE | |
|----------------------|-----------------|-------|-----|-----|---------------|---------------|
| | PUMP | MOTOR | | h4 | Pump | Motor |
| | h1 | P/2 | H | | | |
| 32-125/11/S | 112 | - | - | 112 | - | - |
| 32-125/15/S | 112 | - | - | 112 | - | - |
| 32-125/22/P | 112 | - | - | 112 | - | - |
| 32-125/30/P | 112 | - | - | 112 | - | - |
| 32-160/22/P | 132 | - | - | 132 | - | - |
| 32-160/30/P | 132 | - | - | 132 | - | - |
| 32-160/40/P | 132 | - | - | 132 | - | - |
| 32-160/55/P | 132 | - | - | 132 | - | - |
| 32-200/30/P | 160 | - | - | 160 | - | - |
| 32-200/40/P | 160 | - | - | 160 | - | - |
| 32-200/55/P | 160 | - | - | 160 | - | - |
| 32-200/75/P | 160 | - | - | 160 | - | - |
| 32-250/75/P | 180 | - | - | 180 | - | - |
| 32-250/92/P | 180 | - | - | 180 | - | - |
| 32-250/110/P | 180 | - | - | 180 | - | - |
| 32-250/150/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 40-125/15/S | 112 | - | - | 112 | - | - |
| 40-125/22/P | 112 | - | - | 112 | - | - |
| 40-125/30/P | 112 | - | - | 112 | - | - |
| 40-125/40/P | 112 | - | - | 112 | - | - |
| 40-160/30/P | 132 | - | - | 132 | - | - |
| 40-160/40/P | 132 | - | - | 132 | - | - |
| 40-160/55/P | 132 | - | - | 132 | - | - |
| 40-160/75/P | 132 | - | - | 132 | - | - |
| 40-200/55/P | 160 | - | - | 160 | - | - |
| 40-200/75/P | 160 | - | - | 160 | - | - |
| 40-200/92/P | 160 | - | - | 160 | - | - |
| 40-200/110/P | 160 | - | - | 160 | - | - |
| 40-250/92/P | 180 | - | - | 180 | - | - |
| 40-250/110/P | 180 | - | - | 180 | - | - |
| 40-250/150/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 40-250/185/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 40-250/220/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 50-125/30/P | 132 | - | - | 132 | - | - |
| 50-125/40/P | 132 | - | - | 132 | - | - |
| 50-125/55/P | 132 | - | - | 132 | - | - |
| 50-125/75/P | 132 | - | - | 132 | - | - |
| 50-160/55/P | 160 | - | - | 160 | - | - |
| 50-160/75/P | 160 | - | - | 160 | - | - |
| 50-160/92/P | 160 | - | - | 160 | - | - |
| 50-160/110/P | 160 | - | - | 160 | - | - |

| PUMP TYPE NSCE..2 | DIMENSIONS (mm) | | | | SHIM* CODE | |
|----------------------|-----------------|-------|-----|-----|---------------|---------------|
| | PUMP | MOTOR | | h4 | Pump | Motor |
| | h1 | P/2 | H | | | |
| 50-200/92/P | 160 | - | - | 160 | - | - |
| 50-200/110/P | 160 | - | - | 160 | - | - |
| 50-200/150/P | 160 | - | 160 | 160 | - | - |
| 50-200/185/P | 160 | - | 160 | 160 | - | - |
| 50-250/150/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 50-250/185/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 50-250/220/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 65-125/40/P | 160 | - | - | 160 | - | - |
| 65-125/55/P | 160 | - | - | 160 | - | - |
| 65-125/75/P | 160 | - | - | 160 | - | - |
| 65-125/92/P | 160 | - | - | 160 | - | - |
| 65-125/110/P | 160 | - | - | 160 | - | - |
| 65-160/75/P | 160 | - | - | 160 | - | - |
| 65-160/92/P | 160 | - | - | 160 | - | - |
| 65-160/110/P | 160 | - | - | 160 | - | - |
| 65-160/150/P | 160 | - | 160 | 160 | - | - |
| 65-160/185/P | 160 | - | 160 | 160 | - | - |
| 65-200/110/P | 180 | - | - | 180 | - | - |
| 65-200/150/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 65-200/185/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 65-200/220/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 80-160/110/P | 180 | - | - | 180 | - | - |
| 80-160/150/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 80-160/185/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| 80-160/220/P | 180 | - | 160 | 180 | - | 2 x 161407670 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

* On request. nsce-32-80sp_2p50-en_b_td

NSCE 32 ÷ 80 SERIES, 4 POLES SHIM FOR PUMP AND MOTOR FEET

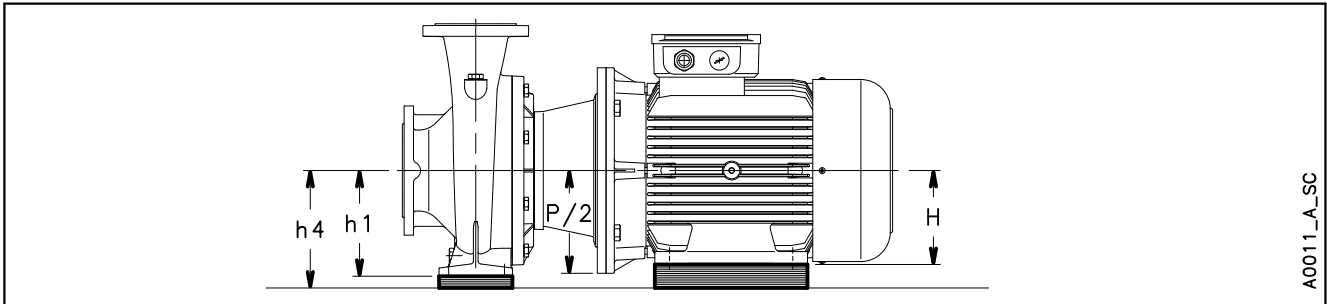

A0011_A_SC


| PUMP TYPE NSCE..4 | DIMENSIONS (mm) | | | | SHIM* CODE | |
|----------------------|-----------------|--------------|------------|-----|---------------|-------|
| | PUMP h1 | MOTOR P/2 | MOTOR H | h4 | Pump | Motor |
| 32-125/02B/S | 112 | - | - | 112 | - | - |
| 32-125/02A/S | 112 | - | - | 112 | - | - |
| 32-125/02/S | 112 | - | - | 112 | - | - |
| 32-125/03/S | 112 | - | - | 112 | - | - |
| 32-160/02/S | 132 | - | - | 132 | - | - |
| 32-160/03/S | 132 | - | - | 132 | - | - |
| 32-160/05A/S | 132 | - | - | 132 | - | - |
| 32-160/05/S | 132 | - | - | 132 | - | - |
| 32-200/05A/S | 160 | - | - | 160 | - | - |
| 32-200/05/S | 160 | - | - | 160 | - | - |
| 32-200/07/X | 160 | - | - | 160 | - | - |
| 32-200/11/P | 160 | - | - | 160 | - | - |
| 32-250/15B/P | 180 | - | - | 180 | - | - |
| 32-250/15A/P | 180 | - | - | 180 | - | - |
| 32-250/15/P | 180 | - | - | 180 | - | - |
| 32-250/22/P | 180 | - | - | 180 | - | - |
| 40-125/02A/S | 112 | - | - | 112 | - | - |
| 40-125/02/S | 112 | - | - | 112 | - | - |
| 40-125/03/S | 112 | - | - | 112 | - | - |
| 40-125/05/S | 112 | - | - | 112 | - | - |
| 40-160/03/S | 132 | - | - | 132 | - | - |
| 40-160/05/S | 132 | - | - | 132 | - | - |
| 40-160/07/X | 132 | - | - | 132 | - | - |
| 40-160/11/P | 132 | - | - | 132 | - | - |
| 40-200/07/X | 160 | - | - | 160 | - | - |
| 40-200/11/P | 160 | - | - | 160 | - | - |
| 40-200/15A/P | 160 | - | - | 160 | - | - |
| 40-200/15/P | 160 | - | - | 160 | - | - |
| 40-250/15A/P | 180 | - | - | 180 | - | - |
| 40-250/15/P | 180 | - | - | 180 | - | - |
| 40-250/22A/P | 180 | - | - | 180 | - | - |
| 40-250/22/P | 180 | - | - | 180 | - | - |
| 40-250/30/P | 180 | - | - | 180 | - | - |
| 50-125/03/S | 132 | - | - | 132 | - | - |
| 50-125/05/S | 132 | - | - | 132 | - | - |
| 50-125/07/X | 132 | - | - | 132 | - | - |
| 50-125/11/P | 132 | - | - | 132 | - | - |
| 50-160/07/X | 160 | - | - | 160 | - | - |
| 50-160/11A/P | 160 | - | - | 160 | - | - |
| 50-160/11/P | 160 | - | - | 160 | - | - |
| 50-160/15/P | 160 | - | - | 160 | - | - |

| PUMP TYPE NSCE..4 | DIMENSIONS (mm) | | | | SHIM* CODE | |
|----------------------|-----------------|--------------|------------|-----|---------------|-------|
| | PUMP h1 | MOTOR P/2 | MOTOR H | h4 | Pump | Motor |
| 50-200/15A/P | 160 | - | - | 160 | - | - |
| 50-200/15/P | 160 | - | - | 160 | - | - |
| 50-200/22A/P | 160 | - | - | 160 | - | - |
| 50-200/22/P | 160 | - | - | 160 | - | - |
| 50-250/22A/P | 180 | - | - | 180 | - | - |
| 50-250/22/P | 180 | - | - | 180 | - | - |
| 50-250/30/P | 180 | - | - | 180 | - | - |
| 50-250/40/P | 180 | - | - | 180 | - | - |
| 65-125/05/S | 160 | - | - | 160 | - | - |
| 65-125/07/X | 160 | - | - | 160 | - | - |
| 65-125/11/P | 160 | - | - | 160 | - | - |
| 65-125/15/P | 160 | - | - | 160 | - | - |
| 65-160/15B/P | 160 | - | - | 160 | - | - |
| 65-160/15A/P | 160 | - | - | 160 | - | - |
| 65-160/15/P | 160 | - | - | 160 | - | - |
| 65-160/22A/P | 160 | - | - | 160 | - | - |
| 65-160/22/P | 160 | - | - | 160 | - | - |
| 65-200/15/P | 180 | - | - | 180 | - | - |
| 65-200/22A/P | 180 | - | - | 180 | - | - |
| 65-200/22/P | 180 | - | - | 180 | - | - |
| 65-200/30/P | 180 | - | - | 180 | - | - |
| 65-200/40/P | 180 | - | - | 180 | - | - |
| 80-160/15/P | 180 | - | - | 180 | - | - |
| 80-160/22A/P | 180 | - | - | 180 | - | - |
| 80-160/22/P | 180 | - | - | 180 | - | - |
| 80-160/30/P | 180 | - | - | 180 | - | - |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

* On request.

nsce-32-80sp_4p50-en_b_td

NSCS 32 ÷ 80 SERIES, 2 POLES SHIM FOR PUMP AND MOTOR FEET

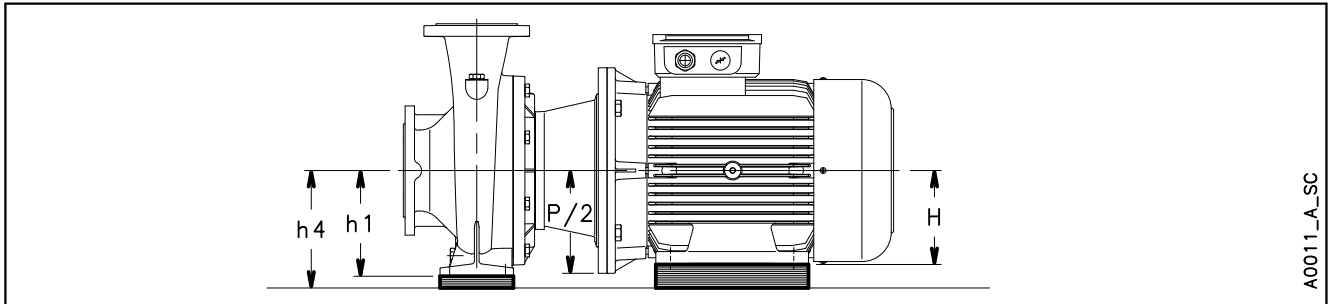


A0011_A_SC

| PUMP TYPE NSCS..2 | DIMENSIONS (mm) | | | | SHIM* CODE | |
|----------------------|-----------------|--------------|------------|-----|--------------------------------|---------------|
| | PUMP h1 | MOTOR P/2 | MOTOR H | h4 | Pump | Motor |
| 32-125/11/S | 112 | 100 | - | 112 | - | - |
| 32-125/15/S | 112 | 100 | - | 112 | - | - |
| 32-125/22/P | 112 | 100 | - | 112 | - | - |
| 32-125/30/P | 112 | 125 | - | 132 | 2 x 161403210 | - |
| 32-160/22/P | 132 | 100 | - | 100 | - | - |
| 32-160/30/P | 132 | 125 | - | 125 | - | - |
| 32-160/40/P | 132 | 125 | - | 125 | - | - |
| 32-160/55/P | 132 | 150 | - | 160 | 2 x 161403210 2 x 161407550 | - |
| 32-200/30/P | 160 | 125 | - | 160 | - | - |
| 32-200/40/P | 160 | 125 | - | 160 | - | - |
| 32-200/55/P | 160 | 150 | - | 160 | - | - |
| 32-200/75/P | 160 | 150 | - | 160 | - | - |
| 32-250/75/P | 180 | 150 | - | 180 | - | - |
| 32-250/110A/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 32-250/110/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 32-250/150/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 40-125/15/S | 112 | 100 | - | 112 | - | - |
| 40-125/22/P | 112 | 100 | - | 112 | - | - |
| 40-125/30/P | 112 | 125 | - | 132 | 2 x 161403210 | - |
| 40-125/40/P | 112 | 125 | - | 132 | 2 x 161403210 | - |
| 40-160/30/P | 132 | 125 | - | 132 | - | - |
| 40-160/40/P | 132 | 125 | - | 132 | - | - |
| 40-160/55/P | 132 | 150 | - | 160 | 2 x 161403210 2 x 161407550 | - |
| 40-160/75/P | 132 | 150 | - | 160 | 2 x 161403210 2 x 161407550 | - |
| 40-200/55/P | 160 | 150 | - | 160 | - | - |
| 40-200/75/P | 160 | 150 | - | 160 | - | - |
| 40-200/110A/P | 160 | 175 | 160 | 180 | 2 x 161403210 | 2 x 161407670 |
| 40-200/110/P | 160 | 175 | 160 | 180 | 2 x 161403210 | 2 x 161407670 |
| 40-250/110A/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 40-250/110/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 40-250/150/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 40-250/185/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 40-250/220/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 50-125/30/P | 132 | 125 | - | 132 | - | - |
| 50-125/40/P | 132 | 125 | - | 132 | - | - |
| 50-125/55/P | 132 | 150 | - | 160 | 2 x 161403210 2 x 161407550 | - |
| 50-125/75/P | 132 | 150 | - | 160 | 2 x 161403210 2 x 161407550 | - |
| 50-160/55/P | 160 | 150 | - | 160 | - | - |
| 50-160/75/P | 160 | 150 | - | 160 | - | - |
| 50-160/110A/P | 160 | 175 | 160 | 180 | 2 x 161403210 | 2 x 161407670 |
| 50-160/110/P | 160 | 175 | 160 | 180 | 2 x 161403210 | 2 x 161407670 |
| 50-200/110A/P | 160 | 175 | 160 | 180 | 2 x 161403210 | 2 x 161407670 |
| 50-200/110/P | 160 | 175 | 160 | 180 | 2 x 161403210 | 2 x 161407670 |
| 50-200/150/P | 160 | 175 | 160 | 180 | 2 x 161403210 | 2 x 161407670 |
| 50-200/185/P | 160 | 175 | 160 | 180 | 2 x 161403210 | 2 x 161407670 |

| PUMP TYPE NSCS..2 | DIMENSIONS (mm) | | | | SHIM* CODE | |
|----------------------|-----------------|--------------|------------|-----|--------------------------------|---------------|
| | PUMP h1 | MOTOR P/2 | MOTOR H | h4 | Pump | Motor |
| 50-250/150/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 50-250/185/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 50-250/220/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 50-250/300/W | 180 | 200 | 200 | 200 | 2 x 161403230 | - |
| 50-315/370/W | 225 | 200 | 200 | 225 | - | 2 x 768082110 |
| 50-315/450/W | 225 | 225 | 225 | 225 | - | - |
| 50-315/550/W | 225 | 275 | 250 | 280 | 2 x 768003140 2 x 768003180 | 2 x 161407990 |
| 50-315/750/W | 225 | 275 | 280 | 280 | 2 x 768003140 2 x 768003180 | - |
| 65-125/40/P | 160 | 125 | - | 160 | - | - |
| 65-125/55/P | 160 | 150 | - | 160 | - | - |
| 65-125/75/P | 160 | 150 | - | 160 | - | - |
| 65-125/110A/P | 160 | 175 | 160 | 180 | 2 x 161403230 | 2 x 161407670 |
| 65-125/110/P | 160 | 175 | 160 | 180 | 2 x 161403230 | 2 x 161407670 |
| 65-160/75/P | 160 | 150 | - | 160 | - | - |
| 65-160/110A/P | 160 | 175 | 160 | 180 | 2 x 161403230 | 2 x 161407670 |
| 65-160/110/P | 160 | 175 | 160 | 180 | 2 x 161403230 | 2 x 161407670 |
| 65-160/150/P | 160 | 175 | 160 | 180 | 2 x 161403230 | 2 x 161407670 |
| 65-160/185/P | 160 | 175 | 160 | 180 | 2 x 161403230 | 2 x 161407670 |
| 65-200/110/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 65-200/150/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 65-200/185/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 65-200/220/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 65-200/300/W | 180 | 200 | 200 | 200 | 2 x 161403230 | - |
| 65-250/220/P | 200 | 175 | 160 | 200 | - | 4 x 161407670 |
| 65-250/300/W | 200 | 200 | 200 | 200 | - | - |
| 65-250/370/W | 200 | 200 | 200 | 200 | - | - |
| 65-250/450/W | 200 | 225 | 225 | 225 | 2 x 161404380 | - |
| 65-250/550/W | 200 | 275 | 250 | 280 | 4 x 161404380 2 x 161407800 | 2 x 161407990 |
| 65-315/550/W | 225 | 275 | 250 | 280 | 2 x 768003140 2 x 768003180 | 2 x 161407990 |
| 65-315/750/W | 225 | 275 | 280 | 280 | 2 x 768003140 2 x 768003180 | - |
| 65-315/900/W | 225 | 275 | 280 | 280 | 2 x 768003140 2 x 768003180 | - |
| 80-160/110/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 80-160/150/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 80-160/185/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 80-160/220/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 80-200/220/P | 180 | 175 | 160 | 180 | - | 2 x 161407670 |
| 80-200/300/W | 180 | 200 | 200 | 200 | 2 x 161403230 | - |
| 80-200/370/W | 180 | 200 | 200 | 200 | 2 x 161403230 | - |
| 80-200/450/W | 180 | 225 | 225 | 225 | 2 x 161403230 2 x 161407570 | - |
| 80-250/370/W | 200 | 200 | 200 | 200 | - | - |
| 80-250/450/W | 200 | 225 | 225 | 225 | 2 x 161404380 | - |
| 80-250/550/W | 200 | 275 | 250 | 280 | 4 x 161404380 2 x 161407800 | 2 x 161407990 |
| 80-250/750/W | 200 | 275 | 280 | 280 | 4 x 161404380 2 x 161407800 | - |

* On request.

NSCS 32 ÷ 80 SERIES, 4 POLES SHIM FOR PUMP AND MOTOR FEET

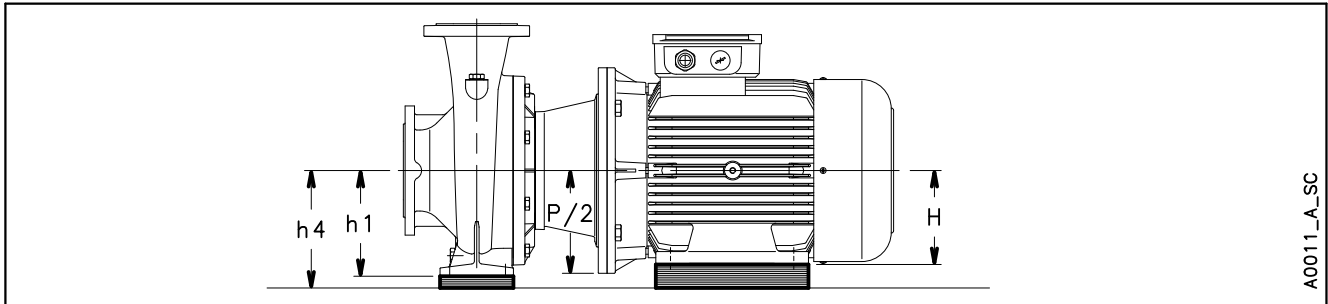


A0011_A_SC

| PUMP TYPE NSCS..4 | DIMENSIONS (mm) | | | | SHIM* CODE | |
|----------------------|-----------------|-------|-----|-----|---------------|----------------|
| | PUMP h1 | MOTOR | | h4 | Pump | Motor |
| | | P/2 | H | | | |
| 32-160/05A/S | 132 | 100 | - | 132 | - | - |
| 32-160/05/S | 132 | 100 | - | 132 | - | - |
| 32-200/05A/S | 160 | 100 | - | 160 | - | - |
| 32-200/05/S | 160 | 100 | - | 160 | - | - |
| 32-200/07/X | 160 | 100 | - | 160 | - | - |
| 32-200/11/P | 160 | 100 | - | 160 | - | - |
| 32-250/11A/P | 180 | 100 | - | 180 | - | - |
| 32-250/11/P | 180 | 100 | - | 180 | - | - |
| 32-250/15/P | 180 | 100 | - | 180 | - | - |
| 32-250/22/P | 180 | 125 | - | 180 | - | - |
| 40-125/05/S | 112 | 100 | - | 112 | - | - |
| 40-160/03/S | 132 | 100 | - | 132 | - | - |
| 40-160/05/S | 132 | 100 | - | 132 | - | - |
| 40-160/07/X | 132 | 100 | - | 132 | - | - |
| 40-160/11/P | 132 | 100 | - | 132 | - | - |
| 40-200/07/X | 160 | 100 | - | 160 | - | - |
| 40-200/11/P | 160 | 100 | - | 160 | - | - |
| 40-200/15A/P | 160 | 100 | - | 160 | - | - |
| 40-200/15/P | 160 | 100 | - | 160 | - | - |
| 40-250/11/P | 180 | 100 | - | 180 | - | - |
| 40-250/15/P | 180 | 100 | - | 180 | - | - |
| 40-250/22A/P | 180 | 125 | - | 180 | - | - |
| 40-250/22/P | 180 | 125 | - | 180 | - | - |
| 40-250/30/P | 180 | 125 | - | 180 | - | - |
| 50-125/05/S | 132 | 100 | - | 132 | - | - |
| 50-125/07/X | 132 | 100 | - | 132 | - | - |
| 50-125/11/P | 132 | 100 | - | 132 | - | - |
| 50-160/07/X | 132 | 100 | - | 132 | - | - |
| 50-160/11A/P | 160 | 100 | - | 160 | - | - |
| 50-160/11/P | 160 | 100 | - | 160 | - | - |
| 50-160/15/P | 160 | 100 | - | 160 | - | - |
| 50-200/11/P | 160 | 100 | - | 160 | - | - |
| 50-200/15/P | 160 | 100 | - | 160 | - | - |
| 50-200/22A/P | 160 | 125 | - | 160 | - | - |
| 50-200/22/P | 160 | 125 | - | 160 | - | - |
| 50-250/22A/P | 180 | 125 | - | 180 | - | - |
| 50-250/22/P | 180 | 125 | - | 180 | - | - |
| 50-250/30/P | 180 | 125 | - | 180 | - | - |
| 50-250/40/P | 180 | 125 | - | 180 | - | - |
| 50-315/40/P | 225 | 125 | - | 225 | - | - |
| 50-315/55/P | 225 | 150 | - | 225 | - | - |
| 50-315/75/P | 225 | 150 | - | 225 | - | - |
| 50-315/110/P | 225 | 175 | 160 | 225 | - | 1 x 743760350▲ |

| PUMP TYPE NSCS..4 | DIMENSIONS (mm) | | | | SHIM* CODE | |
|----------------------|-----------------|-------|-----|-----|---------------|----------------|
| | PUMP h1 | MOTOR | | h4 | Pump | Motor |
| | | P/2 | H | | | |
| 65-125/05/S | 160 | 100 | - | 160 | - | - |
| 65-125/07/X | 160 | 100 | - | 160 | - | - |
| 65-125/11/P | 160 | 100 | - | 160 | - | - |
| 65-125/15/P | 160 | 100 | - | 160 | - | - |
| 65-160/11A/P | 160 | 100 | - | 160 | - | - |
| 65-160/11/P | 160 | 100 | - | 160 | - | - |
| 65-160/15/P | 160 | 100 | - | 160 | - | - |
| 65-160/22A/P | 160 | 125 | - | 160 | - | - |
| 65-160/22/P | 160 | 125 | - | 160 | - | - |
| 65-200/15/P | 180 | 100 | - | 180 | - | - |
| 65-200/22A/P | 180 | 125 | - | 180 | - | - |
| 65-200/22/P | 180 | 125 | - | 180 | - | - |
| 65-200/30/P | 180 | 125 | - | 180 | - | - |
| 65-200/40/P | 180 | 125 | - | 180 | - | - |
| 65-250/30/P | 200 | 125 | - | 200 | - | - |
| 65-250/40/P | 200 | 125 | - | 200 | - | - |
| 65-250/55A/P | 200 | 150 | - | 200 | - | - |
| 65-250/55/P | 200 | 150 | - | 200 | - | - |
| 65-250/75/P | 200 | 150 | - | 200 | - | - |
| 65-315/55/P | 225 | 150 | - | 225 | - | - |
| 65-315/75/P | 225 | 150 | - | 225 | - | - |
| 65-315/110/P | 225 | 175 | 160 | 225 | - | 1 x 743760350▲ |
| 65-315/150/P | 225 | 175 | 160 | 225 | - | 1 x 743760350▲ |
| 80-160/15/P | 180 | 100 | - | 180 | - | - |
| 80-160/22A/P | 180 | 125 | - | 180 | - | - |
| 80-160/22/P | 180 | 125 | - | 180 | - | - |
| 80-160/30/P | 180 | 125 | - | 180 | - | - |
| 80-200/30/P | 180 | 125 | - | 180 | - | - |
| 80-200/40/P | 180 | 125 | - | 180 | - | - |
| 80-200/55A/P | 180 | 150 | - | 180 | - | - |
| 80-200/55/P | 180 | 150 | - | 180 | - | - |
| 80-250/55A/P | 200 | 150 | - | 200 | - | - |
| 80-250/55/P | 200 | 150 | - | 200 | - | - |
| 80-250/75/P | 200 | 150 | - | 200 | - | - |
| 80-250/110/P | 200 | 175 | 160 | 200 | - | 4 x 161407670 |
| 80-315/110A/P | 250 | 175 | 160 | 250 | - | 1 x 743760360▲ |
| 80-315/110/P | 250 | 175 | 160 | 250 | - | 1 x 743760360▲ |
| 80-315/150/P | 250 | 175 | 160 | 250 | - | 1 x 743760360▲ |
| 80-315/185/W | 250 | 175 | 180 | 250 | - | 1 x 743760290▲ |
| 80-315/220/W | 250 | 175 | 180 | 250 | - | 1 x 743760290▲ |
| 80-400/185/W | 280 | 175 | 180 | 280 | - | 1 x 743760300▲ |
| 80-400/220/W | 280 | 175 | 180 | 280 | - | 1 x 743760300▲ |
| 80-400/300/W | 280 | 200 | 200 | 280 | - | 1 x 743760230▲ |
| 80-400/370/W | 280 | 225 | 225 | 280 | - | 1 x 743760170▲ |

* On request. ▲ Support base kit.

NSCS 100 ÷ 250 SERIES, 4 POLES SHIM FOR PUMP AND MOTOR FEET

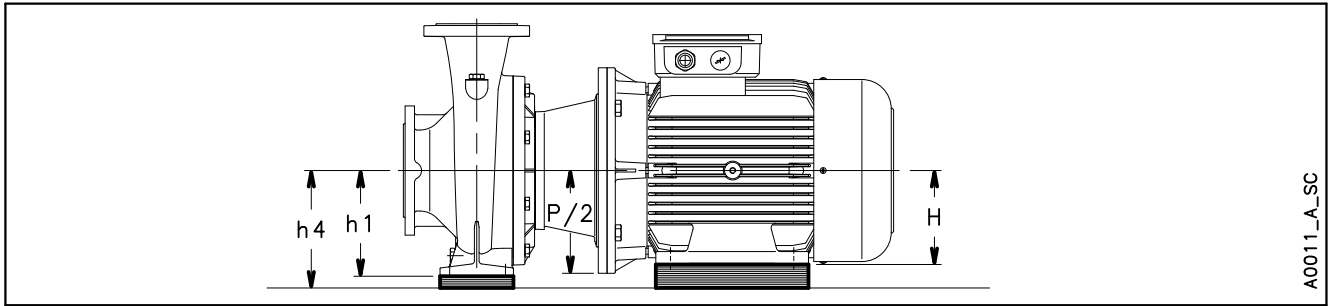

A0011_A_SC


| PUMP TYPE NSCS..4 | DIMENSIONS (mm) | | | | SHIM* CODE | |
|----------------------|-----------------|-------|-----|-----|---------------|----------------|
| | PUMP h1 | MOTOR | | h4 | Pump | Motor |
| | | P/2 | H | | | |
| 100-160/22A/P | 200 | 125 | - | 200 | - | - |
| 100-160/22/P | 200 | 125 | - | 200 | - | - |
| 100-160/30/P | 200 | 125 | - | 200 | - | - |
| 100-160/40/P | 200 | 125 | - | 200 | - | - |
| 100-200/40/P | 200 | 125 | - | 200 | - | - |
| 100-200/55/P | 200 | 150 | - | 200 | - | - |
| 100-200/75/P | 200 | 150 | - | 200 | - | - |
| 100-250/75/P | 225 | 150 | - | 225 | - | - |
| 100-250/110/P | 225 | 175 | 160 | 225 | - | 1 x 743760350▲ |
| 100-315/110/P | 250 | 175 | 160 | 250 | - | 1 x 743760360▲ |
| 100-315/150/P | 250 | 175 | 160 | 250 | - | 1 x 743760360▲ |
| 100-315/185/W | 250 | 175 | 180 | 250 | - | 1 x 743760290▲ |
| 100-315/220/W | 250 | 175 | 180 | 250 | - | 1 x 743760290▲ |
| 100-315/300/W | 250 | 200 | 200 | 250 | - | 1 x 743760220▲ |
| 100-400/300/W | 280 | 200 | 200 | 280 | - | 1 x 743760230▲ |
| 100-400/370/W | 280 | 225 | 225 | 280 | - | 1 x 743760170▲ |
| 100-400/450/W | 280 | 225 | 225 | 280 | - | 1 x 743760170▲ |
| 125-200/55/P | 250 | 150 | - | 250 | - | - |
| 125-200/75/P | 250 | 150 | - | 250 | - | - |
| 125-200/110/P | 250 | 175 | 160 | 250 | - | 1 x 743760360▲ |
| 125-250/110/P | 250 | 175 | 160 | 250 | - | 1 x 743760360▲ |
| 125-250/150/P | 250 | 175 | 160 | 250 | - | 1 x 743760360▲ |
| 125-315/185/W | 280 | 175 | 180 | 280 | - | 1 x 743760300▲ |
| 125-315/220/W | 280 | 175 | 180 | 280 | - | 1 x 743760300▲ |
| 125-315/300/W | 280 | 200 | 200 | 280 | - | 1 x 743760230▲ |
| 125-315/370/W | 280 | 225 | 225 | 280 | - | 1 x 743760170▲ |
| 125-400/370/W | 315 | 225 | 225 | 315 | - | 1 x 743760180▲ |
| 125-400/450/W | 315 | 225 | 225 | 315 | - | 1 x 743760180▲ |
| 125-400/550/W | 315 | 275 | 250 | 315 | - | 1 x 743760130▲ |
| 125-400/750/W | 315 | 275 | 280 | 315 | - | 2 x 768082130 |
| 150-200/110A/P | 280 | 175 | 160 | 280 | - | 1 x 743760370▲ |
| 150-200/110/P | 280 | 175 | 160 | 280 | - | 1 x 743760370▲ |
| 150-200/150A/P | 280 | 175 | 160 | 280 | - | 1 x 743760370▲ |
| 150-200/150/P | 280 | 175 | 160 | 280 | - | 1 x 743760370▲ |
| 150-250/150/P | 280 | 175 | 160 | 280 | - | 1 x 743760370▲ |
| 150-250/185/W | 280 | 175 | 180 | 280 | - | 1 x 743760300▲ |
| 150-250/220/W | 280 | 175 | 180 | 280 | - | 1 x 743760300▲ |
| 150-250/300/W | 280 | 200 | 200 | 280 | - | 1 x 743760230▲ |
| 150-315/300/W | 280 | 200 | 200 | 280 | - | 1 x 743760230▲ |
| 150-315/370/W | 280 | 225 | 225 | 280 | - | 1 x 743760170▲ |
| 150-315/450/W | 280 | 225 | 225 | 280 | - | 1 x 743760170▲ |

| PUMP TYPE NSCS..4 | DIMENSIONS (mm) | | | | SHIM* CODE | |
|----------------------|-----------------|-------|-----|-----|---------------|----------------|
| | PUMP h1 | MOTOR | | h4 | Pump | Motor |
| | | P/2 | H | | | |
| 150-400/450/W | 315 | 225 | 225 | 315 | - | 1 x 743760180▲ |
| 150-400/550/W | 315 | 275 | 250 | 315 | - | 1 x 743760130▲ |
| 150-400/750/W | 315 | 275 | 280 | 315 | - | 2 x 768082130 |
| 150-400/900/W | 315 | 275 | 280 | 315 | - | 2 x 768082130 |
| 200-250/185/W | 355 | 175 | 180 | 355 | - | 1 x 743760320▲ |
| 200-250/220/W | 355 | 175 | 180 | 355 | - | 1 x 743760320▲ |
| 200-250/300A/W | 355 | 200 | 200 | 355 | - | 1 x 743760250▲ |
| 200-250/300/W | 355 | 200 | 200 | 355 | - | 1 x 743760250▲ |
| 200-315/370/W | 355 | 225 | 225 | 355 | - | 1 x 743760190▲ |
| 200-315/450/W | 355 | 225 | 225 | 355 | - | 1 x 743760190▲ |
| 200-315/550/W | 355 | 275 | 250 | 355 | - | 1 x 743760140▲ |
| 200-315/750/W | 355 | 275 | 280 | 355 | - | 1 x 743760100▲ |
| 250-315/370/W | 400 | 225 | 225 | 400 | - | 1 x 743760200▲ |
| 250-315/450/W | 400 | 225 | 225 | 400 | - | 1 x 743760200▲ |
| 250-315/550/W | 400 | 275 | 250 | 400 | - | 1 x 743760150▲ |
| 250-315/750/W | 400 | 275 | 280 | 400 | - | 1 x 743760110▲ |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

* On request. ▲ Support base kit.

nscs-100-250sp_4p50-en_a_td

SHIM FOR MOTOR FEET

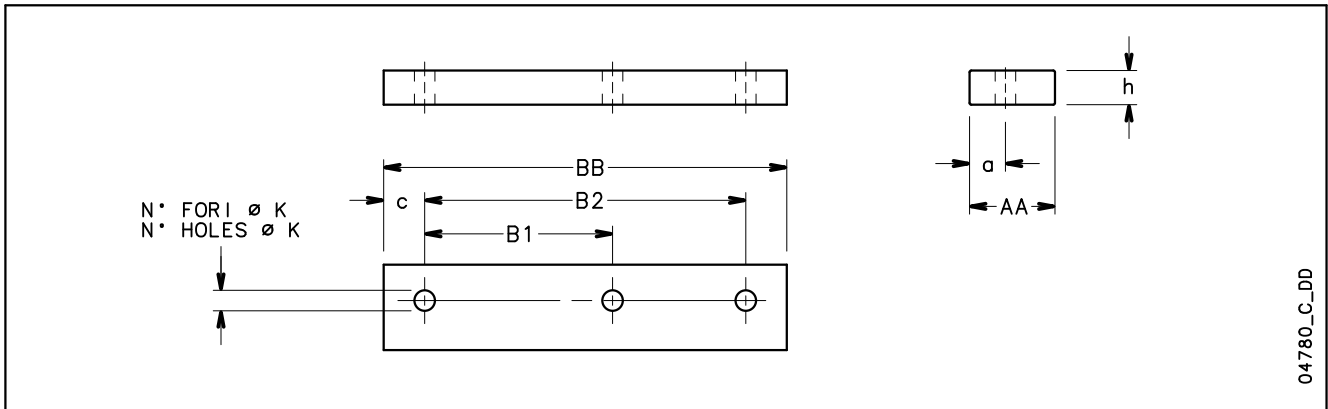


04780_C_DD

| CODE | DENOMINATION | | | | | DIMENSIONS (mm) | | | | HOLES | |
|-----------|--------------|---|----|---|-----|-----------------|-----|-----|------|-------|-----|
| | AA | x | h | x | BB | a | B1 | B2 | c | N° | ø K |
| 161402570 | 35 | | 20 | | 125 | 17 | 100 | - | 12,5 | 2 | 10 |
| 161402320 | 40 | | 10 | | 155 | 20 | 100 | 125 | 15 | 3 | 10 |
| 161402340 | 40 | | 12 | | 155 | 20 | 100 | 125 | 15 | 3 | 10 |
| 161402360 | 40 | | 12 | | 180 | 17 | 140 | - | 20 | 2 | 14 |
| 161402380 | 40 | | 20 | | 180 | 17 | 140 | - | 20 | 2 | 14 |
| 161402400 | 40 | | 30 | | 155 | 20 | 100 | 125 | 15 | 3 | 10 |
| 161402420 | 40 | | 40 | | 180 | 17 | 140 | - | 20 | 2 | 14 |
| 161402440 | 50 | | 8 | | 226 | 21 | 140 | 178 | 24 | 3 | 14 |
| 161402460 | 50 | | 20 | | 226 | 21 | 140 | 178 | 24 | 3 | 14 |
| 161407670 | 50 | | 20 | | 304 | 25 | 210 | 254 | 25 | 3 | 14 |
| 161407690 | 50 | | 30 | | 304 | 25 | 210 | 254 | 25 | 3 | 14 |
| 768082180 | 80 | | 5 | | 332 | 35,5 | 241 | 279 | 26,5 | 3 | 14 |
| 768082190 | 80 | | 10 | | 332 | 35,5 | 241 | 279 | 26,5 | 3 | 14 |
| 161407590 | 80 | | 20 | | 332 | 35,5 | 241 | 279 | 26,5 | 3 | 14 |
| 768082110 | 80 | | 25 | | 370 | 33,5 | 305 | - | 32,5 | 2 | 19 |
| 768082120 | 80 | | 25 | | 412 | 40 | 286 | 311 | 50,5 | 3 | 19 |
| 161407990 | 100 | | 30 | | 467 | 50 | 311 | 349 | 59 | 3 | 22 |
| 768082130 | 100 | | 35 | | 517 | 50 | 368 | 419 | 49 | 3 | 24 |

SHIM FOR PUMP FEET

sp-mot-nscs-nscf-en_d_td

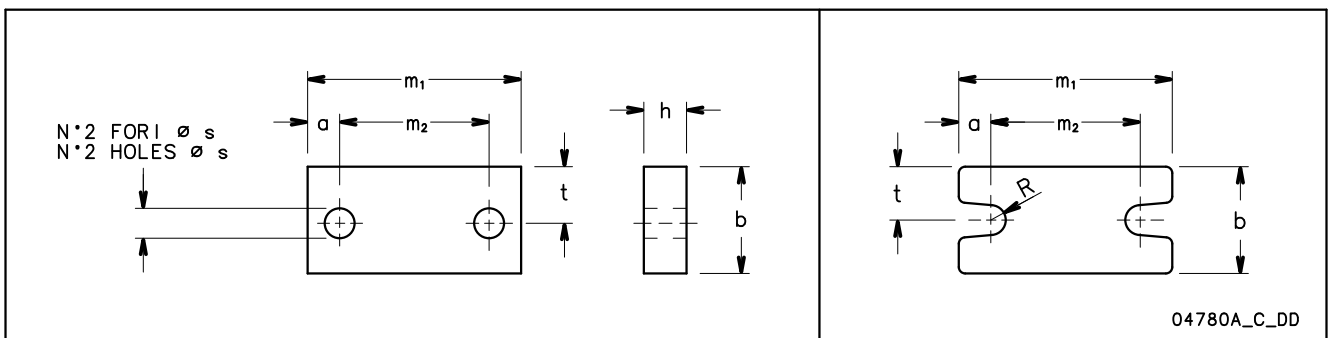


04780A_C_DD

| CODE | DENOMINATION | | | | | DIMENSIONS (mm) | | | | |
|-----------|--------------|---|----|---|----------------|-----------------|----------------|-----|---|------|
| | b | x | h | x | m ₁ | a | m ₂ | ø s | R | t |
| 161407770 | 40 | | 10 | | 160 | 25 | 110 | 14 | - | 16,5 |
| 161403250 | 40 | | 20 | | 160 | 25 | 110 | 14 | - | 16,5 |
| 161404360 | 40 | | 25 | | 160 | 25 | 110 | 14 | - | 16,5 |
| 161407780 | 40 | | 30 | | 160 | 25 | 110 | 14 | - | 16,5 |
| 161407550 | 50 | | 8 | | 100 | 15 | 70 | 14 | - | 26,5 |
| 161403210 | 50 | | 20 | | 100 | 15 | 70 | 14 | - | 26,5 |
| 161403230 | 70 | | 20 | | 125 | 15 | 95 | 14 | - | 37,5 |
| 161407570 | 70 | | 25 | | 125 | 15 | 95 | 14 | - | 37,5 |
| 161407790 | 80 | | 10 | | 160 | 20 | 120 | 18 | - | 42,5 |
| 161404380 | 80 | | 25 | | 160 | 20 | 120 | 18 | - | 42,5 |
| 161407800 | 80 | | 30 | | 160 | 20 | 120 | 18 | - | 42,5 |
| 768003140 | 85 | | 10 | | 160 | 32,5 | 95 / 120 | - | 9 | 42,5 |
| 768003150 | 85 | | 15 | | 160 | 32,5 | 95 / 120 | - | 9 | 42,5 |
| 768003170 | 85 | | 30 | | 160 | 32,5 | 95 / 120 | - | 9 | 42,5 |
| 768003180 | 85 | | 45 | | 160 | 32,5 | 95 / 120 | - | 9 | 42,5 |
| 768003190 | 85 | | 50 | | 160 | 32,5 | 95 / 120 | - | 9 | 42,5 |

sp-pompa-nscf-en_d_td

NSCS SUPPORT BASE KIT

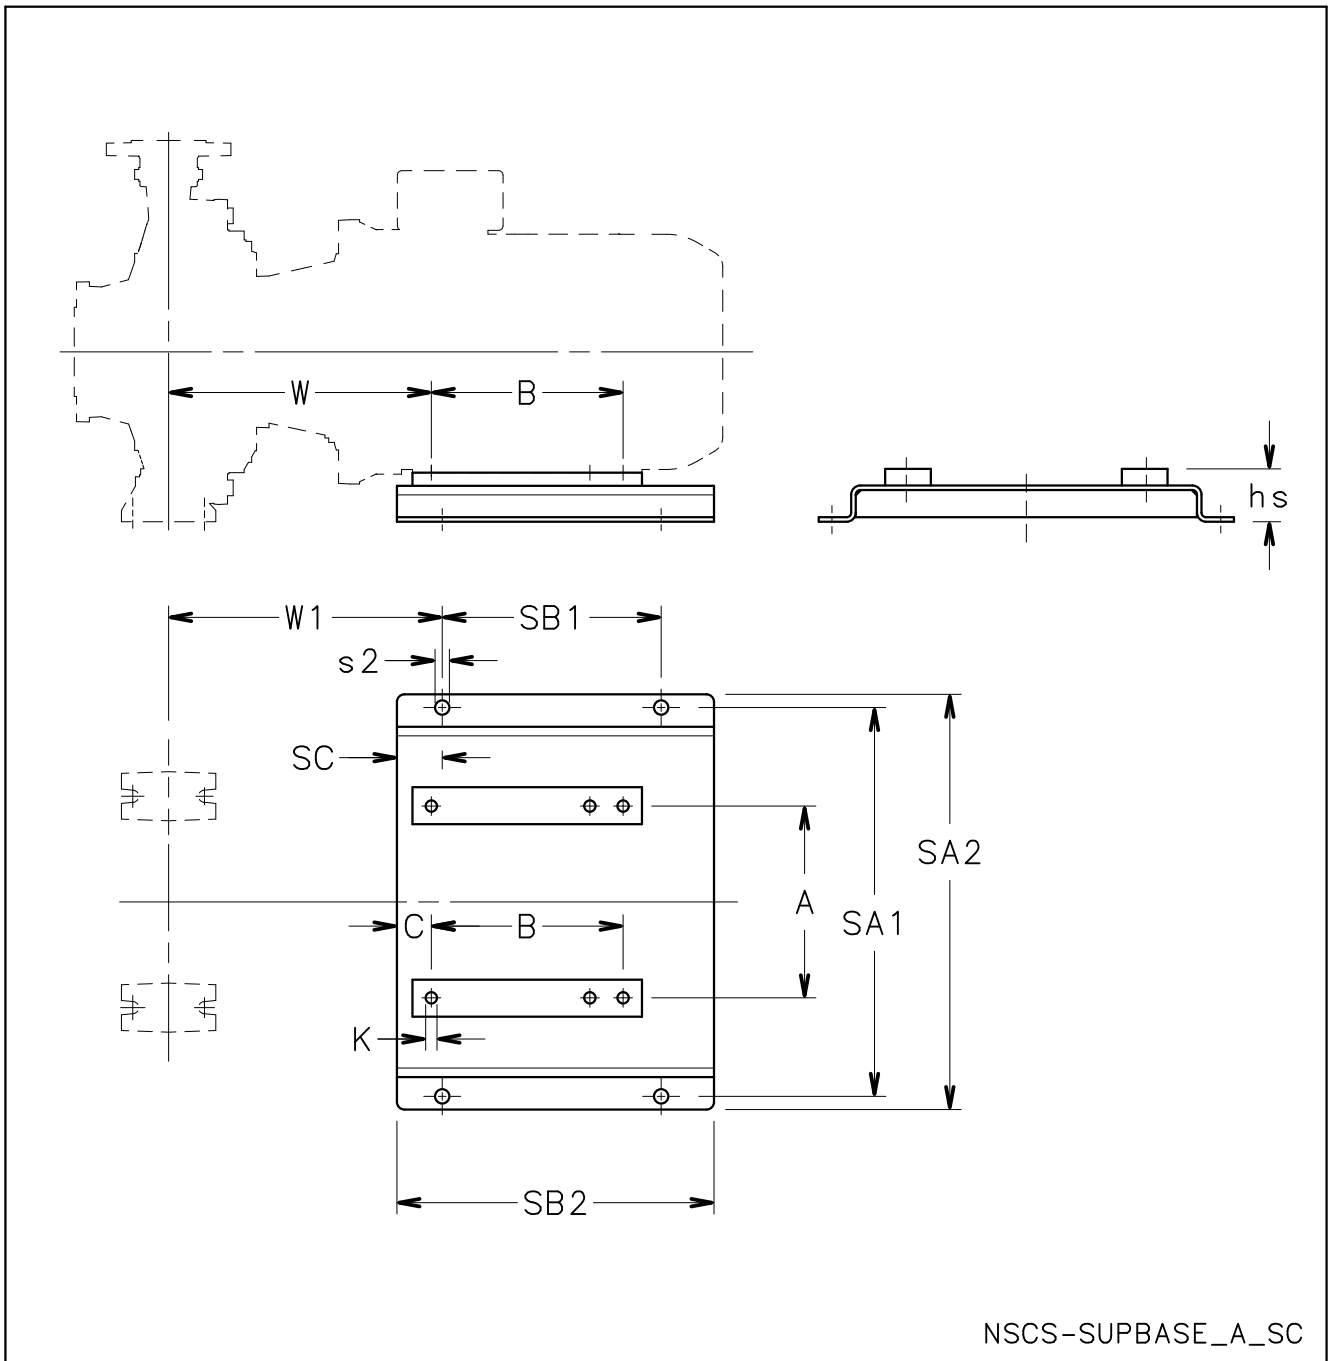

NSCS SUPPORT BASE KIT

| CODE KIT | PUMP TYPE NSCS..4 | DIMENSIONS (mm) | | | | | | | | | | | |
|-------------|----------------------|-----------------|------|-----|------|-----|-------|-----|-----|-----|-----|----|----|
| | | B | C | hs | K | W | W1 | SA1 | SA2 | SB1 | SB2 | SC | s2 |
| 743760350 | 50-315/110/P | 210 | 32,5 | 65 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760350 | 65-315/110/P | 210 | 32,5 | 65 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760350 | 65-315/150/P | 254 | 32,5 | 65 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760360 | 80-315/110A/P | 210 | 32,5 | 90 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760360 | 80-315/110/P | 210 | 32,5 | 90 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760360 | 80-315/150/P | 254 | 32,5 | 90 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760290 | 80-315/185/W | 241 | 45,5 | 70 | 14,5 | 361 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760290 | 80-315/220/W | 279 | 45,5 | 70 | 14,5 | 361 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760300 | 80-400/185/W | 241 | 45,5 | 100 | 14,5 | 375 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760300 | 80-400/220/W | 279 | 45,5 | 100 | 14,5 | 375 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760230 | 80-400/300/W | 305 | 57,5 | 80 | 18,5 | 387 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760170 | 80-400/370/W | 286/311 | 60 | 55 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760350 | 100-250/110/P | 210 | 32,5 | 65 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760360 | 100-315/110/P | 210 | 32,5 | 90 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760360 | 100-315/150/P | 254 | 32,5 | 90 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760290 | 100-315/185/W | 241 | 45,5 | 70 | 14,5 | 361 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760290 | 100-315/220/W | 279 | 45,5 | 70 | 14,5 | 361 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760220 | 100-315/300/W | 305 | 57,5 | 50 | 18,5 | 379 | 381,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760230 | 100-400/300/W | 305 | 57,5 | 80 | 18,5 | 387 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760170 | 100-400/370/W | 286/311 | 60 | 55 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760170 | 100-400/450/W | 286/311 | 60 | 55 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760360 | 125-200/110/P | 210 | 32,5 | 90 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760360 | 125-250/110/P | 210 | 32,5 | 90 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760360 | 125-250/150/P | 254 | 32,5 | 90 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760300 | 125-315/185/W | 241 | 45,5 | 100 | 14,5 | 375 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760300 | 125-315/220/W | 279 | 45,5 | 100 | 14,5 | 375 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760230 | 125-315/300/W | 305 | 57,5 | 80 | 18,5 | 387 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760170 | 125-315/370/W | 286/311 | 60 | 55 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760180 | 125-400/370/W | 286/311 | 60 | 90 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760180 | 125-400/450/W | 286/311 | 60 | 90 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760130 | 125-400/550/W | 349 | 79 | 65 | 24 | 452 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760370 | 150-200/110A/P | 210 | 32,5 | 120 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760370 | 150-200/110/P | 210 | 32,5 | 120 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760370 | 150-200/150A/P | 254 | 32,5 | 120 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760370 | 150-200/150/P | 254 | 32,5 | 120 | 14,5 | 348 | 375,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760370 | 150-250/150/P | 254 | 32,5 | 120 | 14,5 | 362 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760300 | 150-250/185/W | 241 | 45,5 | 100 | 14,5 | 375 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760300 | 150-250/220/W | 279 | 45,5 | 100 | 14,5 | 375 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760230 | 150-250/300/W | 305 | 57,5 | 80 | 18,5 | 387 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760230 | 150-315/300/W | 305 | 57,5 | 80 | 18,5 | 387 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760170 | 150-315/370/W | 286/311 | 60 | 55 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760170 | 150-315/450/W | 286/311 | 60 | 55 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760180 | 150-400/450/W | 286/311 | 60 | 90 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760130 | 150-400/550/W | 349 | 79 | 65 | 24 | 452 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760320 | 200-250/185/W | 241 | 45,5 | 175 | 14,5 | 375 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760320 | 200-250/220/W | 279 | 45,5 | 175 | 14,5 | 375 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760250 | 200-250/300A/W | 305 | 57,5 | 155 | 18,5 | 387 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760250 | 200-250/300/W | 305 | 57,5 | 155 | 18,5 | 387 | 389,5 | 515 | 550 | 290 | 420 | 60 | 19 |
| 743760190 | 200-315/370/W | 286/311 | 60 | 130 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760190 | 200-315/450/W | 286/311 | 60 | 130 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760140 | 200-315/550/W | 349 | 79 | 105 | 24 | 452 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760100 | 200-315/750/W | 368/419 | 70,5 | 75 | 24 | 474 | 473,5 | 655 | 690 | 420 | 560 | 70 | 19 |
| 743760200 | 250-315/370/W | 286/311 | 60 | 175 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760200 | 250-315/450/W | 286/311 | 60 | 175 | 18,5 | 433 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760150 | 250-315/550/W | 349 | 79 | 150 | 24 | 452 | 433 | 605 | 640 | 392 | 510 | 60 | 19 |
| 743760110 | 250-315/750/W | 368/419 | 70,5 | 120 | 24 | 474 | 473,5 | 655 | 690 | 420 | 560 | 70 | 19 |

REPORTS AND DECLARATIONS

REPORTS AND DECLARATIONS

i) Test reports

a) Factory Test Report

- Test report compiled at the end of the assembly line, including flow-head performance test (ISO 9906:2012 – Grade 3B) and hydrostatic pressure test.

b) Audit Test Report

- Test report for electric pumps compiled in the test room, comprising flow-head-pump input-pump efficiency performance test (according to ISO 9906:2012)

c) NPSH Test Report

- Test report for electric pumps compiled in the test room, comprising flow-NPSH performance test (according to ISO 9906:2012)

d) Noise Test Report

- Report indicating sound pressure and power measurements (EN ISO 20361, EN ISO 11203, EN ISO 4871)

e) Vibration Test Report

(unavailable for submerged or submergible pumps)

- Report indicating vibration measurements (ISO 10816-1)

ii) Declaration of product conformity with the technical requirements indicated in the order

a) EN 10204:2004 - type 2.1

- does not include test results on supplied or similar products.

b) EN 10204:2004 - type 2.2

- includes test results (materials certificates) on similar products.

iii) Issue of a further EC Declaration of Conformity,

- in addition to the one accompanying the product, it comprises references to European law and the main technical standards (e.g.: MD 2006/42/EC, EMCD 2004/108/EC, ErP 2009/125/EC).

N.B.: if the request is made after receipt of the product, communicate the code (name) and serial number (date + progressive number).

iv) Manufacturer's declaration of conformity

- relative to one of more types of products without indicating specific codes and serial numbers.

v) Other certificates and/or documentation on request

- subject to availability or feasibility.

vi) Duplication of certificates and/or documentation on request

- subject to availability or feasibility.

TECHNICAL APPENDIX

NPSH

The minimum operating values that can be reached at the pump suction end are limited by the onset of cavitation.

Cavitation is the formation of vapour-filled cavities within liquids where the pressure is locally reduced to a critical value, or where the local pressure is equal to, or just below the vapour pressure of the liquid.

The vapour-filled cavities flow with the current and when they reach a higher pressure area the vapour contained in the cavities condenses. The cavities collide, generating pressure waves that are transmitted to the walls. These, being subjected to stress cycles, gradually become deformed and yield due to fatigue. This phenomenon, characterized by a metallic noise produced by the hammering on the pipe walls, is called incipient cavitation.

The damage caused by cavitation may be magnified by electrochemical corrosion and a local rise in temperature due to the plastic deformation of the walls. The materials that offer the highest resistance to heat and corrosion are alloy steels, especially austenitic steel. The conditions that trigger cavitation may be assessed by calculating the total net suction head, referred to in technical literature with the acronym NPSH (Net Positive Suction Head).

The NPSH represents the total energy (expressed in m.) of the liquid measured at suction under conditions of incipient cavitation, excluding the vapour pressure (expressed in m.) that the liquid has at the pump inlet.

To find the static height h_z at which to install the machine under safe conditions, the following formula must be verified:

$$h_p + h_z \geq (NPSH_r + 0.5) + h_f + h_{pv} \quad \textcircled{1}$$

where:

- h_p** is the absolute pressure applied to the free liquid surface in the suction tank, expressed in m. of liquid; h_p is the quotient between the barometric pressure and the specific weight of the liquid.
- h_z** is the suction lift between the pump axis and the free liquid surface in the suction tank, expressed in m.; h_z is negative when the liquid level is lower than the pump axis.
- h_f** is the flow resistance in the suction line and its accessories, such as: fittings, foot valve, gate valve, elbows, etc.
- h_{pv}** is the vapour pressure of the liquid at the operating temperature, expressed in m. of liquid. h_{pv} is the quotient between the P_v vapour pressure and the liquid's specific weight.
- 0,5** is the safety factor.

The maximum possible suction head for installation depends on the value of the atmospheric pressure (i.e. the elevation above sea level at which the pump is installed) and the temperature of the liquid.

To help the user, with reference to water temperature (4° C) and to the elevation above sea level, the following tables show the drop in hydraulic pressure head in relation to the elevation above sea level, and the suction loss in relation to temperature.

| Water temperature (°C) | 20 | 40 | 60 | 80 | 90 | 110 | 120 |
|------------------------|-----|-----|-----|-----|-----|------|------|
| Suction loss (m) | 0,2 | 0,7 | 2,0 | 5,0 | 7,4 | 15,4 | 21,5 |

| Elevation above sea level (m) | 500 | 1000 | 1500 | 2000 | 2500 | 3000 |
|-------------------------------|------|------|------|------|------|------|
| Suction loss (m) | 0,55 | 1,1 | 1,65 | 2,2 | 2,75 | 3,3 |

Friction loss is shown in the tables Flow Resistance of this catalogue. To reduce it to a minimum, especially in cases of high suction head (over 4-5 m.) or within the operating limits with high flow rates, we recommend using a suction line having a larger diameter than that of the pump's suction port. It is always a good idea to position the pump as close as possible to the liquid to be pumped.

Make the following calculation:

Liquid: water at ~15°C $\gamma = 1 \text{ kg/dm}^3$

Flow rate required: 25 m³/h

Head for required delivery: 70 m.

Suction lift: 3,5 m.

The selection is an 33SV3G075T pump whose NPSH required value is, at 25 m³/h, of 2 m.

For water at 15 °C

$$h_p = P_a / \gamma = 10,33\text{m}, h_{pv} = P_v / \gamma = 0,174\text{m} (0,01701 \text{ bar})$$

The H_f flow resistance in the suction line with foot valves is ~ 1,2 m.

By substituting the parameters in formula $\textcircled{1}$ with the numeric values above, we have:

$$10,33 + (-3,5) \geq (2 + 0,5) + 1,2 + 0,17$$

from which we have: 6,8 > 3,9

The relation is therefore verified.

VAPOUR PRESSURE

VAPOUR PRESSURE p_s AND ρ DENSITY OF WATER TABLE

| t °C | T K | p_s bar | ρ kg/dm ³ | t °C | T K | p_s bar | ρ kg/dm ³ | t °C | T K | p_s bar | ρ kg/dm ³ |
|---------|--------|--------------|------------------------------|---------|--------|--------------|------------------------------|---------|--------|--------------|------------------------------|
| 0 | 273,15 | 0,00611 | 0,9998 | 55 | 328,15 | 0,15741 | 0,9857 | 120 | 393,15 | 1,9854 | 0,9429 |
| 1 | 274,15 | 0,00657 | 0,9999 | 56 | 329,15 | 0,16511 | 0,9852 | 122 | 395,15 | 2,1145 | 0,9412 |
| 2 | 275,15 | 0,00706 | 0,9999 | 57 | 330,15 | 0,17313 | 0,9846 | 124 | 397,15 | 2,2504 | 0,9396 |
| 3 | 276,15 | 0,00758 | 0,9999 | 58 | 331,15 | 0,18147 | 0,9842 | 126 | 399,15 | 2,3933 | 0,9379 |
| 4 | 277,15 | 0,00813 | 1,0000 | 59 | 332,15 | 0,19016 | 0,9837 | 128 | 401,15 | 2,5435 | 0,9362 |
| 5 | 278,15 | 0,00872 | 1,0000 | 60 | 333,15 | 0,1992 | 0,9832 | 130 | 403,15 | 2,7013 | 0,9346 |
| 6 | 279,15 | 0,00935 | 1,0000 | 61 | 334,15 | 0,2086 | 0,9826 | 132 | 405,15 | 2,867 | 0,9328 |
| 7 | 280,15 | 0,01001 | 0,9999 | 62 | 335,15 | 0,2184 | 0,9821 | 134 | 407,15 | 3,041 | 0,9311 |
| 8 | 281,15 | 0,01072 | 0,9999 | 63 | 336,15 | 0,2286 | 0,9816 | 136 | 409,15 | 3,223 | 0,9294 |
| 9 | 282,15 | 0,01147 | 0,9998 | 64 | 337,15 | 0,2391 | 0,9811 | 138 | 411,15 | 3,414 | 0,9276 |
| 10 | 283,15 | 0,01227 | 0,9997 | 65 | 338,15 | 0,2501 | 0,9805 | 140 | 413,15 | 3,614 | 0,9258 |
| 11 | 284,15 | 0,01312 | 0,9997 | 66 | 339,15 | 0,2615 | 0,9799 | 145 | 418,15 | 4,155 | 0,9214 |
| 12 | 285,15 | 0,01401 | 0,9996 | 67 | 340,15 | 0,2733 | 0,9793 | 155 | 428,15 | 5,433 | 0,9121 |
| 13 | 286,15 | 0,01497 | 0,9994 | 68 | 341,15 | 0,2856 | 0,9788 | 160 | 433,15 | 6,181 | 0,9073 |
| 14 | 287,15 | 0,01597 | 0,9993 | 69 | 342,15 | 0,2984 | 0,9782 | 165 | 438,15 | 7,008 | 0,9024 |
| 15 | 288,15 | 0,01704 | 0,9992 | 70 | 343,15 | 0,3116 | 0,9777 | 170 | 443,15 | 7,920 | 0,8973 |
| 16 | 289,15 | 0,01817 | 0,9990 | 71 | 344,15 | 0,3253 | 0,9770 | 175 | 448,15 | 8,924 | 0,8921 |
| 17 | 290,15 | 0,01936 | 0,9988 | 72 | 345,15 | 0,3396 | 0,9765 | 180 | 453,15 | 10,027 | 0,8869 |
| 18 | 291,15 | 0,02062 | 0,9987 | 73 | 346,15 | 0,3543 | 0,9760 | 185 | 458,15 | 11,233 | 0,8815 |
| 19 | 292,15 | 0,02196 | 0,9985 | 74 | 347,15 | 0,3696 | 0,9753 | 190 | 463,15 | 12,551 | 0,8760 |
| 20 | 293,15 | 0,02337 | 0,9983 | 75 | 348,15 | 0,3855 | 0,9748 | 195 | 468,15 | 13,987 | 0,8704 |
| 21 | 294,15 | 0,24850 | 0,9981 | 76 | 349,15 | 0,4019 | 0,9741 | 200 | 473,15 | 15,550 | 0,8647 |
| 22 | 295,15 | 0,02642 | 0,9978 | 77 | 350,15 | 0,4189 | 0,9735 | 205 | 478,15 | 17,243 | 0,8588 |
| 23 | 296,15 | 0,02808 | 0,9976 | 78 | 351,15 | 0,4365 | 0,9729 | 210 | 483,15 | 19,077 | 0,8528 |
| 24 | 297,15 | 0,02982 | 0,9974 | 79 | 352,15 | 0,4547 | 0,9723 | 215 | 488,15 | 21,060 | 0,8467 |
| 25 | 298,15 | 0,03166 | 0,9971 | 80 | 353,15 | 0,4736 | 0,9716 | 220 | 493,15 | 23,198 | 0,8403 |
| 26 | 299,15 | 0,03360 | 0,9968 | 81 | 354,15 | 0,4931 | 0,9710 | 225 | 498,15 | 25,501 | 0,8339 |
| 27 | 300,15 | 0,03564 | 0,9966 | 82 | 355,15 | 0,5133 | 0,9704 | 230 | 503,15 | 27,976 | 0,8273 |
| 28 | 301,15 | 0,03778 | 0,9963 | 83 | 356,15 | 0,5342 | 0,9697 | 235 | 508,15 | 30,632 | 0,8205 |
| 29 | 302,15 | 0,04004 | 0,9960 | 84 | 357,15 | 0,5557 | 0,9691 | 240 | 513,15 | 33,478 | 0,8136 |
| 30 | 303,15 | 0,04241 | 0,9957 | 85 | 358,15 | 0,5780 | 0,9684 | 245 | 518,15 | 36,523 | 0,8065 |
| 31 | 304,15 | 0,04491 | 0,9954 | 86 | 359,15 | 0,6011 | 0,9678 | 250 | 523,15 | 39,776 | 0,7992 |
| 32 | 305,15 | 0,04753 | 0,9951 | 87 | 360,15 | 0,6249 | 0,9671 | 255 | 528,15 | 43,246 | 0,7916 |
| 33 | 306,15 | 0,05029 | 0,9947 | 88 | 361,15 | 0,6495 | 0,9665 | 260 | 533,15 | 46,943 | 0,7839 |
| 34 | 307,15 | 0,05318 | 0,9944 | 89 | 362,15 | 0,6749 | 0,9658 | 265 | 538,15 | 50,877 | 0,7759 |
| 35 | 308,15 | 0,05622 | 0,9940 | 90 | 363,15 | 0,7011 | 0,9652 | 270 | 543,15 | 55,058 | 0,7678 |
| 36 | 309,15 | 0,05940 | 0,9937 | 91 | 364,15 | 0,7281 | 0,9644 | 275 | 548,15 | 59,496 | 0,7593 |
| 37 | 310,15 | 0,06274 | 0,9933 | 92 | 365,15 | 0,7561 | 0,9638 | 280 | 553,15 | 64,202 | 0,7505 |
| 38 | 311,15 | 0,06624 | 0,9930 | 93 | 366,15 | 0,7849 | 0,9630 | 285 | 558,15 | 69,186 | 0,7415 |
| 39 | 312,15 | 0,06991 | 0,9927 | 94 | 367,15 | 0,8146 | 0,9624 | 290 | 563,15 | 74,461 | 0,7321 |
| 40 | 313,15 | 0,07375 | 0,9923 | 95 | 368,15 | 0,8453 | 0,9616 | 295 | 568,15 | 80,037 | 0,7223 |
| 41 | 314,15 | 0,07777 | 0,9919 | 96 | 369,15 | 0,8769 | 0,9610 | 300 | 573,15 | 85,927 | 0,7122 |
| 42 | 315,15 | 0,08198 | 0,9915 | 97 | 370,15 | 0,9094 | 0,9602 | 305 | 578,15 | 92,144 | 0,7017 |
| 43 | 316,15 | 0,09639 | 0,9911 | 98 | 371,15 | 0,9430 | 0,9596 | 310 | 583,15 | 98,70 | 0,6906 |
| 44 | 317,15 | 0,09100 | 0,9907 | 99 | 372,15 | 0,9776 | 0,9586 | 315 | 588,15 | 105,61 | 0,6791 |
| 45 | 318,15 | 0,09582 | 0,9902 | 100 | 373,15 | 1,0133 | 0,9581 | 320 | 593,15 | 112,89 | 0,6669 |
| 46 | 319,15 | 0,10086 | 0,9898 | 102 | 375,15 | 1,0878 | 0,9567 | 325 | 598,15 | 120,56 | 0,6541 |
| 47 | 320,15 | 0,10612 | 0,9894 | 104 | 377,15 | 1,1668 | 0,9552 | 330 | 603,15 | 128,63 | 0,6404 |
| 48 | 321,15 | 0,11162 | 0,9889 | 106 | 379,15 | 1,2504 | 0,9537 | 340 | 613,15 | 146,05 | 0,6102 |
| 49 | 322,15 | 0,11736 | 0,9884 | 108 | 381,15 | 1,3390 | 0,9522 | 350 | 623,15 | 165,35 | 0,5743 |
| 50 | 323,15 | 0,12335 | 0,9880 | 110 | 383,15 | 1,4327 | 0,9507 | 360 | 633,15 | 186,75 | 0,5275 |
| 51 | 324,15 | 0,12961 | 0,9876 | 112 | 385,15 | 1,5316 | 0,9491 | 370 | 643,15 | 210,54 | 0,4518 |
| 52 | 325,15 | 0,13613 | 0,9871 | 114 | 387,15 | 1,6362 | 0,9476 | 374,15 | 647,30 | 221,20 | 0,3154 |
| 53 | 326,15 | 0,14293 | 0,9862 | 116 | 389,15 | 1,7465 | 0,9460 | | | | |
| 54 | 327,15 | 0,15002 | 0,9862 | 118 | 391,15 | 1,8628 | 0,9445 | | | | |

G-at_npsb_b.sc

TABLE OF FLOW RESISTANCE IN 100 m OF STRAIGHT CAST IRON PIPELINE (HAZEN-WILLIAMS FORMULA C=100)

| FLOW RATE | | | NOMINAL DIAMETER in mm and inches | | | | | | | | | | | | | | | | | | | | | |
|-------------------|-------|---------|-----------------------------------|---------------|--------------|--------------|--------------|--|---------------|--------------|--------------|--------------|--------------|---------------|--------------|--------------|--------------|--------------|------------|--|--|--|--|--|
| m ³ /h | l/min | | 15 1/2" | 20 3/4" | 25 1" | 32 1 1/4" | 40 1 1/2" | 50 2 | 65 2 1/2" | 80 3" | 100 4" | 125 5" | 150 6" | 175 7" | 200 8" | 250 10" | 300 12" | 350 14" | 400 16" | | | | | |
| 0,6 | 10 | v hr | 0,94 16 | 0,53 3,94 | 0,34 1,33 | 0,21 0,40 | 0,13 0,13 | The hr values must be multiplied by: 0,71 for galvanized or painted steel pipes 0,54 for stainless steel or copper pipes 0,47 for PVC or PE pipes | | | | | | | | | | | | | | | | |
| 0,9 | 15 | v hr | 1,42 33,9 | 0,80 8,35 | 0,51 2,82 | 0,31 0,85 | 0,20 0,29 | | | | | | | | | | | | | | | | | |
| 1,2 | 20 | v hr | 1,89 57,7 | 1,06 14,21 | 0,68 4,79 | 0,41 1,44 | 0,27 0,49 | 0,17 0,16 | | | | | | | | | | | | | | | | |
| 1,5 | 25 | v hr | 2,36 87,2 | 1,33 21,5 | 0,85 7,24 | 0,52 2,18 | 0,33 0,73 | 0,21 0,25 | | | | | | | | | | | | | | | | |
| 1,8 | 30 | v hr | 2,83 122 | 1,59 30,1 | 1,02 10,1 | 0,62 3,05 | 0,40 1,03 | 0,25 0,35 | | | | | | | | | | | | | | | | |
| 2,1 | 35 | v hr | 3,30 162 | 1,86 40,0 | 1,19 13,5 | 0,73 4,06 | 0,46 1,37 | 0,30 0,46 | | | | | | | | | | | | | | | | |
| 2,4 | 40 | v hr | | 2,12 51,2 | 1,36 17,3 | 0,83 5,19 | 0,53 1,75 | 0,34 0,59 | 0,20 0,16 | | | | | | | | | | | | | | | |
| 3 | 50 | v hr | | 2,65 77,4 | 1,70 26,1 | 1,04 7,85 | 0,66 2,65 | 0,42 0,89 | 0,25 0,25 | | | | | | | | | | | | | | | |
| 3,6 | 60 | v hr | | 3,18 108 | 2,04 36,6 | 1,24 11,0 | 0,80 3,71 | 0,51 1,25 | 0,30 0,35 | | | | | | | | | | | | | | | |
| 4,2 | 70 | v hr | | 3,72 144 | 2,38 48,7 | 1,45 14,6 | 0,93 4,93 | 0,59 1,66 | 0,35 0,46 | | | | | | | | | | | | | | | |
| 4,8 | 80 | v hr | | 4,25 185 | 2,72 62,3 | 1,66 18,7 | 1,06 6,32 | 0,68 2,13 | 0,40 0,59 | | | | | | | | | | | | | | | |
| 5,4 | 90 | v hr | | | 3,06 77,5 | 1,87 23,3 | 1,19 7,85 | 0,76 2,65 | 0,45 0,74 | 0,30 0,27 | | | | | | | | | | | | | | |
| 6 | 100 | v hr | | | 3,40 94,1 | 2,07 28,3 | 1,33 9,54 | 0,85 3,22 | 0,50 0,90 | 0,33 0,33 | | | | | | | | | | | | | | |
| 7,5 | 125 | v hr | | | 4,25 142 | 2,59 42,8 | 1,66 14,4 | 1,06 4,86 | 0,63 1,36 | 0,41 0,49 | | | | | | | | | | | | | | |
| 9 | 150 | v hr | | | | 3,11 59,9 | 1,99 20,2 | 1,27 6,82 | 0,75 1,90 | 0,50 0,69 | 0,32 0,23 | | | | | | | | | | | | | |
| 10,5 | 175 | v hr | | | | 3,63 79,7 | 2,32 26,9 | 1,49 9,07 | 0,88 2,53 | 0,58 0,92 | 0,37 0,31 | | | | | | | | | | | | | |
| 12 | 200 | v hr | | | | 4,15 102 | 2,65 34,4 | 1,70 11,6 | 1,01 3,23 | 0,66 1,18 | 0,42 0,40 | | | | | | | | | | | | | |
| 15 | 250 | v hr | | | | 5,18 154 | 3,32 52,0 | 2,12 17,5 | 1,26 4,89 | 0,83 1,78 | 0,53 0,60 | 0,34 0,20 | | | | | | | | | | | | |
| 18 | 300 | v hr | | | | | 3,98 72,8 | 2,55 24,6 | 1,51 6,85 | 1,00 2,49 | 0,64 0,84 | 0,41 0,28 | | | | | | | | | | | | |
| 24 | 400 | v hr | | | | | 5,31 124 | 3,40 41,8 | 2,01 11,66 | 1,33 4,24 | 0,85 1,43 | 0,54 0,48 | 0,38 0,20 | | | | | | | | | | | |
| 30 | 500 | v hr | | | | | 6,63 187 | 4,25 63,2 | 2,51 17,6 | 1,66 6,41 | 1,06 2,16 | 0,68 0,73 | 0,47 0,30 | | | | | | | | | | | |
| 36 | 600 | v hr | | | | | | 5,10 88,6 | 3,02 24,7 | 1,99 8,98 | 1,27 3,03 | 0,82 1,02 | 0,57 0,42 | 0,42 0,20 | | | | | | | | | | |
| 42 | 700 | v hr | | | | | | 5,94 118 | 3,52 32,8 | 2,32 11,9 | 1,49 4,03 | 0,95 1,36 | 0,66 0,56 | 0,49 0,26 | | | | | | | | | | |
| 48 | 800 | v hr | | | | | | 6,79 151 | 4,02 42,0 | 2,65 15,3 | 1,70 5,16 | 1,09 1,74 | 0,75 0,72 | 0,55 0,34 | | | | | | | | | | |
| 54 | 900 | v hr | | | | | | 7,64 188 | 4,52 52,3 | 2,99 19,0 | 1,91 6,41 | 1,22 2,16 | 0,85 0,89 | 0,62 0,42 | | | | | | | | | | |
| 60 | 1000 | v hr | | | | | | 5,03 63,5 | 3,32 23,1 | 2,12 7,79 | 1,36 2,63 | 0,94 1,08 | 0,69 0,51 | 0,53 0,27 | | | | | | | | | | |
| 75 | 1250 | v hr | | | | | | 6,28 96,0 | 4,15 34,9 | 2,65 11,8 | 1,70 3,97 | 1,18 1,63 | 0,87 0,77 | 0,66 0,40 | | | | | | | | | | |
| 90 | 1500 | v hr | | | | | | 7,54 134 | 4,98 48,9 | 3,18 16,5 | 2,04 5,57 | 1,42 2,29 | 1,04 1,08 | 0,80 0,56 | | | | | | | | | | |
| 105 | 1750 | v hr | | | | | | 8,79 179 | 5,81 65,1 | 3,72 21,9 | 2,38 7,40 | 1,65 3,05 | 1,21 1,44 | 0,93 0,75 | | | | | | | | | | |
| 120 | 2000 | v hr | | | | | | | 6,63 83,3 | 4,25 28,1 | 2,72 9,48 | 1,89 3,90 | 1,39 1,84 | 1,06 0,96 | 0,68 0,32 | | | | | | | | | |
| 150 | 2500 | v hr | | | | | | | 8,29 126 | 5,31 42,5 | 3,40 14,3 | 2,36 5,89 | 1,73 2,78 | 1,33 1,45 | 0,85 0,49 | | | | | | | | | |
| 180 | 3000 | v hr | | | | | | | | 6,37 59,5 | 4,08 20,1 | 2,83 8,26 | 2,08 3,90 | 1,59 2,03 | 1,02 0,69 | 0,71 0,28 | | | | | | | | |
| 210 | 3500 | v hr | | | | | | | | 7,43 79,1 | 4,76 26,7 | 3,30 11,0 | 2,43 5,18 | 1,86 2,71 | 1,19 0,91 | 0,83 0,38 | | | | | | | | |
| 240 | 4000 | v hr | | | | | | | | 8,49 101 | 5,44 34,2 | 3,77 14,1 | 2,77 6,64 | 2,12 3,46 | 1,36 1,17 | 0,94 0,48 | | | | | | | | |
| 300 | 5000 | v hr | | | | | | | | | 6,79 51,6 | 4,72 21,2 | 3,47 10,0 | 2,65 5,23 | 1,70 1,77 | 1,18 0,73 | | | | | | | | |
| 360 | 6000 | v hr | | | | | | | | | 8,15 72,3 | 5,66 29,8 | 4,16 14,1 | 3,18 7,33 | 2,04 2,47 | 1,42 1,02 | | | | | | | | |
| 420 | 7000 | v hr | | | | | | | | | | 6,61 39,6 | 4,85 18,7 | 3,72 9,75 | 2,38 3,29 | 1,65 1,35 | 1,21 0,64 | | | | | | | |
| 480 | 8000 | v hr | | | | | | | | | | 7,55 50,7 | 5,55 23,9 | 4,25 12,49 | 2,72 4,21 | 1,89 1,73 | 1,39 0,82 | | | | | | | |
| 540 | 9000 | v hr | | | | | | | | | | 8,49 63,0 | 6,24 29,8 | 4,78 15,5 | 3,06 5,24 | 2,12 2,16 | 1,56 1,02 | 1,19 0,53 | | | | | | |
| 600 | 10000 | v hr | | | | | | | | | | 6,93 36,2 | 5,31 18,9 | 3,40 6,36 | 2,36 2,62 | 1,73 1,24 | 1,33 0,65 | | | | | | | |

G-at-pct-en_a_th

hr = flow resistance for 100 m of straight pipeline (m)

V = water speed (m/s)

FLOW RESISTANCE TABLE OF FLOW RESISTANCE IN BENDS, VALVES AND GATES

The flow resistance is calculated using the equivalent pipeline length method according to the table below:

| ACCESSORY TYPE | DN | | | | | | | | | | | |
|--------------------|--------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|
| | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 |
| | Equivalent pipeline length (m) | | | | | | | | | | | |
| 45° bend | 0,2 | 0,2 | 0,4 | 0,4 | 0,6 | 0,6 | 0,9 | 1,1 | 1,5 | 1,9 | 2,4 | 2,8 |
| 90° bend | 0,4 | 0,6 | 0,9 | 1,1 | 1,3 | 1,5 | 2,1 | 2,6 | 3,0 | 3,9 | 4,7 | 5,8 |
| 90° smooth bend | 0,4 | 0,4 | 0,4 | 0,6 | 0,9 | 1,1 | 1,3 | 1,7 | 1,9 | 2,8 | 3,4 | 3,9 |
| Union tee or cross | 1,1 | 1,3 | 1,7 | 2,1 | 2,6 | 3,2 | 4,3 | 5,3 | 6,4 | 7,5 | 10,7 | 12,8 |
| Gate | - | - | - | 0,2 | 0,2 | 0,2 | 0,4 | 0,4 | 0,6 | 0,9 | 1,1 | 1,3 |
| Non return valve | 1,1 | 1,5 | 1,9 | 2,4 | 3,0 | 3,4 | 4,7 | 5,9 | 7,4 | 9,6 | 11,8 | 13,9 |

G-a-pcv-en_a_th

The table is valid for the Hazen Williams coefficient $C=100$ (cast iron pipework);

for steel pipework, multiply the values by 1,41;

for stainless steel, copper and coated cast iron pipework, multiply the values by 1,85;

When the **equivalent pipeline length** has been determined, the flow resistance is obtained from the table of flow resistance.

The values given are guideline values which are bound to vary slightly according to the model, especially for gate valves and non-return valves, for which it is a good idea to check the values supplied by manufacturers.

VOLUMETRIC CAPACITY

| Litres per minute l/min | Cubic metres per hour m ³ /h | Cubic feet per hour ft ³ /h | Cubic feet per minute ft ³ /min | Imperial gallon per minute Imp. gal/min | U.S. gallon per minute US gal/min |
|-------------------------------|---|--|--|---|---|
| 1,000 | 0,0600 | 2,1189 | 0,0353 | 0,2200 | 0,2642 |
| 16,6667 | 1,0000 | 35,3147 | 0,5886 | 3,6662 | 4,4029 |
| 0,4719 | 0,0283 | 1,0000 | 0,0167 | 0,1038 | 0,1247 |
| 28,3168 | 1,6990 | 60,0000 | 1,0000 | 6,2288 | 7,4805 |
| 4,5461 | 0,2728 | 9,6326 | 0,1605 | 1,0000 | 1,2009 |
| 3,7854 | 0,2271 | 8,0208 | 0,1337 | 0,8327 | 1,0000 |

PRESSURE AND HEAD

| Newton per square metre N/m ² | kilo Pascal kPa | bar bar | Pound force per square inch psi | Metre of water m H ₂ O | Millimetre of mercury mm Hg |
|--|--------------------|----------------------|---------------------------------------|---|-----------------------------------|
| 1,0000 | 0,0010 | 1 x 10 ⁻⁵ | 1,45 x 10 ⁻⁴ | 1,02 x 10 ⁻⁴ | 0,0075 |
| 1 000,0000 | 1,0000 | 0,0100 | 0,1450 | 0,1020 | 7,5006 |
| 1 x 10 ⁵ | 100,0000 | 1,0000 | 14,5038 | 10,1972 | 750,0638 |
| 6 894,7570 | 6,8948 | 0,0689 | 1,0000 | 0,7031 | 51,7151 |
| 9 806,6500 | 9,8067 | 0,0981 | 1,4223 | 1,0000 | 73,5561 |
| 133,3220 | 0,1333 | 0,0013 | 0,0193 | 0,0136 | 1,0000 |

LENGTH

| Millimetre mm | Centimetre cm | Metre m | Inch in | Foot ft | Yard yd |
|------------------|------------------|---------------|---------------|---------------|---------------|
| 1,0000 | 0,1000 | 0,0010 | 0,0394 | 0,0033 | 0,0011 |
| 10,0000 | 1,0000 | 0,0100 | 0,3937 | 0,0328 | 0,0109 |
| 1 000,0000 | 100,0000 | 1,0000 | 39,3701 | 3,2808 | 1,0936 |
| 25,4000 | 2,5400 | 0,0254 | 1,0000 | 0,0833 | 0,0278 |
| 304,8000 | 30,4800 | 0,3048 | 12,0000 | 1,0000 | 0,3333 |
| 914,4000 | 91,4400 | 0,9144 | 36,0000 | 3,0000 | 1,0000 |

VOLUME


| Cubic metre m ³ | Litre L | Millilitre ml | Imperial gallon imp. gal. | U.S. gallon US gal. | Cubic foot ft ³ |
|-------------------------------|---------------|---------------------|------------------------------|--------------------------|-------------------------------|
| 1,0000 | 1 000,0000 | 1 x 10 ⁶ | 219,9694 | 264,1720 | 35,3147 |
| 0,0010 | 1,0000 | 1 000,0000 | 0,2200 | 0,2642 | 0,0353 |
| 1 x 10 ⁻⁶ | 0,0010 | 1,0000 | 2,2 x 10 ⁻⁴ | 2,642 x 10 ⁻⁴ | 3,53 x 10 ⁻⁵ |
| 0,0045 | 4,5461 | 4 546,0870 | 1,0000 | 1,2009 | 0,1605 |
| 0,0038 | 3,7854 | 3 785,4120 | 0,8327 | 1,0000 | 0,1337 |
| 0,0283 | 28,3168 | 28 316,8466 | 6,2288 | 7,4805 | 1,0000 |

TEMPERATURE

| Water | Kelvin K | Celsius °C | Fahrenheit °F | $^{\circ}\text{F} = ^{\circ}\text{C} \times \frac{9}{5} + 32$ $^{\circ}\text{C} = (^{\circ}\text{F} - 32) \times \frac{5}{9}$ |
|---------|-------------|---------------|------------------|--|
| icing | 273,1500 | 0,0000 | 32,0000 | |
| boiling | 373,1500 | 100,0000 | 212,0000 | |

G-at_pp-en_b_sc

FURTHER PRODUCT SELECTION AND DOCUMENTATION Xylect™

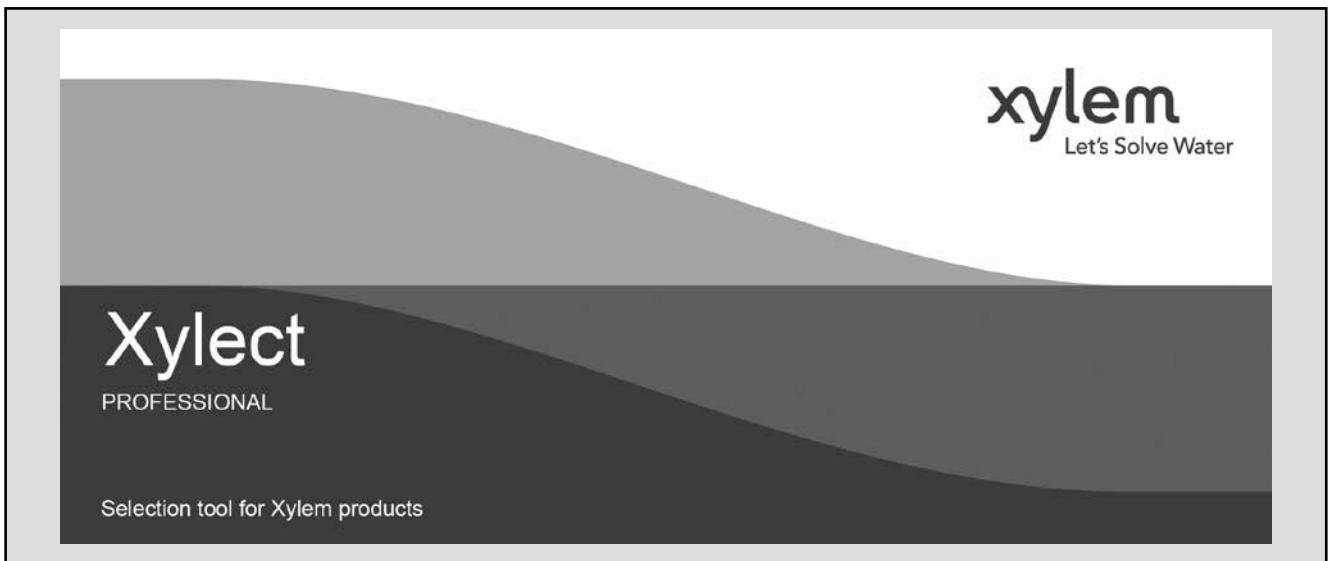

Xylect™ is pump solution selection software with an extensive online database of product information across the entire Lowara range of pumps and related products, with multiple search options and helpful project management facilities. The system holds up-to-date product information on thousands of products and accessories.


The possibility to search by applications and the detailed information output given makes it easy to make the optimal selection without having detailed knowledge about the Lowara products.

The search can be made by:

- Application
- Product type
- Duty point

Xylect™ gives a detailed output:

- List with search results
- Performance curves (flow, head, power, efficiency, NPSH)
- Motor data
- Dimensional drawings
- Options
- Data sheet printouts
- Document downloads incl dxf files

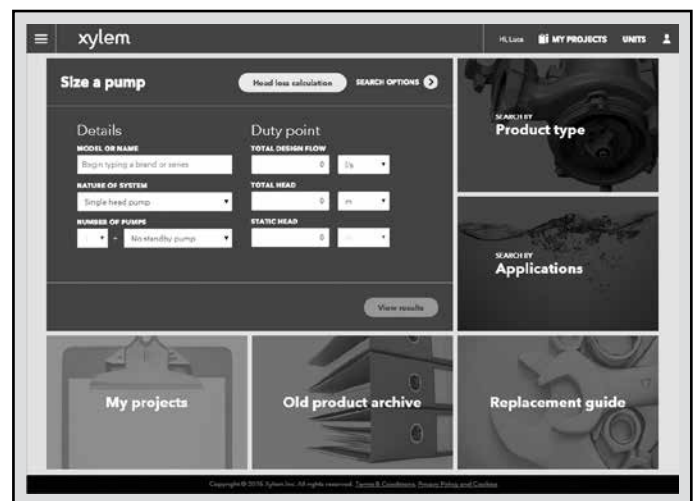

The search by application guides users not familiar with the product range to the right choice.

FURTHER PRODUCT SELECTION AND DOCUMENTATION

Xylect™




The detailed output makes it easy to select the optimal pump from the given alternatives.

The best way to work with Xylect™ is to create a personal account. This makes it possible to:

- Set own standard units
- Create and save projects
- Share projects with other Xylect™ users

Every registered user has a proper space, where all projects are saved.

For more information about Xylect™ please contact our sales network or visit www.xylect.com.

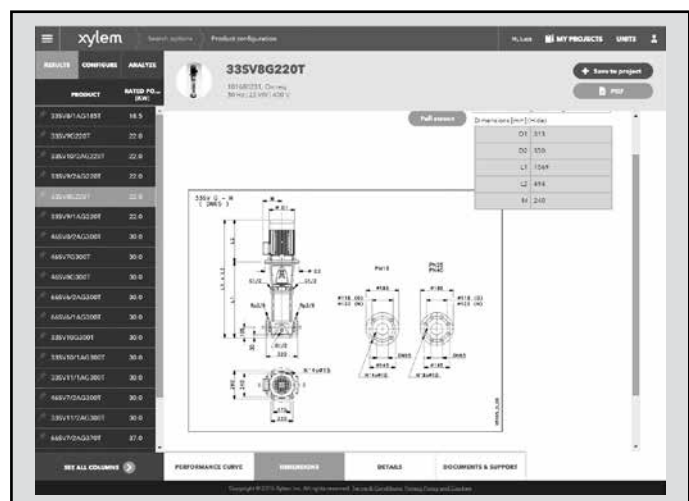

Dimensional drawings appear on the screen and can be downloaded in dxf format.

Xylem |'zīləm|

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're a global team unified in a common purpose: creating advanced technology solutions to the world's water challenges. Developing new technologies that will improve the way water is used, conserved, and reused in the future is central to our work. Our products and services move, treat, analyze, monitor and return water to the environment, in public utility, industrial, residential and commercial building services, and agricultural settings. With its October 2016 acquisition of Sensus, Xylem added smart metering, network technologies and advanced data analytics for water, gas and electric utilities to its portfolio of solutions. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise with a strong focus on developing comprehensive, sustainable solutions.

For more information on how Xylem can help you, go to www.xylem.com.



For information and technical support
Xylem Service Italia Srl

Via Dottor Vittorio Lombardi 14
36075 - Montecchio Maggiore (VI) - Italy
Tel. (+39) 0444 707111
Fax (+39) 0444 491043
www.lowara.com

Xylem Service Italia Srl reserves the right to make modification without prior notice.
Lowara, Xylem are trademarks of Xylem Inc. or one of its subsidiaries
© 2017 Xylem, Inc.