

DRF

Multi-channel open impeller



All product images are indicative only



General characteristics

Multi-channel open impeller	
motor power	0,55 ÷ 1,5 kW
poles	2 / 4
discharge	GAS 1½" - 2" vertical GAS 1½" DN32 - GAS 2" DN50 horizontal DN65 ÷ DN100
free passage	max 50 mm
max flow rate	17.6 l/s
max head	16.5 m

Electromechanical assembly

Electromechanical assembly in GJL-250 cast iron, for submerged operation. Seal set comprising 2 (two) silicon carbide mechanical seals assembled opposing in inspectable oil sump. Ecological dry motor. Series with explosion-proof ATEX certification.

Applications

Specifically developed for use with flammable liquids or in potentially explosive atmospheres, the DRF is used where the use of ordinary submersible electric pumps would not be possible. The main sectors of use are industrial and for the removal of landfill percolates.


Construction materials

Case	Cast iron EN-GJL 250
Impeller	Cast iron EN-GJL-250
Nuts and bolts	Stainless steel - Class A2-70
Standard gasket	Rubber - NBR - VITON
Shaft	Stainless steel - AISI 420
Paint type	Ecological bicomponent epoxy (medium thickness 150 µm)
Set of standard mechanical seals	Two silicon carbide mechanical seals (2SiC)

Operating limits

Maximum operating temperature	40 °C
PH of treated fluid	6 ÷ 14
Viscosity of treated fluid	1 mm ² /s
Maximum immersion depth	20 m
Density of treated fluid	1 Kg/dm ³
Maximum acoustic pressure	70 dB
max starts per hour	30

DRF

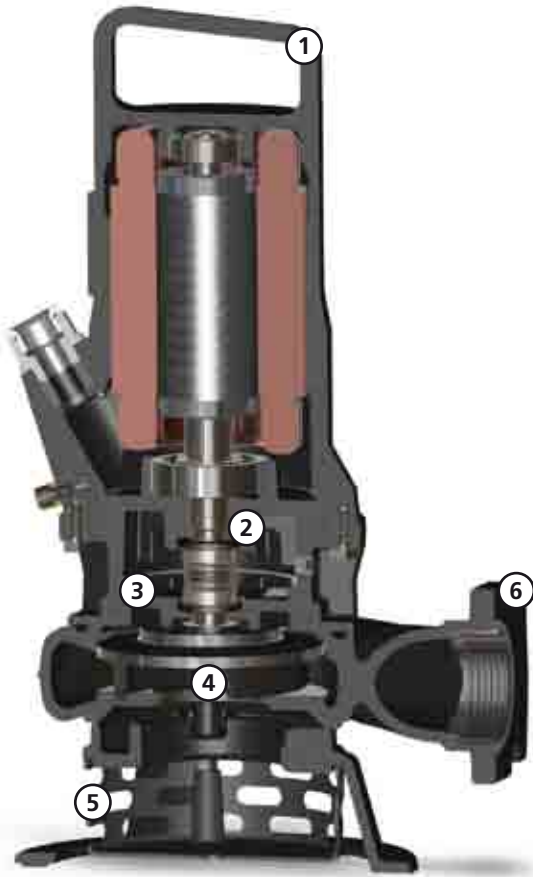

CE 0496  II 2GD Ex db k c IIB T4 Ex tb IIIC T135°C IP68

Models with ATEX certification, suitable for installation in the presence of potentially explosive gases, powders and liquids



Handle/Cable gland

Cast iron lifting and carrying handle. The GAS thread ring-nut can be removed to fix a rigid or flexible duct to the cable gland to protect the power supply cable.



Mechanical seals

Two silicon carbide (2SiC) mechanical seals in oil sump.



Oil sump

Large oil sump to guarantee longer mechanical seal lifetime.




Drive shaft

Impeller connected to the drive shaft by means of tapered coupling.



Intake strainer

Intake strainer in tough polypropylene and cast iron feet.

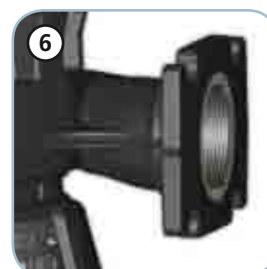



Discharge

Threaded, flanged discharge for the maximum ease of installation.

DRF

Models with vertical GAS 1½" threaded discharge - 2 poles

Performances

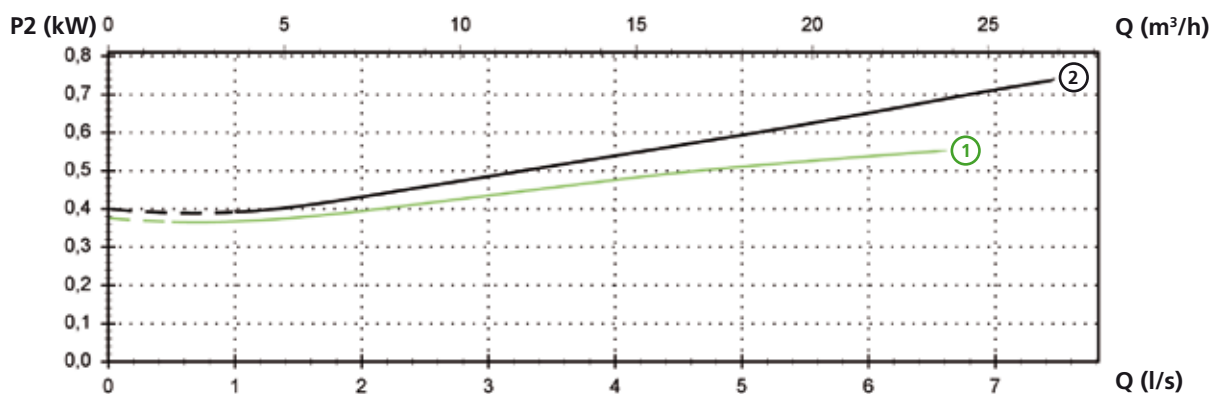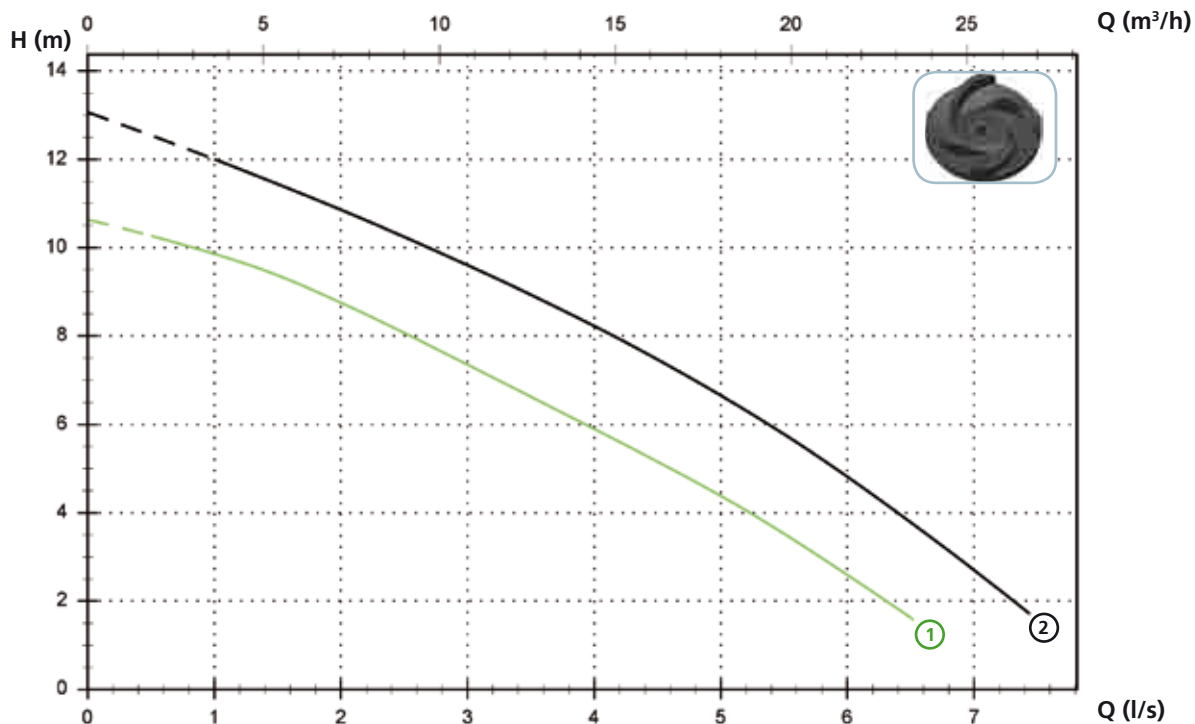


Technical data

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Start	Ø	Free passage
① DRF 75/2/G40V A1CM/50	230	1	0.8	0.55	3.9	2900	Dir	G 1½"	10x30 mm
② DRF 100/2/G40V A1CM/50	230	1	1.1	0.74	4.9	2900	Dir	G 1½"	10x30 mm
	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Start	Ø	Free passage
① DRF 75/2/G40V A1CT/50	400	3	0.8	0.55	1.5	2900	Dir	G 1½"	10x30 mm
② DRF 100/2/G40V A1CT/50	400	3	1.1	0.74	1.9	2900	Dir	G 1½"	10x30 mm

Models with horizontal GAS 1½" threaded - DN32 PN6 flanged discharge - 2 poles

Performances

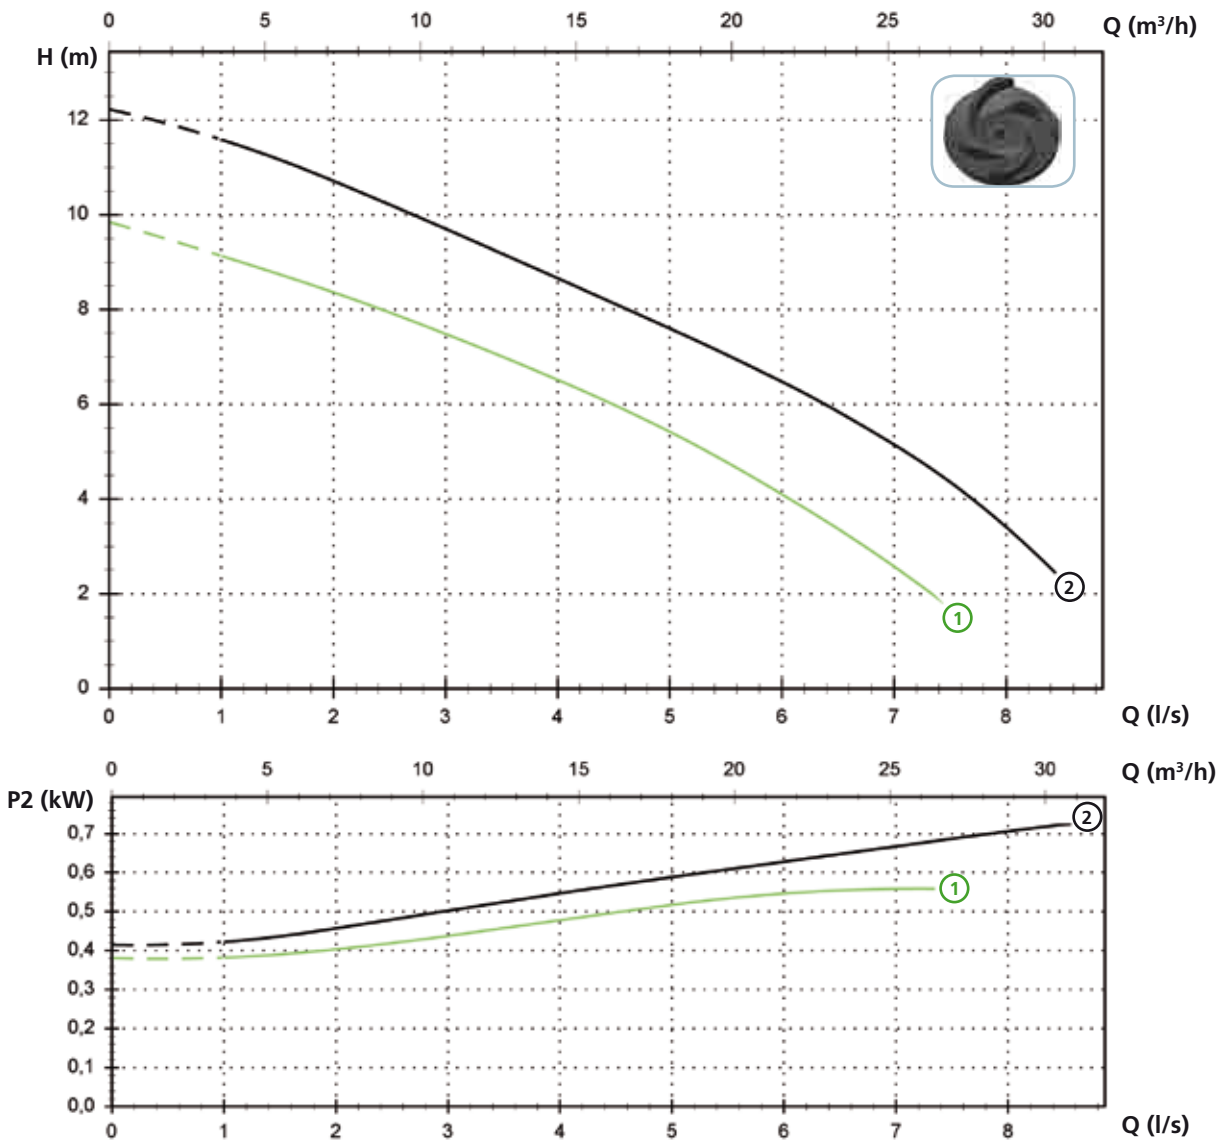

Technical data


	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Start	Ø	Free passage	
①	DRF 75/2/G40H A1CM/50	230	1	0.8	0.55	3.9	2900	Dir	G 1½" - DN32 PN6	10x30 mm
②	DRF 100/2/G40H A1CM/50	230	1	1.1	0.74	4.9	2900	Dir	G 1½" - DN32 PN6	10x30 mm

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Start	Ø	Free passage	
①	DRF 75/2/G40H A1CT/50	400	3	0.8	0.55	1.5	2900	Dir	G 1½" - DN32 PN6	10x30 mm
②	DRF 100/2/G40H A1CT/50	400	3	1.1	0.74	1.9	2900	Dir	G 1½" - DN32 PN6	10x30 mm

DRF

Models with vertical GAS 2" threaded discharge - 2 poles

Performances

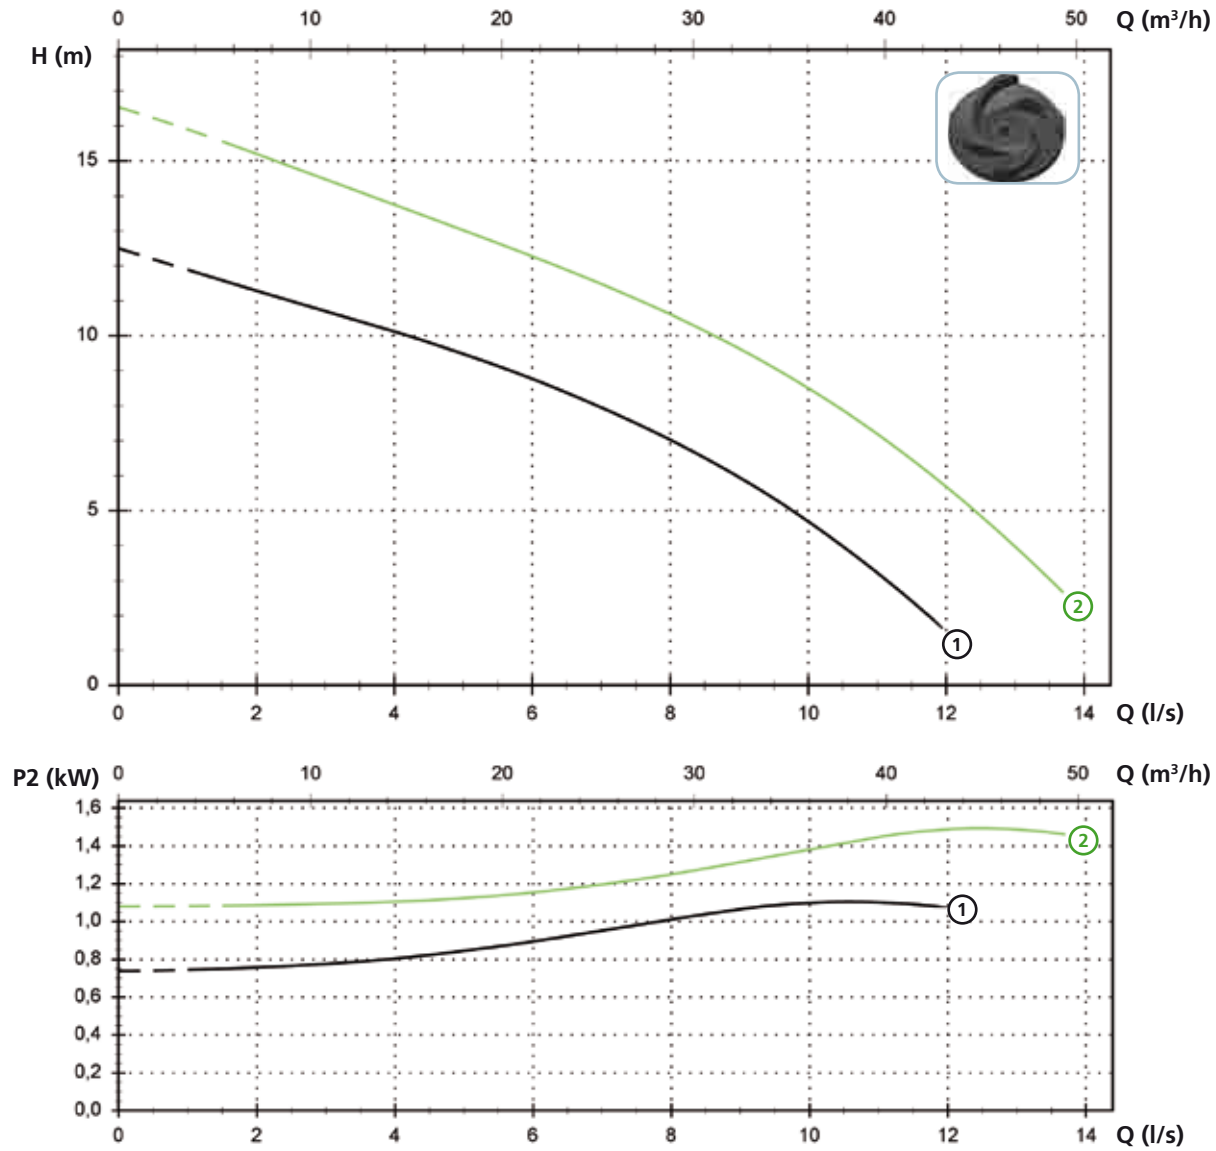


Technical data

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Start	Ø	Free passage
① DRF 150/2/G50V A1CM/50	230	1	1.6	1.1	7.2	2900	Dir	G 2"	10x30 mm
② DRF 200/2/G50V A1CM/50	230	1	2.2	1.5	9.8	2900	Dir	G 2"	10x30 mm

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Start	Ø	Free passage
① DRF 150/2/G50V A1CT/50	400	3	1.7	1.1	2.9	2900	Dir	G 2"	10x30 mm
② DRF 200/2/G50V A1CT/50	400	3	2.1	1.5	3.7	2900	Dir	G 2"	10x30 mm

Models with horizontal GAS 2" threaded - DN50 PN10-16 flanged discharge - 2 poles

Performances

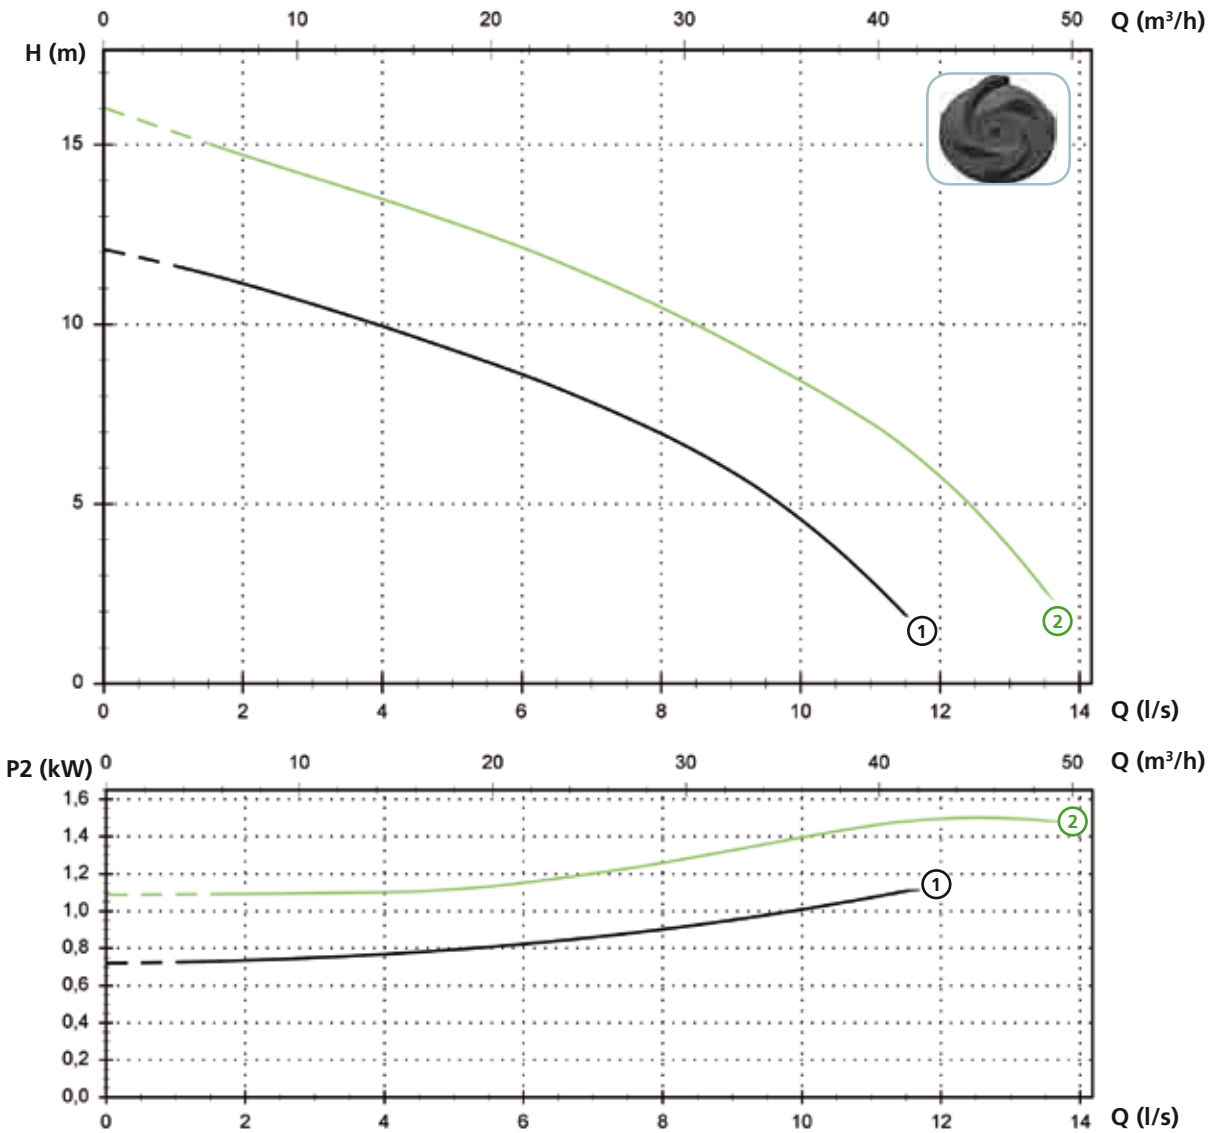

Technical data


	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Start	Ø	Free passage	
①	DRF 150/2/G50H A1CM/50	230	1	1.6	1.1	7.2	2900	Dir	G 2"- DN50 PN10-16	10x30 mm
②	DRF 200/2/G50H A1CM/50	230	1	2.2	1.5	9.8	2900	Dir	G 2"- DN50 PN10-16	10x30 mm

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Start	Ø	Free passage	
①	DRF 150/2/G50H A1CT/50	400	3	1.7	1.1	2.9	2900	Dir	G 2"- DN50 PN10-16	10x30 mm
②	DRF 200/2/G50H A1CT/50	400	3	2.1	1.5	3.7	2900	Dir	G 2"- DN50 PN10-16	10x30 mm

DRF

Models with horizontal DN65 PN10-16 flanged discharge - 4 poles

Performances


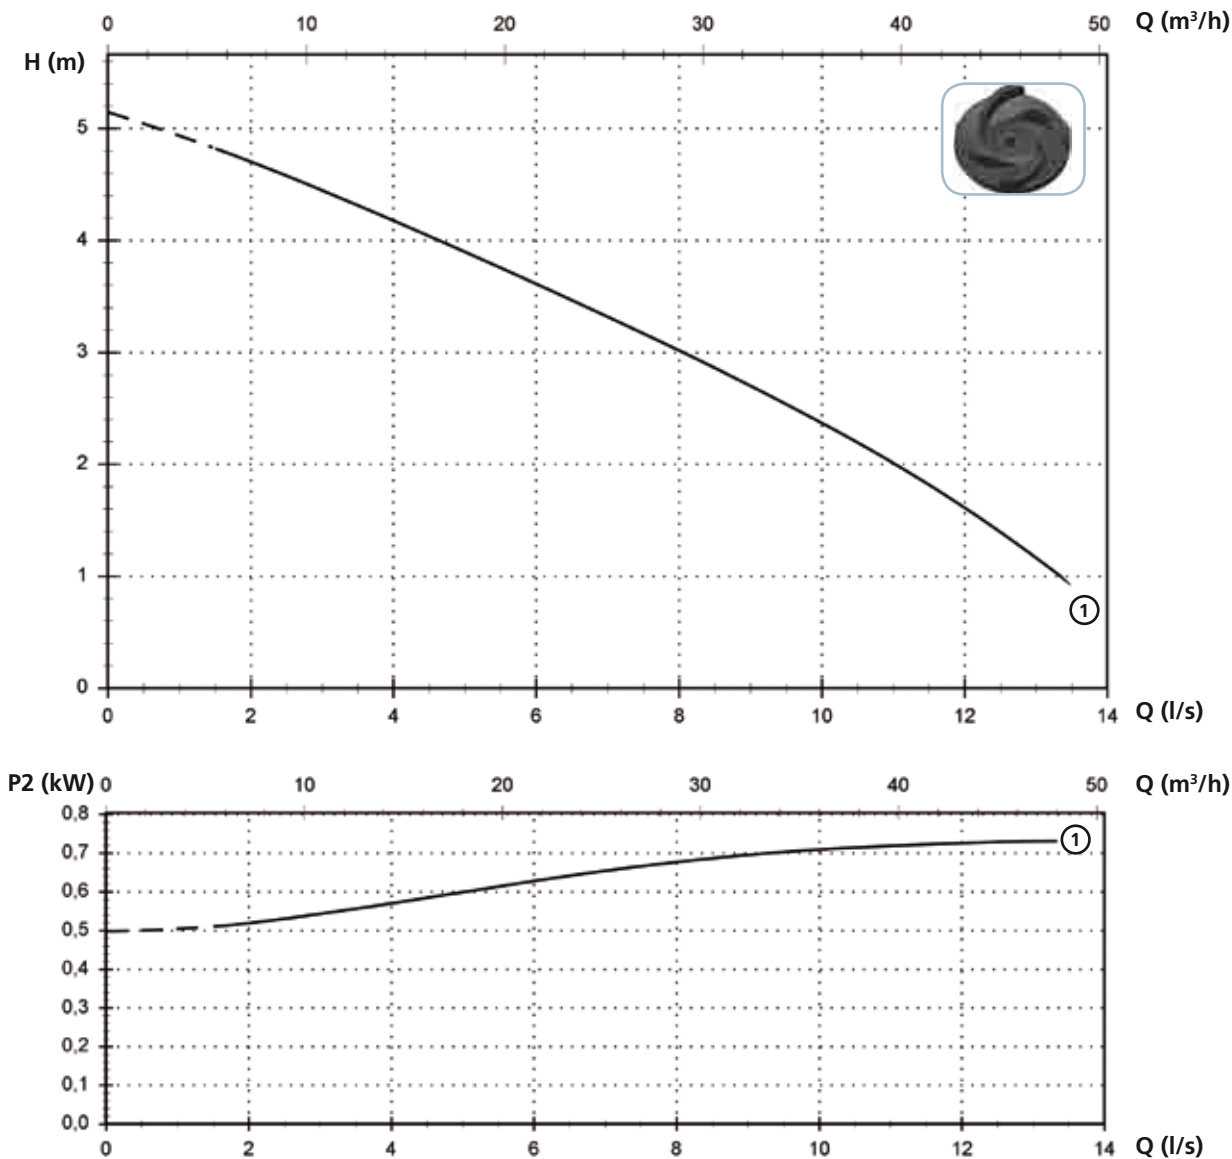


Technical data

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Start	Ø	Free passage
① DRF 100/4/65 A1CT/50	400	3	1.1	0.74	2.2	1450	Dir	DN65 PN10-16	50 mm

Models with horizontal DN80 PN10-16 flanged discharge - 4 poles

Performances

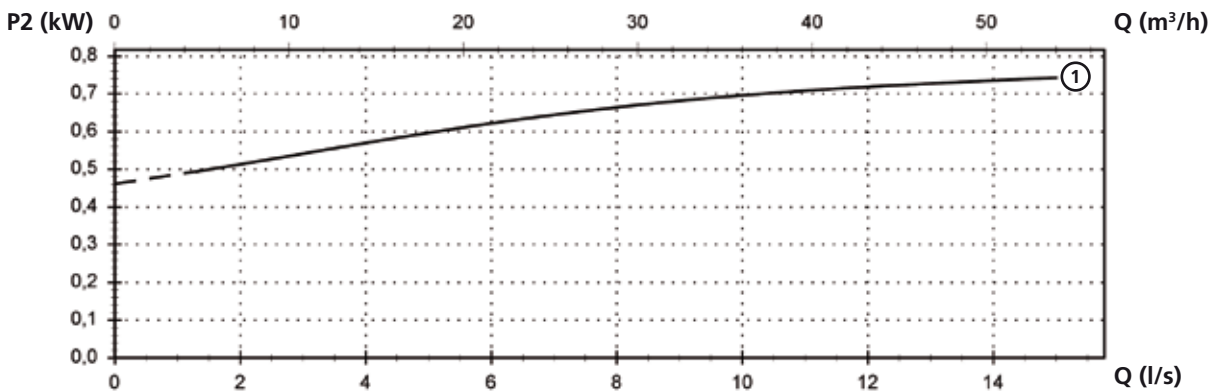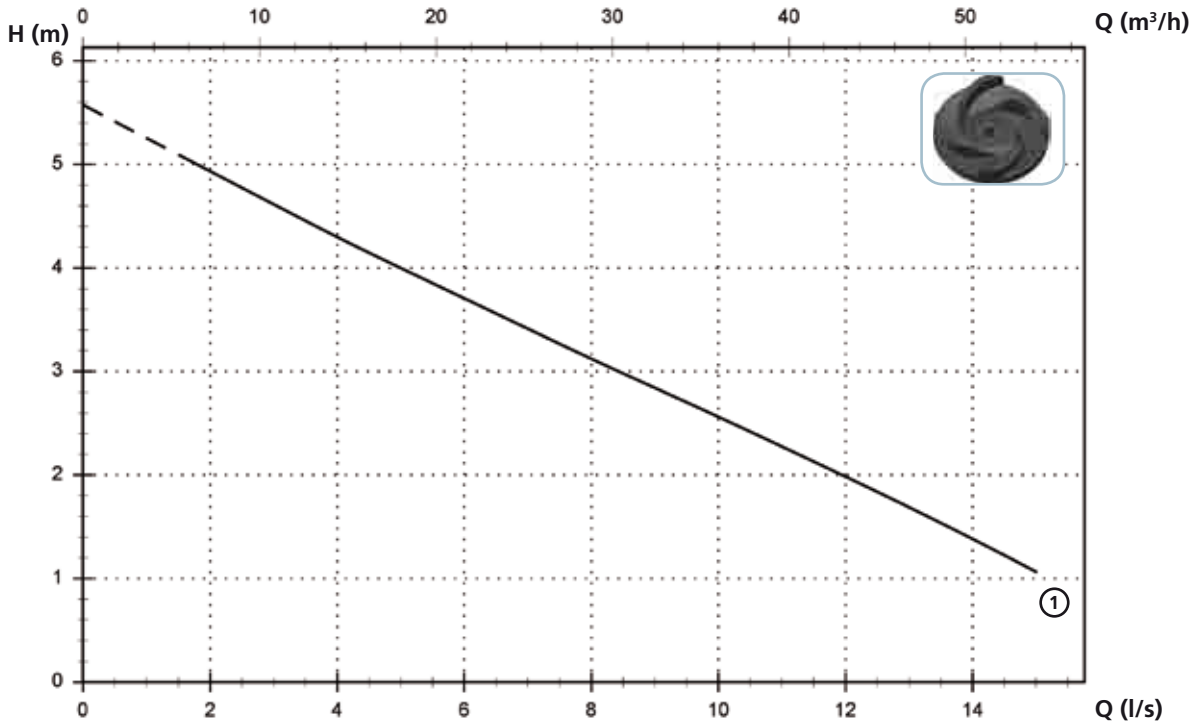



Technical data

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Start	Ø	Free passage
① DRF 100/4/80 A1CT/50	400	3	1.1	0.74	2.2	1450	Dir	DN80 PN10-16	50 mm

DRF

Models with horizontal DN100 PN10-16 flanged discharge - 4 poles

Performances

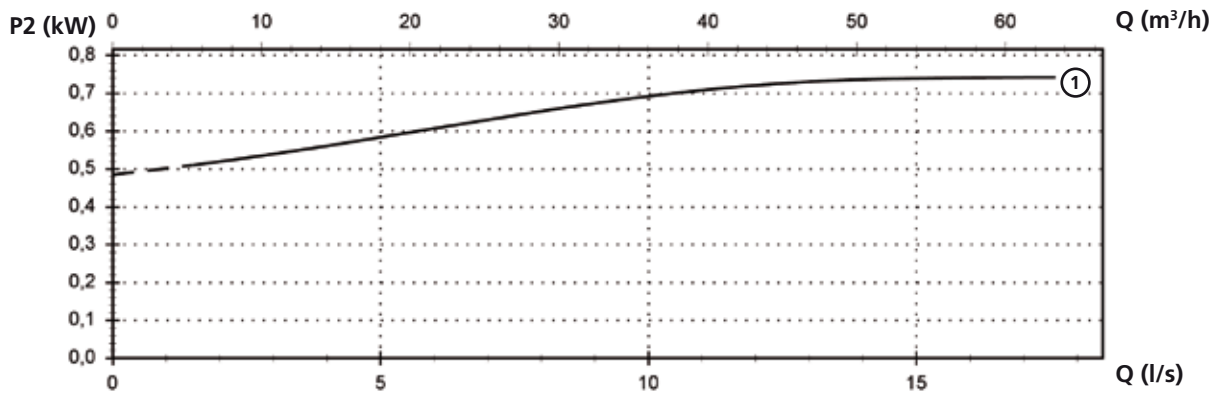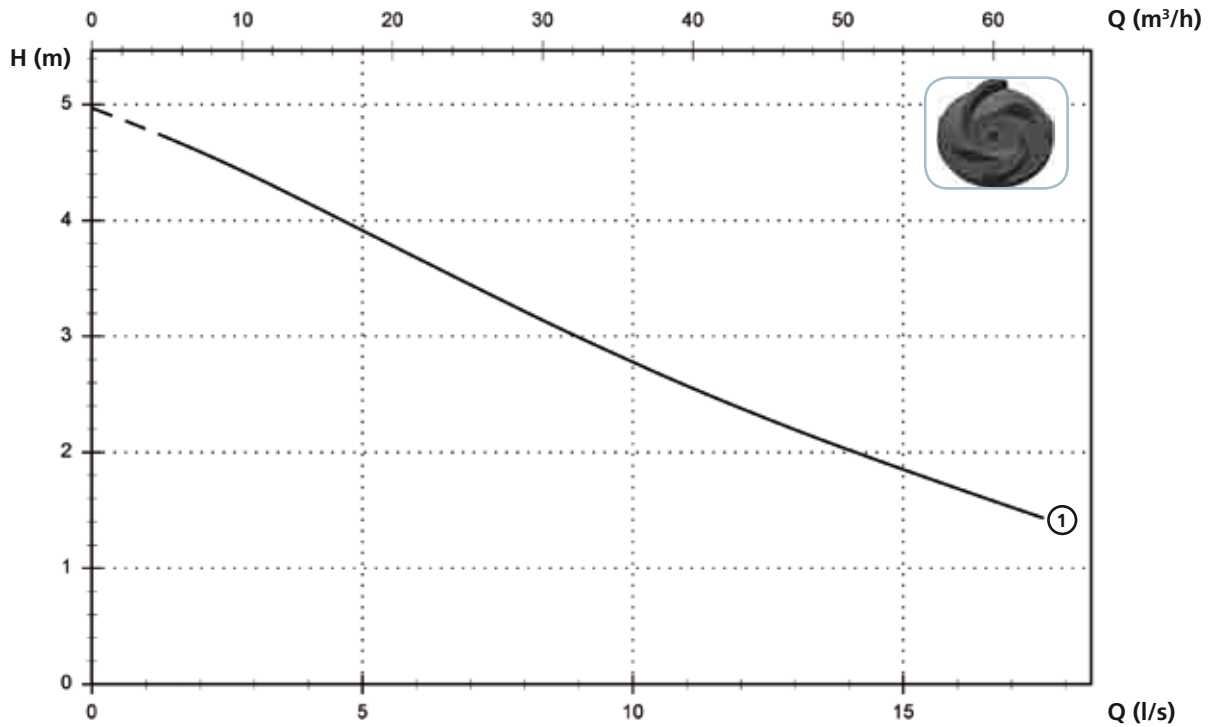

Technical data

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Start	Ø	Free passage
① DRF 100/4/100 A1CT/50	400	3	1.1	0.74	2.2	1450	Dir	DN100 PN10-16	50 mm

Versions available


(Key to versions on page 16)

	Electrical variants											Cooling				Mechanical seals			
	N A E	T	T C D	T C D T	T C D G T	T C G	T C S T	T C S G T	T S	T R	T R G	N	CC CCE	FT	C G F T	2SIC	SICM	SICAL	2SICAL
DRF 75/2/G40V A1CM/50			●									●				●			
DRF 100/2/G40V A1CM/50			●									●				●			
DRF 150/2/G50V A1CM/50			●									●				●			
DRF 200/2/G50V A1CM/50			●									●				●			
DRF 75/2/G40H A1CM/50			●									●				●			
DRF 100/2/G40H A1CM/50			●									●				●			
DRF 150/2/G50H A1CM/50			●									●				●			
DRF 200/2/G50H A1CM/50			●									●				●			
DRF 75/2/G40V A1CT/50	●											●				●			
DRF 100/2/G40V A1CT/50	●											●				●			
DRF 150/2/G50V A1CT/50	●											●				●			
DRF 200/2/G50V A1CT/50	●											●				●			
DRF 75/2/G40H A1CT/50	●											●				●			
DRF 100/2/G40H A1CT/50	●											●				●			
DRF 150/2/G50H A1CT/50	●											●				●			
DRF 200/2/G50H A1CT/50	●											●				●			
DRF 100/4/65 A1CT/50	●											●				●			
DRF 100/4/80 A1CT/50	●											●				●			
DRF 100/4/100 A1CT/50	●											●				●			

NOTE FOR SINGLE PHASE PUMPS: thermal protections into the winding have to be connected to the electrical panel.
 Capacitor supplied but not connected to the pump cable.
 The use of an electrical panel as circuit breaker housing is mandatory.
 For installation please see use and maintenance instructions booklet.

Overall dimensions and weights

Models with vertical discharge - 2 poles

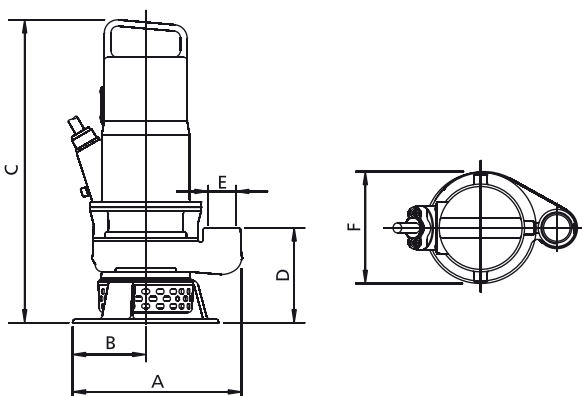

	A	B	C	D	E	F	kg
DRF 75/2/G40V A1CM(T)/50	225	80	455	145	G 1½"	170	27
DRF 100/2/G40V A1CM(T)/50	225	80	455	145	G 1½"	170	28
DRF 150/2/G50V A1CM(T)/50	265	100	465	165	G 2"	190	32
DRF 200/2/G50V A1CM(T)/50	265	100	465	165	G 2"	190	32


Dimensions in mm

All weights and dimensions are indicative only




DRF

Models with horizontal discharge - 2 poles

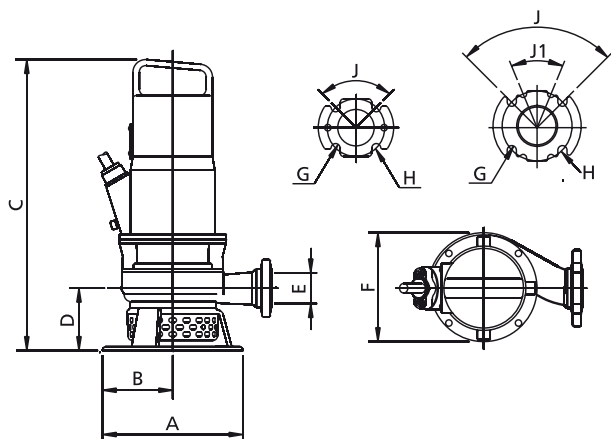

Models with horizontal discharge - 4 poles

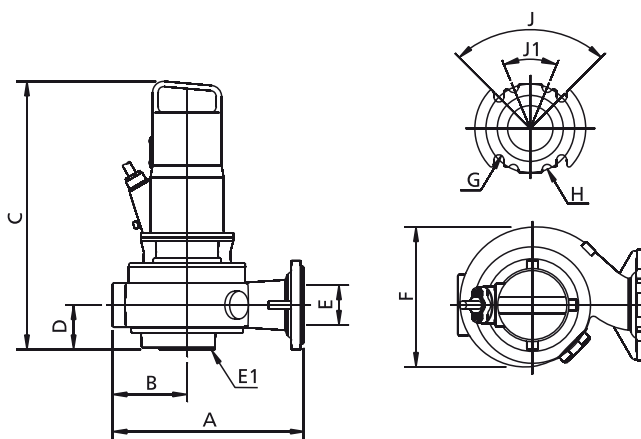

	A	B	C	D	E	E1(*)	F	G	H	J	J1	kg
DRF 75/2/G40H A1CM(T)/50	225	80	455	100	G 1½"	-	170	14	90	90°	-	28
DRF 100/2/G40H A1CM(T)/50	225	80	455	100	G 1½"	-	170	14	90	90°	-	31
DRF 150/2/G50H A1CM(T)/50	250	90	465	105	G 2"	-	195	18	125	90°	-	31
DRF 200/2/G50H A1CM(T)/50	250	90	465	105	G 2"	-	195	18	125	90°	-	32
DRF 100/4/65 A1CT/50	345	135	455	80	65	65	255	18	145	90°	-	41
DRF 100/4/80 A1CT/50	345	135	455	80	80	65	255	18	160	90°	45°	42
DRF 100/4/100 A1CT/50	430	170	475	90	100	80	325	18	180	45°	-	47


Dimensions in mm

All weights and dimensions are indicative only

(*) DN of the suction flange - PN6

Packaging dimension


	A	B	C
DRF 75/2/G40V A1CM(T)/50	580	310	310
DRF 100/2/G40V A1CM(T)/50	580	310	310
DRF 150/2/G50V A1CM(T)/50	580	310	310
DRF 200/2/G50V A1CM(T)/50	580	310	310
DRF 75/2/G40H A1CM(T)/50	580	310	310
DRF 100/2/G40H A1CM(T)/50	580	310	310
DRF 150/2/G50H A1CM(T)/50	580	310	310
DRF 200/2/G50H A1CM(T)/50	580	310	310
DRF 100/4/65 A1CT/50	725	445	415
DRF 100/4/80 A1CT/50	725	445	415
DRF 100/4/100 A1CT/50	725	445	415

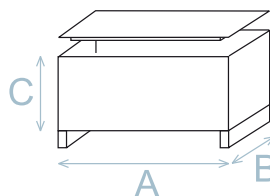

All weights and dimensions are indicative only

Dimension in mm

Installations available

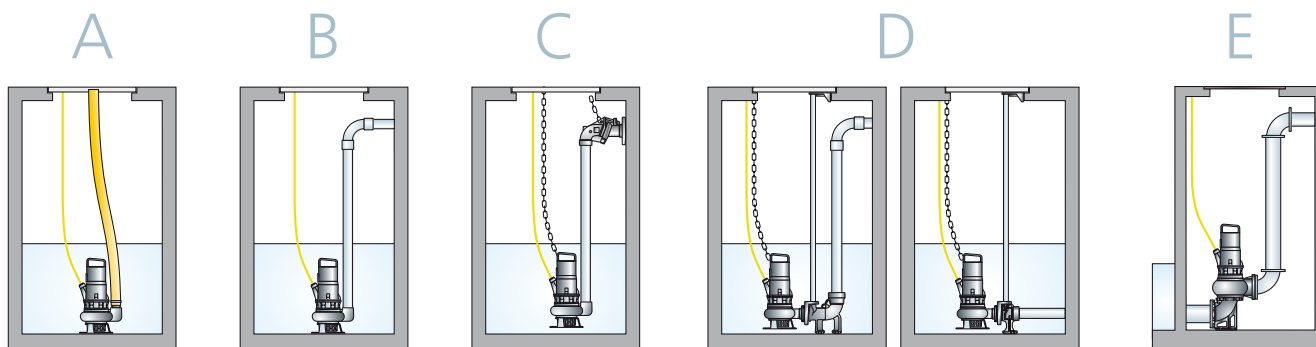

Dry installation available in S3 mode for models with suction flange. Contact Customer Service for more information.

